Color Television

7573

Service
Service
Service

PTV800, PTV805, PTV810, PTV811, PTV815, PTV820, PTV825

ServiceManual

Contents **Page**

Safety Notes 2
General Information 10
Cabinet Replacement Parts 19
Picture Tube Replacement 62
Disassembly 63
Adjustment Procedures 68
Circuit Description 98
Waveforms 124
Electrical Diagrams 130
Exploded Views 192
Parts List 194

©Copyright 2004 Philips Consumer Electronics.
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by means, electronic, mechanical, photographic, or otherwise without the prior permission of Philips.

Published by Philips Consumer Electronics Subject to modification 2004 Dec 28

IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done, or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a ⚠ or "S" by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

*** Broken Line ____ _ ____ _ ____ _ ____**

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.

2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.

3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.

4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.

5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.

6. Critical components having special safety characteristics are identified with an **'S'** by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematic diagrams and /or exploded views.

7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.

8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.

9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

*** Broken line ____ _ ____ _ ____ _ ____**

LEAKAGE CURRENT COLD CHECK

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.

2. Turn on the power switch.

3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.

2. Connect a 1.5k, 10W resistor paralleled by a 0.15uF. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown below.


3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.

4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5mA. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.

5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the ac line cord directly into a 120Vac outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument ac switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5mA. Reverse the instrument power cord plug in the outlet and repeat the test. See the graphic below.

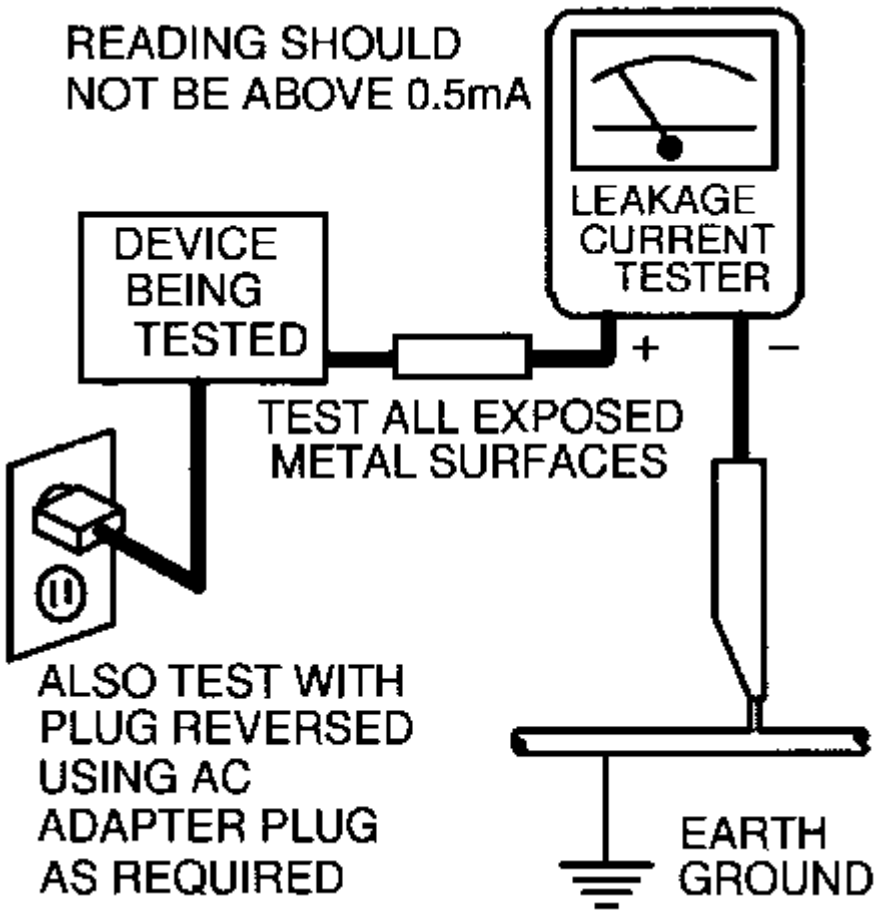
READING SHOULD
NOT BE ABOVE 0.5mA
LEAKAGE
CURRENT
TESTER
DEVICE
BEING
TESTED
+
–
TEST ALL EXPOSED
METAL SURFACES
ALSO TEST WITH
PLUG REVERSED
USING AC
ADAPTER PLUG
AS REQUIRED
EARTH
GROUND

TV SAFETY NOTES

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

Fire and Shock Hazard
Implosion
X-Radiation
Leakage Current Cold Check
Leakage Current Hot Check
Picture Tube Replacement
Parts Replacement

WARNING: Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.

SERVICE NOTE: The CRT DAG is not at chassis ground.

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.

2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.

2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.

3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.

4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.

5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.

7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.

8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.

USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices, Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.

3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.

4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.

5. Do not use Freon propelled chemicals. These can generate electrical charges sufficient to damage ES devices.

6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).

7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:
This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

PRACTICAL SERVICE PRECAUTIONS

IT MAKES SENSE TO AVOID EXPOSURE TO ELECTRICAL SHOCK. While some sources are expected to have a possible dangerous impact, others of quite high potential are of limited current and are sometimes held in less regard.

ALWAYS RESPECT VOLTAGES. While some may not be dangerous in themselves, they can cause unexpected reactions – reactions that are best avoided. Before reaching into the powered color TV set, it is best to test the high voltage insulation. It is easy to do, and is just a good service precaution.

BEFORE POWERING UP THE TV WITH THE BACK OFF (or on a test fixture), attach a clip lead to the CRT DAG ground and to a screwdriver blade that has a well insulated handle. After the TV is powered on and high voltage has developed, probe the anode lead with the blade, starting at the bottom of the High Voltage Transformer (flyback – IFT). Move the blade to within two inches of the connector of the CRT. **IF THERE IS AN ARC, YOU FOUND IT THE EASY WAY, WITHOUT GETTING A SHOCK!** If there is an arc to the screwdriver blade, replace the High Voltage Transformer or the lead, (if removable) whichever is causing the problem.

PICTURE TUBE REPLACEMENT PROCEDURE

Note: a. Two (2) people are required to handle this picture tube.
b. Safety Glasses must be worn during this procedure or whenever directly handling a picture tube.
c. Take care in each step not to damage the CRT or the cabinet.

1. Remove the Chassis and the CRT Socket Board Module from the cabinet.
2. A furniture pad or blanket should be positioned on the floor to support only the CRT Face. This pad or blanket should be high enough to keep the CRT Face approximately 12 to 14 inches off the floor.
3. Using two people, place the cabinet in a front down position with the CRT Face on the pad or blanket.
4. Place padded blocks under each corner of the cabinet to keep it from rocking.
5. Remove the four screws, at the corners of the CRT.
6. With two people lowering the cabinet to the floor, leave the CRT elevated by the pad or blanket.

Note: Take care not to grasp the neck of the CRT during this procedure, as it is extremely fragile.

7. Two (2) people may then lift the CRT from the cabinet.
8. Remove the degaussing coil from the defective CRT and mount on the replacement. Take care to maintain the exact shape and fit.

To install the new CRT, reverse steps 1 to 7.

GENERAL INFORMATION

CAUTION: A SEPARATE ISOLATION TRANSFORMER MUST BE USED WHEN SERVICING THIS CHASSIS.

PTV 800 PANEL INFORMATION

Models Covered in This Manual:

Model	Chassis Reference	Screen Size and Brand
1152980001	PTV800	52" Philips/Magnavox
626-54538.890	PTV800	52" Sears
8P4831C101	PTV805	48" Philips/Magnavox
8P4834C101	PTV805	48" Philips/Magnavox
8P5431C101	PTV805	54" Philips/Magnavox
8P5434C101	PTV805	54" Philips/Magnavox
8P6031C101	PTV805	60" Philips/Magnavox
8P6034C101	PTV805	60" Philips/Magnavox
8P4841C101	PTV810	48" Philips/Magnavox
8P4844C101	PTV810	48" Philips/Magnavox
8P5441C101	PTV810	54" Philips/Magnavox
8P5444C101	PTV810	54" Philips/Magnavox
8P6041C101	PTV810	60" Philips/Magnavox
8P6044C101	PTV810	60" Philips/Magnavox
8P6051C101	PTV810	60" Philips/Magnavox
48PP72A001	PTV811	48" Philips Brazil
48XP43C101	PTV811	48" Philips Taiwan/Latam
48XP44C101	PTV811	48" Philips Korea
54PP72A001	PTV811	54" Philips Brazil
54XP43C101	PTV811	54" Philips Taiwan/Latam
54XP44C101	PTV811	54" Philips Korea
60XP43C101	PTV811	60" Philips Mexico/Latam
MX5472C101	PTV815	54" Magnavox
MX6072C101	PTV815	60" Magnavox
MX6472C101	PTV815	64" Magnavox
XV5270B103	PTV820	52" Marantz Wallvision
PV5470C104/105	PTV825	54" Marantz
PV6070C104/105	PTV825	60" Marantz

MODEL TO PANEL LIST

- The Model to Panel List shown below identifies all electrical panels, modules, and assemblies used in each model produced with the PTV800 series chassis.
- This information was current at time of printing.
- Information concerning cabinet parts and cabinet mounted parts (CRT/Yoke/etc.) is shown in the Cabinet Replacement Parts List.
- Replacement part numbers for each panel are provided in the Chassis / Panel Replacement Parts List.
- If you are attempting to service a model equipped with the PTV800 series chassis, the necessary electrical information should be covered in the this service manual, even if the corresponding model number is not listed.

PTV800
1152980001 52" Philips/Magnavox
5545380002 52" Sears

Reference	Description
00APD019A001	Large Signal Panel
00ASG051A001	Small Signal Panel
00A10688A001	Digital Convergence Panel
00APT191A001	Green CRT Panel
00APT192A001	Red CRT Panel
00APT193A001	Blue CRT Panel
00ATC669A001	Customer Control Assembly
00ARR023A001	IR Receiver Panel
00ASW129A001	Switch Panel
00T207NGPM01	Remote Transmitter (1152980001)
00T206NGGA01	Remote Transmitter (5545380002)

PTV805

8P4831C101 48" Philips/Magnavox
8P4834C101 48" Philips/Magnavox
8P5431C101 54" Philips/Magnavox
8P5434C101 54" Philips/Magnavox
8P6031C101 60" Philips/Magnavox
8P6034C101 60" Philips/Magnavox

Reference	Description
00APD019A001	Large Signal Panel
00ASG052A001	Small Signal Panel
00A10688A001	Digital Convergence Panel
00APT191A001	Green CRT Panel
00APT192A001	Red CRT Panel
00APT193A001	Blue CRT Panel
00ATC669A001	Customer Control Assembly
00ARR023A001	IR Receiver Panel
00ASW129A001	Switch Panel
00Y147SBAA01	Remote Transmitter UR714

PTV810

8P4841C101 48" Philips/Magnavox
8P4844C101 48" Philips/Magnavox
8P5441C101 54" Philips/Magnavox
8P5444C101 54" Philips/Magnavox
8P6041C101 60" Philips/Magnavox
8P6044C101 60" Philips/Magnavox
8P6051C101 60" Philips/Magnavox

Reference	Description
00APD020A001	Large Signal Panel
00ASG053A001	Small Signal Panel
00A10688A001	Digital Convergence Panel
00APT191A001	Green CRT Panel
00APT192A001	Red CRT Panel
00APT193A001	Blue CRT Panel
00ATC669A001	Customer Control Assembly
00ARR023A001	IR Receiver Panel
00ASW129A001	Switch Panel
00AVJ221A001	Front Jack Panel
00A10707A001	2 Tube Scan Velocity Module
00Y147MEAA01	Remote Transmitter

PTV811

48PP72A001 48" Philips Brazil
48XP43C101 48" Philips Taiwan/Latam
48XP44C101 48" Philips Korea
54PP72A001 54" Philips Brazil
54XP43C101 54" Philips Taiwan/Latam
54XP44C101 54" Philips Korea
60XP43C101 60" Philips Mexico/Latam

Reference	Description
00APD021A001	Large Signal Panel
00ASG053A001	Small Signal Panel
00A10688A001	Digital Convergence Panel
00APT191A001	Green CRT Panel
00APT192A001	Red CRT Panel
00APT193A001	Blue CRT Panel
00ATC669A001	Customer Control Assembly
00ATC669SKD1	Customer Control Assembly (48PP72A001 and 54PP72A001)
00ARR023A001	IR Receiver Panel
00ASW129A001	Switch Panel
00AVJ221A001	Front Jack Panel
00AMP030A001	25W Audio Amp
00A10690A001	3 Tube Scan Velocity Module
00H147MEAA01	Remote Transmitter UR614

PTV815

MX5472C101 54" Magnavox

MX6072C101 60" Magnavox

MX6472C101 64" Magnavox

Reference	Description
00APD020A001	Large Signal Panel
00ASG054A001	Small Signal Panel
00A10688A001	Digital Convergence Panel
00APT191A001	Green CRT Panel
00APT192A001	Red CRT Panel
00APT193A001	Blue CRT Panel
00ATC669A001	Customer Control Assembly
00ARR023A001	IR Receiver Panel
00ASW129A001	Switch Panel
00AVJ218A001	Front Jack Panel
00AMP029A001	25W Audio Amp
00A10691A001	Stereo Spread Panel
00A10672C003	Guide Plus Panel
00A10706A001	Remote Locator
00A10694A001	Wallvision Switch Panel
00A10690A001	3 Tube Scan Velocity Module
00X177CEAA01	Remote Transmitter UR617

PTV820

XV5270B103 52" Marantz Wallvision

Reference	Description
00APD020A001	Large Signal Panel
00ASG056A001	Small Signal Panel
00A10688A001	Digital Convergence Panel
00APT191A001	Green CRT Panel
00APT192A001	Red CRT Panel
00APT193A001	Blue CRT Panel
00ATC670A001	Customer Control Assembly
00ARR024A001	IR Receiver Panel
00ASW131A001	Switch Panel
00AMP029A001	25W Audio Amp
00A10691A001	Stereo Spread Panel
00A10672C003	Guide Plus Panel
00A10695A001	Wallvision Switch Panel
00Z147CEAA01	Remote Transmitter UR614

PTV825
PV5470C104/105 **54" Marantz**
PV6070C104/105 **60" Marantz**

Reference	Description
00APD020A001	Large Signal Panel
00ASG054A001	Small Signal Panel
00A10688A001	Digital Convergence Panel
00APT191A001	Green CRT Panel
00APT192A001	Red CRT Panel
00APT193A001	Blue CRT Panel
00ATC671A001	Customer Control Assembly
00A10699A001	IR Receiver Panel
00ASW130A001	Switch Panel
00AVJ218A001	Front Jack Panel
00AMP029A001	25W Audio Amp
00A10691A001	Stereo Spread Panel
00A10672C003	Guide Plus Panel
00A10706A001	Remote Locator
00A10696A001	Wallvision Switch Panel
00Z177CEAA01	Remote Transmitter UR617

SMALL SIGNAL PANEL SCHEMATIC & WAVEFORM NOTES:

CAUTION: A SEPARATE ISOLATION TRANSFORMER MUST BE USED WHEN SERVICING THIS CHASSIS.

SMALL SIGNAL PANEL WAVEFORM NOTES:

UNLESS OTHERWISE SPECIFIED

1. ALL VOLTAGES AND WAVEFORMS WERE TAKEN WITH AN NTSC COLOR BAR PATTERN SIGNAL APPLIED.
2. SWEEP TIME/DIV SETTINGS ARE SHOWN JUST BELOW THE PHOTOS IN THE CALIBRATED POSITION. HORIZONTAL POSITIONING OF THE WAVEFORMS WAS ADJUSTED FOR MAXIMUM CLARITY.

SMALL SIGNAL PANEL SCHEMATIC NOTES:

UNLESS OTHERWISE SPECIFIED:

1. ALL VOLTAGES AND WAVEFORMS WERE TAKEN UNDER THE FOLLOWING CONDITIONS:
   - LINE VOLTAGE MAINTAINED AT 120VAC, 60HZ VIA AN ISOLATION TRANSFORMER.
   - CUSTOMER CONTROLS SET TO FACTORY DEFAULT LEVELS AS FOLLOWS: COLOR, TINT, AND BRIGHTNESS SET TO MIDRANGE, PICTURE SET TO APPROXIMATELY 2/3 (BETWEEN MIDRANGE AND FULL ON).
2. WAVEFORMS AND VOLTAGES (WITHOUT BRACKETS) WERE TAKEN WITH AN NTSC SIGNAL GENERATOR DELIVERING 10mVp-p AT THE ANTENNA TERMINALS.
3. VOLTAGES SHOWN WITH BRACKETS WERE TAKEN WITH NO SIGNAL APPLIED; THEY ARE LISTED ONLY WHERE AN APPRECIABLE CHANGE WAS NOTED, OR AS IN THE SOUND CIRCUITRY WHERE NO VOLTAGES WITH SIGNAL WERE TAKEN.
4. ALL VOLTAGES ARE POSITIVE DC WITH RESPECT TO THE GROUND LOCATED IN THAT AREA OF THE CIRCUITRY AND MAY VARY DUE TO NORMAL PRODUCTION TOLERANCES. VOLTAGE SOURCES ARE ALSO NOMINAL, WITH THE EXCEPTION OF THE +130Vdc SOURCE (TP4) WHICH IS TIGHTLY REGULATED TO BE WITHIN +.1Vdc, -2Vdc (MEASURED WITH A .1% DIGITAL VOLTMETER).
5. SCHEMATIC SYMBOLS:
   - INDICATES THESE COMPONENTS ARE SMD "CHIP" TYPE COMPONENTS AND AS SUCH, WILL BE LOCATED ON THE COPPER SIDE OF THE PRINTED CIRCUIT BOARD.
   - ✸ INDICATES THESE COMPONENTS WILL VARY DEPENDING UPON SCREEN SIZE, PRODUCTION DATES, AND OPTIONAL FEATURES INSTALLED. SEE THE COMPONENT CHARTS POSTED ON THE SCHEMATIC, OR THE REPLACEMENT PARTS LIST FOR SPECIFIC PART INFORMATION.

   NUMBERS 1 THROUGH 23 CORRESPOND TO WAVEFORM PHOTOS.
6. FOR VOLTAGE, WATTAGE AND TOLERANCE RATINGS OF CAPACITORS OR RESISTORS, REFER TO THE ELECTRICAL REPLACEMENT PARTS LIST.

LARGE SIGNAL PANEL SCHEMATIC AND WAVEFORM NOTES:

1. ALL VOLTAGES AND WAVEFORMS WERE TAKEN WITH AN NTSC COLOR BAR PATTERN SIGNAL APPLIED.
2. SWEEP TIME/DIV SETTINGS ARE SHOWN JUST BELOW THE PHOTOS IN THE CALIBRATED POSITION. HORIZONTAL POSITIONING OF THE WAVEFORMS WAS ADJUSTED FOR MAXIMUM CLARITY.

LARGE SIGNAL PANEL SCHEMATIC NOTES:

UNLESS OTHERWISE SPECIFIED:

1. ALL VOLTAGES AND WAVEFORMS WERE TAKEN UNDER THE FOLLOWING CONDITIONS:

- LINE VOLTAGE MAINTAINED AT 120VAC, 60HZ VIA AN ISOLATION TRANSFORMER.
- CUSTOMER CONTROLS SET TO FACTORY DEFAULT LEVELS AS FOLLOWS:
  COLOR, TINT, AND BRIGHTNESS SET TO MIDRANGE, PICTURE SET TO APPROXIMATELY 2/3 (BETWEEN MIDRANGE AND FULL ON).

2. WAVEFORMS AND VOLTAGES (WITHOUT BRACKETS) WERE TAKEN WITH AN NTSC SIGNAL GENERATOR DELIVERING 10mVp-p AT THE ANTENNA TERMINALS.
3. VOLTAGES SHOWN WITH BRACKETS WERE TAKEN WITH NO SIGNAL APPLIED; THEY ARE LISTED ONLY WHERE AN APPRECIABLE CHANGE WAS NOTED, OR AS IN THE SOUND CIRCUITRY WHERE NO VOLTAGES WITH SIGNAL WERE TAKEN.
4. ALL VOLTAGES ARE POSITIVE DC WITH RESPECT TO THE GROUND LOCATED IN THAT AREA OF THE CIRCUITRY AND MAY VARY DUE TO NORMAL PRODUCTION TOLERANCES. VOLTAGE SOURCES ARE ALSO NOMINAL, WITH THE EXCEPTION OF THE +130Vdc SOURCE (TP4) WHICH IS TIGHTLY REGULATED TO BE WITHIN +.1Vdc, -2Vdc (MEASURED WITH A .1% DIGITAL VOLTMETER).
5. SCHEMATIC SYMBOLS:

   - INDICATES THESE COMPONENTS ARE SMD "CHIP" TYPE COMPONENTS AND AS SUCH, WILL BE LOCATED ON THE COPPER SIDE OF THE PRINTED CIRCUIT BOARD.
   - ✸ INDICATES THESE COMPONENTS WILL VARY DEPENDING UPON SCREEN SIZE, PRODUCTION DATES, AND OPTIONAL FEATURES INSTALLED. SEE THE COMPONENT CHARTS POSTED ON THE SCHEMATIC, OR THE REPLACEMENT PARTS LIST FOR SPECIFIC PART INFORMATION.

   NUMBERS 1 THROUGH 23 CORRESPOND TO WAVEFORM PHOTOS.
6. FOR VOLTAGE, WATTAGE AND TOLERANCE RATINGS OF CAPACITORS OR RESISTORS, REFER TO THE ELECTRICAL REPLACEMENT PARTS LIST.

DIGITAL CONVERGENCE PANEL SCHEMATIC AND WAVEFORM NOTES:

UNLESS OTHERWISE SPECIFIED:

1. ALL VOLTAGES AND WAVEFORMS WERE TAKEN WITH AN NTSC COLOR BAR PATTERN SIGNAL APPLIED.
2. SWEEP TIME/DIV SETTINGS ARE SHOWN JUST BELOW THE PHOTOS IN THE CALIBRATED POSITION. HORIZONTAL POSITIONING OF THE WAVEFORMS WAS ADJUSTED FOR MAXIMUM CLARITY.


DIGITAL CONVERGENCE PANEL SCHEMATIC NOTES:

UNLESS OTHERWISE SPECIFIED:

1. ALL VOLTAGES AND WAVEFORMS WERE TAKEN UNDER THE FOLLOWING CONDITIONS:
   - LINE VOLTAGE MAINTAINED AT 120VAC, 60HZ VIA AN ISOLATION TRANSFORMER.
   - CUSTOMER CONTROLS SET TO FACTORY DEFAULT LEVELS AS FOLLOWS: COLOR, TINT AND BRIGHTNESS SET TO MIDRANGE, PICTURE SET TO APPROXIMATELY 2/3 (BETWEEN MIDRANGE AND FULL ON).
2. WAVEFORMS AND VOLTAGES (WITHOUT BRACKETS) WERE TAKEN WITH AN NTSC SIGNAL GENERATOR DELIVERING 10mVp-p AT THE ANTENNA TERMINALS.
3. VOLTAGES WITHIN PARENTHESES WERE TAKEN UNDER THE SAME CONDITIONS AS ABOVE, ONLY WITH NO SIGNAL APPLIED. THEY ARE LISTED ONLY WHERE AN APPRECIABLE CHANGE WAS NOTED.
4. FOR VOLTAGE, WATTAGE OR TOLERANCE RATINGS OF CAPACITORS OR RESISTORS, REFER TO THE ELECTRICAL REPLACEMENT PARTS LIST.
5. SCHEMATIC SYMBOLS:
   - INDICATES THESE COMPONENTS ARE SMD "CHIP" TYPE COMPONENTS AND AS SUCH, WILL BE LOCATED ON THE COPPER SIDE OF THE PRINTED CIRCUIT BOARD.

Cabinet Replacement Parts Lists

Cabinet Exploded View

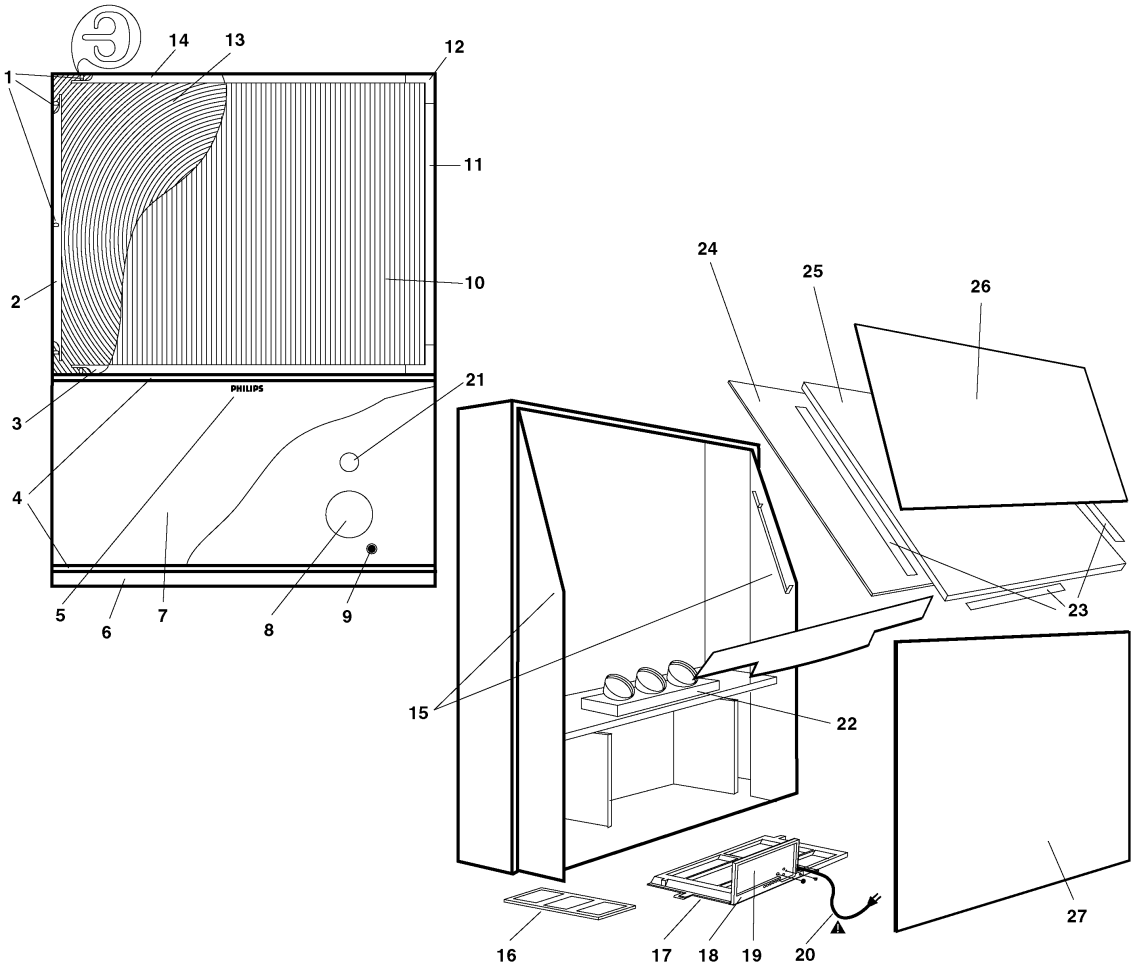

001152980001

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01850	Back Barrier
BK/CV/LW	27		3135 013 01440	Back Cover (Lower)
BK/CV/UP	26		3135 013 01010	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			4835 138 17001	Battery AAA 2Pk
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02930	Extr., Screen Bottom
SCRN/TOP	14		3135 014 03020	Extr., Screen Edge Top
SCRN/EDG	2		3135 014 03030	Extr., Screen Edge, Side (x2)
BS/RL/FO	4		3135 014 03131	Foot Base Rail (x2)
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
BS/RL/FRT	6		3135 013 02381	Front Base Rail
INSERT/H	9		3135 014 02741	Hole Insert (x12)
INST/BK			3135 015 07350	Instruction Book
JP/FRM	18		3135 014 06650	Jack Panel Frame
JP/OVLAY	19		3135 015 04420	Jack Panel Overlay
LENSF	13		3135 013 01110	Lens, Fresnel
LENSL	10		3135 013 01100	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MTNG	25		3135 013 00780	Mirror Mounting
MIR/TRAP	24		3135 013 01200	Mirror Trapezoid, 2nd
QUICK/GD			3135 015 07340	Quick Use Guide
REM/TRAN			4835 219 17716	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x12)
SCRN/FRM	11		3135 014 06550	Screen Frame 52" (x2)
SPEAKER	8		4835 240 47011	Speaker Full 4x6" 8 Ohm (x2)
SPK/GRL	7		3135 014 06410	Speaker Grille Cover

Optical Assembly Parts List 007061150001

0048PP72A001

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01370	Back Barrier
BK/CV/LW	27		3135 013 01290	Back Cover (Lower)
BK/CV/UP	26		3135 013 01320	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/BOT	3		3135 014 02940	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03050	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03040	Extr., Screen Edge, Top
FILTER			4835 380 57009	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
INSERT/H	9		3135 014 02741	Hole Insert (x14)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00960	Lens, Fresnel
LENSL	10		3135 013 00930	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BD	25		3135 013 01351	Mirror Board
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		3135 013 01150	Mirror Trapz 2nd Surface
FRNT/JP			3135 014 02980	Panel, Front Jack
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			00H1 47M EAA01	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06300	Screen Frame 48" (x2)
SPK/GRL	7		4835 432 67252	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		4835 240 57011	Speaker Woofer 5.25" (x2)

Optical Assembly Parts List 007061090001

0048XP43C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01370	Back Barrier
BK/CV/LW	27		4835 432 97717	Back Cover (Lower)
BK/CV/UP	26		3135 013 01320	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/BOT	3		3135 014 02940	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03050	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03040	Extr., Screen Edge, Top
FILTER			4835 380 57009	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x14)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00960	Lens, Fresnel
LENSL	10		3135 013 00930	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MT/BD	25		3135 013 01350	Mirror Mounting Board
MIR/TRAP	24		3135 013 01150	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07510	Owners Manual
OWN/MN/E			3135 015 08400	Owners Manual English
OWN/MN/S			3135 015 07510	Owners Manual Spanish
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07500	Quick Use Guide
QUICK/GD			3135 015 08390	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			00H1 47M EAA01	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06300	Screen Frame 48" (x2)
SPK/GRL	7		4835 432 67252	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		4835 240 57011	Speaker Woofer 5.25" (x2)

Optical Assembly Parts List 007060890001

0048XP44C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	3135 010 03060	AC Cord, Filtered
BACK/BAR			3135 013 01370	Back Barrier
BK/CV/LW	27		4835 432 97717	Back Cover (Lower)
BK/CV/UP	26		3135 013 01320	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA 3Pk
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/BOT	3		3135 014 02940	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03050	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03040	Extr., Screen Edge, Top
FILTER			4835 380 57009	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x14)
INSRT/BK			3135 015 08820	Instruction Book
LENSF	13		3135 013 00960	Lens, Fresnel
LENSL	10		3135 013 00930	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MT/BD	25		3135 013 01350	Mirror Mounting Board
MIR/TRAP	24		3135 013 01150	Mirror Trapz 2nd Surface
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 08810	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			00H1 47M EAA01	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06300	Screen Frame 48" (x2)
SPK/GRL	7		4835 432 67252	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		4835 240 57011	Speaker Woofer 5.25" (x2)

Optical Assembly Parts List 007060890001

0054PP72A001

"s" in the "s" column indicates a safety part.

Ref.	Ref No		Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01381	Back Barrier
BK/CV/LW	27		3135 013 01300	Back Cover (Lower)
BK/CV/UP	26		3135 013 01331	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/BOT	3		3135 014 02950	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03070	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03060	Extr., Screen Edge, Top
FILTER			4835 380 57011	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
SCRN/FRM	11		3135 014 06350	Frame, Screen 54" (x2)
INSERT/H	9		3135 014 02741	Hole Insert (x17)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BD	25		3135 013 01410	Mirror Board
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		3135 013 01140	Mirror Trapz 2nd Surface
FRNT/JP			3135 014 02980	Panel, Front Jack
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			00H1 47M EAA01	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SPK/GRL	7		4835 459 47112	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		4835 240 57011	Speaker Woofer 5.25" (x2)

Optical Assembly Parts List 007061090002

0054XP43C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 00800	Back Barrier
BK/CV/CRT			3135 013 02360	Back Cover CRT
BK/CV/ED			3135 013 00730	Back Cover End
BK/CV/UP	26		3135 014 03320	Back Cover Vac FM, (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/BOT	3		3135 014 02950	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03070	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03060	Extr., Screen Edge, Top
FILTER			4835 380 57011	Filter
BS/RL/FO	4		3135 014 03131	Foot Base Rail (x2)
BS/RL/FRT	6		3135 013 02381	Front Base Rail
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x17)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BRKT	15		3135 011 02021	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		4835 310 77052	Mirror Trapz
OWN/MAN			3135 015 07510	Owners Manual
OWN/MN/E			3135 015 08400	Owners Manual English
OWN/MN/S			3135 015 07510	Owners Manual Spanish
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07500	Quick Use Guide
QUICK/GD			3135 015 08390	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			00H1 47M EAA01	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06350	Screen Frame 54" (x2)
SPK/GRL	7		3135 014 06570	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		4835 240 57011	Speaker Woofer 5.25" (x2)

Optical Assembly Parts List 007061160001

0054XP44C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	3135 010 03060	AC Cord, Filtered
BK/CV/LW	27		3135 013 01300	Back Cover (Lower)
BK/CV/UP	26		4835 432 97693	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA 3Pk
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/BOT	3		3135 014 02950	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03070	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03060	Extr., Screen Edge, Top
FILTER			4835 380 57011	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x17)
INSTR/BK			3135 015 08820	Instruction Book
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MTNG	25		3135 013 01410	Mirror Mounting
MIR/TRAP	24		3135 013 01140	Mirror Trapz 2nd Surface
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 08810	Quick Use Guide
REAR/BAR			4835 432 97694	Rear Barrier
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			00H1 47M EAA01	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06350	Screen Frame 54" (x2)
SPK/GRL	7		4835 459 47112	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		4835 240 57011	Speaker Woofer 5.25" (x2)

Optical Assembly Parts List 007060890002

005545380002

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01850	Back Barrier
BK/CV/LW	27		3135 013 01440	Back Cover (Lower)
BK/CV/UP	26		3135 013 01010	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			9299 000 13827	Battery f/Remote AAA 2Pk
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02930	Extr., Screen Bottom
SCRN/TOP	14		3135 014 03020	Extr., Screen Edge,Top
SCRN/EDG	2		3135 014 03030	Extr., Screen Edge,Side (x2)
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
INSERT/H	9		3135 014 02741	Hole Insert (x12)
INSTR/BK			3135 015 07330	Instruction Book
JP/FRM	18		3135 014 06650	Jack Panel Frame
JP/OVLAY	19		3135 015 04420	Jack Panel Overlay
LENSF	13		3135 013 01110	Lens, Fresnel
LENSL	10		3135 013 01100	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		3135 013 01200	Mirror Trapz, 2nd
QUICK/GD			3135 015 07320	Quick Use Guide
REM/TRAN			4835 219 17659	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer Treelock (x12)
SCRN/FRM	11		3135 014 06421	Screen Frame
SPEAKER	8		4835 240 47011	Speaker Full 4x6" 8 Ohm (x2)
SPK/GRL	7		3135 014 03270	Speaker Grille

Optical Assembly Parts List 007061150001

0060XP43C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	3135 010 03060	AC Cord, Filtered
BACK/BAR			3135 013 01390	Back Barrier
BK/CV/LW	27		3135 013 02350	Back Cover (Lower)
BK/CV/UP	26		3135 013 01340	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly
SCRN/BOT	3		3135 014 02960	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03090	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03080	Extr., Screen Edge, Top
FILTER			3135 014 02780	Filter
SCN/FRMS			3135 014 03430	Frame, Screen 60, Side (x2)
SCN/FRMT			3135 014 03410	Frame, Screen Top 60
FRNT/JP			4835 219 77787	Front Jack Panel
FRNT/COV			3135 013 01480	Front Panel Cover
INSERT/H	9		3135 014 02741	Hole Insert (x18)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00940	Lens, Fresnel
LENSL	10		3135 013 00910	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 01420	Mirror Board
MIR/BRKT	15		3135 011 03011	Mirror Board Mtng Bracket Lt
MIR/BRKT	15		3135 011 03021	Mirror Board Mtng Bracket Rt
MIR/TRAP	24		3135 013 01130	Mirror Trapz, 2nd
OWN/MAN			00IB 789 4E001	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			00EL 623 9E001	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			00H1 47M EAA01	Remote Transmitter UR614
RETAINER	1		3135 014 02620	Retainer Treelock (x17)
SPK/GRL	7		3135 014 06320	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		4835 240 57011	Speaker Woofer 5.25" (x2)

Optical Assembly Parts List 007061200001

008P4831C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01370	Back Barrier
BK/CV/LW	27		4835 432 97706	Back Cover (Lower)
BK/CV/UP	26		3135 013 01320	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02940	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03050	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03040	Extr., Screen Edge, Top
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
DIG/CONV	16		4835 432 17846	Frame f/Digital Convergence
INSERT/H	9		3135 014 02741	Hole Insert (x14)
JP/FRM	18		3135 014 06650	Jack Panel Frame
LENSF	13		3135 013 00960	Lens, Fresnel
LENSL	10		3135 013 00930	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MT/BD	25		3135 013 01350	Mirror Mounting Board
MIR/TRAP	24		3135 013 01150	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07370	Owners Manual
QUICK/GD			3135 015 07360	Quick Use Guide
JP/OVLAY	19		4835 459 17556	Rear Jack Panel Overlay
REM/TRAN			4835 219 17699	RemoteTransmit. UR714SB
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06300	Screen Frame 48" (x2)
SPEAKER	8		4835 240 47011	Speaker Full 4x6" 8 Ohm (x2)
SPK/GRL	7		3135 014 06270	Speaker Grille

Optical Assembly Parts List 007060870001

008P4834C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01370	Back Barrier
BK/CV/LW	27		4835 432 97706	Back Cover (Lower)
BK/CV/UP	26		3135 013 01320	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			4835 138 17047	Battery f/Remote AA ZC 1.5V
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02940	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03050	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03040	Extr., Screen Edge, Top
FILTER			4835 380 57009	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
INSERT/H	9		3135 014 02741	Hole Insert (x14)
JP/FRM	18		3135 014 06650	Jack Panel Frame
LENSF	13		3135 013 00960	Lens, Fresnel
LENSL	10		3135 013 00930	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MT/BD	25		3135 013 01350	Mirror Mounting Board
MIR/TRAP	24		3135 013 01150	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07370	Owners Manual
QUICK/GD			3135 015 07360	Quick Use Guide
JP/OVLAY	19		4835 459 17556	Rear Jack Panel Overlay
REM/TRAN			4835 219 17699	RemoteTransmit. UR714SB
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06300	Screen Frame 48" (x2)
SPEAKER	8		4835 240 47011	Speaker Full 4x6 8 Ohm (x2)
SPK/GRL	7		3135 014 06270	Speaker Grille

Optical Assembly Parts List 007060870001

008P4841C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01370	Back Barrier
BK/CV/LW	27		3135 013 01260	Back Cover (Lower)
BK/CV/UP	26		3135 013 01320	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02940	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03050	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03040	Extr., Screen Edge, Top
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x14)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00960	Lens, Fresnel
LENSL	10		3135 013 00930	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MT/BD	25		3135 013 01350	Mirror Mounting Board
MIR/TRAP	24		3135 013 01150	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07400	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07390	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17724	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06300	Screen Frame 48" (x2)
SPEAKER	8		2422 264 00301	Speaker 8 Ohm Full (x2)
SPK/GRL	7		4835 459 47107	Speaker Grille

Optical Assembly Parts List 007061010001

008P4844C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01370	Back Barrier
BK/CV/LW	27		3135 013 01260	Back Cover (Lower)
BK/CV/UP	26		3135 013 01320	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02940	Extr., Screen Bottom
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
SCRN/EDG	2		3135 014 03050	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03040	Extr., Screen Edge, Top
FILTER			4835 380 57009	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x14)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00960	Lens, Fresnel
LENSL	10		3135 013 00930	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MT/BD	25		3135 013 01350	Mirror Mounting Board
MIR/TRAP	24		3135 013 01150	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07400	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07390	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17724	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SCRN/FRM	11		3135 014 06300	Screen Frame 48" (x2)
SPEAKER	8		2422 264 00301	Speaker 8 Ohm Full (x2)
SPK/GRL	7		4835 459 47107	Speaker Grille

Optical Assembly Parts List 007061010001

008P5431C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BK/CV/LW	27		4835 432 97707	Back Cover (Lower)
BK/CV/UP	26		4835 432 97693	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			4835 138 17047	Battery f/Remote AA ZC 1.5V
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02950	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03070	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03060	Extr., Screen Edge, Top
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
SCRN/FRM	11		3135 014 06350	Frame, Screen 54" (x2)
INSERT/H	9		3135 014 02741	Hole Insert (x17)
JP/FRM	18		3135 014 06650	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MT/BD	25		3135 013 01410	Mirror Mounting
MIR/TRAP	24		3135 013 01140	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07370	Owners Manual
QUICK/GD			3135 015 07360	Quick Use Guide
REAR/BAR			4835 432 97694	Rear Barrier
JP/OVLAY	19		4835 459 17556	Rear Jack Panel Overlay
REM/TRAN			4835 219 17699	Remote Transmit. UR714SB
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SPEAKER	8		4835 240 47011	Speaker Full 4x6" 8 Ohm (x2)
SPK/GRL	7		4835 459 47113	Speaker Grille

Optical Assembly Parts List 007060870002

008P5434C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BK/CV/LW	27		4835 432 97707	Back Cover (Lower)
BK/CV/UP	26		4835 432 97693	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			4835 138 17047	Battery f/Remote AA ZC 1.5V
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02950	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03070	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03060	Extr., Screen Edge, Top
FILTER			4835 380 57011	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
SCRN/FRM	11		3135 014 06350	Frame, Screen 54" (x2)
INSERT/H	9		3135 014 02741	Hole Insert (x17)
JP/FRM	18		3135 014 06650	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MTNG	25		3135 013 01410	Mirror Mounting
MIR/TRAP	24		3135 013 01140	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07370	Owners Manual
QUICK/GD			3135 015 07360	Quick Use Guide
REAR/BAR			4835 432 97694	Rear Barrier
JP/OVLAY	19		4835 459 17556	Rear Jack Panel Overlay
REM/TRAN			4835 219 17699	RemoteTransmit. UR714SB
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SPEAKER	8		4835 240 47011	Speaker Full 4x6" 8 Ohm (x2)
SPK/GRL	7		4835 459 47113	Speaker Grille

Optical Assembly Parts List 007060870002

008P5441C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BK/CV/LW	27		4835 432 97691	Back Cover (Lower)
BK/CV/UP	26		4835 432 97693	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02950	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03070	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03060	Extr., Screen Edge, Top
BASE/RAIL	4		3135 014 03131	Foot, Base Rail (x2)
SCRN/FRM	11		3135 014 06350	Frame, Screen 54" (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x17)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MTNG	25		3135 013 01410	Mirror Mounting
MIR/TRAP	24		3135 013 01140	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07400	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07390	Quick Use Guide
REAR/BAR			4835 432 97694	Rear Barrier
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17724	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer, Treelock (x15)
SPEAKER	8		2422 264 00301	Speaker 8 Ohm Full (x2)
SPK/GRL	7		4835 459 47108	Speaker Grille

Optical Assembly Parts List 007061010002

008P5444C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BK/CV/LW	27		4835 432 97691	Back Cover (Lower)
BK/CV/UP	26		4835 432 97693	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02950	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03070	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03060	Extr., Screen Edge, Top
FILTER			4835 380 57011	Filter
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
SCRN/FRM	11		3135 014 06350	Frame, Screen 54" (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
INSERT/H	9		3135 014 02741	Hole Insert (x17)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17945	Light Barrier
MIR/BRKT	15		3135 011 02401	Mirror Board Mtng Brkt. (x2)
MIR/MTNG	25		3135 013 01410	Mirror Mounting
MIR/TRAP	24		3135 013 01140	Mirror Trapz 2nd Surface
OWN/MAN			3135 015 07400	Owners Manual
QUICK/GD			3135 015 07390	Quick Use Guide
REAR/BAR			4835 432 97694	Rear Barrier
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17724	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer Treelock (x15)
SPEAKER	8		2422 264 00301	Speaker 8 Ohm Full (x2)
SPK/GRL	7		4835 459 47108	Speaker Grille

Optical Assembly Parts List 007061010002

008P6031C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01390	Back Barrier
BK/CV/LW	27		4835 432 97708	Back Cover (Lower)
BK/CV/UP	26		3135 013 01340	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			4835 138 17047	Battery f/Remote AA ZC 1.5V
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02960	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03090	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03080	Extr., Screen Edge, Top
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
FRNT/COV			3135 013 01480	Front Panel Cover
INSERT/H	9		3135 014 02741	Hole Insert (x18)
JP/FRM	18		3135 014 06650	Jack Panel Frame
LENSF	13		3135 013 00940	Lens, Fresnel
LENSL	10		3135 013 00910	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 01420	Mirror Board
MIR/BRKT	15		3135 011 03011	Mirror Board Mtng Bracket Lt
MIR/BRKT	15		3135 011 03021	Mirror Board Mtng Bracket Rt
MIR/TRAP	24		3135 013 01130	Mirror Trapz, 2nd
OWN/MAN			3135 015 07370	Owners Manual
QUICK/GD			3135 015 07360	Quick Use Guide
JP/OVLAY	19		4835 459 17556	Rear Jack Panel Overlay
REM/TRAN			4835 219 17699	Remote Transmit. UR714SB
RETAINER	1		3135 014 02620	Retainer Treelock (x17)
SCN/FRMT			4835 432 17848	Screen Frame Top (x2)
SCN/FRMS			4835 432 17851	Screen Frame, Side (x2)
SPEAKER	8		4835 240 47011	Speaker Full 4x6" 8 Ohm (x2)
SPK/GRL	7		4835 459 47114	Speaker Grille

Optical Assembly Parts List 007060880001

008P6034C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01390	Back Barrier
BK/CV/LW	27		4835 432 97708	Back Cover (Lower)
BK/CV/UP	26		3135 013 01340	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			4835 138 17047	Battery f/Remote AA ZC 1.5V
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02960	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03090	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03080	Extr., Screen Edge, Top
FILTER			3135 014 02780	Filter
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
FRNT/COV			3135 013 01480	Front Panel Cover
INSERT/H	9		3135 014 02741	Hole Insert (x18)
JP/FRM	18		3135 014 06650	Jack Panel Frame
LENSF	13		3135 013 00940	Lens, Fresnel
LENSL	10		3135 013 00910	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 01420	Mirror Board
MIR/BRKT	15		3135 011 03011	Mirror Board Mtng Bracket Lt
MIR/BRKT	15		3135 011 03021	Mirror Board Mtng Bracket Rt
MIR/TRAP	24		3135 013 01130	Mirror Trapz, 2nd
OWN/MAN			3135 015 07370	Owners Manual
QUICK/GD			3135 015 07360	Quick Use Guide
JP/OVLAY	19		4835 459 17556	Rear Jack Panel Overlay
REM/TRAN			4835 219 17699	Remote Transmit. UR714SB
RETAINER	1		3135 014 02620	Retainer Treelock (x17)
SCN/FRMT			4835 432 17848	Screen Frame Top (x2)
SCN/FRMS			4835 432 17851	Screen Frame, Side (x2)
SPEAKER	8		4835 240 47011	Speaker Full 4x6" 8 Ohm (x2)
SPK/GRL	7		4835 459 47114	Speaker Grille

Optical Assembly Parts List 007060880001

008P6041C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01390	Back Barrier
BK/CV/LW	27		3135 013 01280	Back Cover (Lower)
BK/CV/UP	26		3135 013 01340	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02960	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03090	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03080	Extr., Screen Edge, Top
SCN/FRMS			3135 014 03430	Frame, Screen 60, Side (x2)
SCN/FRMT			3135 014 03410	Frame, Screen Top 60 (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
FRNT/COV			3135 013 01480	Front Panel Cover
INSERT/H	9		3135 014 02741	Hole Insert (x18)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00940	Lens, Fresnel
LENSL	10		3135 013 00910	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 01420	Mirror Board
MIR/BRKT	15		3135 011 03011	Mirror Board Mtng Bracket Lt
MIR/BRKT	15		3135 011 03021	Mirror Board Mtng Bracket Rt
MIR/TRAP	24		3135 013 01130	Mirror Trapz, Screen
OWN/MAN			3135 015 07400	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07390	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17724	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer, Treelock (x17)
SPEAKER	8		2422 264 00301	Speaker 8 Ohm Full (x2)
SPK/GRL	7		4835 459 47109	Speaker Grille

Optical Assembly Parts List 007061020001

008P6044C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 01390	Back Barrier
BK/CV/LW	27		3135 013 01280	Back Cover (Lower)
BK/CV/UP	26		3135 013 01340	Back Cover (Upper)
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
SCRN/BOT	3		3135 014 02960	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03090	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03080	Extr., Screen Edge, Top
FILTER			3135 014 02780	Filter
BASE/RAIL	4		3135 014 03131	Foot, Base Rail
SCN/FRMS			3135 014 03430	Frame, Screen 60, Side (x2)
SCN/FRMT			3135 014 03410	Frame, Screen Top 60 (x2)
FRNT/JP			4835 219 77787	Front Jack Panel
FRNT/COV			3135 013 01480	Front Panel Cover
INSERT/H	9		3135 014 02741	Hole Insert (x18)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00940	Lens, Fresnel
LENSL	10		3135 013 00910	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 01420	Mirror Board
MIR/BRKT	15		3135 011 03011	Mirror Board Mtng Bracket Lt
MIR/BRKT	15		3135 011 03021	Mirror Board Mtng Bracket Rt
MIR/TRAP	24		3135 013 01130	Mirror Trapz, 2nd
OWN/MAN			3135 015 07400	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07390	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17724	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer Treelock (x17)
SPEAKER	8		2422 264 00301	Speaker 8 Ohm Full (x2)
SPK/GRL	7		4835 459 47109	Speaker Grille

Optical Assembly Parts List 007061020001

008P6051C101

"s" in the "s" column indicates a safety part.

Ref.	Ref	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
SHELF			3135 013 02191	Accessory Shelf
SHELF			3135 013 02201	Accessory Shelf
SPACER			3135 014 05880	ATC Spacer
BK/CV/CTR			4835 432 97697	Back Cover Ctr.
BK/CV/ED			3135 013 00730	Back Cover End
RECEPT			4835 265 97154	Baffle Mount Receptacle (x8)
BATTERY			2422 526 01262	Battery f/Remote AA
CAB/BACK			4835 432 97626	Cabinet Back, Vac
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
DOOR/GL			3135 013 02181	Door, Glass (x2)
SCRN/BOT	3		3135 014 02960	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03090	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03080	Extr., Screen Edge, Top
SCN/FRMS			3135 014 03430	Frame, Screen 60, Side (x2)
SCN/FRMT			3135 014 03410	Frame, Screen Top 60 (x2)
BASE/RAIL	6		3135 013 02211	Front Base Rail
FRNT/JP			4835 219 77787	Front Jack Panel
HINGE/LW			3135 010 02411	Hinge (Lower)
HINGE/UP			3135 010 02401	Hinge (Upper)
INSERT/H	9		3135 014 02741	Hole Insert (x16)
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00940	Lens, Fresnel
LENSL	10		3135 013 00910	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MAG/CTCH			3135 010 02381	Magnetic Catch (x2)
MIR/BRKT	15		3135 011 02021	Mirror Board Mtng Brkt. (x2)
MIR/MTNG	25		3135 013 00760	Mirror Mounting
MIR/TRAP	24		4835 380 37021	Mirror Trapz, 2nd
OWN/MAN			3135 015 07430	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
PULL/D			3135 010 02391	Pull, Door (x2)
QUICK/GD			3135 015 07420	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17724	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer Treelock (x17)
SHELF			3135 011 03211	Shelf VCR Storage
SPEAKER	8		2422 264 00301	Speaker 8 Ohm Full (x2)
SPKR/BFL			4835 432 67244	Speaker Bfl
TUBE/VCR			3135 014 05870	Tube VCR
VCR/ENCL			3135 014 07031	VCR Enclosure

Optical Assembly Parts List 007060920001

00MX5472C101

"s" in the "s" column indicates a safety part.

Ref.	Ref	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 00800	Back Barrier
BK/CV/CTR			4835 432 97703	Back Cover Ctr
BK/CV/ED			3135 013 00730	Back Cover End
BK/CV/RL			4835 432 97716	Back Cover Rail
BK/CV/VAC			3135 014 03320	Back Cover Vac FM 54"
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/EDG	2		3135 014 04130	Extr., Screen Side (x2)
SCRN/T/B			3135 014 04120	Extr., Screen T/B (x2)
FILT/CONT			3135 014 03720	Filter Contrast 54
BS/RL/FO	4		3135 014 03131	Foot Base Rail (x2)
BS/RL/FRT	6		3135 013 02031	Front Base Rail
FRNT/JP			4835 219 77791	Front Jack Panel
GUIDE/PLS			4835 219 77704	Guide Plus
INSERT/H	9		3135 014 02741	Hole Insert (x13)
IR/BLAST			3135 017 00920	IR Blaster 705994
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 00840	Mirror Board
MIR/BRKT	15		3135 011 02021	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		4835 380 37028	Mirror Trapz,1st
OWN/MAN			3135 015 07470	Owners Manual
PNL/FT/JK			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07460	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17703	Remote Transmit. UR617KD
RETAINER	1		3135 014 02620	Retainer Treelock (x16)
SCN/FMBT			3135 014 06140	Screen Frame Bottom
SCN/FMLT	12		3135 014 06110	Screen Frame Lt Corner (x2)
SCN/FMRT	12		3135 014 06120	Screen Frame Rt Corner (x2)
SCN/FMTP			3135 014 06070	Screen Frame Top
SCN/FMSD			3135 014 06080	Screen Frame, Side (x2)
SPK/GRL	7		3135 014 06020	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		2422 264 00259	Speaker Woofer 6" (x2)
SPD/CLP			3135 010 02660	Speed Clip JK

Optical Assembly Parts List 007061040001

00MX6072C101

"s" in the "s" column indicates a safety part.

Ref.	Ref	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 00790	Back Barrier
BK/CV/VAC			3135 014 01020	Back Cover 60" Vac FM
BK/CV/CTR			4835 432 97703	Back Cover Ctr
BK/CV/ED			3135 013 00730	Back Cover End(x2)
BK/CV/RL			4835 432 97716	Back Cover Rail
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/T/B			3135 014 04140	Extr. Screen Edge, T&B (x2)
SCRN/EDG	2		3135 014 04150	Extr., Screen Edge, Side (x2)
FILT/CONT			3135 014 03730	Filter Contrast 60
BS/RL/FO	4		3135 014 03131	Foot Base Rail (x2)
BS/RL/FRT	6		3135 013 02031	Front Base Rail
FRNT/JP			4835 219 77791	Front Jack Panel
GUIDE/PLS			4835 219 77704	Guide Plus
INSERT/H	9		3135 014 02741	Hole Insert (x13)
IR/BLAST			3135 017 00920	IR Blaster 705994
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00940	Lens, Fresnel
LENSL	10		3135 013 00910	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 02330	Mirror Board
MIR/BRKT	15		3135 011 02021	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		4835 380 37029	Mirror Trapz,1st
OWN/MAN			3135 015 07470	Owners Manual
PNL/FT/JK			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07460	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17703	Remote Transmit. UR617KD
RETAINER	1		3135 014 02620	Retainer Treelock (x22)
SCN/FMBT			3135 014 06150	Screen Frame Bottom
SCN/FMLT	12		3135 014 06110	Screen Frame Lt Corner (x2)
SCN/FMRT	12		3135 014 06120	Screen Frame Rt Corner (x2)
SCN/FMTP			3135 014 06090	Screen Frame Top
SCN/FMSD			3135 014 06100	Screen Frame, Side (x2)
SPK/GRL	7		3135 014 06020	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		2422 264 00259	Speaker Woofer 6" (x2)
SPD/CLP			3135 010 02660	Speed Clip JK

Optical Assembly Parts List 007060860002

00MX6472C101

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	4835 321 17128	AC Cord, Filtered
BACK/BAR			3135 013 00800	Back Barrier
BK/CV/CTR			4835 432 97703	Back Cover Ctr.
BK/CV/ED			3135 013 00730	Back Cover End
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA
CAB/BACK			3135 014 03860	Cabinet Back, Vac
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			4835 240 77063	Crossover Assembly (Spkr)
SCRN/EDG	2		3135 014 04150	Extr., Screen Edge, Side (x2)
SCRN/T/B			3135 014 04140	Extr., Screen Edge, T&B (x2)
FILTER			3135 014 03740	Filter 64"
BS/RL/FO	4		3135 014 03131	Foot Base Rail (x2)
BS/RL/FRT	6		3135 013 02031	Front Base Rail
FRNT/JP			4835 219 77791	Front Jack Panel
GUIDE/PLS			4835 219 77704	Guide Plus
INSERT/H	9		3135 014 02741	Hole Insert (x13)
IR/BLAST			3135 017 00920	IR Blaster 705994
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00380	Lens, Fresnel
LENSL	10		3135 013 00370	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 00390	Mirror Board
MIR/BRKT	15		3135 011 02021	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		3135 013 01400	Mirror Trapz,1st
OWN/MAN			3135 015 07470	Owners Manual
FRNT/JP			3135 014 02980	Panel, Front Jack
QUICK/GD			3135 015 07460	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17703	Remote Transmit. UR617KD
RETAINER	1		3135 014 02620	Retainer Treelock (x22)
SCN/FMBT			3135 014 06130	Screen Frame Bottom
SCN/FMLT	12		3135 014 06110	Screen Frame Lt Corner (x2)
SCN/FMRT	12		3135 014 06120	Screen Frame Rt Corner (x2)
SCN/FMSD			3135 014 06060	Screen Frame Side (x2)
SCN/FMTP			3135 014 06050	Screen Frame Top
SPK/GRL	7		3135 014 06020	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		2422 264 00259	Speaker Woofer 6" (x2)
SPD/CLP			3135 010 02660	Speed Clip JK

Optical Assembly Parts List 007060860001

00PV5470 C104, C105

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	3135 010 03060	AC Cord, Filtered (C104)
AC/CORD	20	s	2422 070 98103	AC Cord, Filtered (C105)
BACK/BAR			3135 013 00800	Back Barrier
BK/CV/VAC			3135 014 03320	Back Cover 54" Vac FM
BK/CV/CTR			4835 432 97703	Back Cover Ctr
BK/CV/ED			3135 013 00730	Back Cover End Side (x2)
BK/CV/RL			4835 432 97716	Back Cover Rail
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA 3Pk
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame (C104)
CHAS/FRM	17		3135 014 06041	Chassis Frame (C105)
CROS/ASM			4835 240 77099	Crossover Assembly (Spkr)
SCRN/EDG	2		3135 014 04130	Extr., Screen Side (x2)
SCRN/TOP	14		3135 014 04120	Extr., Screen, Top (x2)
FILT/CONT			3135 014 03720	Filter Contrast 54
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
GUIDE/PLS			4835 219 77704	Guide Plus
INSERT/H	9		3135 014 02741	Hole Insert (x13)
IR/BLAST			3135 017 00920	IR Blaster 705994
JP/FRM	18		4835 432 17944	Jack Panel Frame
LENSF	13		3135 013 00950	Lens, Fresnel
LENSL	10		3135 013 00920	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 00840	Mirror Board
MIR/BRKT	15		3135 011 02021	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		4835 380 37028	Mirror Trapz,1st
OWN/MAN			00IB 790 6E001	Owners Manual
QUICK/GD			00EL 624 7E001	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17718	Remote Transmitter
RETAINER	1		3135 014 02620	Retainer Treelock (x16)
SCRN/FRM	11		4835 432 17949	Screen Frame
SCN/FMTP			4835 432 17948	Screen Frame (Top)
SCN/FMCN	12		4835 432 17946	Screen Frame, Corner (x2)
SCN/FMCN	12		4835 432 17947	Screen Frame, Corner (x2)
SPK/GRL	7		3135 014 06750	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75" (x2)
SPKR/WF	8		2422 264 00259	Speaker Woofer 6" (x2)
SPD/CLP			3135 010 02660	Speed Clip JK

Optical Assembly Parts List 007061050001

00PV6070 C104, C105

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	3135 010 03060	AC Cord Filtered (C104)
AC/CORD	20	s	2422 070 98103	AC Cord Filtered (C105)
BACK/BAR			3135 013 00790	Back Barrier
BK/CV/CTR			4835 432 97703	Back Cover Ctr
BK/CV/SD			3135 013 00730	Back Cover End (Side)
BK/CV/RL			4835 432 97716	Back Cover Rail
BK/CV/VAC			3135 014 01020	Back Cover Vac Fm
RECEPT			4835 265 97154	Baffle Mount Receptacle (x6)
BATTERY			2422 526 01262	Battery f/Remote AA 3 Pk
CASTER			4835 528 77071	Caster (x4)
CHAS/FRM	17		4835 432 17943	Chassis Frame (C104)
CHAS/FRM	17		3135 014 06041	Chassis Frame (C105)
SCRN/SD	2		3135 014 04150	Extr., Screen Edge (Side)
SCRN/TOP	14		3135 014 04140	Extr., Screen Edge (Top)
BASE/RAIL	4		3135 014 03131	Foot Base Rail (x2)
DIG/CONV	16		4835 432 17846	Frame f/Digital Convergence
INSERT/H	9		3135 014 02741	Hole Insert (x13)
IR/BLAST			3135 017 00920	IR Blaster 705994
JP/FRM	18		3135 014 01111	Jack Panel Frame
LENSF	13		3135 013 00940	Lens Fresnel
LENSL	10		3135 013 00910	Lens Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BD	25		3135 013 02330	Mirror Board
MIR/BRKT	15		3135 011 02021	Mirror Board Mtng Brkt. (x2)
MIR/TRAP	24		4835 380 37029	Mirror Trapazoid 1st
OWN/MAN			00IB 790 6E001	Owners Manual
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17718	Remote Transmitter UR617
RETAINER	1		3135 014 02620	Retainer Treelock (x22)
SCRN/FRM	11		4835 432 17981	Screen Frame
SCN/FMTP			4835 432 17979	Screen Frame (Top)
SCN/FMCN	12		4835 432 17946	Screen Frame Corner
SCN/FMCN	12		4835 432 17947	Screen Frame Corner
SPKR/GRL	7		3135 014 06750	Speaker Grille
SPKR/TW	21		4835 240 27003	Speaker Tweeter 2.75"
SPKR/WF	8		2422 264 00259	Speaker Woofer 6"
SPD/CLP			3135 010 02660	Speed Clip JK

Optical Assembly Parts List 007061050002

00XV5270B103

"s" in the "s" column indicates a safety part.

Ref.	Ref No	s	Part Number	Description
AC/CORD	20	s	3135 010 03060	AC Cord, Filtered
BACK/BAR			3135 013 01700	Back Barrier
BK/CV/LW	27		3135 013 01690	Back Cover (Lower)
BK/CV/UP	26		3135 013 01680	Back Cover (Upper)
BATTERY			2422 526 01262	Battery f/Remote AA 3 Pk
CASTER			4835 528 77065	Caster (x2)
CASTER			4835 528 77066	Caster (x2)
CHAS/FRM	17		4835 432 17943	Chassis Frame
CROS/ASM			00A1 069 2A001	Crossover Assembly (Spkr)
SCRN/BOT	3		3135 014 02930	Extr., Screen Bottom
SCRN/EDG	2		3135 014 03030	Extr., Screen Edge, Side (x2)
SCRN/TOP	14		3135 014 03020	Extr., Screen Top
FRM/CONV	16		4835 432 17846	Frame f/Digital Convergence
INSERT/H	9		4835 265 97341	Hole Insert (x12)
JP/FRM	18		3135 014 01111	Jack Panel Frame
LENSF	13		3135 013 01110	Lens, Fresnel
LENSL	10		3135 013 01100	Lens, Lenticular
LIGHT/BAR	22		4835 432 17847	Light Barrier
MIR/BRKT	15		3135 011 0240	Mirror Board Mtng Brkt. (x2)
MIR/MTNG	25		3135 013 01710	Mirror Mounting Board
MIR/TRAP	24		4835 380 37033	Mirror Trapz, 1st Surface
OWN/MAN			00IB 790 4E001	Owners Manual
QUICK/GD			00EL 624 5E001	Quick Use Guide
JP/OVLAY	19		3135 015 04430	Rear Jack Panel Overlay
REM/TRAN			4835 219 17717	Remote Transmitter UR614
RETAINER	1		4835 432 17956	Retainer Treelock (13)
SCRN/FRM	11		4835 380 57013	Screen Frame
SPEAKER	8		2422 264 00313	Speaker 6 ohm Full
SPKR/TW	21		2422 264 00318	Speaker Tweeter 3", 6 ohm
SPD/CLP			3135 010 02660	Speed Clip JK

Optical Assembly Parts List 007061030001

00706086 0001, 0002 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		3135 013 00121	Shield Lt
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57438	CRT Blue (P16LFM00BMB)
E	s	4835 310 57437	CRT Green (P16LFM00HLA)
E	s	4835 310 57436	CRT Red (P16LFM00RFA)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		3135 011 01940	Coupler 60" Red (0002)
P		3135 011 02550	Coupler Red & Blue 64" (0001)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47021	Lens, Delta 79 (Blue)
W		4835 381 47022	Lens, Main, Red & Green (0002)

00706087 0001, 0002 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		4835 290 87153	Coupler Red & Blue 46" (0001)
P		4835 290 87155	Coupler Red & Blue 54" (0002)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47017	Lens, Main, Blue
W		4835 381 47022	Lens, Main, Red & Green

00706088 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43802	Deflection Yoke
		3135 010 00350	Focus Lead Assembly
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		3135 011 01940	Coupler 60" (Red)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47021	Lens, Delta 79
W		4835 381 47022	Lens, Main, Red & Green

00706089 0001, 0002 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		4835 290 87152	Coupler Green
P		4835 290 87153	Coupler, Red & Blue (0001)
P		4835 290 87155	Coupler, Red & Blue 54" (0002)
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47019	Lens C-Element, Green
S		4835 381 47016	Lens C-Element, (Blue & Red) D77
W		4835 381 47017	Lens Main Blue
W		4835 381 47022	Lens, Main, Red & Green D78

00706092 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		3135 011 01940	Coupler 60" (Red)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47021	Lens, Delta 79
W		4835 381 47022	Lens, Main, Red & Green

00706101 0001, 0002 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		4835 290 87153	Coupler Red & Blue 46" (0001)
P		4835 290 87155	Coupler Red & Blue 54" (0002)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47017	Lens, Main, Blue
W		4835 381 47022	Lens, Main, Red & Green

00706102 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43802	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		3135 011 01940	Coupler 60" (Red)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47021	Lens, Delta 79
W		4835 381 47022	Lens, Main, Red & Green

00706103 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
E	s	4835 310 57438	CRT P16LFM00BMB (Blue)
E	s	4835 310 57437	CRT P16LFM00HLA (Green)
E	s	4835 310 57436	CRT P16LFM00RFA (Red)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
O		3135 014 02680	Expansion Diaphragm
O		3135 013 01060	Diaphragm,Coupler
P		4835 290 87152	Coupler, Green
P		4835 290 87154	Coupler, Red & Blue (52")
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47017	Lens, Main, Blue
W		4835 381 47022	Lens, Main, Red & Green

00706104 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57438	CRT (P16LFM00BMB) Blue
E	s	4835 310 57437	CRT (P16LFM00HLA) Green
E	s	4835 310 57436	CRT (P16LFM00RFA) Red
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		4835 290 87155	Coupler Red & Blue (54")
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47017	Lens, Main, Blue
W		4835 381 47022	Lens, Main, Red & Green

00706105 0001, 0002 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		3135 013 00121	Shield Lt
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57438	CRT (P16LFM00BMB) Blue
E	s	4835 310 57437	CRT (P16LFM00HLA) Green
E	s	4835 310 57436	CRT (P16LFM00RFA) Red
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		3135 011 01940	Coupler 60" Red (0002)
P		4835 290 87155	Coupler Red & Blue 54" (0001)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47021	Lens, Delta 79 Blue (0002)
W		4835 381 47017	Lens, Main, Blue (0001)
W		4835 381 47022	Lens, Main, Red & Green

00706109 0001, 0002 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		4835 290 87153	Coupler Red & Blue (0001)
P		4835 290 87155	Coupler Red & Blue 54" (0002)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47017	Lens, Main, Blue
W		4835 381 47022	Lens, Main, Red & Green

00706115 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		3135 011 02290	Coupler Red & Blue (52")
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47017	Lens, Main, Blue
W		4835 381 47022	Lens, Main, Red & Green

00706116 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43801	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		4835 310 57233	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		4835 290 87155	Coupler Red & Blue (54")
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47017	Lens, Main, Blue
W		4835 381 47022	Lens, Main, Red & Green


00706120 0001 OPTICAL ASSEMBLY

"s" in the "s" column indicates a safety part.

Ill.#	s	Part Number	Description
	s	2422 549 43802	Deflection Yoke
		3135 010 00730	Focus Lead
	s	2322 460 90514	Focus/Screen Control.
	s	4835 321 27397	HV Anode Lead (3 used)
		4835 157 58199	SVM Yoke
B		3135 011 00610	Compression Spring (4 used)
E	s	4835 310 57408	CRT 180DLB22 (Blue)
E	s	4835 310 57411	CRT 180DLB22 (Green)
E	s	4835 310 57409	CRT 180DLB22 (Red) (HU)
H		3135 013 02321	Seal, CRT
I		3135 010 02040	Coolant (Enough to do 3 CRTs)
K		4835 432 17791	Fill Plug
L		4835 290 87147	Fill Plug Seal
M		4835 432 17736	Diaphragm Cover
O		3135 013 01060	Expansion Diaphragm
P		3135 011 01940	Coupler 60" (Red)
P		4835 290 87152	Coupler, Green
R		4835 290 87141	O-Ring Seal (Lens to Coupler)
S		4835 381 47016	Lens, C-Element, Blue & Red
S		4835 381 47019	Lens, C-Element, Green
W		4835 381 47021	Lens, Delta 79
W		4835 381 47022	Lens, Main, Red & Green

PICTURE TUBE REPLACEMENT

Exploded view of optical assembly.

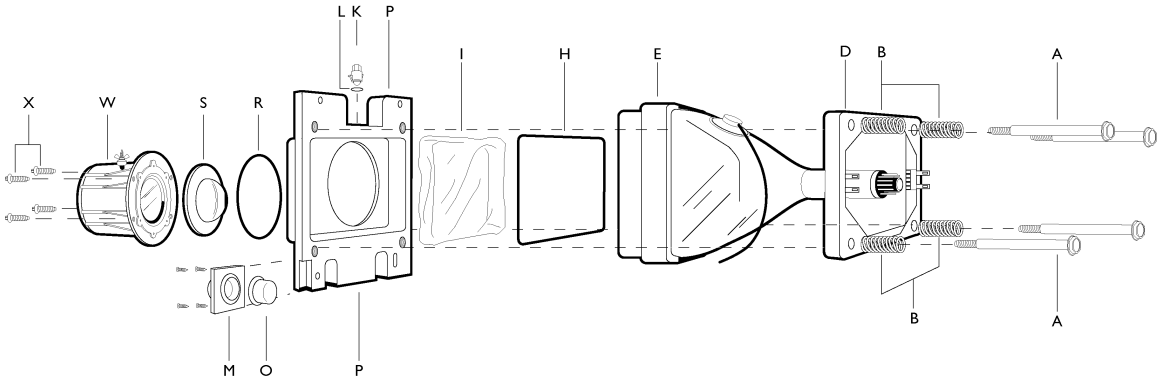

Replacement of the Picture Tube (CRT) and/or Optical system components of a Projection TV (PTV) can easily be accomplished by following these general guidelines.

Use care when working around the CRT and optical systems of the PTV. The PTV light path encompasses a wealth of precision optical components which include lenses, mirrors, lenticular and Fresnel screens.

The PTV uses three separate CRT's representing the Green, Red and Blue outputs. Each CRT uses an independent Deflection/Convergence Yoke, Magnetic Centering Ring, coupler, C-Element lens and Output lens (A/B Lens). Each tube is mechanically fastened to a coupler that houses fluid (glycol type substance) used to cool the high concentrated temperatures generated by the small 7 inch CRT's. The fluid also provides an optical characteristic supporting the optical system of the PTV.

When replacement of a CRT or Optical component is required caution must be exercised in preventing fluid spillage. The Technician must carefully reassemble CRT/Optical components insuring a proper seal of the coupling fluid. Use only Factory original coupling fluid.


Note: Do not use or add water as an alternative to the prescribed coupling fluid!

The following procedure should be used when performing repairs on the CRT/Optical assemblies of the Projection TV:

Note: Upon repair completion of the CRT/Optical assembly, the centering, convergence, gray scale, mechanical and electrical focus adjustment is required. If more than one assembly requires repair it is recommended that the Service Technician fully complete one assembly at a time. Use the existing assemblies as a reference for the alignment of the centering and convergence.

DISASSEMBLY PROCEDURE

Exploded view of optical assembly.

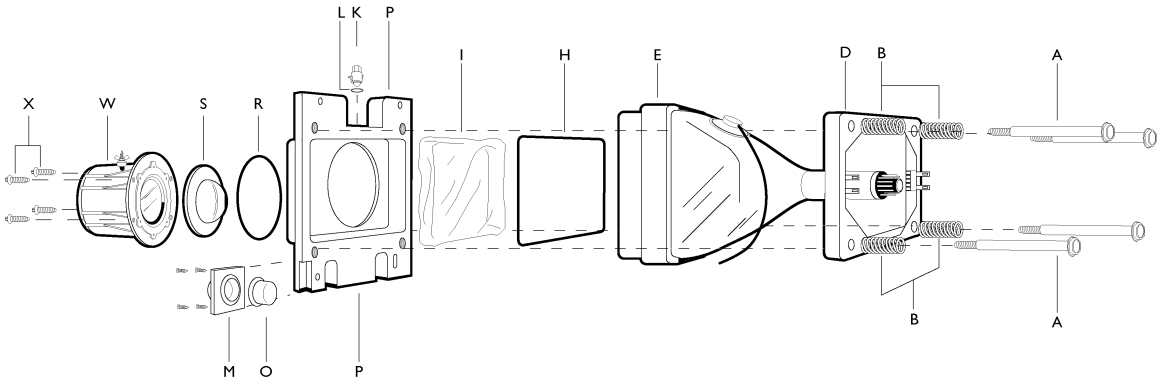

Removal of a single CRT/Lens Assembly from the light rack

1a) Remove AC power from the PTV.

2a) Remove the upper and lower back covers (1/4" screws).

3a) Remove the barrier board and the shield cover from around the lens assemblies (1/4" screws).

4a) Remove the left side wing cover (as viewed from the back) to gain access to the Digital Convergence module (1/4").

5a) Carefully remove the CRT Socket Board from the CRT of the CRT/optical assembly requiring service.

6a) Remove the yoke plug from the Large Signal Module and the Convergence Yoke plug from the Digital Convergence Module of the CRT/Optical assembly requiring service.

7a) Remove the High Voltage Anode lead from the HV splitter block on the Large Signal Module of the CRT/Optical assembly requiring service. Remove ground lug connectors from the coupler frame.

8a) Remove the four 1/4" screws that secure the CRT/Lens assembly to the light rack. These four screws are located in each corner, on the top of the coupler assembly. **DO NOT REMOVE THE BOLTS WITH PRESSURE SPRINGS OR THE INVERTED TORX SCREWS OF THE CRT/LEN ASSEMBLY. THE REMOVAL OF THESE COMPONENTS COULD RESULT IN FLUID SPILLAGE INTO THE PTV CABINET.**

9a) Carefully remove the CRT/lens Assembly from the PTV cabinet.

SERVICING THE CRT/OPTICAL ASSEMBLY

The following procedures describe how to service the Delta 77/78 CRT/Optical block used in the PTV 700 Series Chassis.

NOTE: DO NOT ATTEMPT ANY REPAIRS ON THE CRT/OPTICAL BLOCK ASSEMBLY WITHOUT FIRST REMOVING THE CRT COUPLING FLUID! REMOVAL OF THE DELTA OUTPUT LENS WILL RESULT IN SPILLAGE OF THE COUPLING FLUID!

CAUTION; Coupling fluid is a Poisonous Solution containing a High Concentration of Ethylene Glycol. Do not leave exposed fluid unattended. Prevent Children or Pets from coming in contact with the fluid. Clean up spills immediately.

Removing The PTV Coupling Fluid

All repairs made to the CRT/Optical Block assembly will require the Coupling Fluid to be removed. The following procedure describes how to remove the PTV Coupling Fluid.

1b) Lay the CRT assembly on its side with the drain plug pointing up.

2b) Remove the Drain Plug (1/4 turn to release).

3b) Remove some of the fluid from the coupler to prevent spillage when the CRT is removed. An empty Coupling Fluid Bottle with a Cone Top is recommended to lower the fluid level within the coupler. Squeeze and hold the bottle and insert the tip of the cap into the drain hole of the coupler. Loosen the grip on the bottle allowing the fluid to be pulled up into the bottle. Save the fluid.

4b) Re-install the drain plug.

5b) Stand the CRT assembly up with the neck of the CRT pointing up.

6b) With an awl or marking pen, outline the edges of the CRT onto the coupler. **Note: THE CORRECT POSITIONING OF THE CRT TO THE COUPLER IS CRITICAL TO THE OPTIMUM PERFORMANCE OF THE OPTICAL SYSTEM!**

7b) Remove the 4 CRT mounting bolts (with springs and spacers) and remove the mounting bracket.

8b) Remove the 4 CRT mounting ear screws. Note: Some CRTs do not use the four CRT to Coupler screws.

9b) Gently remove any metal shavings from around the screw holes. Do not allow the metal shavings to get into the fluid.

10b) Note the position of the High Voltage Anode Cap with respect to the Coupler.

11b) Carefully remove the CRT from the Coupler. Wipe excess fluid from the faceplate of the CRT. Set the CRT aside.

12b) Use an empty coupling fluid bottle to extract the remainder of the fluid from the coupler. Note: Complete removal of the coupling fluid is not necessary when only replacing the CRT.

13b) Clean any remaining fluid from the coupler and the CRT gasket channel using absorbent tissue. Refer to the "Cleaning of the Coupler, C-Element Lens and CRT Faceplate " procedure C of this procedure if the fluid is discolored or contaminated.

14b) Make necessary repairs.

Cleaning of The Coupler, C-Element Lens and CRT Faceplate

1c) Remove PTV Coupling Fluid as described in steps 1b through 13b.

2c) Use **Denatured Alcohol** on a cloth made of 100% cotton or a lens cleaning tissue, gently clean the C-Element (Fish eye) Lens, Coupler and the CRT Faceplate. Thoroughly clean the coupler assembly including the Expansion Chamber bladder. Allow to fully dry.

DO NOT USE SOAP OR DETERGENT TYPE SUBSTANCES TO CLEAN THE COUPLER AND ITS RELATED ASSEMBLIES. WATER CAN BE USED AS AN ALTERNATIVE TO DENATURED ALCOHOL BUT THE ASSEMBLIES MUST BE COMPLETELY DRY OF THE WATER PRIOR TO REASSEMBLY OF THE COUPLER AND THE ADDITION OF THE COUPLING FLUID. A HAIR DRYER COULD BE USED TO DRY THE COUPLER AND ITS ASSEMBLIES OF THE WATER PRIOR TO REASSEMBLY.

IF CONTAMINATED FLUID IS DISCOVERED COMPLETE DISASSEMBLY AND CLEANING OF THE COUPLER AND ITS RELATED ASSEMBLIES MUST BE FULLY EXERCISED TO PREVENT A REOCCURRENCE.

3c) Replace the CRT and C-Element Lens Gaskets.

4c) Reassemble the C-Element Lens and the Output Lens to the Coupler.

5c) Refer to the "Replacing the PTV Coupling Fluid " procedure upon completion of necessary repairs and cleaning of the Optical/Coupler assemblies.

Replacement of The CRT

1d) Remove PTV Coupling Fluid as described in steps 1b through 13b.

2d) Remove the plastic protective coating (if present) from the faceplate of the replacement CRT.

3d) Refer to the "Replacing the PTV Coupling Fluid " procedure to complete the CRT replacement.

Repair or Replacement of The Optical/Coupler Assembly

1e) Remove PTV Coupling Fluid as described above in steps 1b through 13b of the "removing PTV Coupling Fluid " procedure.

2e) Remove the four "Inverted Type Torx" screws which secure the Delta Output Lens to the Coupler. An "Inverted Type Torx" socket can be purchased under part number 483539517303.

3e) Removal of the Delta Output Lens will allow access to the C-Element, C-Element Gasket, Coupler and its assemblies.

4e) Refer to the "Replacing the PTV Coupling Fluid " procedure upon completion of necessary repairs to the Optical/Coupler assemblies.

Replacing The PTV Coupling Fluid

Note: Prior to replacing the PTV coupling fluid insure the expansion chamber bladder is fully collapsed. This can easily be inspected by visually viewing the bladder through the small hole on the expansion chamber assembly. If the rubber of the bladder is not easily visible through the small hole then consider the bladder collapsed and fluid can be added. If the rubber of the expansion chamber bladder is visible at the hole of the expansion chamber then replacement of the expansion chamber bladder will be required.

Note: The CRT coupling fluid is critical to the optical performance of the PTV. Use only part number 4835 310 57233 (3 bottle kit) or 4835 310 67004 (single bottle) to insure the optical integrity and performance reliability of the PTV when replacing the PTV Coupling Fluid.

1f) Re-install the CRT gasket into the gasket channel of the coupler. Confirm the placement of the CRT, C-Element and vent plug gaskets.

2f) Place the CRT onto the coupler with the High Voltage Anode lead positioned as marked in step 10b of the previous procedure.

3f) Carefully position the CRT on the coupler using the outline as defined in step 7b in the previous procedure as reference.

4f) Start the CRT mounting ear screws but do not tighten.

5f) Tighten the mounting ear screws in a star pattern (like tightening lug nuts on a car). Make sure the CRT does not shift position from the outline used as a reference in step 6b.

CAUTION: DO NOT OVERTIGHTEN THE CRT EAR SCREWS! Note: Some assemblies will not have the CRT mounting ear screws present.

6f) Install the CRT mounting bracket and start the 4 CRT mounting bracket bolts with springs.

7f) Tighten the bolts in a star pattern.

8f) Lay the CRT assembly on its side with the drain plug pointing up.

9f) Remove the drain plug (1/4 turn to release).

10f) Using the PTV Coupling Fluid Bottle with the Cone Top re-fill the Coupler with fluid through the drain access hole. Completely fill the Coupler chamber so the fluid is level the top of the coupler at the drain plug. Wipe any excess fluid from around the coupler.

11f) Re-install the drain plug. Check for any fluid leaks.

12f) Install the repaired CRT/Optical Block Assembly into the PTV and perform any necessary adjustments.

ADJUSTMENT PROCEDURES

The Large Signal Panel incorporates a "Hot" ground system. Always use a separate isolation transformer when applying power to the exposed chassis.


Service Adjustment Notes:

Unless Otherwise Specified:


1. All service adjustments are "hot" voltagewise. For maximum safety, ensure the use of properly insulated tools.
2. Many of the following adjustments are made through software intervention. The user Remote Transmitter is required in order to modify register values stored within the EEPROM IC the Main Chassis Board Assembly.
3. Refer to the Component Location Diagram for a quick location of test points or service adjustable controls.
4. Grid locations (Ex.: D-2) next to a control reference numbers refer to the Printed Circuit Board Zone Locations.

On-Screen Oscillator Set Up

1 TUNER TEST POINT LOCATION GRAPHIC

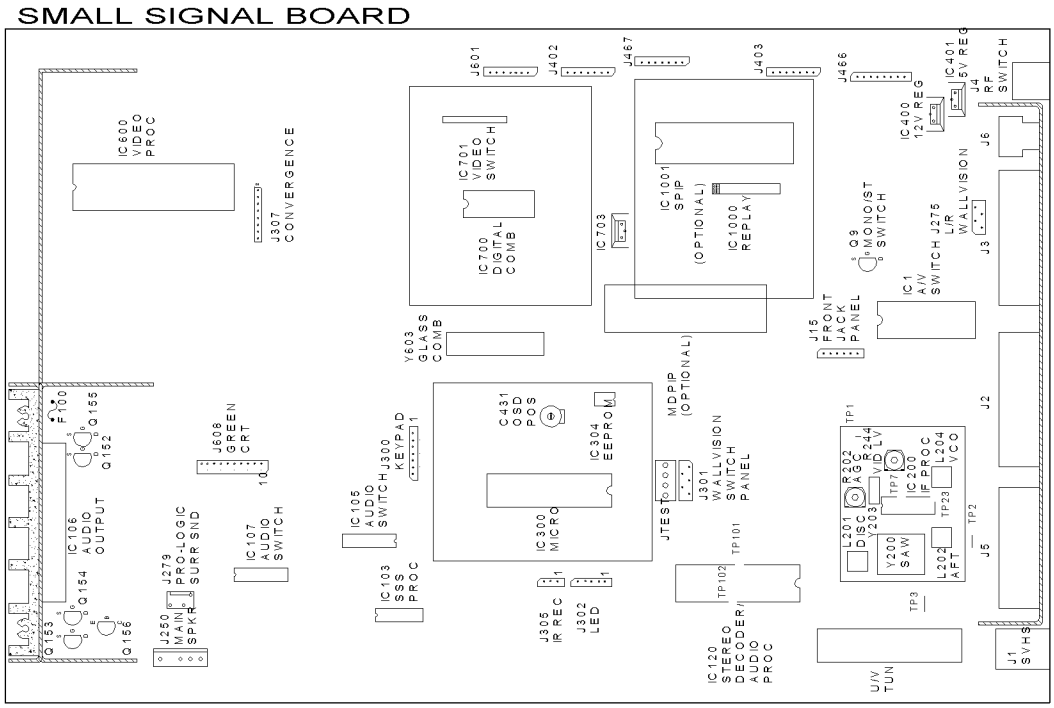

2 TUNER TEST POINT LOCATION GRAPHIC

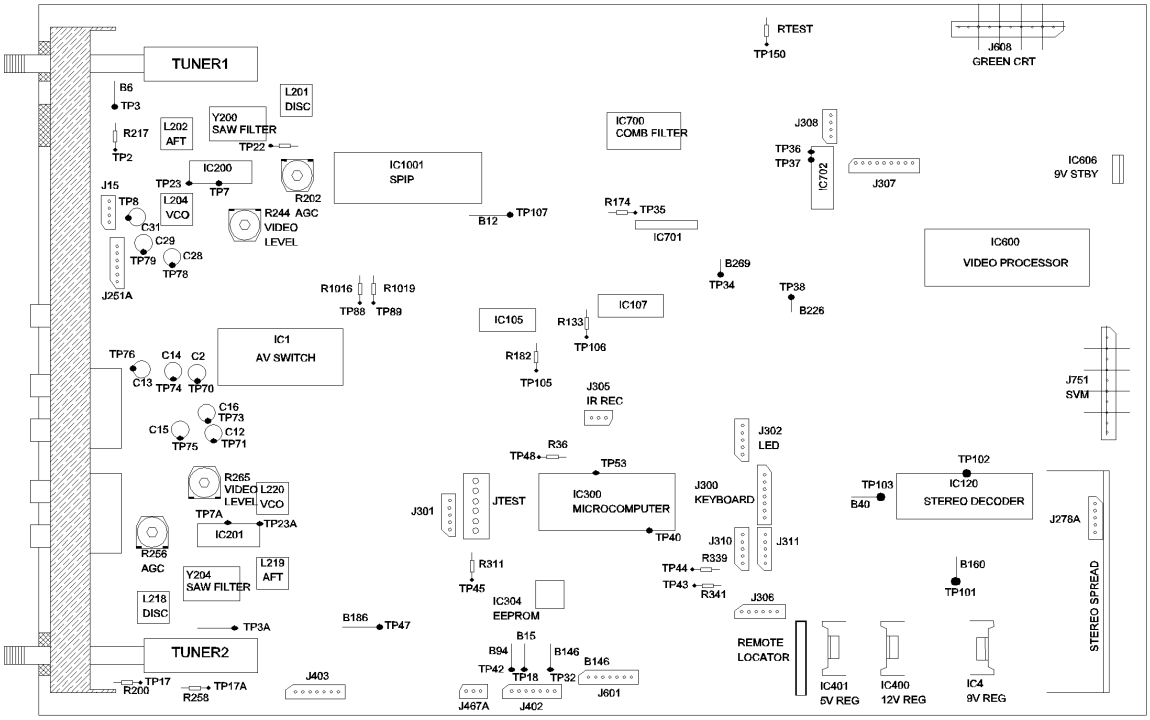

1. Turn the set on and tune to a TV signal.
2. Connect a Digital Voltmeter to TP41 on the Small Signal Panel.
3. Adjust C341 (zone E-6) to obtain a reading of 2.5Vdc (+/- 0.1V) on the meter.

Note: This adjustment may affect On-Screen Menu positioning as well as other graphics generated the set. Refer to "Modifying Factory Default Values" (later in this section) and DAC registers 21 & 22 for vertical and horizontal positioning of the On Screen Display.

RF AGC Delay

Single Tuner Models (ASG051 & 52)

Note: This control (R202) is located on the Small Signal Panel in zone area J-2.

1. Tune to a weak station, or loosely couple the antenna to observe a snowy picture.
2. Set the R.F. AGC Delay (R202) to its fully counterclockwise (CCW) position.
3. Slowly advance R202 clockwise (CW) to a point slightly beyond the point of minimum snow.

Two Tuner Models (ASG053, & 54)

Note: Control (R256) is located on the Small Signal Panel in zone area K-5.

2 TUNER TEST POINT LOCATION GRAPHIC

Tuner 1

1. Use RF AGC Delay adjustment procedure described under Single Tuner Models for alignment of Tuner 1.

Tuner 2

1. Tune to a weak station, or loosely couple the antenna to observe a snowy picture.
2. Set the R.F. AGC Delay (R256) to its fully counter- clockwise (CCW) position.
3. Slowly advance R256 clockwise (CW) to a point slightly beyond the point of minimum snow.

Note: Do not advance the control any further as it may result in an overloaded picture on the face of the CRT (caused by a strong signal from local station). The range of the AGC voltage supplied to Pin 9 (see TP3) of the Varactor Tuner will vary from approximately 4.2Vdc (Without Signal) to about 1.87Vdc (RF Signal of 10mV).

VCO & AFT Adjustment

Single Tuner Models (ASG051 and 52)

1. Cut the shield break points around IC200 and the IF Circuitry (see zone K-2). Peel the top cover of the shield to gain access to the internal circuitry.
2. Short Test Points 16A & 16B off the Varactor Tuner Module (see zone J-1, bottom view).
3. Short Test Point 23 (Pin 13 of IC200) to ground (Shield around IC200 is good).
4. Connect a DC Voltmeter to Test Point 7 (Pin 18 of IC200).
5. Turn the set on and record the voltage reading from Test Point 7 (typically 4.5 to 5.0Vdc).
6. Turn off the set and remove both shorts from Test Points TP16A/B and TP23.
7. Connect the Coincidence line at the collector of Q207 (jumpTP47, zone J-6, on top of board) to +5Vdc line on the tuner.
8. Apply a local broadcast signal (air signal) to the antenna terminals and turn the set on.
9. Select the Cable Tuning from the menu system. Select channel 36 or some other high band inactive cable channel.
10. While still in the cable mode, select your local VHF broadcast channel. The Tuning System will attempt to tune three times and then lock on to the FCC assigned frequency.
11. Adjust the AFT Coil (L202) to obtain a reading of +7.1Vdc (+/-25mVdc) at Test Point TP2.
12. Adjust the VCO Coil (L204) to obtain the same DC voltage reading at Test Point TP7 that was noted in step 5 of this adjustment procedure.
13. Remove the jumper from the Coincidence line.
14. Verify this adjustment by changing between the high band (inactive cable channel) and your local VHF broadcast channel (ensure that the local broadcast channels lock in quickly).

Two Tuner Models (ASG053, & 54)

Tuner 1

1. Use the VCO and AFT adjustment procedure described under Single Tuner Models for alignment of Tuner 1.

Tuner 2

1. Cut the shield break points around IC201 and the IF Circuitry (see zone K-5). Peel back the top cover of the shield to gain access to the internal circuitry.
2. Short Test Points 16C, & D of the Varactor Tuner Module (see zone J-1, bottom view).
3. Short Test Point 23A (Pin 13 IC201) to ground (Shield around IC201 is good).
4. Connect a DC Voltmeter to Test Point 7A (Pin 18 of IC201).
5. Turn the set on and record the voltage reading from Test Point 7A (typically 4.5 to 5.0Vdc).
6. Turn off the set and remove shorts from Test Points TP16C, D and 23A
7. Connect the Coincidence line at the collector of Q207 (jumpTP47, zone J-6, on top of board) to +5Vdc line on the tuner.
8. Apply a local broadcast signal (air signal) to the antenna terminals and turn the set on.
9. Select the Cable Tuning from the menu system. Select channel 36 or some other high band inactive cable channel.
10. While still in the cable mode, select your local VHF broadcast channel. The Tuning System will attempt to tune three times and then lock on to the FCC assigned frequency.
11. Adjust the AFT Coil (L219) to obtain a reading of +6.6Vdc (+/-25mVdc) at Test Point TP2A.
12. Adjust the VCO Coil (L 220) to obtain the same DC voltage reading at Test Point TP7A that was noted in step 5 of this adjustment procedure.
13. Remove the jumper from the Coincidence line.
14. Verify this adjustment by changing between the high band (inactive cable channel) and your local VHF broadcast channel (ensure that the local broadcast channels lock in quickly).

Sound Alignment

Single Tuner Models (ASG051 & 52)

Note: This control (L201) is located on the Small Signal Panel in zone area J2.

1. Select an active channel and loosely couple the antenna until noise/distortion is apparent in the output.
2. While keeping input signal weak enough to produce noise, adjust the Sound Discriminator (L201) for maximum output and minimum distortion.

Two Tuner Models (ASG053, & 54)

Tuner 1

1. Use the Sound Adjustment procedure described under Single Tuner Models for alignment of Tuner 1.

   Note: This control (L218) is located on the Small Signal Panel in zone area K-6.


Tuner 2

1. Select an active channel and loosely couple the antenna until noise/distortion is apparent in the output.
2. While keeping input signal weak enough to produce noise, adjust the Sound Discriminator (L201) for maximum output and minimum distortion.

+130Vdc B+ Adjust

Note: This control (R455) is located on the Large Signal Panel in zone area A-6. Upon replacement of the Large Signal Panel, or if suspect of possible problems with the +130Vdc Source arise, check and adjust in the following manner:

1. Connect the positive lead from a .1% Digital Voltmeter to the +130Vdc Source (TP4).
2. Connect the negative lead to the isolated "Cold" ground).
3. Adjust R455 (also located in the top corner of the board) to achieve +130Vdc +/- .5Vdc).

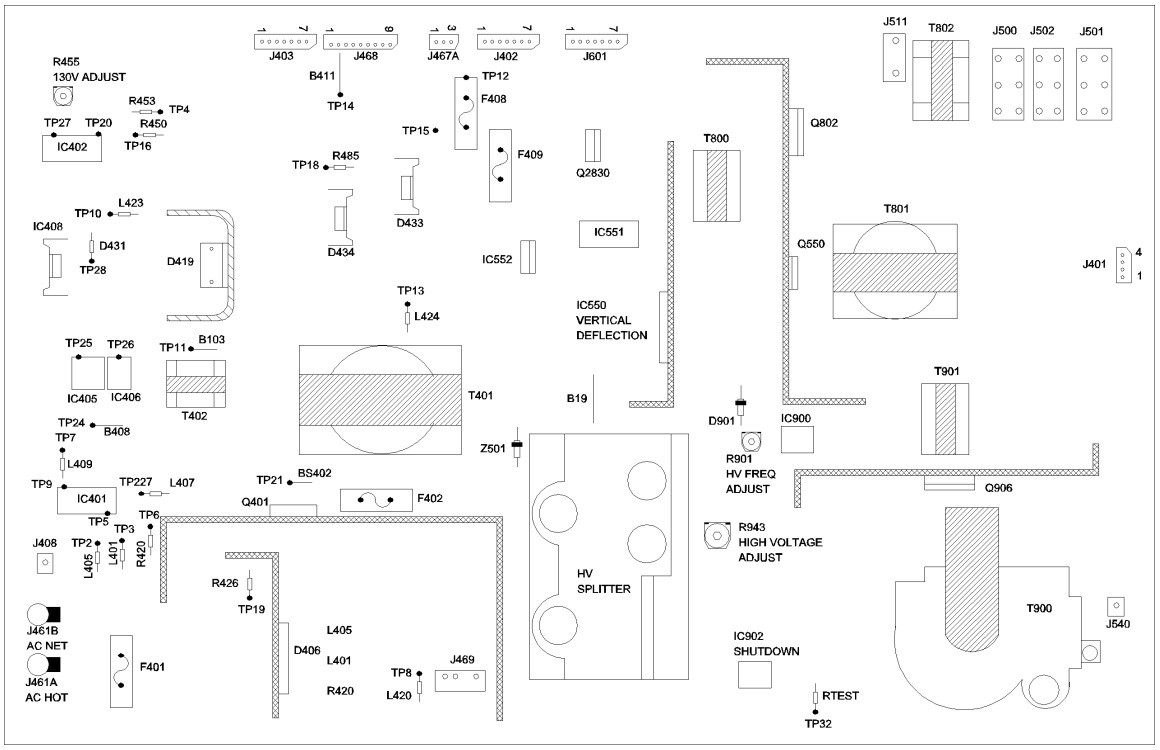

High Voltage Adjustment Procedure:

EXERCISE EXTREME CAUTION WHEN ADJUSTING HIGH VOLTAGE.

NOTE: THE FOLLOWING TEST EQUIPMENT MUST BE USED:

- A High Voltage Probe.
- Digital Multimeter (1% DC accuracy or better and an input impedance of 10 Megohms +/-10%).

Initial PTV settings:

Turn the PTV on.

Confirm that the 130V (TP4) is 130V +/- 1.0V.

Perform the 130V adjustment if the voltage is not within specification.

Select a non-used AUX input for a black picture.

Turn the PTV off.

With the PTV off and unplugged, connect the Fluke model 80K-40 High Voltage Probe as follows and adjust the high voltage:

1. Connect the ground lead to the chassis ground.
2. Connect the High Voltage Probe to the Digital Multimeter.
3. Set the Digital Multimeter to measure DC volts.
4. Remove one of the CRT anode connections from the High Voltage Splitter.
   Note: Make sure that R943 is turned fully clockwise.
5. Insert the probe tip into the open CRT anode connection of the High Voltage Splitter
6. Turn the PTV on.
7. Adjust R943, High Voltage Adjust, on the Large Signal Panel (zone H-2) for 30kV +/- 200V.
8. Turn off the PTV.
9. Remove the High Voltage Probe.
10. Re-install the CRT anode connector into the Combo Block.
11. Turn the PTV on and confirm proper operation.

High Voltage Frequency Adjustment

Note: This control (R901) is located on the Large Signal Panel in zone area H-3.

1. Turn the set off and disconnect power supplied to the chassis.
2. Disable the High Voltage by shorting the collector of Q902 to ground.
3. Disable the sync input to IC900 by shorting the base of Q900 to ground.
4. Connect a Frequency Counter to IC900 Pin 1.
5. Turn on the set and adjust R901 to obtain a reading of 15.75kHz on the counter.
6. Turn the set off and remove the shorts as well as the Frequency Counter.

Note: Some Frequency Counters may be too sensitive at one attenuation level and not sensitive enough at another. In this case, an oscilloscope may be used. Adjust R901 to obtain a 63.5uSec delay from the leading edge of the first main pulse to the leading edge of the second main pulse.

Video Level Alignment

Single Tuner Models (ASG051 and 52)

1 TUNER TEST POINT LOCATION GRAPHIC

Note: This control (R244) is located on the Small Signal Panel in zone area K-3.

1. Apply an NTSC Color Bar Pattern Signal to the antenna terminals.
2. Tune the receiver to the applied signal in step 1.
3. Connect an oscilloscope to the emitter of Q200 (Test Point TP1) and adjust the Video Level Pot (R244) until the video signal observed on the oscilloscope is 2Vp-p +/- 50mV.

Two Tuner Models (ASG053 and 54)

2 TUNER TEST POINT LOCATION GRAPHIC

Tuner 1

1. Use the Video Level Adjustment procedure described under Single Tuner Models for alignment of Tuner 1.

Note: This control (R265) is located on the Small Signal Panel in zone areas K-5.

Tuner 2

1. Apply an NTSC Color Bar Pattern Signal to the antenna terminals.
2. Tune the receiver to the applied signal in step 1.
3. Connect an oscilloscope to the emitter of Q201 (Test Point TP1A) and adjust the Video Level Pot (R265) until the video signal observed on the oscilloscope is 2Vp-p +/- 50mV.

PROGRAMMING FACTORY DEFAULT VALUES

The chassis is controlled by an on-board microcomputer and peripheral parts, altogether known as a "tuning system". The customer picture and sound adjustments are made using either the on-set keyboard or the remote transmitter to enter commands. There are on-screen graphics to show the "menu" list of adjustments.

Service mode makes it possible to change the values of special memory registers in the EEPROM (IC304). These registers control the customer adjustments, PIP setups, graphics intensity and clock calibration. These registers also make many other service adjustments possible that previously would have been handled by conventional controls mounted on the P.C. Board

Service Mode Entry and Exit:

Using the remote transmitter, enter the following seven-button sequence to activate the service mode:

0-6-2-5-9-6-Menu

Depressing the "PWR" button on the front of the PTV will exit the service mode, save the current modification, and turn the chassis off.

Important There are 81 registers within this system. Some of data held in these registers should not be altered and others which were factory set and unique to the unit under test. It is highly recommended that the current values held in these registers be recorded and/or compared to the Table 1-0 on the following page (with the differences noted). This procedure could save a significant amount of time should a mistake occur causing an undesirable condition to the unit under test.

Description of Service Mode:

This service mode is used for changing service control register values from their default values to new values - this includes all factory preset conditions.

When entering this service mode, the tuning system will attempt to retrieve the current register values that are stored in the EEPROM (IC304). If the EEPROM has never been programmed, default data values will be stored as shown listed in the register table. See Table 1-0 on the next page.

Depression of the "PWR" button on the front of the PTV while in this test mode, or, setting Register 00 to "00", shall cause the tuning system to write the adjusted values to the EEPROM IC before chassis power is turned off.

Depressing the 'PWR' button on the front of the PTV will exit the test mode and turn off the chassis.

Adjustment of Registers in Service Mode:

When the receiver is operating in the service mode, all normal on-screen displays are suppressed and replaced by a special display (see Figure 3). This display has two lines of information at the bottom of the screen. The first line of text shows the factory part number of the Microcomputer, IC300 (613085-3). The next set of characters (GR5X3.0) denotes the version of the software currently operating.

The second line, starting from the left, has the currently tuned channel. Channel 3 is the default when entering the service mode set-up as most signal test generators output on channel 3. If no signal is available on this channel, pressing the Channel Up/Down Button will allow you to select an active channel.

Note: The current channel tuned, as well as the register under test, can also be directly accessed through the use of the following method: Use the Cursor Control Keys (surrounding the Menu Button on the Remote Transmitter) to select either the Channel Number, Register Number, or the Register Value on the screen (selection is indicated by red text on a black background). The default selection when entering the Service Mode Set-Up is the Register Number. Pressing the Left Cursor Key will cause the Channel Number to be selected. Once selected the Number Keys may be used to directly access the desired channel number.

The current Register Number (00) is displayed just to the right of the Channel Number. Next is a short description of that register (EXIT). Farthest to the right is the value (in hexadecimal) currently held in that register (1A).

The selections of various registers and the modification of values held in those registers is accomplished through the use of the Cursor Control Keys on the Remote Transmitter.

a) The cursor-left and cursor-right keys allow you to select among the channel, register, and data held in that register.

b) The cursor-up and cursor-down keys allow the desired item to be adjusted up or down.

System Information/Diagnostics:

While in the service mode, depressing the Status Button (on the Remote Transmitter) will cause 2 more lines of information to appear at the top of the screen.

The first line (00B7) is the "run timer" data in hexadecimal form. This data shows the total (in hours) of on-time and in this example, relates to 183 hours.

The next line down from the top displays a string of letters (EFKLMNO) identifying those subsystems which Could Be present but Did Not respond to the micro-controller commands (via the IIC Bus) when the service mode command was first acted upon. The possibilities are listed below:

A Tuner not responding to IIC.
B EEPROM (IC304) not responding to IIC.
C IC120 (Stereo Decoder IC) not responding to IIC.
D IC1001 (PIP Module) not responding to IIC.
E Ghost Canceller Module not responding to IIC.
F RF Switch Module not responding to IIC.
G Video Processor (IC600) not responding to IIC.
H Deflection Processor (IC551) not responding to IIC.
I Source Switch (IC1) not responding to IIC.
J Digital Convergence Module not responding to IIC.
K Graphic Equalizer (IC501; on the Pro-Logic Panel) not responding to IIC.
L Graphic Equalizer (IC601; on the Pro-Logic Panel) not responding to IIC.
M Audio Controller (IC301; on the Pro-Logic Panel) not responding to IIC.
N Dolby DAC (IC203; Pro-Logic Panel) not responding to IIC.
O Pro-Logic DAC (IC203; on the Pro-Logic Panel) not responding to IIC.

WARNING:

Do not enter FF into Exit Register 00.

Exit Register 00 - Entering FF in to this register causes all 80 registers to be rewritten with factory default values.

Do not enter FF into Exit Register 01.

Exit Default Register 01 - Entering FF in to this register causes not only all 76 registers to be rewritten, but Channel Guide and Smart Picture Settings will be lost as well. In addition, the Auto Programming of active channels (accessible under the help section of the on-screen menu) will have to be performed again as this data has also been lost. This procedure should only be performed if replacement of IC304 (EEPROM IC) is required.

Clearing Customer Settings

Entering 00 into Exit Default Register 01 resets all customer settings (including parental control codes) and returns the set to its original factory form.

Note: Parental Control can also be defeated by entering 0711 twice at the Setup Code Menu under Parental Control.

Table 2-0 Register 17; Feature Word

Reg	Description	Value and Notes
17	FEATURE ID	Feature Word: PTV800 = 01 Philips/Magnavox, Sears PTV805 = 02 Philips/Magnavox PTV810 = 03 Philips/Magnavox PTV811 = 04 Latam PTV815 = 06 Magnavox PTV820 = 05 Marantz (Wallvision) PTV825 = 07 Marantz

Sub-Contrast Alignment

1. Enter the Service Mode via the previous procedure (06-25-96-Menu) and apply an NTSC Color Bar Pattern Signal to the antenna terminals.
2. Tune the receiver to the applied signal in step 1.
3. Connect an oscilloscope to Pin 20 of IC600. Adjust the Sub-Contrast Register (52) until the video signal observed on the oscilloscope is 1Vp-p +/- 10mV.
4. Typical default value is F0H.

Sub-Brightness Adjustment

Note: Refer to the Gray Scale Tracking, Sub-Brightnessprocedure later in this section for the precise setting of all interrelated controls.

Picture Height Adjustment

1. Enter the Service Mode via the previous procedure (06-25-96-Menu) and apply a crosshatch pattern to the antenna input terminals.
2. Adjust the Picture Height Register (37) to obtain a slight underscan of the raster at the top and bottom of the screen.
3. Adjust the Picture Height Register (37) to obtain a slight overscan at the top and bottom portions of the screen (approx. 8% overscan total).
4. Typical default value is F0H.

STEREO DECODER ALIGNMENTS

Note: The following procedure was performed with a Sencore VG91 Universal Video Generator and must be performed while the unit under test is in the Service Mode.

Composite Input Level Adjustment

Single Tuner Models (ASG0551 and 52)

1. Connect an oscilloscope to the Test Point TP101 (Pin 15 of IC120) and then turn the set on.
2. Set the Generator as follows: STD TV Channel 3, RF-IF Range set to HI, RF-IF Level set to NORM (1), Video Pattern = Raster, R-G-B raster controls OFF, Mode Switch set to L+R, Audio Frequency set to 300Hz., & 0 Pilot (max. CCW).
3. Enter the Service Mode via the previous procedure (06-25-96-Menu) and connect the RF Output of the VG91 Generator to the Television Antenna Input.
4. Adjust Register 67 (AUD CNTRL 3A) to obtain a reading of 1.4Vp-p on the oscilloscope.

Note: The default value for the data held in this register is 06.

Two Tuner Models (ASG053 and 54)

Tuner 1

1. Use the Composite Input Level Adjustment procedure described under Single Tuner Models for alignment of Tuner 1.

Tuner 2

2. Connect an oscilloscope to the Test Point TP101 (Pin 15 of IC120) and then turn the set on.
3. Set the Generator as follows: STD TV, Tuner B, Channel 3, RF-IF Range set to HI, RF-Level set to NORM (1), Video Pattern = Raster, R-G-B raster controls OFF, Mode Switch set to L+R, Audio Frequency set to 300Hz., and 0 Pilot (max. CCW).
4. Enter the Service Mode via the previous procedure (06-25-96-Menu) and connect the RF Output of the VG91 Generator to the Television Antenna Input.
5. Adjust Register 68 (AUD CNTRL 3B) to obtain a reading of 1.4Vp-p on the oscilloscope.

Note: The default value for the data held in this register is 10.

Wide Band Adjustment

1. Turn the set OFF and connect oscilloscope to TP102 (Pin 38 of IC200).
2. With the VG91 Generator still connected to the tuner input, turn the set ON.
3. Set the Generator as follows: Mode Switch set to L Ch., Audio Frequency set to 300Hz., Stereo Pilot set for 100% NORM.
4. Enter the Service Mode (06-25-96-Menu) and adjust Register 68 (AUD ALIGN 1) for a null reading on the oscilloscope.

Spectrum

1. With the VG91 Generator still connected to the tuner input and the oscilloscope to TP102 (Pin 38 of IC200), turn the set ON.
2. Set the Generator as follows: Mode Switch set to L Ch., Audio Frequency set to 3kHz, Stereo Pilot set for 100% NORM.
3. Adjust Register 69 (AUD ALIGN 2) for a null reading on the oscilloscope.
4. Repeat the Wide Band and Spectrum Adjustments several times to ensure the best possible settings.

FOCUS ADJUSTMENTS

(Electrical and Optical)

Control Preset Positions

1. Picture setting at mid-range.
2. Sharpness setting at mid-range.
3. Brightness setting at mid-range.
4. Color setting at minimum.
5. Tint setting at mid-range.

Electrical Focus

1. With the set tuned to a crosshatch pattern, this adjustment can be made from the back of the set (with the light shield removed). The pattern will appear clearer if the front of the screen is covered with a dark cloth.
2. Cover 2 of the CRT's Output Lenses with 7" X 7" pieces of cardboard.
3. Observe the magnified reflections of the individual picture tubes on the back side of the viewing screen.
4. Adjust the respective focus controls (on the Screen/Focus control Block) for the sharpest raster image.
5. Confirm correct focus by viewing the screen from the front of the unit.
6. Repeat steps 2 through 5 to focus the remaining two CRT's.

Optical Focus

1. With the set tuned to a crosshatch pattern, this adjustment can be made from the back of the set (with the light shield removed). The pattern will appear clearer if the front of the screen is covered with a dark cloth.
2. Cover 2 of the CRT Output Lenses with 7" X 7" pieces of cardboard.
3. Loosen the lens retaining wing nuts on the CRT Output Lens and Housing Assembly.
4. Move the wing nut in the slot of the uncovered Lens to locate the optimum optical focus (viewing the picture from the back side of the screen), re-tighten the wing nut.
5. Confirm correct focus by viewing the screen from the front of the unit.
6. Repeat steps 2 through 5 to focus the remaining two CRTs.

GRAY SCALE AND BLACK AND WHITE TRACKING (G2 ADJ)

Note: Perform Electrical and Optical Focus before attempting this adjustment.

1. Remove the Light Barrier (if present) in order to view the Main Lens Output of each picture tube.

Note: Any dust should be cleaned from the output lenses, mirror, and back of the screen with a soft cloth.

2. Apply an NTSC Generator; display the Gray Scale Graduation Pattern. Or, if not available, select a good channel containing high contrast program material.
3. Turn the set on and tune to the applied signal described in step 2.
4. Set the customer Picture control to ¾ range, set the Sharpness, Brightness and Tint mid-range Place the customer Color setting at minimum.
5. Enter the Service Mode as explained earlier (0, 6, 2, 5, 9, 6, Menu). You will be at register 00. At this point in the procedure, do not use the arrow key to scan the desired register, instead use the random access key of the user remote and select 53.

Note: Scanning through or keying into register 04, Color Default, will turn the Color back on to mid-range point. This Feature allows resetting customer color default level before leaving the Service Mode.

6. Ensure the Cut-Off Registers (53, 54, and 55) contain the default value of 80. Correct if necessary.
7. Ensure the Drive Registers (56, and 57) contain the default value of 40. Correct if necessary.
8. Access Register 62 (G2 SETUP) and enter the value of "00" for the data held by that register. The screen will go blank and all on-screen displays will disappear.

Note: This step places the cathodes of all three CRTs at 185Vdc. This is the optimum condition to set CRT Cutoff.

9. Turn all G2 Controls (on the Screen/Focus control Block) to minimum (fully CCW).
10. Looking into the Output Lens, bring up each of the G2 (Screen) controls (bottom row the Focus/HV Dist. Module) up to barely light each tube. Set as dim as possible, but make the apparent brightness of each tube the same.
11. Press the Arrow Up Button once on the Remote Transmitter. The picture and on-screen display will reappear.

REFINING GRAY SCALE AND BLACK AND WHITE TRACKING

1. Remove any color tint from the dark areas of the picture using the appropriate Cutoff Control Registers (53, 54 and 55).
2. Remove tint from the Intermediate/Bright part of the picture using the Drive Control Registers (56 and 57).
3. Confirm the color tracking by observing the Gray Scale while adjusting the Picture Control from minimum to maximum range (high to minimum brightness). Adjust Cutoffs and Drive control and defaults to obtain optimum performance.

CENTERING, GEOMETRY, AND CONVERGENCE ADJUSTMENTS

Important: Unlike many previous PTV systems, the 770-790 series PTV incorporates a Digital Convergence Panel. This panel does not contain the familiar three rows of adjustment potentiometers as employed in the past PTV systems. Instead geometry and screen convergence settings are contained within EEPROM located on the Digital Convergence Panel. These settings may be easily modified through the following procedures.

Notes on Digital Convergence:

1. W hen aligning the digital convergence, the adjustments are very interactive in that a change in one quadrant will potentially effect other areas of the screen; thus, requiring several alignment passes through the convergence sequences.
2. A convergence panel severely out of convergence will not necessarily have perfect icon shapes. Its not uncommon to see bent or twisted icons.
3. In some instances to initiate icon movement with one of the arrow functions on the remote transmitter, it may require the technician to hold the desired button for several moments to see movement. This is normal. If movement doesn't occur, continue alignment sequence in other areas of the screen (use icon positioning keys 2,4,6,8), then return to the problem area of the screen. The technician may need to save present settings then exit to the convergence menu, then return to the problem area of the screen.
4. Remember the adjustment points are highly interactive with each other. A change in one quadrant of the screen could affect other areas.
5. When converging be sure you're at eye level with the area of the screen you are adjusting.
6. When converging a PTV, it is not required to follow the pre-defined sequence of adjustment points. When converging or adjusting the green geometry of a set that is severely out of convergence, begin at the outer regions (edges) of the set, working in a circular pattern towards the middle. Only move the icon a short distance towards the target point, then continue circling the outer perimeter moving each sector partially.

Digital Convergence Alignment of the Chassis consists of any one or a combination of the following procedures described below.

A. The first procedure "Convergence Touch Up" allows for minor convergence adjustment of any color. With "Convergence Touch Up" it's assumed that one or two of the colors are geometrically correct and used as reference for the color/s requiring alignment. This alignment is required for minor convergence adjustments, single yoke or CRT replacements and any physical alteration of a single Lens/CRT Assembly.

B. The second procedure "Mechanical Alignment" is required with Major Convergence and Geometry Alignments, Yoke replacement, Convergence Module Replacement and the replacement of a CRT or physical alteration of the Lens/CRT Assembly.

C. The third procedure "Major Convergence/Geometry Alignment" is required when a Convergence Module or all three CRT's are replaced. This procedure is also required if the Green Geometry requires adjustment. Note: If the Screen Geometry of the Red or Blue gun is correct, use the "Convergence Touch Up" procedure to converge the green using the Red or Blue as a reference.

Note: The set should be warmed up for at least 20 minutes prior to making any Convergence or Geometry adjustments.

CONVERGENCE SERVICE MODE PROCEDURES

Note: This procedure is required for all of the following geometry and convergence adjustments.

Using the remote transmitter, enter the following seven-button sequence to activate the convergence mode.

06 - 25 - 97 - Menu (M)

The "Opening Menu" will appear offering choices:

Channel 3

Use Channel ↑↓ to

Select a Channel with Video

Remote control key functions:

↑↓←→: Adjust Convergence

M: Advance "cross" location

Up, Down, Left, Right

3: Exit Convergence

Status: Abort/Cancel Changes

M: Begin Convergence

Note: video information must be present to correctly adjust the convergence. A signal source is required to lock the vertical and horizontal sync. After entering the "convergence service mode," verify the presence of a video source by confirming the presence of active audio (use the volume up function on the remote). Use the channel up and down function on the remote to select the desired tuning source.

Select item "M" from the first menu, the "Convergence Menu" will appear featuring 5 possible selections.

Channel 3

Convergence:

1. green geometry
2. red To green Convergence
3. blue To green Convergence
4. green To red Convergence
5. green To blue Convergence

Status: Abort/Cancel Changes

CONVERGENCE TOUCH UP PROCEDURE

1. Enter the "convergence service mode" as described above in the "convergence service mode procedure".
2. Select the desired color requiring adjustment. **Note:** Do not select Green Geometry (1). This procedure is described under "Major Convergence/Geometry Alignment. If Green Geometry is altered during this procedure a "Major Convergence/Geometry Alignment" maybe required.
3. Cover the Output Lens of the single color presently NOT being adjusted. Example: If you select Green to Red Convergence (4) cover the Blue Output Lens.

4. The highlighted adjustment Icon (Cross) should be illuminated on the middle left side of the screen. Make the necessary Convergence Adjustments using the following Remote Keys:
    - Use the Arrow Up ( ) to adjust the selected color up.
    - Use the Arrow Down Key ( ) to adjust the selected color down.
    - Use the Arrow Right Key (-) to adjust the selected color to the right.
    - Use the Arrow Left Key (+) to adjust the selected color to the left.
5. Move to the next location to be converged. It is not required that the full Convergence Sequence be followed while performing the "Convergence Touch Up Alignment Procedure". The following alternate Remote Keys allow for positioning of the Icon to the desired adjustment location:

- Key 2 on the Remote Transmitter will position the Adjustment Icon upward on the screen.
- Key 8 on the Remote Transmitter will position the Adjustment Icon downward on the screen.
- Key 4 on the Remote Transmitter will move the Adjustment Icon to the Left.
- Key 6 on the Remote Transmitter will move the Adjustment Icon to the Right.

6. Return to the "Convergence Service Menu" by selecting Key number 3 on the remote transmitter or by sequencing the Icon to the last adjustment point at the lower right corner of the screen and pushing the Menu (M) Key on the Remote Transmitter..
7. Repeat steps 1 through 6 for other required Convergence Alignments.
8. To Save the Adjustment completed in the last procedure, Exit/Save the Convergence Service Mode by selecting Key 1 on the Remote Transmitter. This forces the corrections to be written to the EEPROM on the Convergence Module.

Note: To save the convergence corrections made above you must exit the convergence menu by selecting Exit/Save Data (1)

CONVERGENCE CENTER FREQUENCY ADJUSTMENT

Note: This adjustment should not be done unless a component on the PLL circuit has been replaced

1. Connect a voltmeter from TP3 on the convergence board to cold ground (use top shield).
2. Adjust L3 to obtain 1.5Vdc.

MAJOR CONVERGENCE/GEOMETRY ALIGNMENT PROCEDURE

Major Convergence/Geometry alignment procedures are required when replacing the Digital Convergence Module or all three CRT's require replacement.

Note: The following procedure must be followed in the order listed to insure satisfactory results. Use the following order to converge a set requiring "Major Convergence/Geometry Alignment":

1. CRT Centering using the Centering Tabs around the Yoke.
2. Align the Convergence by first setting the Green Geometry using the "Convergence Template" and following up with the Red and Blue Convergence Alignment.

The part number for ordering the Screen Template Kit is: ST4130. This kit contains all the templates for all screen sizes required for the PTV770 through PTV788 series. For individual screen templates, add the screen size to the kit number. Example: ST4130-46 is the individual part number for the 46" Screen Template.

To order parts call the TOLL FREE Philips Sales Center number:

(In U.S.A.) 1-800-851-8885

(In Canada) 1-800-363-PART 1-800-663-7178 (Fax)

CRT SCREEN CENTERING (Mechanical)

1. Locate the Screen Center by placing strings diagonally across the viewing area of the screen from corner to corner. The Screen Template, if centered correctly on the screen, can also provide the center point location.
2. Enter the **"Service Setup Mode" (06-25-96-Menu-Menu)** and confirm approximate register values of the following registers: **Note: Confirming the following register values is not required if the Small Signal or Large Signal Boards have not been replaced or altered.**

Function	Register	Value
Picture Height	37	48
V Linearity	38	0F
V S Correction	39	0E
Vertical Shift	40	00
V Comp	41	00
Picture Width	42	20
East/West Parabola	43	10
East/West Corner	44	0E
Trapezium	45	39
Horz Comp	46	00
V SS Corr	47	00
Horiz Phase	48	11

3. Connect a Signal Source (pattern generator) to the antenna terminal of the set. A signal source must be present while following these procedures.
4. Enter the Convergence Service Mode as described above in the Convergence Service Mode Procedure.
5. **Place a jumper wire from pins 1 to 2 of test point 4 (tp4) on the convergence panel.**
6. Select "1" Green Geometry from the Convergence Service Mode Menu. Cover the Red and Blue output lens using a 7" X 7" piece of cardboard.
7. The highlighted icon (cross) maybe visible on the left side of the screen about half way up. Position the icon at the screens approximate center by pressing the M on the remote transmitter 3 times.
8. Using the Centering tabs of the yoke, position the highlighted Green icon to the screen center as defined by the diagonal strings positioned across the viewing area of the screen or using the center point on the screen template. **Note:** In some cases there may be insufficient range with the centering tabs to position the Green icon to the screens center. In this case position the icon as close as possible to the screen center.
9. Confirm the centering by viewing the screen from the front of the unit.
10. Return to the Convergence Service Mode Menu by selecting number 3 on the remote transmitter. Select number "2" on the remote to activate the "Red to Green" Convergence. Cover the Green and Blue output lenses with a 7" X 7" piece of cardboard. Repeat step 7 through 9 using the Red yoke Centering Tabs.
11. Return to the Convergence Service Mode Menu by selecting "3" on the remote transmitter. Select "2" to repeat convergence. Select "3" on the remote to activate the "Blue to Green Convergence". Cover the Red and Green output lenses with a 7" X 7" piece of cardboard. Repeat step 7 through 9 using the Blue yoke Centering Tabs.
12. Exit the convergence mode by selecting the Status Exit function on the remote transmitter. Remove the 7" X 7" pieces of cardboard from the output Lenses. CRT centering is complete.
13. **Remove the jumper from TP4 on the Digital Convergence Module.**

GREEN GEOMETRY

The Green Geometry must be accurately adjusted to achieve proper convergence and screen geometry. The Red and Blue displays will individually be made to conform to the Green.

1. Confirm the CRT Centering as described in the previous procedure.
2. Remove the protective screen enhancement filter (if present) to make the following adjustments.
3. Attach the "Screen Template" to the screen using a low tac tape.
4. Enter the Convergence Service Mode by selecting 06-25-97-Menu with the Remote Transmitter. **Note: Video information must be present to correctly adjust the convergence. This can be checked by the presence of audio on the channel selected.** Select M to begin the convergence adjustments.
5. Select "1" Green Geometry. The Green icon should be positioned near the left edge of the screen and on the middle row of the template If not visible hold the right arrow key of the Remote Transmitter until the icon is visible on the screen. Use the M key to position the icon on the next horizontal point in the convergence sequence. Move the Green icon using the Remote Transmitter arrow buttons **Only Half Way** towards the next template point. Continue through the whole Green Geometry Sequence moving the Green icons **Only Half Way** towards the target point on the template. Upon reaching the End Here point on the template press the M to recalculate.
6. Select Repeat Convergence by selecting the number "2" on the Remote Transmitter. Select Green Geometry number 1 on the Remote Transmitter. Follow the Green Geometry Sequence through a second pass, this time accurately aligning the Green icon to the alignment points on the template. Repeat the Green Geometry Sequence as required. When completed Exit/Save the changes by entering the converging page and selecting 1.
7. Confirm the accuracy of the Green Geometry.

RED AND BLUE CONVERGENCE

1. Remove the Screen Template.
2. Enter the Convergence Service Mode by selecting 06-25-97-Menu with the Remote Transmitter. **Note: Video information must be present to correctly adjust the convergence. This can be checked by the presence of audio on the channel selected.** Select M to begin the convergence adjustments.
3. Enter the "Red to Green Convergence" by selecting the number "2" on the Selection page with the Remote Transmitter.
4. Cover the Blue Output Lens with a 7" X 7" piece of cardboard.
5. The Red icon should be positioned near the left side of the screen and on the middle row of convergence points. If the Red icon is not visible hold the right arrow key of the Remote Transmitter until the icon is visible on the screen. Use the M key to position the icon on the screen at the next point in the convergence sequence. Use the arrow keys to position the Red icon approximately **Half Way Towards The Green Icon.** Continue through the whole Red to Green convergence sequence by moving the Red icons **Only Half Way** towards the green icons. Upon reaching the last position at the lower right of the screen, select M to recalculate.
6. Select Repeat Convergence by selecting the number "2" on the Remote Transmitter. Select "Red to Green Convergence number 2 on the remote transmitter. Follow the Red to Green Convergence Sequence through a second pass, this time accurately aligning the Red Icon to the Green. Repeat Red to Green Convergence Sequence as required to accurately align the Red to Green Convergence. When completed Exit/Save the changes by selecting 1 from the Convergence Menu.
7. Enter the Convergence Service Mode by selecting 06-25-97-Menu with the Remote Transmitter. **Note: Video information must be present to correctly adjust the convergence. This can be checked by the presence of audio on the channel selected.** Select M to begin the convergence adjustments.
8. Enter the "Blue to Green Convergence" by selecting the number "3" on the Selection page with the Remote Transmitter.

9. Remove the 7" X 7" piece of cardboard from the Blue Output Lens and cover the Red Lens.
10. Repeat the procedure in steps 5 and 6 by adjusting the Blue icons to the Green.
11. **When convergence alignment is complete, save the data by selecting "1" from the convergence service menu.**
12. Remove the 7" X 7" piece of cardboard from the Blue Output Lens.

Refine the complete performance of the Convergence as described in the "Convergence Procedure".

HORIZONTAL PHASE

1. Enter the Service Setup Mode (06-25-96-Menu).
2. Select register number 02 (Brightness) and note the present hex value. Increase the value to 7C.
3. Select Register number 42 (Horizontal Width) and note the present hex value. Reduce the Horizontal Width by approximately 1 1/2 to 2 inches.
4. Tune the set to an active off air or cable channel.
   Note: It is recommended that a signal source other than a generator be used to do this alignment. Use an RF signal source such as a broadcast channel.
5. Select register 48 (Horizontal Phase).
6. Using a 7" X 7" piece of cardboard cover the Red and Blue CRT Output Lenses.
7. Adjust the Horizontal Phase to center the picture information onto the reduced raster. This centering can easily be accomplished by observing the left and right edge of the reduced raster.
8. Select register 42 and set the value as previously noted in step 3 of this procedure.
9. Select register number 02 (Brightness) and set the hex value as previously noted in step 2 of this procedure.
10. Remove the 7" X 7" pieces of cardboard.
11. Typical default value is 11.

Clock Calibration

The microcomputer's crystal oscillator frequency of approx. 12MHz is applied to a divider program (within the micro) in order to supply a frequency of 2403..846153846 Hz. The 12MHz. oscillator frequency cannot be adjusted, however, a correction factor may be input in to the divider program in order to adjust for a slow or fast clock reading.

This correction factor is selected in the Service Mode by changing the data value held in Register 20. The data within this register can range from 00 (none) to 7F max. (for a fast clock) or FF (for a slow clock). Models are shipped from the factory with a default value of 00 or 80 for NO correction.

One method used for calibration of this clock is accomplished by measuring the frequency at pin 3 on the microcontroller (IC300). This frequency is nominally 2403.846153846 Hz. Using the calibration tables (refer to the following page), look up the closest frequency to the measured frequency and then find the corresponding calibration number in hexadecimal. The clock calibration register should be loaded with this value. **Note:** This does not change the oscillator frequency.

The more practical method is to simply question the customer on the number of minutes per month the clock is off (assuming the time error has been checked against a known accurate time source). Calculate using the formula below:

Minutes of error per month X 2 = Seconds of error per day

Is it losing (slow) or gaining (fast)?

Enter the Service Mode and look at register 20. If it is 00 or 80 the task is easy. Look up (use Table 3-0 on the following page) the seconds of correction needed, fast or slow, and enter it's "*calibration byte*" in for the data held by register 20.

Normal Example:

4 minutes fast a month X 2 = 8 seconds a day fast

The chart says if the clock is 8 seconds a day fast without correction then use 59. Change register 20 from 00 to 59.

If there is a *calibration byte* in register 20 other than 00 or 80 then the job gets a bit more complex.

Complex Example #1:
Using the error from the "normal example", 8 seconds fast a day, you find register 20 the data value of 16. Look up 16 and you find that there is already a correction for 2 seconds fast a day. You need 8 seconds fast **more** correction (2 + 8 = 10) or a total of 10 seconds fast correction which is 6E. Enter 6E for the data held by register 20.

Complex Example #2:
If the clock is 8 seconds fast a day and you find register 20 holds the data value of 96 you have 2 seconds a day correction **in the wrong direction** (slow). You need to "back up" 8 seconds. First if you back up to 80 (no correction) you have used 2 of the 8 seconds leaving 6. Then go 6 seconds in the fast column, from no correction to 6 seconds (43). Enter 43 for the data held by register 20.

Table 1-0: Factory Register Definitions

REG.	DESCRIPTION	VAL. (HEX)	NOTES
00	EXIT	1A	00 saves data and powers off
01	EXIT DEFAULTS	1A	**(see Warning)**
02	BRIGHTNESS	1F	mid-range
03	PICTURE	2F	3/4 of range
04	COLOR	1F	mid-range
05	TINT	1F	mid-range
06	SHARPNESS	1F	mid-range
07	BASS	1F	mid-range
08	TREBLE	1F	mid-range
09	BALANCE	1F	mid-range
10	SFLAG 00	76	System Flags
11	SFLAG 01	0A	System Flags
12	SFLAG 02	B0	System Flags
13	SFLAG 03	00	System Flags
14	SFLAG 04	00	System Flags
15	SFLAG 05	00	System Flags
16	RL ADDRESS	05	Remote Locator Code
17	FEATURE ID	00	See Table 2-0 for Details
18	DEMO ID	00	01=Magnavox Demo On
19	SmClkCh	00	Smart Clock Channel
20	CLOCK CAL	00	See Clock Calibration Adjustments
21	OSD VERT	22	OSD Vertical Position
22	OSD HORZ	20	OSD Horizontal Position
23	PIP COLOR	1F	PIP Color Control, mid-range
24	PIP TINT	1F	PIP Tint Control, mid-range
25	PIP X1 POS	05	PIP upper left, horiz. start position
26	PIP Y1 POS	3	PIP upper left, vert. start position
27	PIP X2 POS	3C	PIP lower right, horiz. start position
28	PIP Y2 POS	21	PIP lower right, vert. start position
29	P READ POS	09	
30	P WRITE POS	08	
31	COLOR DLY	02	
32	BACK BURST	11	PIP background burst level
33	RED HORZ	1F	Customer Center Convergence
34	RED VERT	1F	Customer Center Convergence
35	BLUE HORZ	1F	Customer Center Convergence
36	BLUE VERT	1F	Customer Center Convergence
37	PICTURE HT	TB	
38	LINEARITY	0F	
39	VS CORR	0E	**Do Not Modify**
40	V SHIFT	00	**Do Not Modify (must be 00)**

41	V COMP	00	**Do Not Modify (must be 00)**
42	PICT WIDTH	28	
43	E W PARAB	10	**Do Not Modify**
44	E W CORNERS	00	**Do Not Modify**
45	TRAPEZIUM	39	**Do Not Modify**
46	H COMP	00	**Do Not Modify (must be 00)**
47	VSS CORR	00	**Do Not Modify (must be 00)**
48	HORZ PH	11	
49	RGB BRT	38	
50	RGB CONT	60	
51	SUB COLOR	F0	
52	SUB CONT	F0	
53	RED CUT-OFF	80	
54	GREEN CUT-OFF	80	
55	BLUE CUT-OFF	80	
56	GREEN DRIVE	40	
57	BLUE DRIVE	40	
58	CHROMA	FA	
59	VID CTRL 1	07	**Do Not Modify**
60	VID CTRL 2	C3	**Do Not Modify**
61	DEF CTRL	20	
62	G2 SETUP	1A	Data=00 kills video & OSD
63	SUB BRIGHT	50	
64	SUB TINT	3F	
65	SURROUND LEVEL	2C	**Do Not Modify**
66	AUD CNTRL 2	70	**Do Not Modify**
67	AUD CNTRL 3A	06	see Stereo Decoder Alignments, Composite Input Level Adj.
68	AUD ALIGN 3B	10	Wide Band Adj. (Stereo Alignment)
69	AUD ALIGN 1	90	Spectrum Adj. (Stereo Alignment)
70	AUD ALIGN 2	90	**Do Not Modify**
71	AUD ALIGN 3	0B	**Do Not Modify**
72	GPOSDHoriz	01	
73	GPOSDVert	23	
74	GPPIPHoriz	02	
75	GPPIPVert	03	
76	ADDRESS	74	
77	DATA	1F	
78	BANK	00	Add. of EEPROM where data is stored.
79	IIData2	1F	Reserved
80	II Trig	00	Reserved

Clock Calibration Values

If Clock is Fast

Freq., Hz. [- Comp.]	Cal. Byte (Hex)	(sec./day)
2403.84615	00	0.00
2403.84866	01	0.09
2403.85116	02	0.18
2403.85367	03	0.27
2403.85617	04	0.36
2403.85867	05	0.45
2403.86118	06	0.54
2403.86368	07	0.63
2403.86619	08	0.72
2403.86869	09	0.81
2403.87119	0A	0.90
2403.87370	0B	0.99
2403.87620	0C	1.08
2403.87871	0D	1.17
2403.88121	0E	1.26
2403.88371	0F	1.35
2403.88622	10	1.44
2403.88872	11	1.53
2403.89123	12	1.62
2403.89373	13	1.71
2403.89623	14	1.80
2403.89874	15	1.89
2403.90124	16	1.98
2403.90375	17	2.07
2403.90625	18	2.16
2403.90875	19	2.25
2403.91126	1A	2.34
2403.91376	1B	2.43
2403.91627	1C	2.52
2403.91877	1D	2.61
2403.92127	1E	2.70
2403.92378	1F	2.79
2403.92628	20	2.88
2403.92879	21	2.97
2403.93129	22	3.06
2403.93379	23	3.15
2403.93630	24	3.24

2403.93880	25	3.33
2403.94131	26	3.42
2403.94381	27	3.51
2403.94631	28	3.60
2403.94882	29	3.69
2403.95132	2A	3.78
2403.95383	2B	3.87
2403.95633	2C	3.96
2403.95883	2D	4.05
2403.96134	2E	4.14
2403.96384	2F	4.23
2403.96635	30	4.32
2403.96885	31	4.41
2403.97135	32	4.50
2403.97386	33	4.59
2403.97636	34	4.68
2403.97887	35	4.77
2403.98137	36	4.86
2403.98387	37	4.95
2403.98638	38	5.04
2403.98888	39	5.13
2403.99139	3A	5.22
2403.99389	3B	5.31
2403.99639	3C	5.40
2403.99890	3D	5.49
2404.00140	3E	5.58
2404.00391	3F	5.67
2404.00641	40	5.76
2404.00891	41	5.85
2404.01142	42	5.94
2404.01392	43	6.03
2404.01643	44	6.12
2404.01893	45	6.21
2404.02143	46	6.30
2404.02394	47	6.39
2404.02644	48	6.48
2404.02895	49	6.57
2404.03145	4A	6.66
2404.03395	4B	6.75
2404.03646	4C	6.84
2404.03896	4D	6.93
2404.04147	4E	7.02
2404.04397	4F	7.11
2404.04647	50	7.20
2404.04898	51	7.29
2404.05148	52	7.38

2404.05399	53	7.47
2404.05649	54	7.56
2404.05899	55	7.65
2404.06150	56	7.74
2404.06400	57	7.83
2404.06651	58	7.92
2404.06901	59	8.01
2404.07151	5A	8.10
2404.07402	5B	8.19
2404.07652	5C	8.28
2404.07903	5D	8.37
2404.08153	5E	8.46
2404.08403	5F	8.55
2404.08654	60	8.64
2404.08904	61	8.73
2404.09155	62	8.82
2404.09405	63	8.91
2404.09655	64	9.09
2404.09906	65	9.18
2404.10156	66	9.27
2404.10407	67	9.36
2404.10657	68	9.45
2404.10907	69	9.54
2404.11158	6A	9.63
2404.11408	6B	9.72
2404.11659	6C	9.81
2404.11909	6D	9.90
2404.12159	6E	9.99
2404.12410	6F	10.08
2404.12660	70	10.17
2404.12911	71	10.26
2404.13161	72	10.35
2404.13411	73	10.44
2404.13662	74	10.53
2404.13912	75	10.62
2404.14163	76	10.71
2404.14413	77	10.80
2404.14663	78	10.89
2404.14914	79	10.98
2404.15164	7A	11.07
2404.15415	7B	11.16
2404.15665	7C	11.25
2404.15915	7D	11.34
2404.16166	7E	11.43
2404.16416	7F	11.52

If Clock is Slow

Freq., Hz. [- Comp.]	Cal. Byte (Hex)	(sec./day)
2403.84615	80	0.00
2403.84365	81	0.09
2403.84115	82	0.18
2403.83864	83	0.27
2403.83614	84	0.36
2403.83363	85	0.45
2403.83113	86	0.54
2403.82863	87	0.63
2403.82612	88	0.72
2403.82362	89	0.81
2403.82111	8A	0.90
2403.81861	8B	0.99
2403.81611	8C	1.08
2403.81360	8D	1.17
2403.81110	8E	1.26
2403.80859	8F	1.35
2403.80609	90	1.44
2403.80359	91	1.53
2403.80108	92	1.62
2403.79858	93	1.71
2403.79607	94	1.80
2403.79357	95	1.89
2403.79107	96	1.98
2403.78856	97	2.07
2403.78606	98	2.16
2403.78355	99	2.25
2403.78105	9A	2.34
2403.77855	9B	2.43
2403.77604	9C	2.52
2403.77354	9D	2.61
2403.77103	9E	2.70
2403.76853	9F	2.79
2403.76603	A0	2.88
2403.76352	A1	2.97
2403.76102	A2	3.06
2403.75851	A3	3.15
2403.75601	A4	3.24
2403.75351	A5	3.33
2403.75100	A6	3.42
2403.74850	A7	3.51

2403.74599	A8	3.60
2403.74349	A9	3.69
2403.74099	AA	3.78
2403.73848	AB	3.87
2403.73598	AC	3.96
2403.73347	AD	4.05
2403.73097	AE	4.14
2403.72847	AF	4.23
2403.72596	B0	4.32
2403.72346	B1	4.41
2403.72095	B2	4.50
2403.71845	B3	4.59
2403.71595	B4	4.68
2403.71344	B5	4.77
2403.71094	B6	4.86
2403.70843	B7	4.95
2403.70593	B8	5.04
2403.70343	B9	5.13
2403.70092	BA	5.22
2403.69842	BB	5.31
2403.69591	BC	5.40
2403.69341	BD	5.49
2403.69091	BE	5.58
2403.68840	BF	5.67
2403.68590	C0	5.76
2403.68339	C1	5.85
2403.68089	C2	5.94
2403.67839	C3	6.03
2403.67588	C4	6.12
2403.67338	C5	6.21
2403.67087	C6	6.30
2403.66837	C7	6.39
2403.66587	C8	6.48
2403.66336	C9	6.57
2403.66086	CA	6.66
2403.65835	CB	6.75
2403.65585	CC	6.84
2403.65335	CD	6.93
2403.65084	CE	7.02
2403.64834	CF	7.11
2403.64583	D0	7.20
2403.64333	D1	7.29
2403.64083	D2	7.38
2403.63832	D3	7.47
2403.63582	D4	7.56
2403.63331	D5	7.65

2403.63081	D6	7.74
2403.62831	D7	7.83
2403.62580	D8	7.92
2403.62330	D9	8.01
2403.62079	DA	8.10
2403.61829	DB	8.19
2403.61579	DC	8.28
2403.61328	DD	8.37
2403.61078	DE	8.46
2403.60827	DF	8.55
2403.60577	E0	8.64
2403.60327	E1	8.73
2403.60076	E2	8.82
2403.59826	E3	8.91
2403.59575	E4	9.09
2403.59325	E5	9.18
2403.59075	E6	9.27
2403.58824	E7	9.36
2403.58574	E8	9.45
2403.58323	E9	9.54
2403.58073	EA	9.63
2403.57823	EB	9.72
2403.57572	EC	9.81
2403.57322	ED	9.90
2403.57071	EE	9.99
2403.56821	EF	10.08
2403.56571	F0	10.17
2403.56320	F1	10.26
2403.56070	F2	10.35
2403.55819	F3	10.44
2403.55569	F4	10.53
2403.55319	F5	10.62
2403.55068	F6	10.71
2403.54818	F7	10.80
2403.54567	F8	10.89
2403.54317	F9	10.98
2403.54067	FA	11.07
2403.53816	FB	11.16
2403.53566	FC	11.25
2403.53315	FD	11.34
2403.53065	FE	11.43
2403.52815	FF	11.52

CIRCUIT DESCRIPTION

PTV Introduction

The PTV800 series Projection TV Chassis was developed by Philips/Magnavox Consumer Electronics for the 1998 model year. This Chassis is used in the 48, 52, 54, and 60 inch screen sizes. The Tuning System is On-Screen, Remote controlled and Menu Driven. The Tuning System is mounted on the Small Signal Board and will tune 178 channels. The PTV800 and PTV805 (Figure 1) uses a single Tuner Tuning System which is controlled by the I2C bus. The PTV810 and above uses a two tuner Tuning System. (Figure 2) Each Tuner has its own Saw Filter and IF circuitry. All TV functions are controlled via the Menu except Power, Channel Select, Personal Preference, Volume, Mute, Alternate Channel, Sleep Timer, and Channel Guide. The Microcomputer communicates via an I2C bus with the Tuners, EEPROM IC304, Stereo Decoder IC120, Signal Processor IC600, Digital PIP IC1001, and the AV Switcher IC1. The I2C bus also communicates with the Gemstar panel, Digital Convergence panel, and ESI bus panel. Sets with the ESI bus panel are equipped with an external jack to accept control data from add on equipment. An I2C bus is a two-line communications link between IC's consisting of a Serial Clock and Serial Data line. The Microcomputer IC300 communicates with the Signal Processor IC600 to control Brightness, Picture, Color, Tint, and Sharpness.


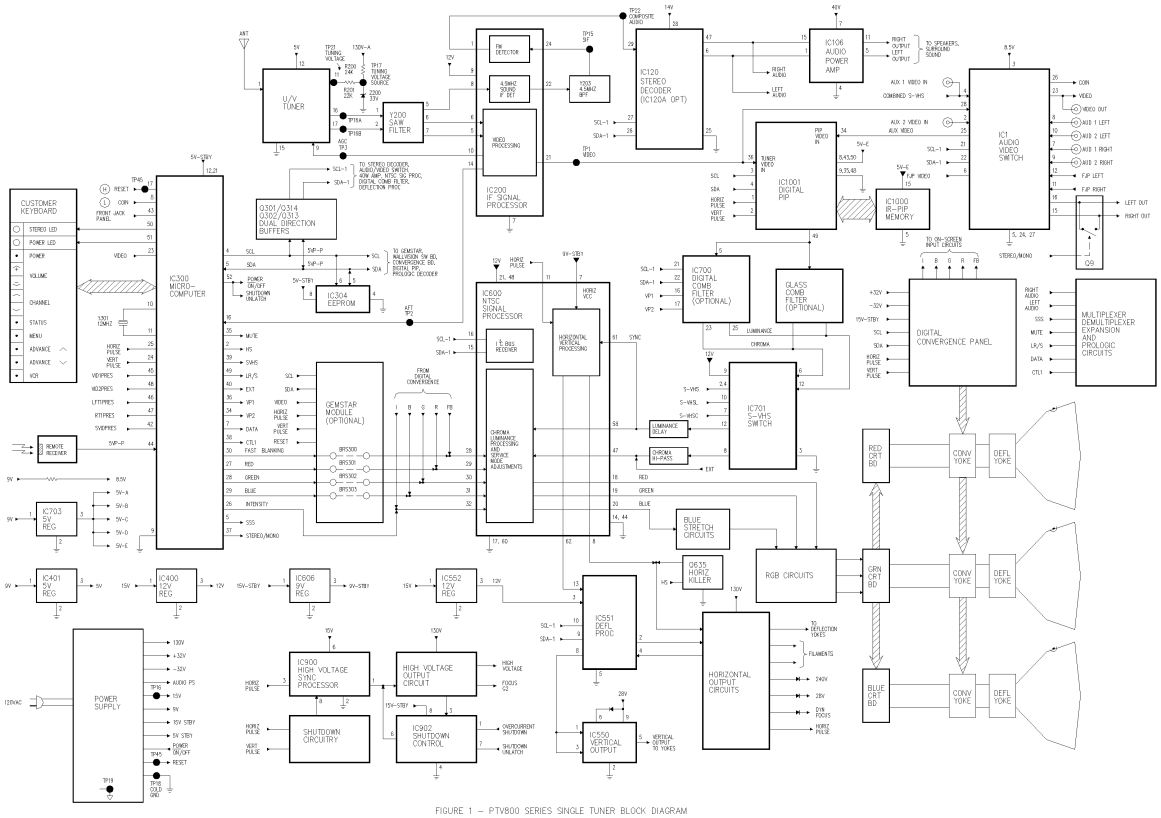


FIGURE 1 – PTV800 SERIES SINGLE TUNER BLOCK DIAGRAM

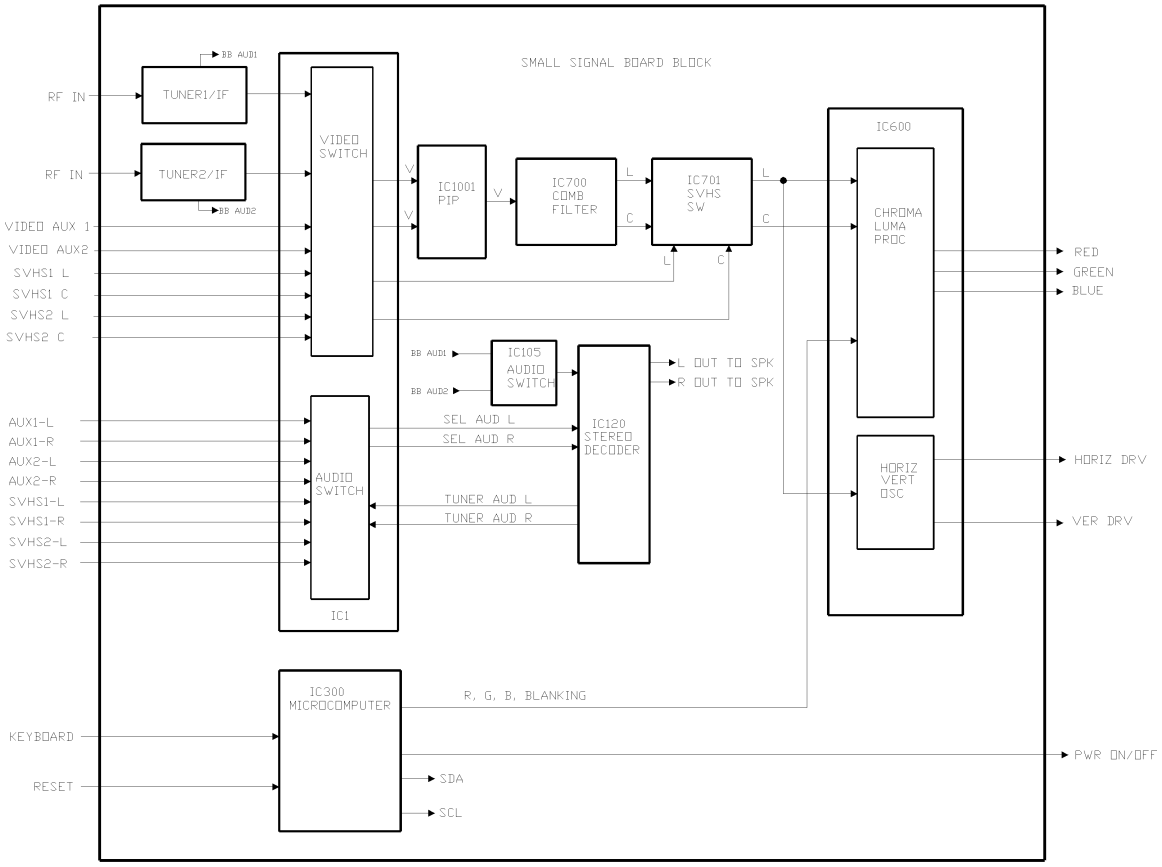

SMALL SIGNAL PANEL BLOCK

The Microcomputer IC300 develops the RGB and Fast Blanking signals for the On-Screen Graphics. White Balance is adjusted at the output of the NTSC Signal Processor in IC600 before the RGB signals are sent to the CRT boards.

LARGE SIGNAL PANEL

The large signal panel contains the SMPS (Switch Mode Power Supply), Scan-derived Power Supply, Horizontal and Vertical deflection, High Voltage circuits, and safety shut down circuits.

Switched Mode Power Supply

120 volts AC is applied through F401 to the bridge rectifier D406 which produces approximately 160 volts DC at TP8. (Figure 3) The 160 vdc is applied through F402 and the primary windings of T401 Pin 8 to the drain of Q401. It is also applied through R416 and the primary windings of T402 Pin 3 to the drain of Q402 the Standby Regulator. 160 volts from R416 goes through R415 (Start Resistor) and powers IC401 Pin 16 (Controller). The 160 vdc source also provides power for an audio amplifier, which has its own switch mode regulator supply.

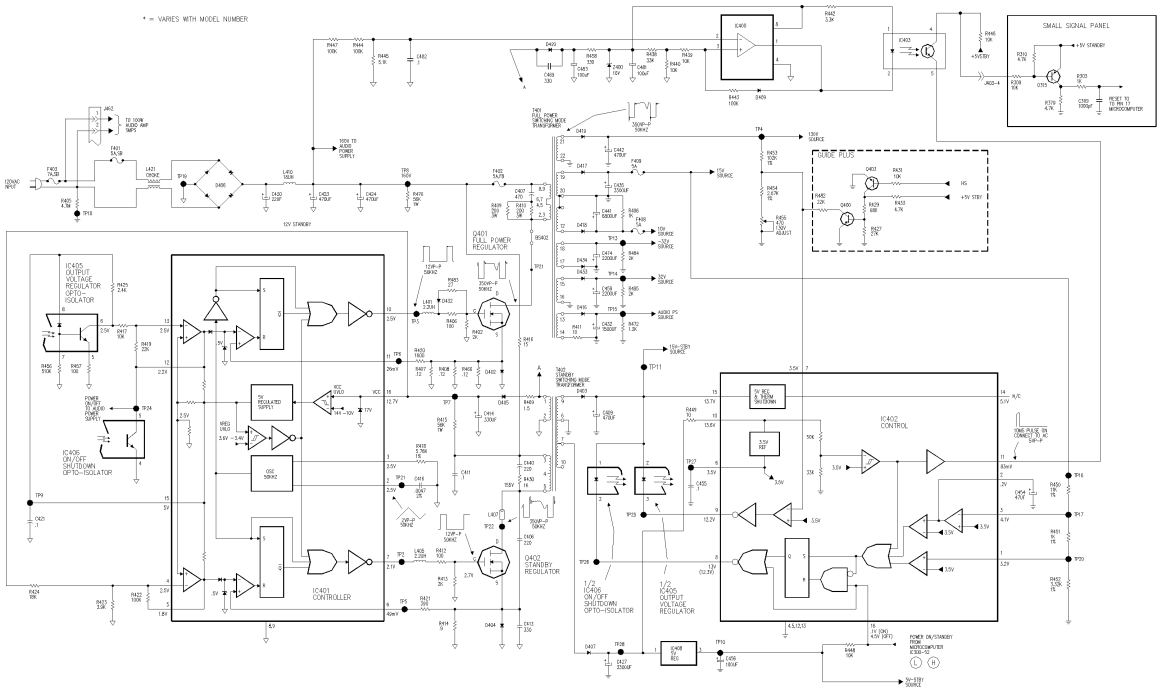


FIGURE 3 – PTV800 SERIES SWITCHING MODE POWER SUPPLY

Stand By Power Supply

As the voltage through R415 charges C414 to 14.5 volts peak at IC401 Pin16, the under voltage lockout is over come, and the 5 volt power supply inside IC401 switches on starting the 50 kHz oscillator. A 12 vpp drive signal is then output from IC401 Pin 7 to the gate of Q402, which turns Q402 On. Current through R414, Q402, and the primary winding of T402 develops a voltage across R414. This voltage is sampled at IC401 Pin 6, and is applied to a comparator within the IC. The sampled voltage is compared to an internal reference voltage. When the sample exceeds the reference, the reset goes high, turning off the drive signal at IC401 Pin 7. When Q402 turns off, the voltage drop across R414 goes away. Reset inside the chip goes Low. It turns on with the next high from the oscillator. IC401 Pin 7 will go High again turning on Q402.

The pulse from T402 Pin 1 is rectified by D405 and provides the run voltage for IC401 Pin 16. This rectified run voltage is also applied to IC401 Pin 4 to adjust the chip's internal reference, regulating the duty cycle at IC401 Pin 7. The duty cycle controls the on time of Q402 to regulate the output of T402. This maintains the DC voltage on Pin16 of IC401 between 12 and 13 volts.

The voltage from T402 Pin 9 is rectified by D403 to provide a 15vdc standby source voltage. T402 Pin 7 is rectified by D407 and is applied to IC408 Pin 1, a 5 volt regulator and IC402 Pin 10. The voltage from D403 is also applied to IC406 Pin 1 (Opto-Isolator), IC405 Pin 2 (Opto-Isolator).

Reset from IC402 Pin 11 is coupled through Opto isolator IC403, Pins 4 and 5, to Q315 on the Small Signal Board. When ac is first applied to the set, a momentary High from IC402 Pin 11 is coupled through IC403 turning transistor Q315 off, causing the Microprocessor, Pin 17, to go Low to provide reset. After reset, IC402 Pin 11 stays Low, turning Q315 On providing a High to the Microcomputer, Pin 17, in normal operation. IC 400 monitors the 160 volt supply for a loss of AC power. In normal operation, IC400, Pin 2 will have a higher dc voltage than Pin 3 causing Pin 1 to go Low. This turns the LED inside Opto isolator IC403 On. If the 160 volt supply drops below 50 volts, IC400 Pin 1 goes High turning IC403 Off. The 5 volt standby through R446 turns Q315 Off, causing the Microcomputer, Pin 17, to go Low, resetting the IC which turns the set Off. Voltage from Pin 1 of T402 is rectified by D420 and filtered by C483 to provide power for IC400 and IC403. This voltage is also used to provide a dc reference for Pin 3 of IC400.

When AC is applied to the set, IC402 Pin 16 is held high by the 5 volt standby supply through R448. The High on the input of the NOR gate inside IC402 switches Pin 8 Low turning On the LED of Opto-Isolator IC406. An approximate 1.5 volt drop across Pins 1 and 2 of IC406 will indicate that the IC is On. The photo transistor inside IC406 will forward bias, pulling IC406 Pin 5 Low holding IC401 Pin 12 Low. With IC401 Pin 12 at ground, the internal reference on the comparator will be negative with respect to the non-inverting input of the comparator, causing the reset of the flip flop to be high. This will keep IC401 Pin 10 Low, keeping the full power supply turned off. With no 130 vdc from the full power supply, there will be no voltage present at IC402 Pin 7. IC402 Pin 9 will go Low, turning the Opto-Isolator IC405 On, driving Pin 6 Low and also driving IC401 Pin 13 Low.

Full Power Supply

When any button on the front of the set or the Power button on the remote control is pressed, the microcomputer IC300, Pin 52, on the Small Signal panel goes Low, pulling IC402, Pin16, Low. IC402, Pin 8, goes High, turning Off IC406, removing the low from IC401, Pin 12. The output of the comparator connected to Pin 12 goes high, allowing the flip flop inside the IC to drive Pin 10 High turning Q401 On. Energy is stored in T401 while Q401 is on and is transferred to the secondary when Q401 is Off. Current through Q401 develops a voltage across R407, R408, and R466 and is monitored by Pin 11 of IC401. If this voltage exceeds the internal reference of the IC, the output on Pin 10 will shut Off.

Voltages from separate windings of T401 are rectified and filtered, producing 130 volts dc, 15 volts dc, 10 volts dc, -32 volts dc, and 32 volts dc. The 130 vdc is sampled through a voltage divider network, R453, R454, and R455 and fed to IC402, Pin 7, where it is compared to an internal 3.5 volt reference. As the 130 volt supply reaches the correct voltage, the voltage at IC402 Pin 9 will increase, which will reduce the brightness of the LED inside IC405. IC405 controls the voltage on IC401 Pin 13, controlling the duty cycle at IC401, Pin 10. This controls the On time of Q401 to maintain the 130 volt power supply at the correct voltage. The 15 volts

from D417 is applied through F409, and a voltage divider network R450, R451, and R452 to pins 3, and 1 of IC402 for over-voltage, and under-voltage shut down protection. The 15 volts is also applied to other circuits on the Large Signal Panel.

The 10 volt source from D418 is applied through F408 to the Small Signal Panel.

The +32 volt source from D433 and the -32 volt source from D434 are applied to circuits on the Large Signal Panel and the Digital Convergence Panel.

Over voltage shut down

If regulation of the full power supply is lost and the output voltages increase, the 15 volt source also increases. As the voltage on IC402 Pin 1 goes above the 3.5 volt internal reference, the latch circuit inside IC402 drives pin 8 Low. This turns IC406 On, pulling IC401, Pin 12, Low turning the Full Power supply off.

Under voltage shut down

If the full power supply does not turn on or does not come up to full power, the voltage on IC402 Pin 3 will stay below the 3.5 volt internal reference. C454 on IC402 Pin 2 will begin charging. When the voltage on IC402 Pin 2 reaches 3.5 volts, the latch circuit inside IC402 switches IC402 Pin 8 Low. This turns IC406 On. IC401 Pin 12 will then go Low, turning the Full Power supply off.

Guide Plus - Smart Clock

Guide Plus or Gemstar is a menu-driven broadcast information service broadcast on ABC affiliate stations. **(Figure 4)** TV guide company provides the service which contains information similar to their weekly magazine. The free service provides two to three days of programming per download. When the set is turned off, the set tunes to the ABC affiliate station, downloading Channel Guide information when it is broadcast. The data is serially transmitted during the vertical blanking interval. The complete data transfer takes about two hours.

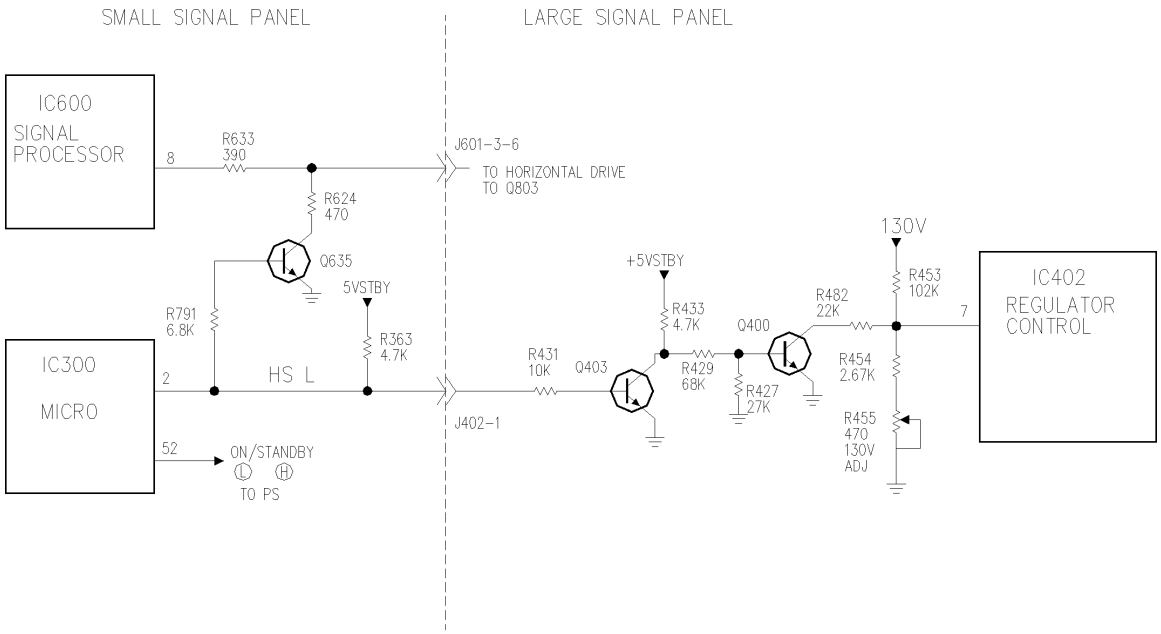


FIGURE 4 – GUIDE PLUS – SMART CLOCK

Smart Clock downloads Time information from the local PBS affiliate when the set is turned off. Both the Smart Clock and Guide Plus must be set up in the menu before they will work.

Sets with Guide Plus and Smart Clock are required to keep the power supply turned On, to supply power to the Tuner and IF circuitry while downloading information. Guide Plus and Smart Clock download information while the set is turned off. To accomplish this, the Microprocessor, IC300, Pin 52, remains low, when the set is turned off to keep the Power Supply turned on. The HS line on Pin 2 of IC300 outputs a Low, turning Transistor Q403 Off. This removes the Low from the base of Q400, which keeps it turned off, during normal operation. Q400 is now turned on by the 5 volt Standby Supply through resistors R433 and R429. This turns Q400 On, switching resistor R482 to Cold ground putting it in parallel with R454 and R455. This changes the biasing of the feedback circuit for the 130 volt source. This biasing change causes the 130 volt source to increase to approximately 145 volts. Since the load is removed from the 130 volt supply, it is necessary to increase the output voltage to 145 volts to maintain the secondary voltages, 15 volt, 9 volt, -32 volt, 32 volt and the Audio Power Source at the correct voltage.

In addition, the Low on IC300, Pin 2, also turns off transistor Q635 in the Horizontal drive circuit. This removes the pull up resistor, R624 from the Horizontal Drive Circuit. This allows Pin 8 of IC600 to go high removing Horizontal Drive. With no Horizontal Drive, Q501 (Figure

7) will turn On, turning Q500 Off, turning Q503 Off. This turns Q502 On, which turns Q904 On. This will turn Q903 On hard increasing the voltage on Pin 8 of IC900 to above 4.8 volts removing drive from Pin 1 of IC900, to the High Voltage output circuit.

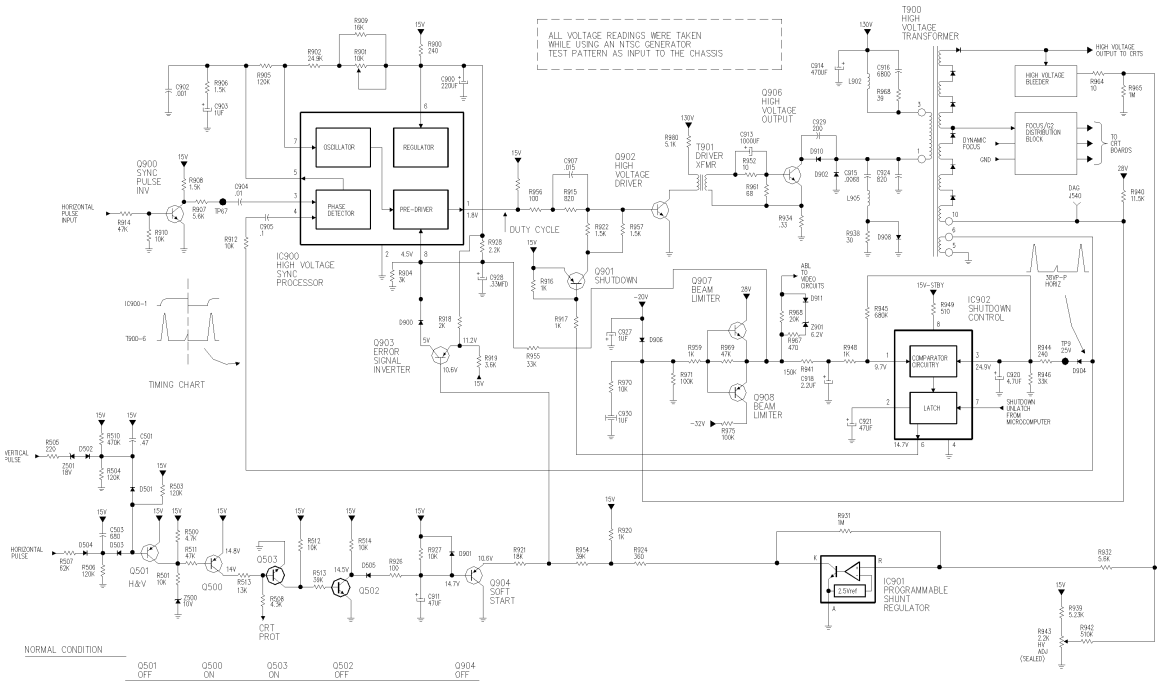


FIGURE 7 – PTV800 SERIES HIGH VOLTAGE/BEAM LIMITING/SHUTDOWN CIRCUITS

TROUBLESHOOTING

CAUTION: THIS CHASSIS REQUIRES THE USE OF AN ISOLATION TRANSFORMER WHILE TROUBLESHOOTING.

Switch Mode Power Supply

Since there are two supplies, Standby and Full Power, the operation of the Standby supply should first be verified. **(Figure 3)** With the set plugged into 120 volts AC, check the 15 volt standby supply at TP11 and the 5 volt standby at TP10. If these voltages are present, then the problem is in the Full Power supply. If not, troubleshoot for No Standby Voltage.

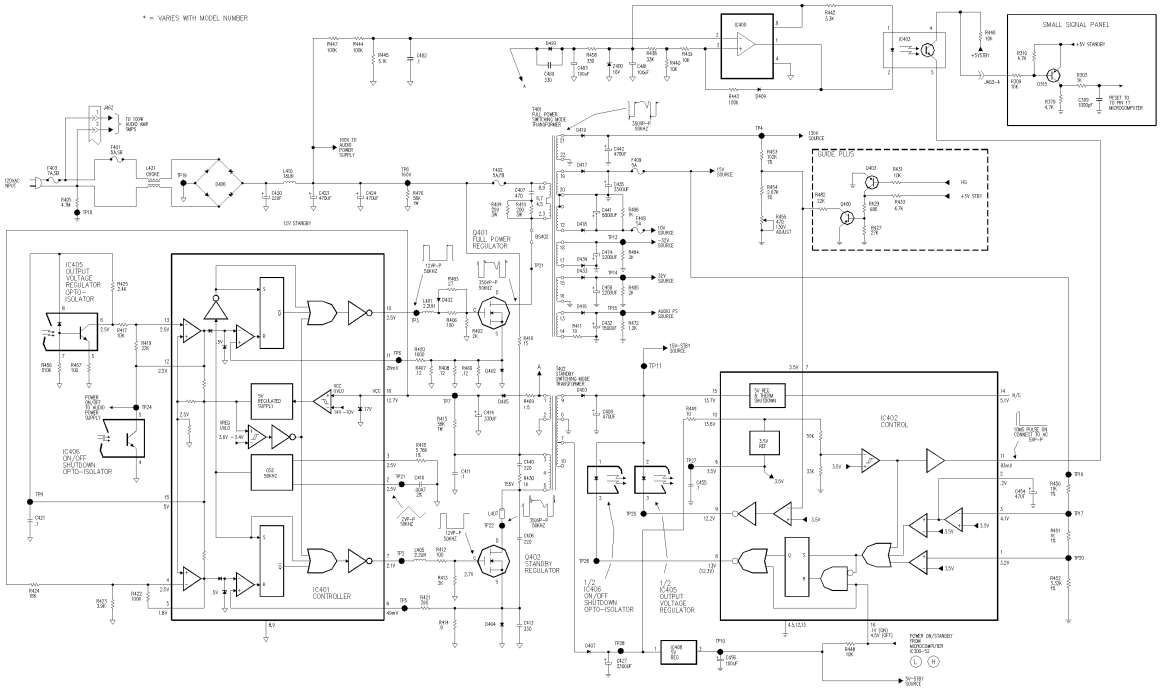


FIGURE 3 – PTV800 SERIES SWITCHING MODE POWER SUPPLY

No Standby Voltage

1. Check for 12 volts dc on Pin 16 of the Controller IC, IC401. If this voltage is missing, check for an open shorted IC401 Pin 16, R415, shorted Q402, open R416, bridge rectifier, fuse F401.
2. If the 12 volt startup voltage is present, it should be changing between 9.4 and 14.5 volts. If this change is not occurring, C414 may be leaky or open. Pin 5 should be going to 5 volts with each voltage change at Pin 16. A 12 volt peak to peak drive voltage should be seen at Pin 7 of IC401. If there is no output at Pin 7, IC401 may be defective.
3. If drive is present at Pin 7 of IC401, check L405, R412, and Q402.

No 130 volt supply

1. With 120 volts ac applied, ground Pin 16 of IC402 to bypass the microprocessor. If the full power supply turns on, troubleshoot the microprocessor and reset circuit.
2. Monitor the voltage between Pins 1 and 2 of IC406 as Pin 16 of IC402 is grounded. The voltage should equalize between these two Pins as Pin 8 of IC402 turns Off. If no change occurs, check IC406, IC402, and C454.
3. Check the 130 volt supply line for a short circuit.
4. Monitor the 130 volt supply line with an Oscilloscope for a change as the set is turned On. If the supply comes up and then shuts down, check Pin 7 of IC402 as the set is turned On. If no change occurs at Pin 7, check R453. If the voltage changes at Pin 7 of IC402, then check IC402, F409, R450, R451, and R452.
5. If IC406 turns Off, then check Pin 13 of IC401 for a voltage less than 2.5 volts. If this voltage is above 2.5 volts, check the voltage between Pins 2 and 3 of IC405. If this voltage is approximately 1.5 volts, change IC405.
6. If Pin 13 of IC401 is lower than Pin 12, check the output on Pin 10 of IC401, Q401 and related components.
7. If the 130 volt supply is present, troubleshoot the sweep circuits.

Horizontal Drive

The Horizontal Drive signal from the Small Signal Panel is fed to the base of Q803, the Horizontal Pre Driver. (Figure 5) The output of Q803 drives Q801, the Horizontal Driver transistor. The collector of Q801 is connected through the primary of Driver Transformer, T800, and resistors R810 and R811 to the 130V source. The R/C network of R808 and C806 across the primary provides protection to the Horizontal Driver transistor, during its off time, when the transformer field is collapsing. This energy is dissipated across these two components.

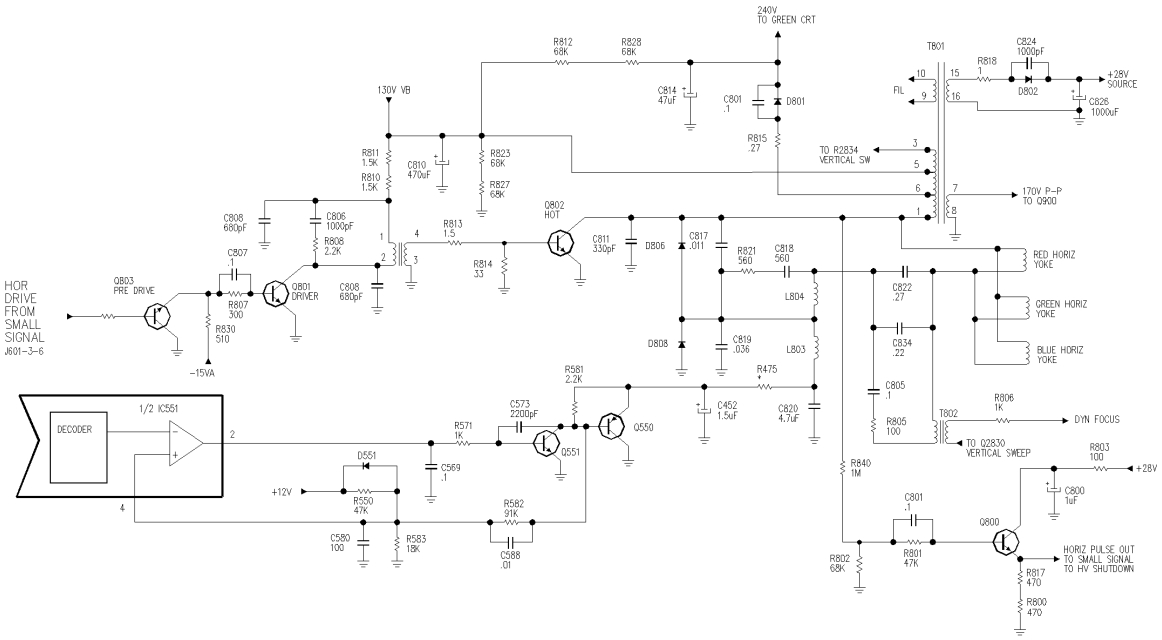


FIGURE 5 – PTV800 SERIES HORIZONTAL SWEEP

Output from the Driver Transformer is applied to the base of the Horizontal Output transistor, Q802. Q802 receives its source voltage from the 130V Source through the primary of the T801 Horizontal Output transformer. The Horizontal Output transistor drives the Horizontal out transformer producing the scan derived voltages for the chassis. These include the +28 volt source for the Vertical Drive circuit, Filament voltage, and 240 volts for CRT drive. Pin 3 of T801 provides drive signal for Q2830, Vertical Dynamic Focus drive. A 170 volt peak to peak drive from Pin 7 provides Horizontal Sync to Q900 in the High Voltage section. Horizontal drive from the collector of Q802 is sampled by R840 and is buffered by Q800 to provide Horizontal Sync to the Small Signal board and the Shutdown circuit of the High Voltage section.

Vertical parabola signals from IC551 Pin 2 are amplified by Q551 and Q550 before being added to the Diode Modulator, D806 and D808 in the Horizontal Output for side pincushion correction.

Vertical Deflection

Vertical Sync from the Small Signal Panel is applied to the Large Signal Panel via J601 Pins 2 and 7 and is applied to IC551 Pin 13 Deflection Processor. (Figure 6) Vertical drive exits IC551 Pin 8 and is applied to IC550 Pins 1 and 3.

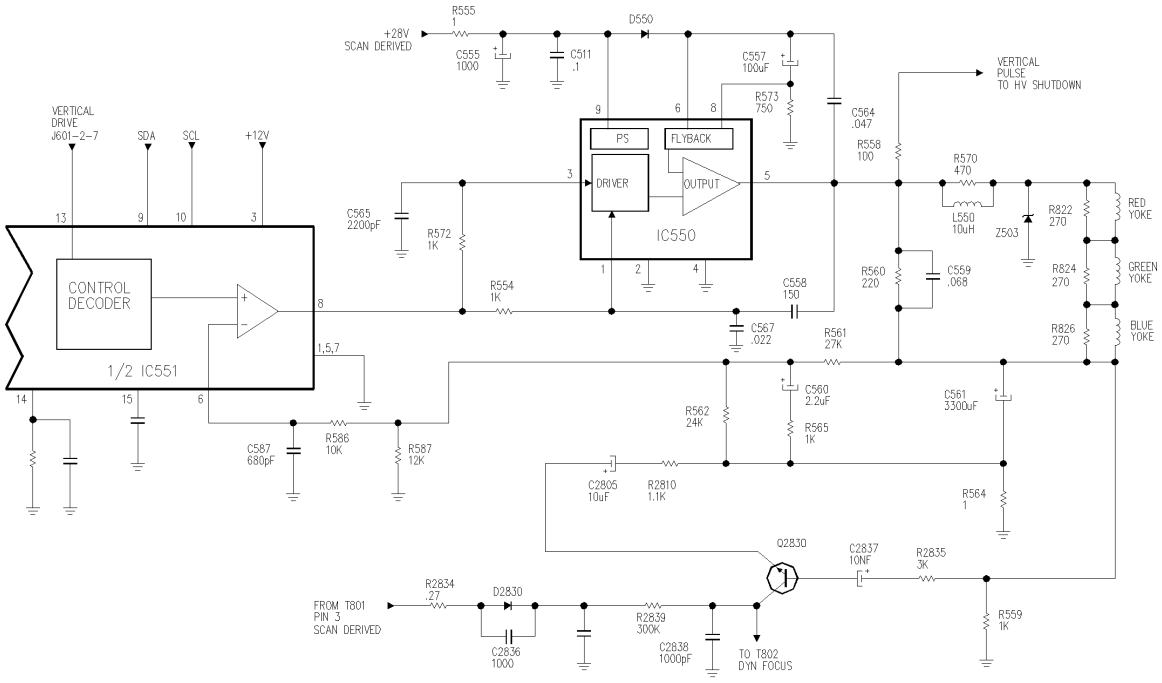


FIGURE 6 – PTV800 SERIES VERTICAL DRIVE

The Vertical Output IC550 receives its power from the 28V source. This voltage is applied to IC550 Pin 9 to a Voltage Stabilizer circuit inside the IC. The Flyback Generator circuit is powered by the 28V Source through Diode D550 to IC550 Pin 6. Capacitor C557 charges during the vertical scan time and discharges back into IC550 Pin 8 during vertical retrace to shorten retrace time. A Thermal and Soar Protection circuit monitors the temperature and operation of the IC. It will defeat the output on Pin 5 if the IC becomes too hot. The Vertical Drive signal for the Yokes exits IC550 Pin 5.

Feedback and dc bias from the Yoke return circuit is applied to the Vertical Drive circuit to IC551 Pin 6 via R561, R562, C560 and R565, and R586. Linearity correction is developed by the resistor capacitor network of R560 and R565.

Dynamic Focus correction signals are fed to the base of Q2830 through R2835 and C2837, and to the emitter through R2810 and C2805. Transistor Q2830 drives Transformer T802 to produce Dynamic Focus drive.

High Voltage/Beam Limiting/Shutdown Circuits

The Horizontal Pulse from the Horizontal Output transformer T801 Pin 7 is applied to the Sync Pulse Inverter, Q900. (Figure 7) This signal is amplified and sent to the High Voltage Sync Processor, IC900 Pin 3. The adjusted, phase detected signal is applied via the Oscillator to the Pre-Driver block. R901 and related components make up an RC network to set the frequency of the Oscillator. The Oscillator is set for 15,750 Hz with no signal applied. The Oscillator will phase lock to the incoming sync when a signal is applied. The output from the Pre-Driver drives the High Voltage Driver transistor, Q902. Q902 drives the High Voltage Output transistor, Q906. Q906 drives the High Voltage Transformer to produce 30KV of high voltage.

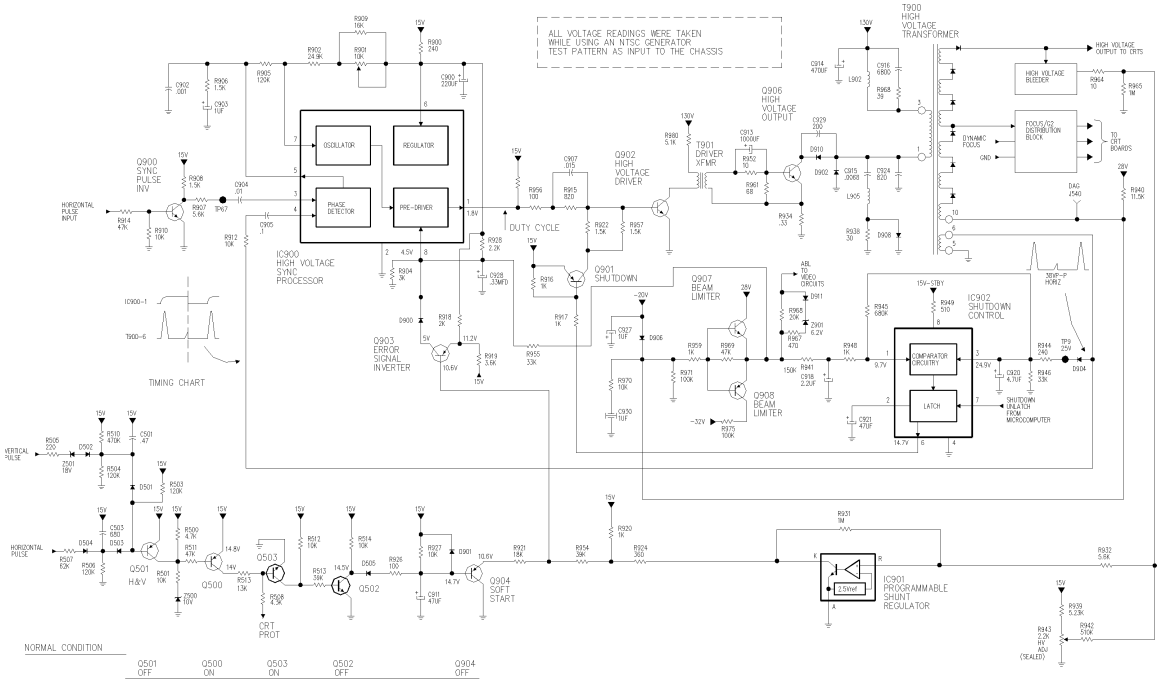


FIGURE 7 – PTV800 SERIES HIGH VOLTAGE/BEAM LIMITING/SHUTDOWN CIRCUITS

The 30KV is sampled by the High Voltage Bleeder and is fed to the input of IC901 through R964 and R932. This voltage is compared with the internal 2.5 volt reference in IC901. IC901 drives the Error Signal Inverter, Q903 to set the control voltage on Pin 8 of IC900. The duty-cycle or pulse width of the Pre-Driver output from IC900 Pin 1 is controlled by the voltage on IC900 Pin 8. The 30KV is regulated by controlling the duty-cycle of the output on Pin 1 of IC900. This output can have such a Low duty-cycle or pulse width that the output will not drive the next stage. The normal operating voltage range at IC900 Pin 8 is from 4.5V to 4.8V. If this voltage goes above 4.8 volts or below 4.5 volts, the pulse width output from IC900 Pin 1 will be insufficient to drive Q902 shutting the High Voltage down.

Loss of Vertical or Horizontal scan will cause Pin 8 to go above 4.8 volts shutting the High Voltage down. Transistors Q501, Q500, Q503, Q502, and Q904 make up the Scan Drive shutdown circuit. Drive pulses from the Vertical Output circuit are rectified by D502, keeping a dc voltage greater than 15 volts at the cathode of D501. Horizontal pulses from Q800 are rectified by D504 to keep D503 reversed biased. As long as D501 and D503 are reversed biased, Q501 will stay turned off. Q500 will turn on turning Q503 On. This will turn Q502 off which will turn Q904 off.

If Vertical or Horizontal sweep should fail, D502 or D503 will conduct turning transistor Q501 On. This will turn Q500 Off, which will turn Q503 Off, also pulling the CRT protection circuit Low to blank the RGB drive to protect the CRT phosphors. Q502 will turn on turning Q904 On. This will turn Q903 on hard, increasing the voltage at Pin 8 of IC900 above 4.8 volts. This will remove the drive from Pin 1 of IC900, shutting the High Voltage down.

The Shutdown circuit also features under voltage sensing. If the 15V Source goes Low, Z500 will not conduct and Q500 will turn off. This turns Q503 off, turning Q502 on and turning Q904 on. This turns Q903 on Hard, placing the set into shutdown.

Soft start is achieved by the charging of C911 through R927 at turn on. This prevents the High Voltage from turning on until the Power Supply has fully turned on.

The chassis will go into over voltage Shutdown when the High Voltage increases beyond the designed safety limits. The shutdown monitor voltage comes from Pin 6 of T900 on the High Voltage Transformer and can be checked on the chassis at the cathode of D904. The voltage from Pin 6 of T900 is rectified by D904, filtered by C920, and applied to Pin 3 of IC902. The normal voltage at Pin 3 of the Shutdown Control IC, IC902, is approximately 25Vdc. If this voltage increases beyond 28 Volts for more than 800mS, the shutdown circuit inside IC902 will activate. The 800mS timing is affected by the value of C921. If the Shutdown latch circuit is activated, the set must be turned Off and On to reset the circuit. When the Shutdown latch is activated, Pin 6 of IC902 will go Low turning Q901 On. This will drive Q902 into saturation preventing it from driving the High Voltage output.

Beam Current is monitored from the bottom of the diode stack in the High Voltage Transformer through Resistors R940 and R971. Excessive CRT beam current will lower the DAG voltage, which will lower the output from the Beam Limiter transistors, Q907 and Q908. Automatic Beam Limiting is applied to the video circuits through R968 counteracting the high beam current condition. If the excessive beam current lowers IC902-1 below 3.5V for more than 800mS, the Latch circuitry will latch and the set will be placed into over current Shutdown.

This will also cause Pin 6 of IC902 to go Low turning Q901 On hard saturating Q902.

Troubleshooting the High Voltage Power Supply

Loss of High Voltage can be caused by a failure in the drive circuits, beam current shutdown, overvoltage, and loss of scan.

Check the dc voltage at on the anode of D901. If this voltage is less than one volt, the High Voltage has been shut down due to a scan loss. Check the Horizontal and Vertical drive circuits and the scan protection circuit. If the anode of D901 is 14 to 15 volts and Pin 8 of IC900 is less than 4.4 or greater than 4.8 volts, check the feedback circuit.

Check Pin 6 of IC902. This voltage should be approximately 15 volts. If this voltage is low (near zero volts), an overvoltage or overcurrent shutdown has occurred. Place an Oscilloscope on the anode of D904 and observe the waveform as the set is turned on. If the small pulse between the two large pulses moves, the unit is going into over voltage shutdown. If the pulse does not move, the unit is going into over current shutdown.

Audio Switching

Baseband Audio from Tuner 1 and Tuner 2 are fed to IC105, the Audio Switch, on Pins 2, 1, 13, and 12. (Figure 8) Switching for IC105 Pins 10 and 11 is done by the Microcomputer IC300 on Pin 39. Selected Baseband audio exits the IC on Pin 15 and is fed to the Stereo Decoder IC120 on Pin 29. Decoded Left and Right Audio exits IC120 on Pins 15 and 38 where it is fed to IC1 on Pins 31 and 32. IC1 outputs selected audio from the Stereo Decoder, Aux 1, Aux 2, SVHS 1, or SVHS 2 on Pins 39 and 38. Selected audio from IC1 is fed to IC120 on Pins 12 and 41. Left and Right outputs from IC120 on Pins 6 and 47 are fed to a 25 watt amplifier. IC107 selects between Left and Right Audio Out or baseband audio on Pin 4 of IC120 for the variable audio output.

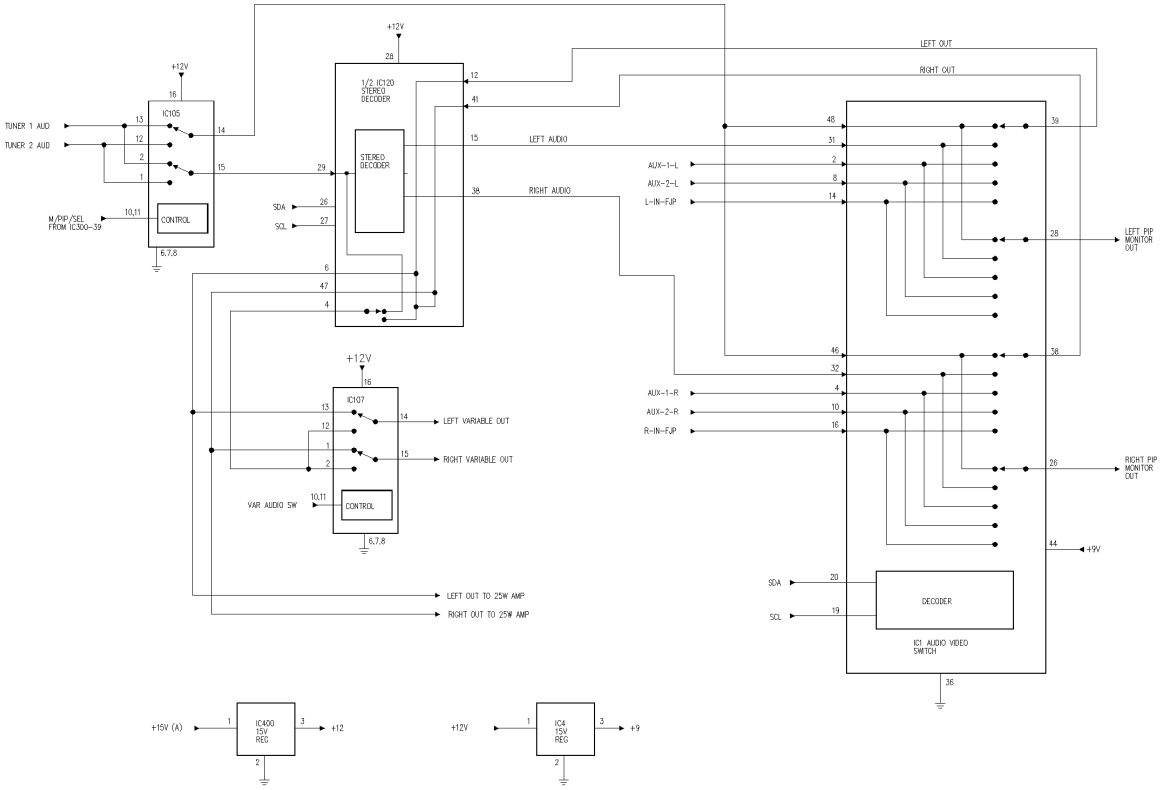


FIGURE 8 – PTV800 TWO TUNER AUDIO SWITCHING

AUDIO POWER SUPPLY

A switch mode power supply on the Audio amplifier board supplies the 43 and 12 volt sources to power the output. IC401 provides Pulse Width drive to switch the FET, Q403. Startup voltage for the IC from the 160 source is fed through R401 and R402 to charge C423 and C404. When the voltage reaches 14.5 volts, the under voltage lockout of the IC will be overcome, turning on the reference section of the IC. The reference voltage from Pin 8 will turn Q402 on through R409 shorting the output of the comparator to ground. Pin 7 of IC401 will then fall below 9 volts causing the undervoltage lockout to shut the reference section off. This will keep the power supply to the Audio Circuit shut off.

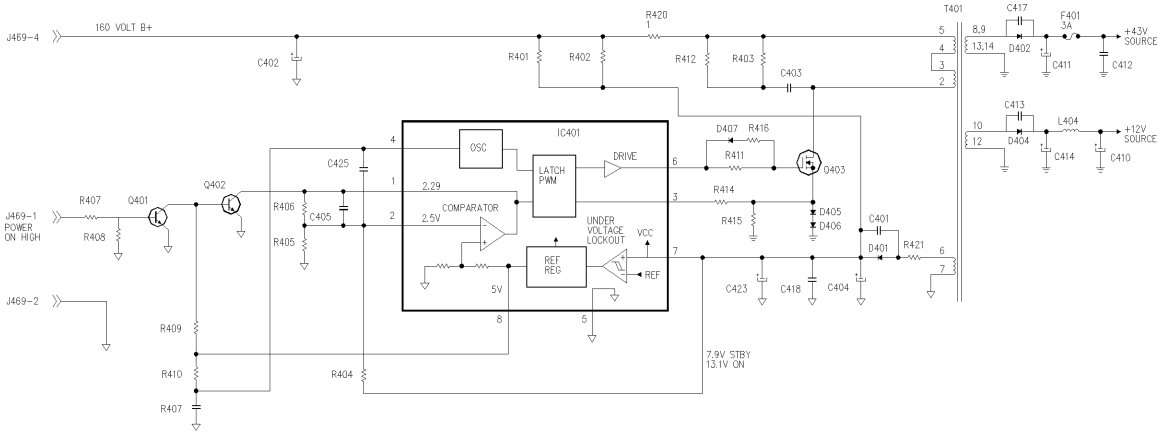


FIGURE 9 – GR7D AUDIO POWER SUPPLY

When the set is turned on, a High on J469 Pin 1 will turn transistor Q401 on, turning Q402 Off. This will allow the output of the comparator to increase to approximately 2.25 volts on Pin 1 of the IC. The Pulse Width Modulator will then output a drive pulse on Pin 6 to switch Q403. When Q403 is on, energy is stored in the transformer. Energy is transferred to the secondaries when Q403 is off. Voltage from Pin 6 of the hot secondary is rectified by D401 and filtered by C404 and C423 to provide operating voltage for Pin 7 of the IC. This voltage will measure approximately 8 volts when the power supply is turned off and 13 volts when the supply is turned On. Voltage from Pins 8 and 9 of the secondary is rectified by D402 and filtered by C411 for the 43 volt source. The 43 volt source is fused by F401. Voltage from Pin 10 of the secondary is rectified by D404 and filtered by C414 to produce the 12 volt source.

AUDIO OUTPUT

(Figure 10)

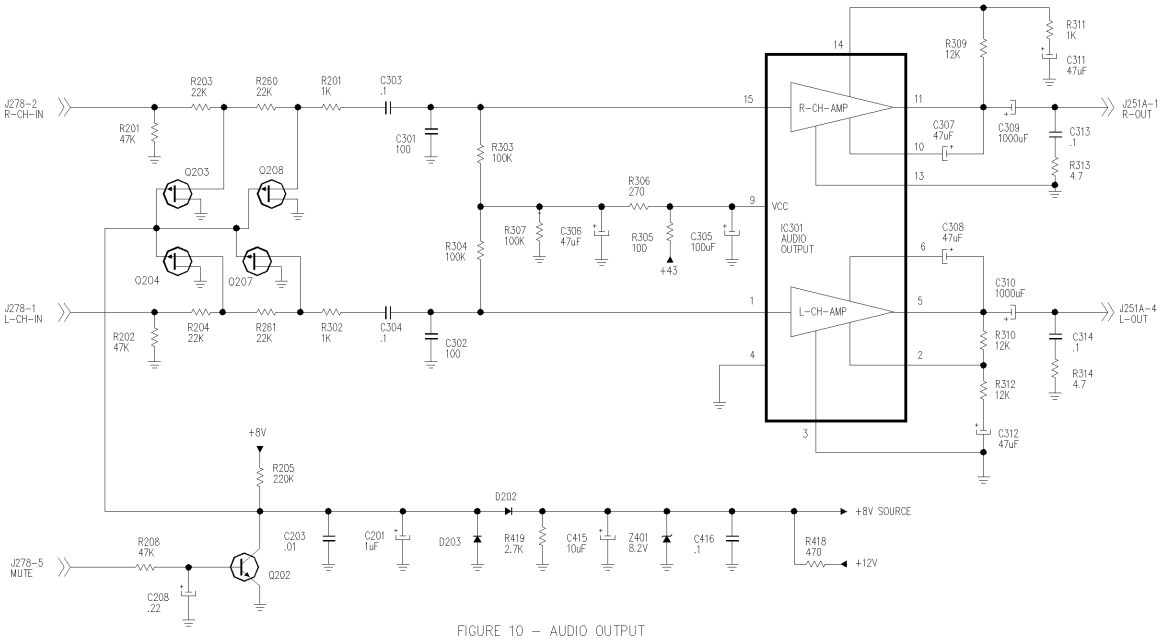


FIGURE 10 – AUDIO OUTPUT

To prevent a Pop in the speakers when the set is turned on, Q203, Q204, Q207, and Q208 provide muting. When the Audio Power Supply is turned on, C201 is charged through resistor R205 to momentarily turn on the muting transistors. While the capacitor is charging, the Low on the gate of the muting transistors turns them on, muting the audio. Once the Capacitor is charged, the muting transistors are turned off. A high on the Mute line from the Microprocessor turns transistor Q202 on, turning the muting transistors, Q203, Q204, Q207, and Q208, on. The 8 volt source is regulated by the 8.2 volt zener, Z401.

SPEAKER OUTPUT CIRCUIT

(Figure 11)

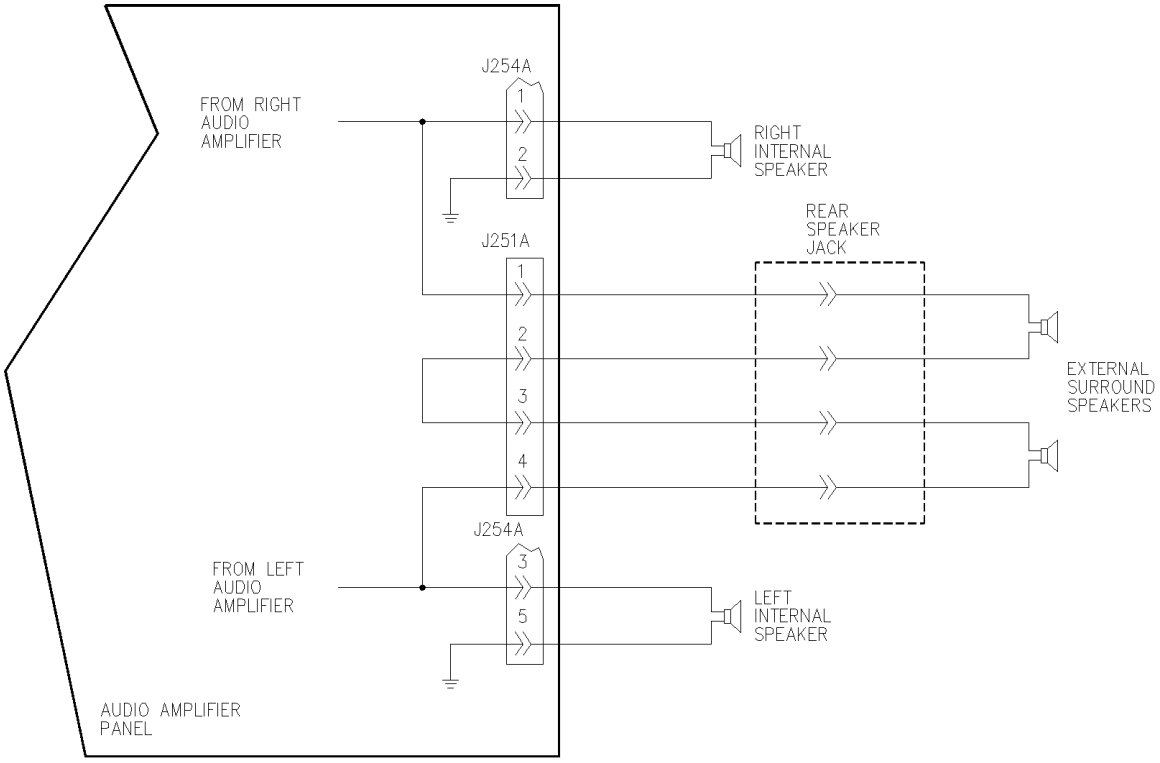


FIGURE 11 – PTV800 SERIES SPEAKER OUTPUT CIRCUIT

In the PTV810 and above, the Right and Left internal Speakers are connected to J254A on the Audio Amplifier panel. The Surround Sound speakers are connected in series between the Right and Left amplifier outputs. Both Surround Sound speakers must be connected. These speakers will only have sound when the set is in the Stereo mode while receiving a Stereo signal.

The speakers in the PTV800 and PTV805 are connected to the Small Signal panel in a similar manner.

Troubleshooting the Audio Circuit

To troubleshoot a no audio problem, first measure J278, Pins 1 and 2, for audio drive. If this signal is present, check DC voltage on each side of F401. If voltage is missing on one side, the fuse is open. Before changing the fuse, check Pin 9 of IC301, the audio output IC for a short to ground. If there is no voltage on either side of F401 when the set is turned on, check Pin 7 of IC401 with a Scope. If IC401 is working correctly, the voltage on Pin 7 will be pulsating between 9 and 14 volts. There should be 0.7 volts on the Base of Q401 to turn this transistor on when the set is turned on. The Base of Q402 should be 0 volts at this point to turn the transistor off. Pin 8 of the IC should be going to 5 volts when Pin 7 goes to 14 volts. If no voltage is seen on Pin 8 with a scope, the IC should be changed. If voltage is present on Pin 8, a drive signal should be present on Pin 6 of the IC.

If the Audio Power supply is working correctly and there is input signal present, check the gates of the muting transistors for approximately 8 volts. If this voltage is Low, the muting transistors are turned on. Check the 8 volt source if the gate voltage is Low. If the 8 volt source is present, check the mute line on J278 Pin 5.

Convergence Panel

Phase-Locked Loop:

The phase-locked loop produces a 13.59mhz signal, which is phase locked to the 15,734 Hz horizontal blanking pulse (HBLN). (Figure 12) This signal is used as the system clock which is used by the Convergence Spline Processor (CSP) and the three digital to analog converters (dacs). In this manner, the convergence correction waveforms are synchronized to the deflection system of the television set.

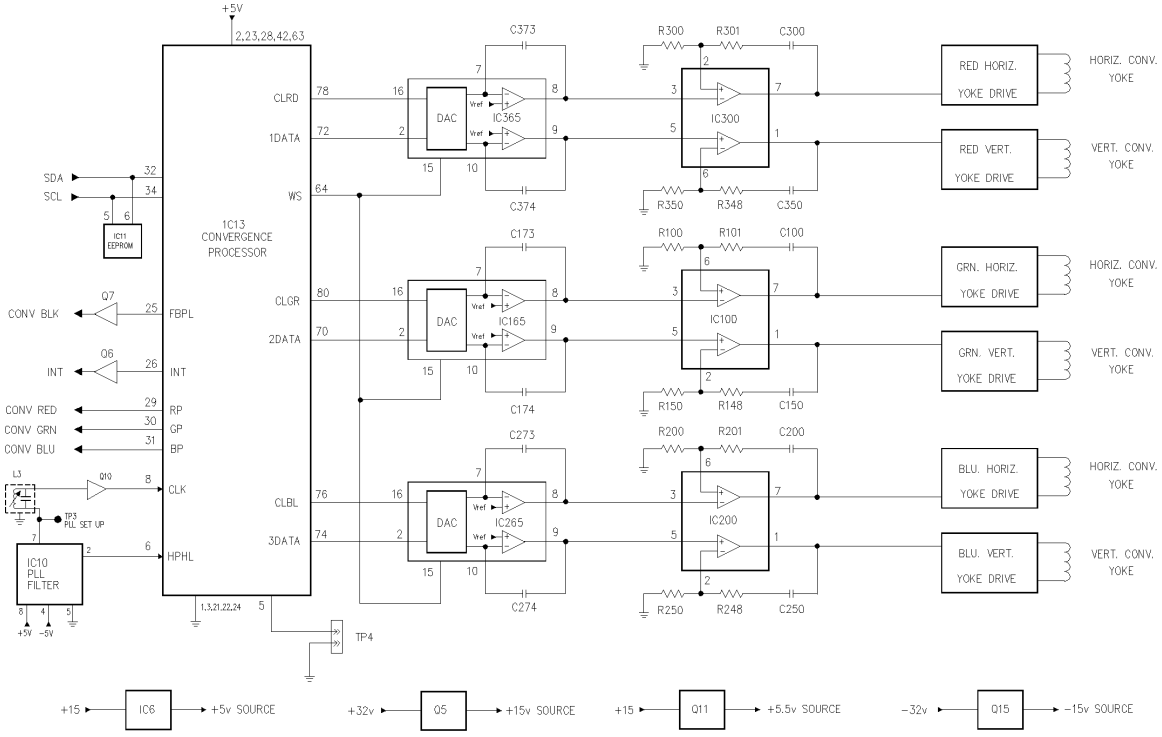


FIGURE 12 – PTV800 SERIES CONVERGENCE PANEL

Transistors Q10, and related components make up the oscillator. Adjustable coil L3 is used to set the free run frequency oscillator which is at the middle range when the dc voltage at TP3 is 1.5 volts.

Convergence Spline Processor (CSP)

When the TV set is turned On, IC300 the main microprocessor on the Small Signal Board reads the data stored in IC11 on the Convergence Board via the I2C bus. This information contains the x-y coordinates for the 35 alignment points of each color visible on the screen during convergence set up along with other register settings used by the CSP.

The CSP uses fourth order polynomial equations called quadric splines in the algorithm to convert the data of the 35(7 horizontal by 5 vertical) alignment points into 24 points per horizontal line by 243 vertical lines. The resulting digital data is supplied to IC365, IC165, and IC265, the three two channel dacs, which convert the digital data into analog convergence

corrections signals for red, green, and blue horizontal and vertical. The dac outputs are approximately 2 volts peak to peak with a 2.5 volt dc offset. The CSP also supplies a 375 KHz 5 volt peak to peak WS or word select signal to select the proper channel on the dac for horizontal or vertical.

If for some reason the set needs to be converged in the field, the CSP generates a crosshatch pattern with an intensified cross. Control for IC13 is done by the microcomputer on the Small Signal Panel. The R, G, B, Fast Blanking, and intensity signals used to display the pattern, are output on pins 29, 30, 31, 25, and 26 of IC13.

The convergence correction waveforms may be disabled for set up procedures by shorting the set up connector TP4.

The output of the dac's are amplified by and filtered by IC100, IC200, and IC300 before being fed to the Yoke drive amplifiers.

Small Signal Panel

Chassis PTV810 and above are equipped with a dual tuner PIP. (Figure 13) Composite Video output from each Tuner circuit is fed to IC1, the AV switch. The AV switch has two video outputs. Either of the two outputs from the AV switch can select its video source from the Tuners, Aux 1, Aux 2, SVHS1, or SVHS2. The two selected video outputs are fed to the IC1001 Picture in Picture IC. The Output of the PIP is fed to a Comb filter where Luminance and Chroma are separated. SVHS switch, IC701 selects Luminance and Chroma from the Comb Filter or selected SVHS from the Video Switch. Selected Luminance and Chroma is fed to the Chroma Luminance Processor, IC600 where On Screen Display OSD signals are added to outgoing RGB signals. Red, Green, and Blue drive is then sent to the CRT boards. Sync is separated from the Luminance for the Horizontal and Vertical Oscillators. Horizontal and Vertical drive is then sent to the Large Signal Panel.

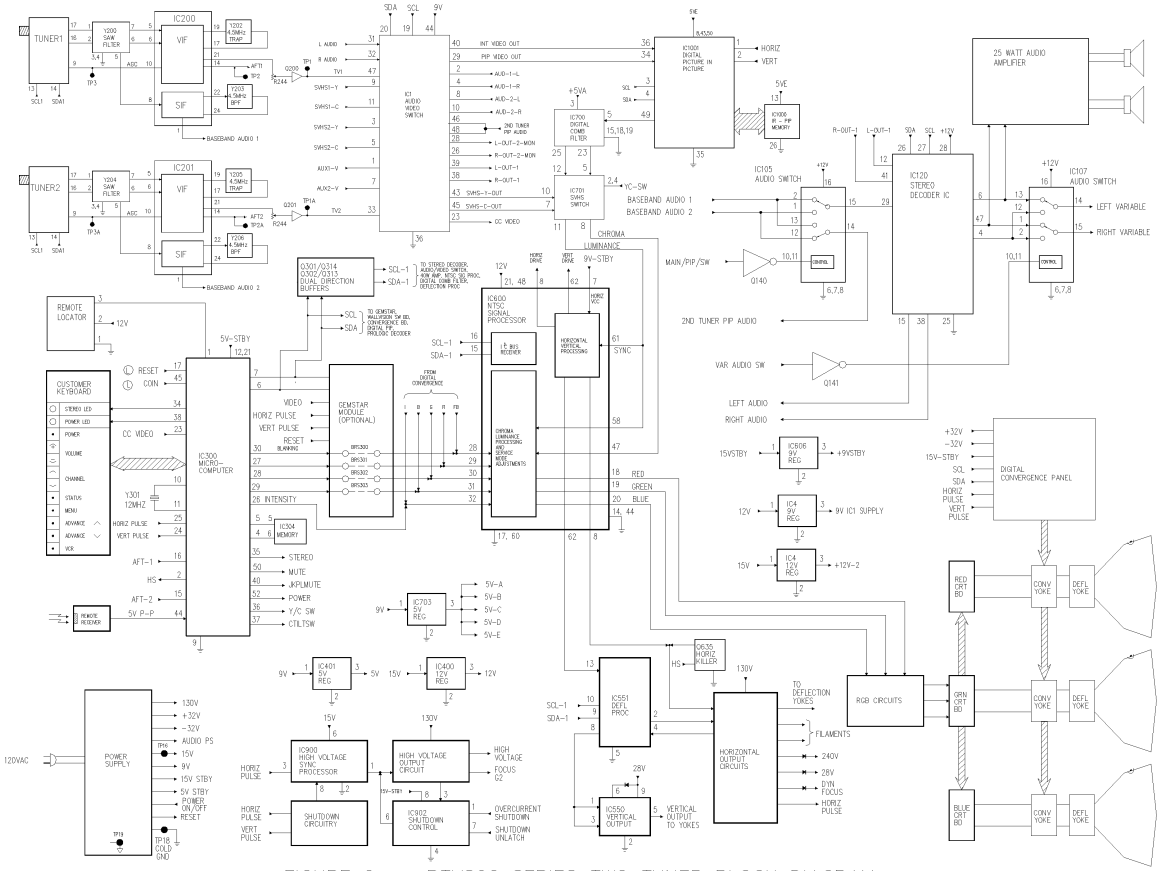


FIGURE 2 – PTV800 SERIES TWO TUNER BLOCK DIAGRAM

Baseband audio from the two Tuners is selected by IC105 and fed to IC120 Stereo Decoder. Left and Right Audio is sent to IC1 AV switch. IC1 AV switch selects Audio from the Stereo Decoder, Aux 1, Aux 2, SVHS 1, or SVHS 2. Selected Audio is fed back to the Stereo Decoder which selects between Baseband audio or selected Left and Right audio before being sent to the Audio Amplifier.

Tuner

Each tuner has it's own Saw Filter and IF circuitry. (Figure 14) The output from the Tuner on Pins 16 and 17 is fed to the input of Saw Filter Y200 Pins 1 and 2 respectively. Video IF from Y200 Pins 6 and 7 are fed to Pins 5 and 6 of IC200, the Video and Sound IF processor. VCO is set by L204 and AFT is set by L202. Composite Video on Pin 17 is passed through Y202, 4.5mhz sound trap to remove any audio components present before reentering the IC on Pin 19. Composite Video output from IC200 on Pin 21 is fed to a Video level control R244 to set the output level. Q200 buffers the signal before it is sent to the AV switcher IC.

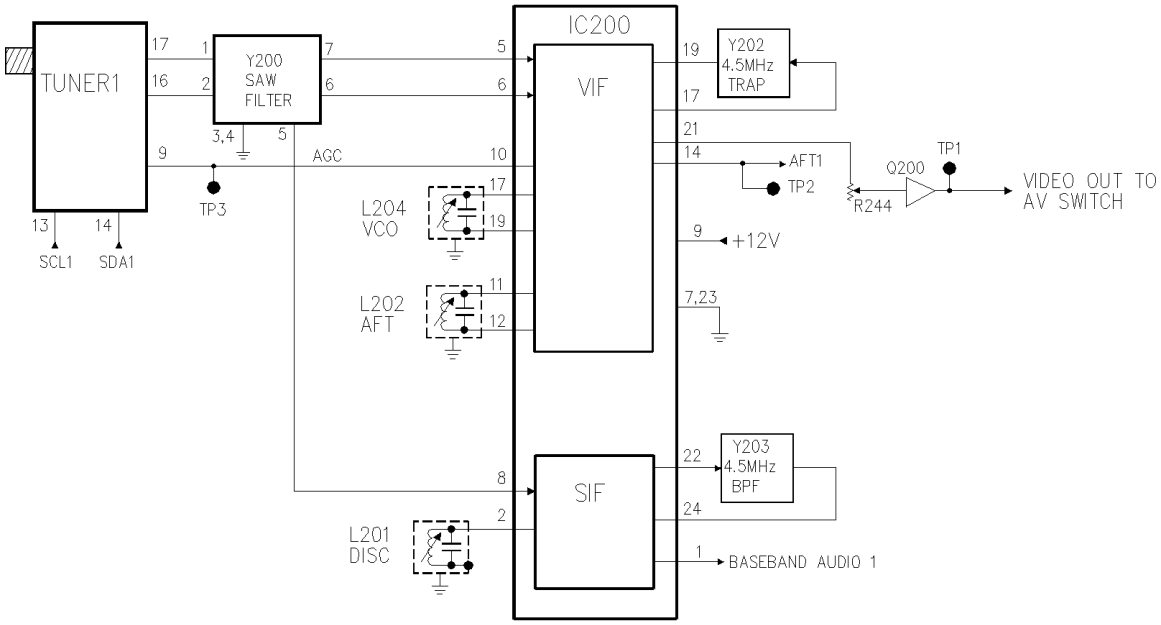


FIGURE 14 – PTV800 TUNER IF

Audio IF from Pin 5 of Y200 is fed to Pin 8 of IC200 to the Sound IF circuit. Sound IF signal from Pin 22 is passed through Y203, 4.5MHz bandpass filter to Pin 24 and on to the sound discriminator circuit. The discriminator is controlled by coil L201. Baseband audio is output on Pin 1.

Video Switcher

The Video output of each tuner and IF is buffered and fed to the Audio/Video switcher IC1 on Pins 33 and 47. (Figure 15) Either of the Video Outputs on Pin 40 or Pin 29 can select Tuner 1, Tuner 2, Aux 1, Aux 2, SVHS 1, or SVHS 2 as a signal source. Internal Video Out and PIP Video Out is fed to IC1001 on Pins 36 and 34 where it is processed. Video Output from IC1001 Pin 49 is fed to the Digital Comb Filter IC700, Pin 5 where Chroma and Luminance are separated. Chroma from IC700 Pin 23 and Luminance on Pin 25 are fed to IC701 Pins 5 and 7. IC701 selects Chroma and Luminance from either the Digital Comb Filter or IC1 Audio Video Switch on Pins 10 and 7. Chroma and Luminance are output on Pins 11 and 8 and fed to IC600, Signal Processor.

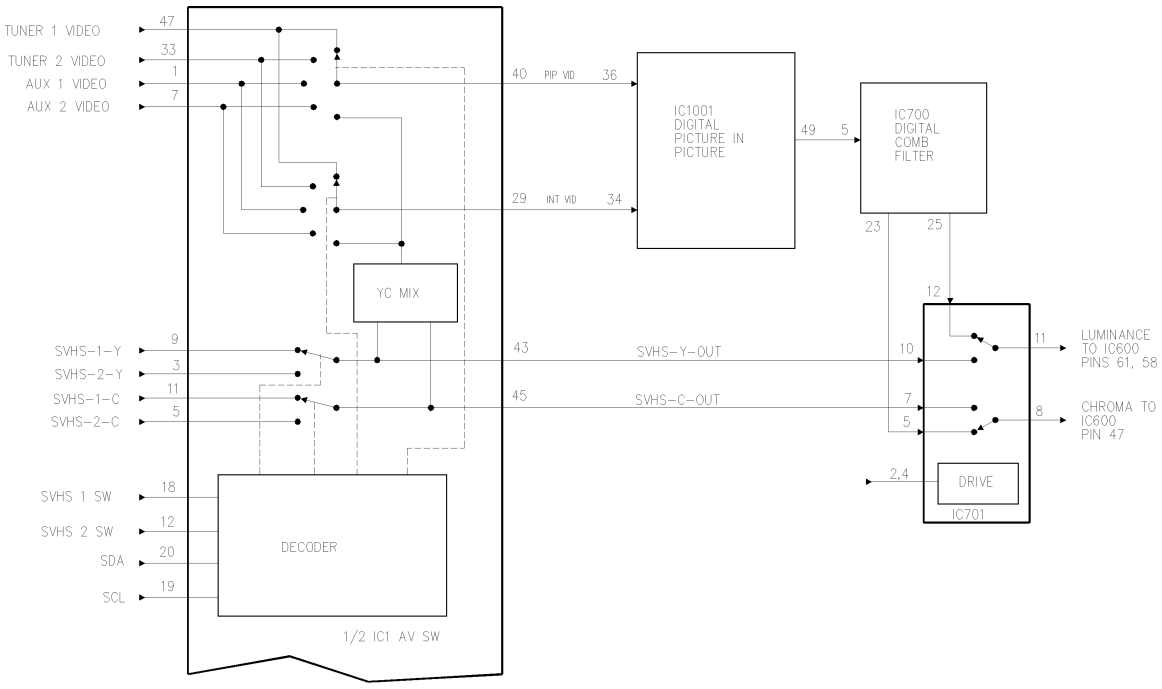


FIGURE 15 – PTV800 SERIES TWO TUNER VIDEO SWITCHING

Signal Processor

Luminance from IC701 is fed through a delay circuit, amplified by Q601, and is buffered by Q611 and applied to IC600 Pin 61. (Figure 16) The output of Q601 is buffered by Q602 to provide sync to Pin 61 of IC600. Chroma is fed to IC600 on Pin 47.

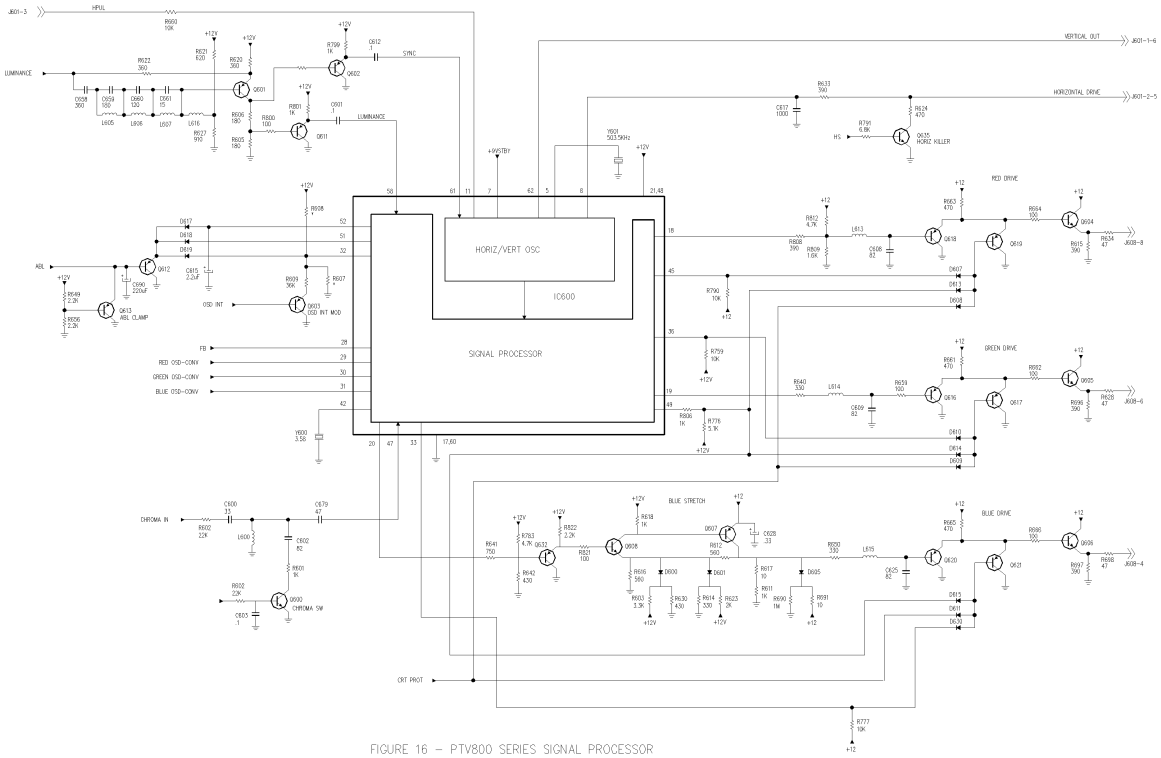


FIGURE 16 – PTV800 SERIES SIGNAL PROCESSOR

Red, Green, and Blue OSD and fast blanking from the Microcomputer and Convergence Panel are fed to the IC on Pins 31, 30, 29, and 28 respectively. Red, Green, and Blue drive for the CRT's are output on Pins 18, 19, and 20 respectively. The Red drive signal is buffered by Q618 and Q604. Q619 is used for blanking and to kill drive to the tubes if the CRT protection circuit is activated. In a similar manner, Green drive is buffered by Q616 and Q605. Q617 is the Green blanking transistor. Blue drive on Pin 20 is fed to buffer transistor Q632 and is amplified by Q608 and Q607 before being buffered by Q620 and Q606. Q621 provides blanking for the Blue drive. Q632 and Q607 is a Blue Stretch circuit which provides a slight delay and extra gain to the Blue signal.

The Luminance signal is fed into IC600 on Pin 61 to provide sync to the Vertical and Horizontal Oscillator. A 503 KHz crystal on Pin 5 provides the reference for the count down circuit in IC600. Horizontal drive on Pin 8 of IC600 is fed to the Large Signal Panel through Pins 2 and 5 of J601. Vertical drive is routed to the Large Signal Panel by J601 Pins 1 and 6 from IC600 Pin 62.

BOARD LEVEL TROUBLESHOOTING

For a dead set condition, check the 5 volt standby supply on J403 Pin 1 of the Small Signal Panel or J403 Pin 7 of the Large Signal Panel. (FIGURE 17) If missing, then check the ac input voltage on J461 of the Large Signal Panel. If the ac is present, but the 5 volt standby is missing, repair or replace the Large Signal Panel.

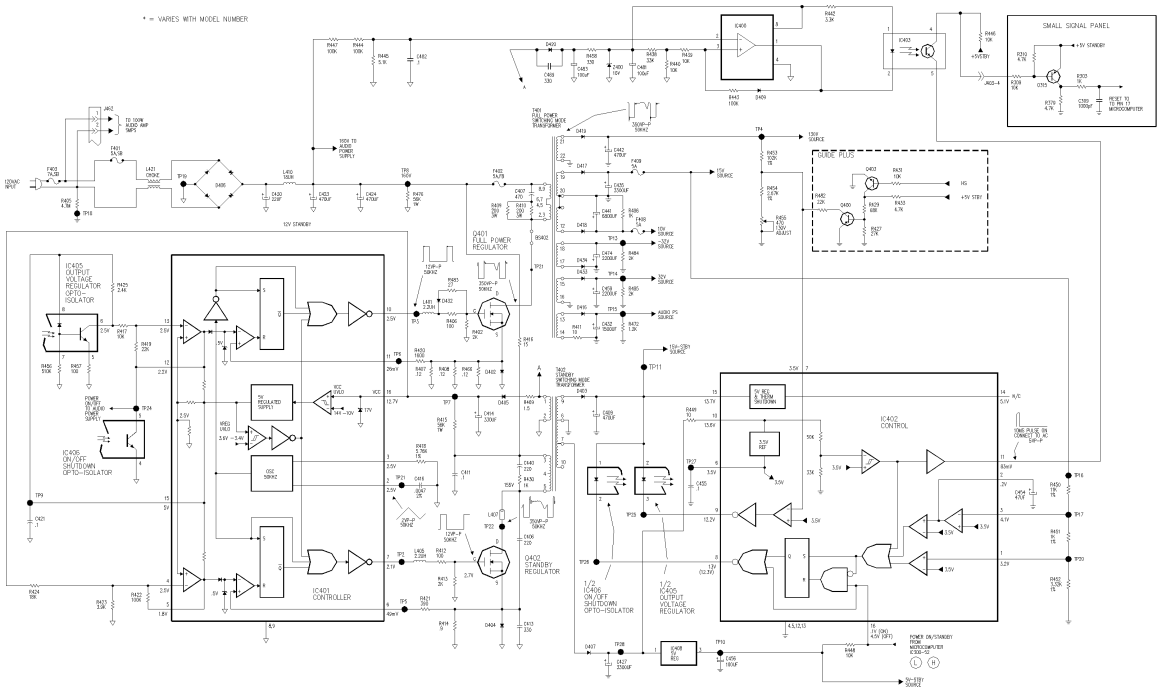
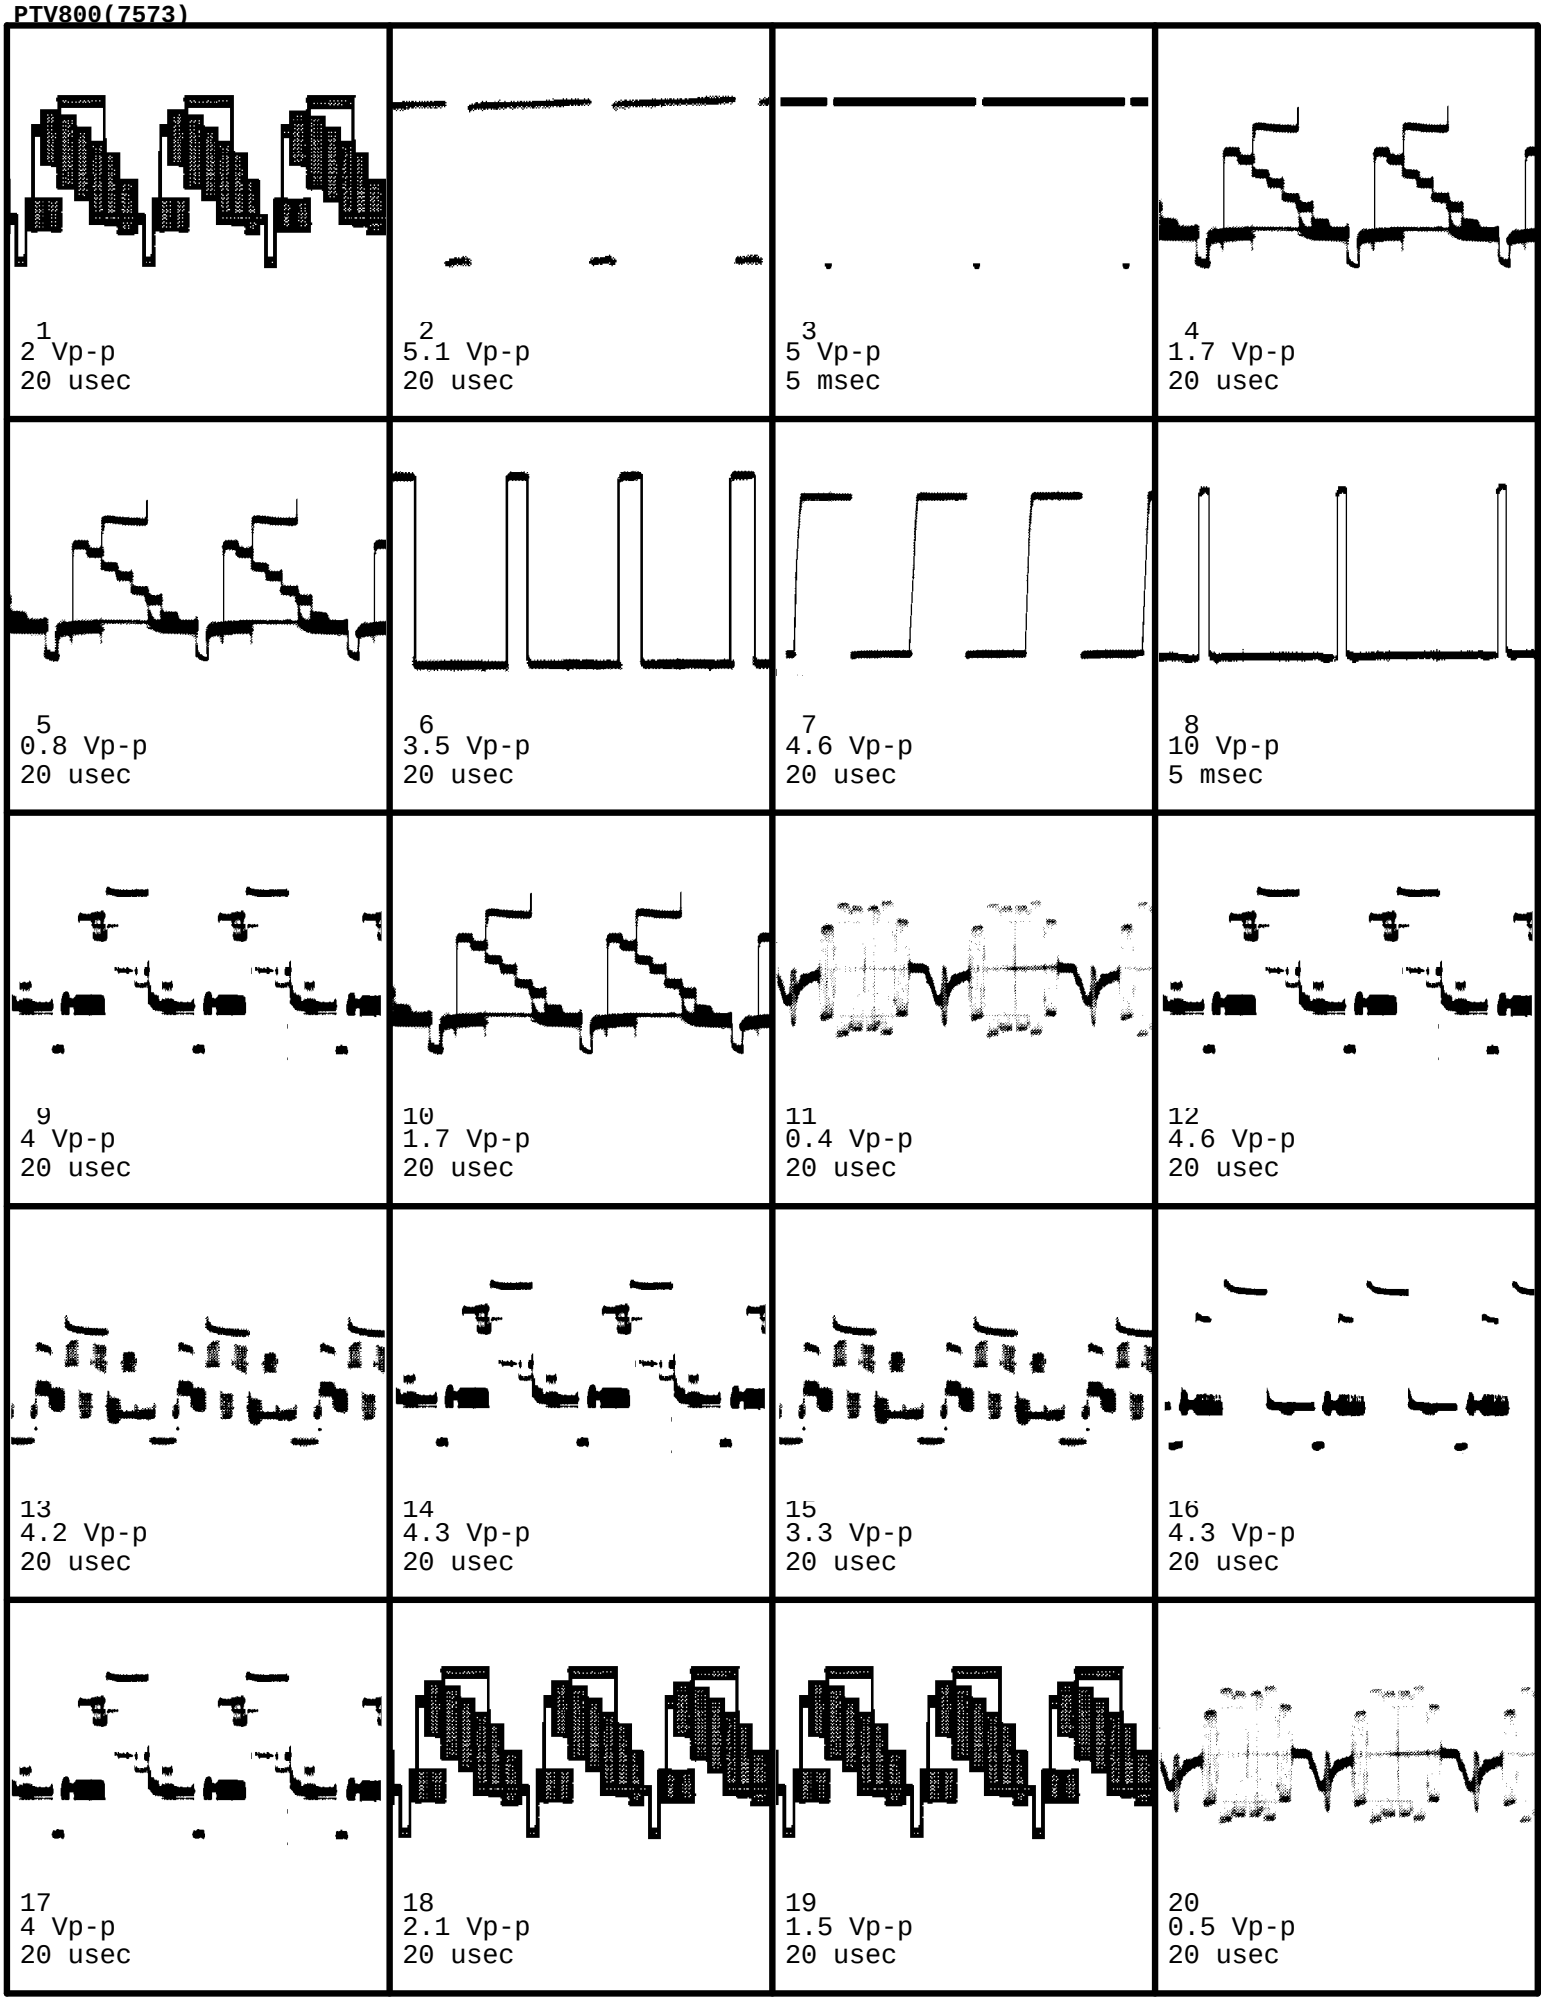


FIGURE 3 – PTV800 SERIES SWITCHING MODE POWER SUPPLY


If 5 volts is present at J403 Pin 1 of the Small Signal Panel, press the Power button and check J403 Pin 5 for a Low. If J403 Pin 5 goes Low, the problem is with the Large Signal Panel. If it does not go Low, the problem is with the Small Signal Panel, Keyboard, or connections to the Keyboard.

Other important troubleshooting checkpoints are J401 on the Large Signal Panel for the 240 volt supply and filament voltage. Check J608 on the Small Signal Panel for Red, Green, and Blue drives. Horizontal Drive from the Small Signal Panel J601, Pin 5 and Vertical Drive on J601 Pin 6 should also be checked.


PTV800(7573)


1
2 Vp-p
20 usec
2
5.1 Vp-p
20 usec
3
5 Vp-p
5 msec
4
1.7 Vp-p
20 usec
5
0.8 Vp-p
20 usec
6
3.5 Vp-p
20 usec
7
4.6 Vp-p
20 usec
8
10 Vp-p
5 msec
9
4 Vp-p
20 usec
10
1.7 Vp-p
20 usec
11
0.4 Vp-p
20 usec
12
4.6 Vp-p
20 usec
13
4.2 Vp-p
20 usec
14
4.3 Vp-p
20 usec
15
3.3 Vp-p
20 usec
16
4.3 Vp-p
20 usec
17
4 Vp-p
20 usec
18
2.1 Vp-p
20 usec
19
1.5 Vp-p
20 usec
20
0.5 Vp-p
20 usec


PTV800(7573)

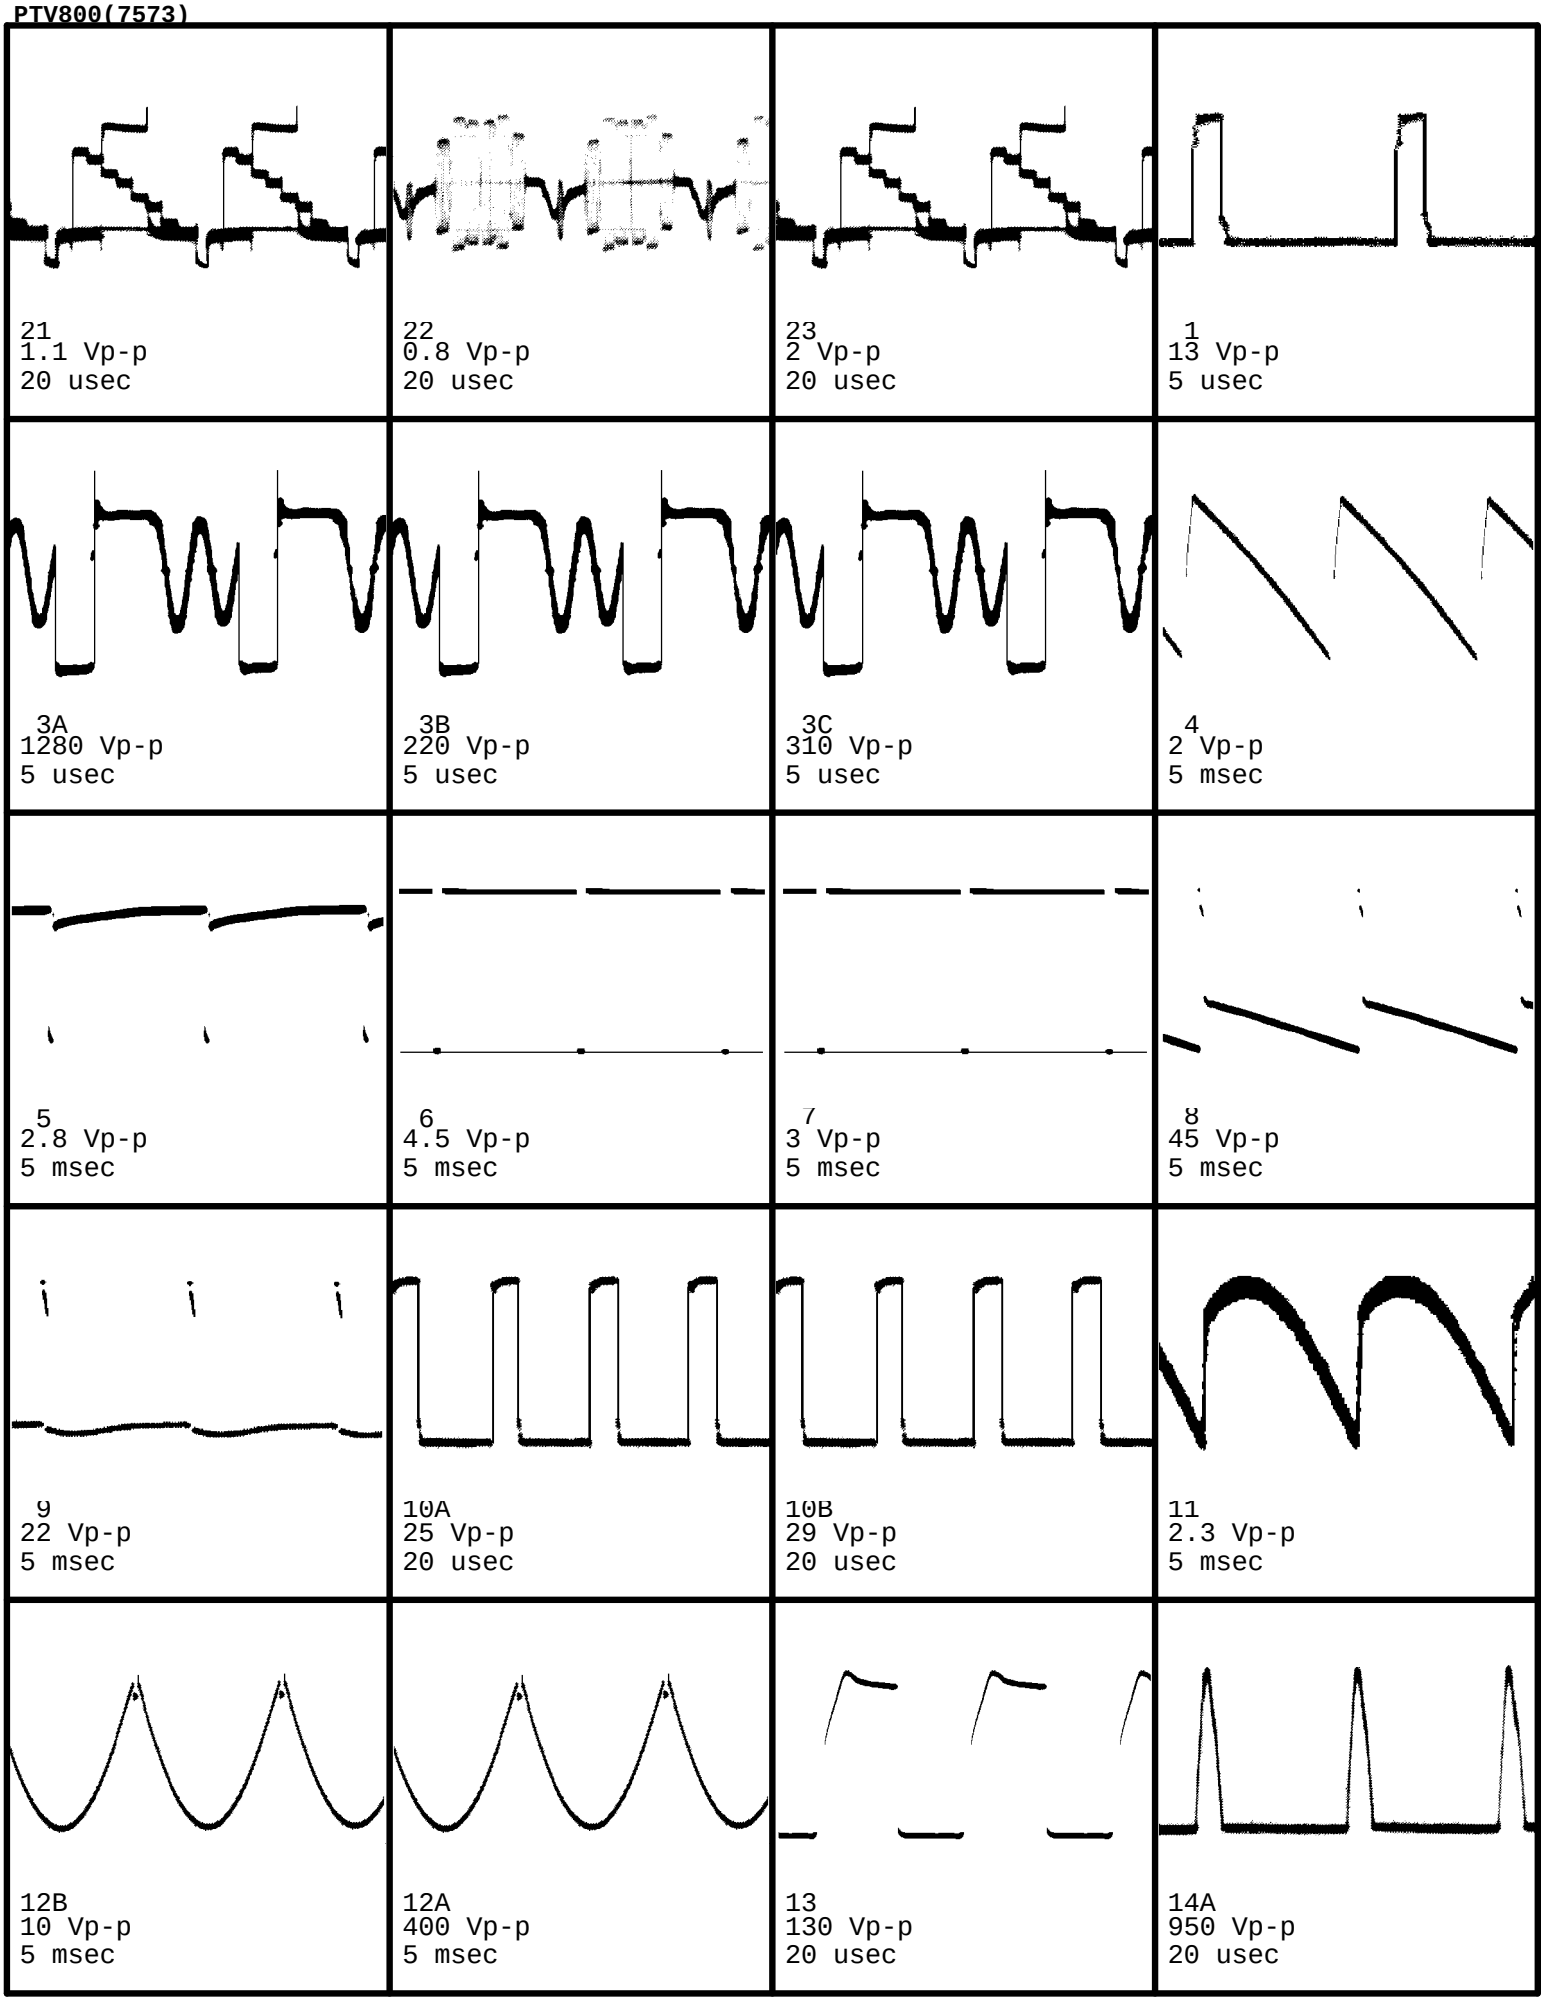
21
1.1 Vp-p
20 usec
22
0.8 Vp-p
20 usec
23
2 Vp-p
20 usec
1
13 Vp-p
5 usec
3A
1280 Vp-p
5 usec
3B
220 Vp-p
5 usec
3C
310 Vp-p
5 usec
4
2 Vp-p
5 msec
5
2.8 Vp-p
5 msec
6
4.5 Vp-p
5 msec
7
3 Vp-p
5 msec
8
45 Vp-p
5 msec
9
22 Vp-p
5 msec
10A
25 Vp-p
20 usec
10B
29 Vp-p
20 usec
11
2.3 Vp-p
5 msec
12B
10 Vp-p
5 msec
12A
400 Vp-p
5 msec
13
130 Vp-p
20 usec
14A
950 Vp-p
20 usec


PTV800(7573)

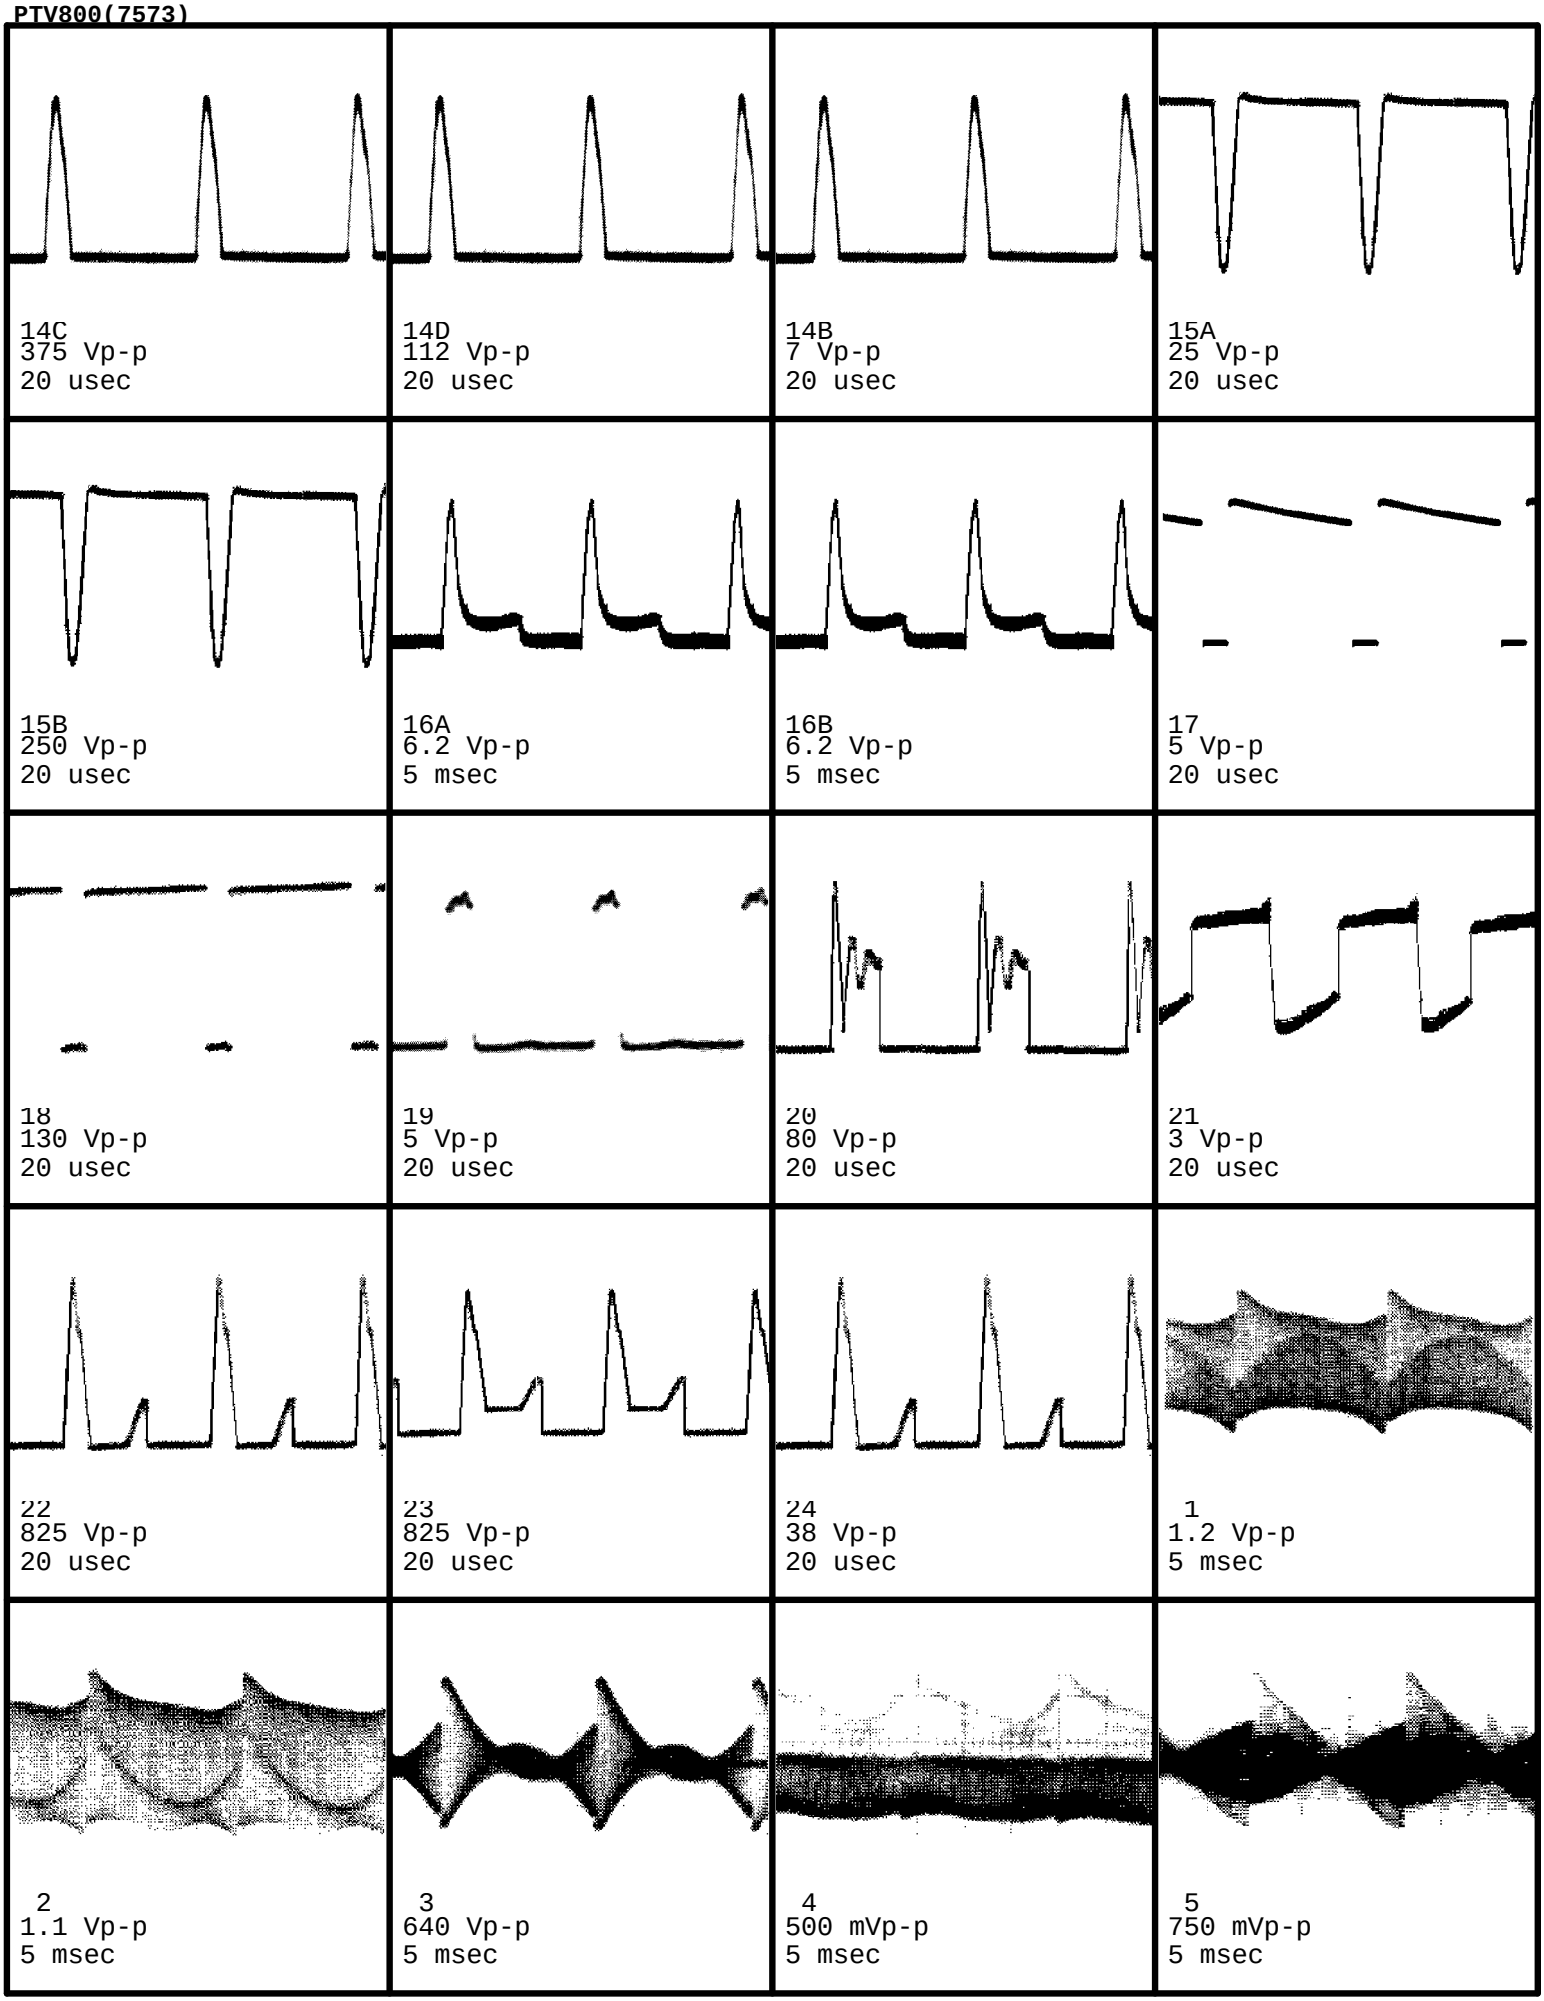
14C
375 Vp-p
20 usec
14D
112 Vp-p
20 usec
14B
7 Vp-p
20 usec
15A
25 Vp-p
20 usec
15B
250 Vp-p
20 usec
16A
6.2 Vp-p
5 msec
16B
6.2 Vp-p
5 msec
17
5 Vp-p
20 usec
18
130 Vp-p
20 usec
19
5 Vp-p
20 usec
20
80 Vp-p
20 usec
21
3 Vp-p
20 usec
22
825 Vp-p
20 usec
23
825 Vp-p
20 usec
24
38 Vp-p
20 usec
1
1.2 Vp-p
5 msec
2
1.1 Vp-p
5 msec
3
640 Vp-p
5 msec
4
500 mVp-p
5 msec
5
750 mVp-p
5 msec


PTV800(7573)

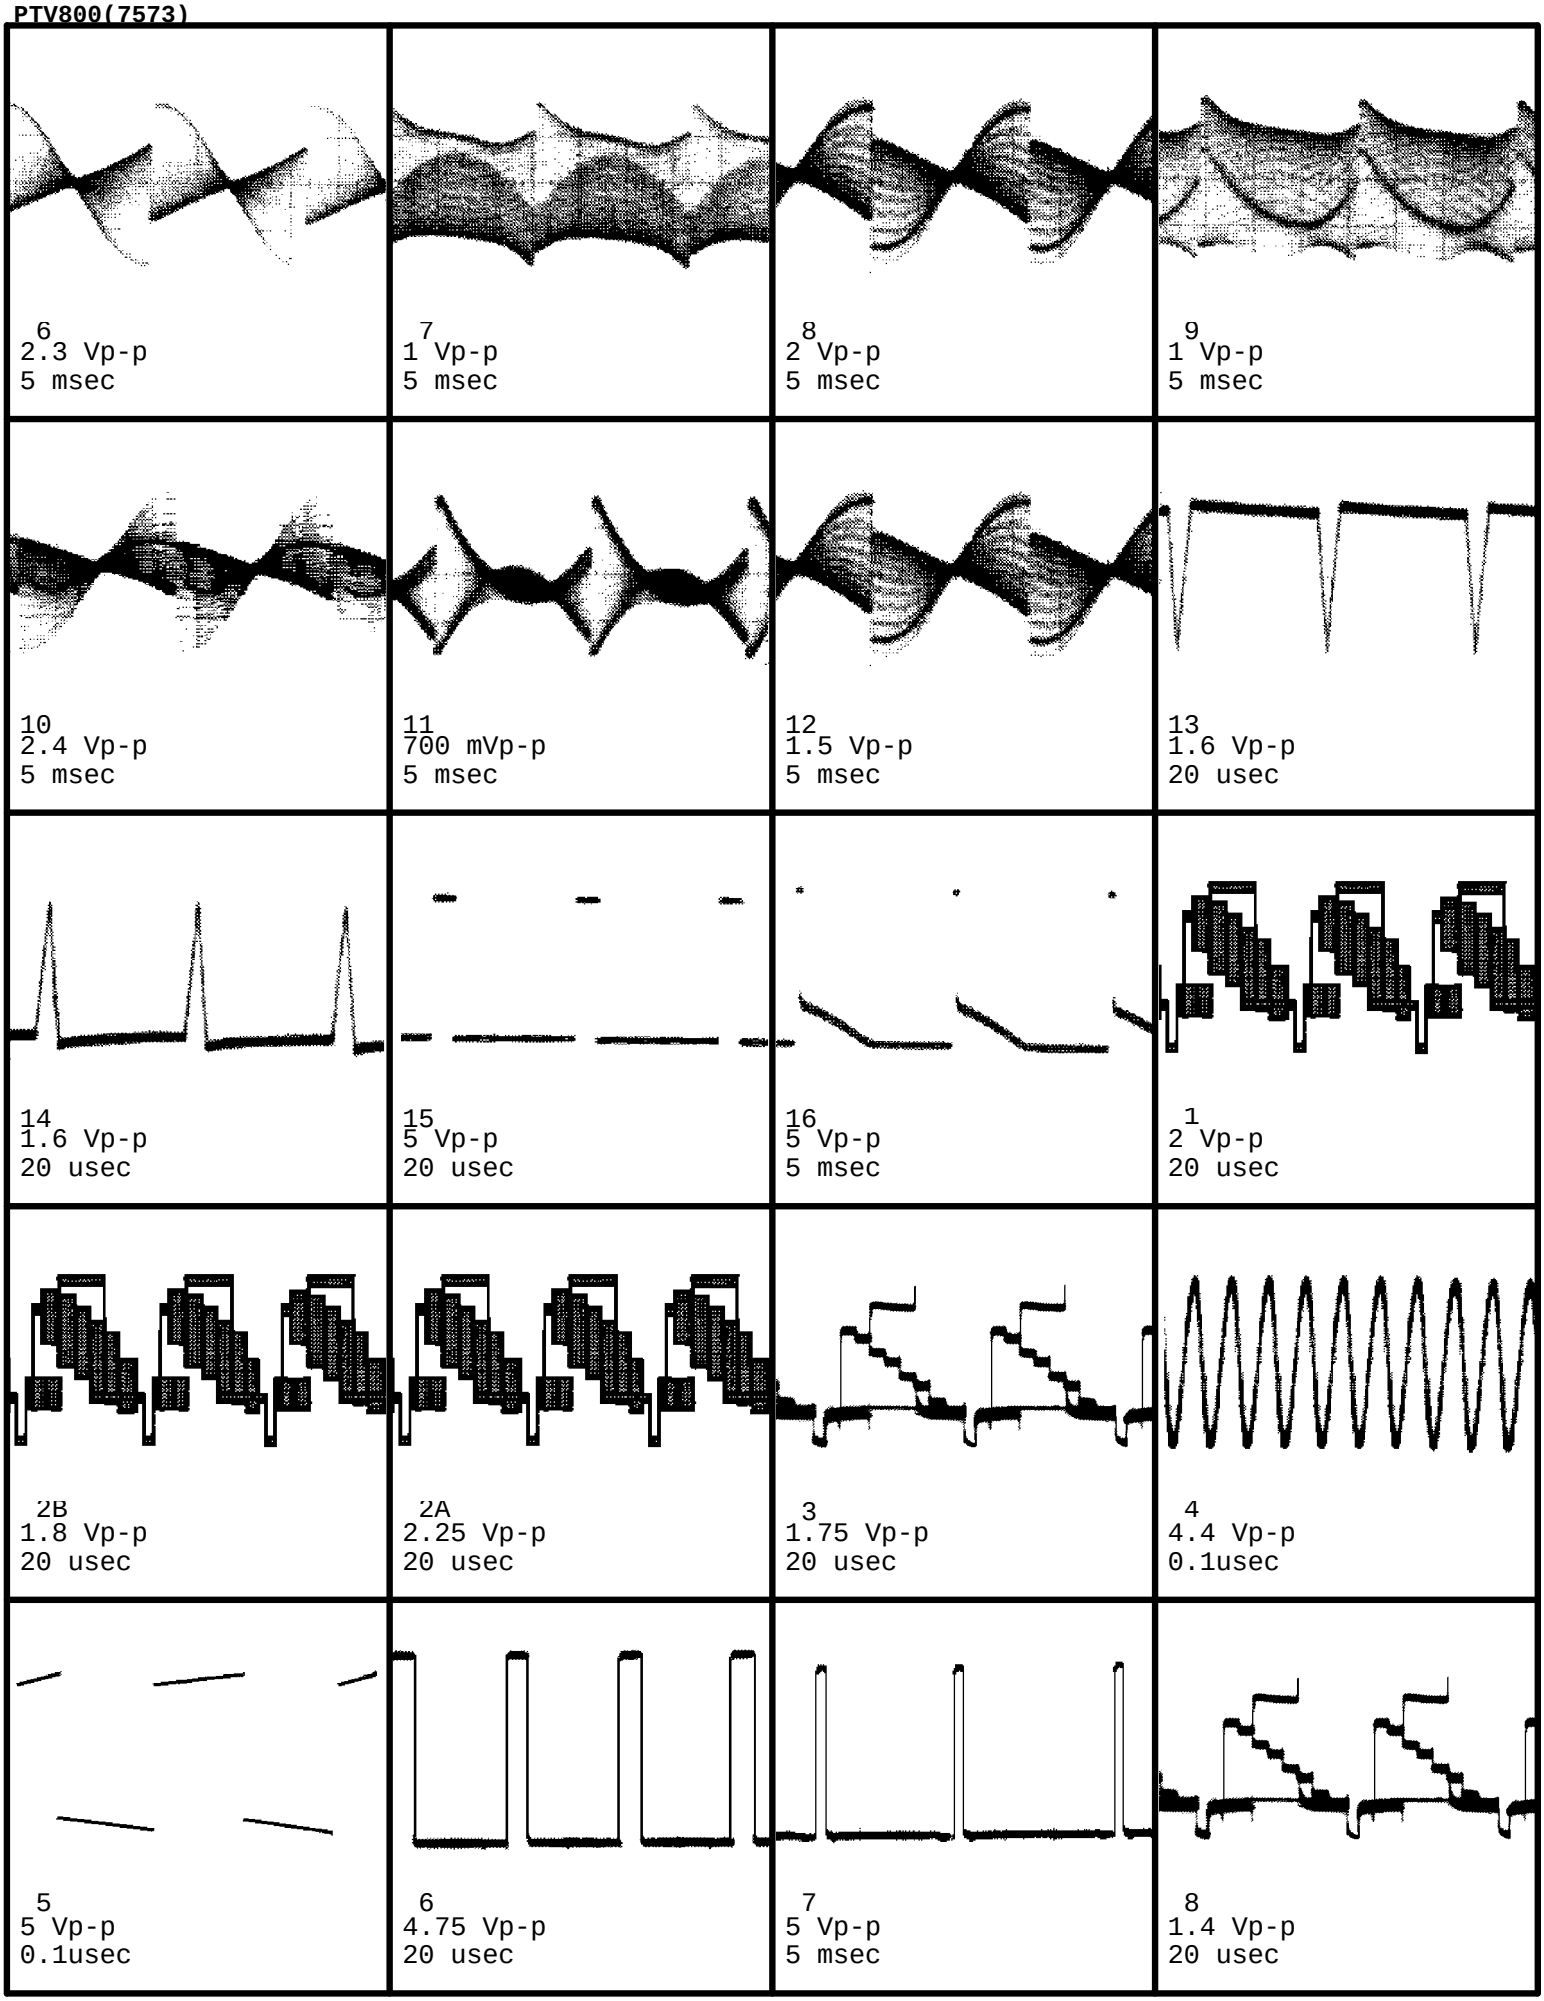
6
2.3 Vp-p
5 msec
7
1 Vp-p
5 msec
8
2 Vp-p
5 msec
9
1 Vp-p
5 msec
10
2.4 Vp-p
5 msec
11
700 mVp-p
5 msec
12
1.5 Vp-p
5 msec
13
1.6 Vp-p
20 usec
14
1.6 Vp-p
20 usec
15
5 Vp-p
20 usec
16
5 Vp-p
5 msec
1
2 Vp-p
20 usec
2B
1.8 Vp-p
20 usec
2A
2.25 Vp-p
20 usec
3
1.75 Vp-p
20 usec
4
4.4 Vp-p
0.1usec
5
5 Vp-p
0.1usec
6
4.75 Vp-p
20 usec
7
5 Vp-p
5 msec
8
1.4 Vp-p
20 usec


PTV800(7573)

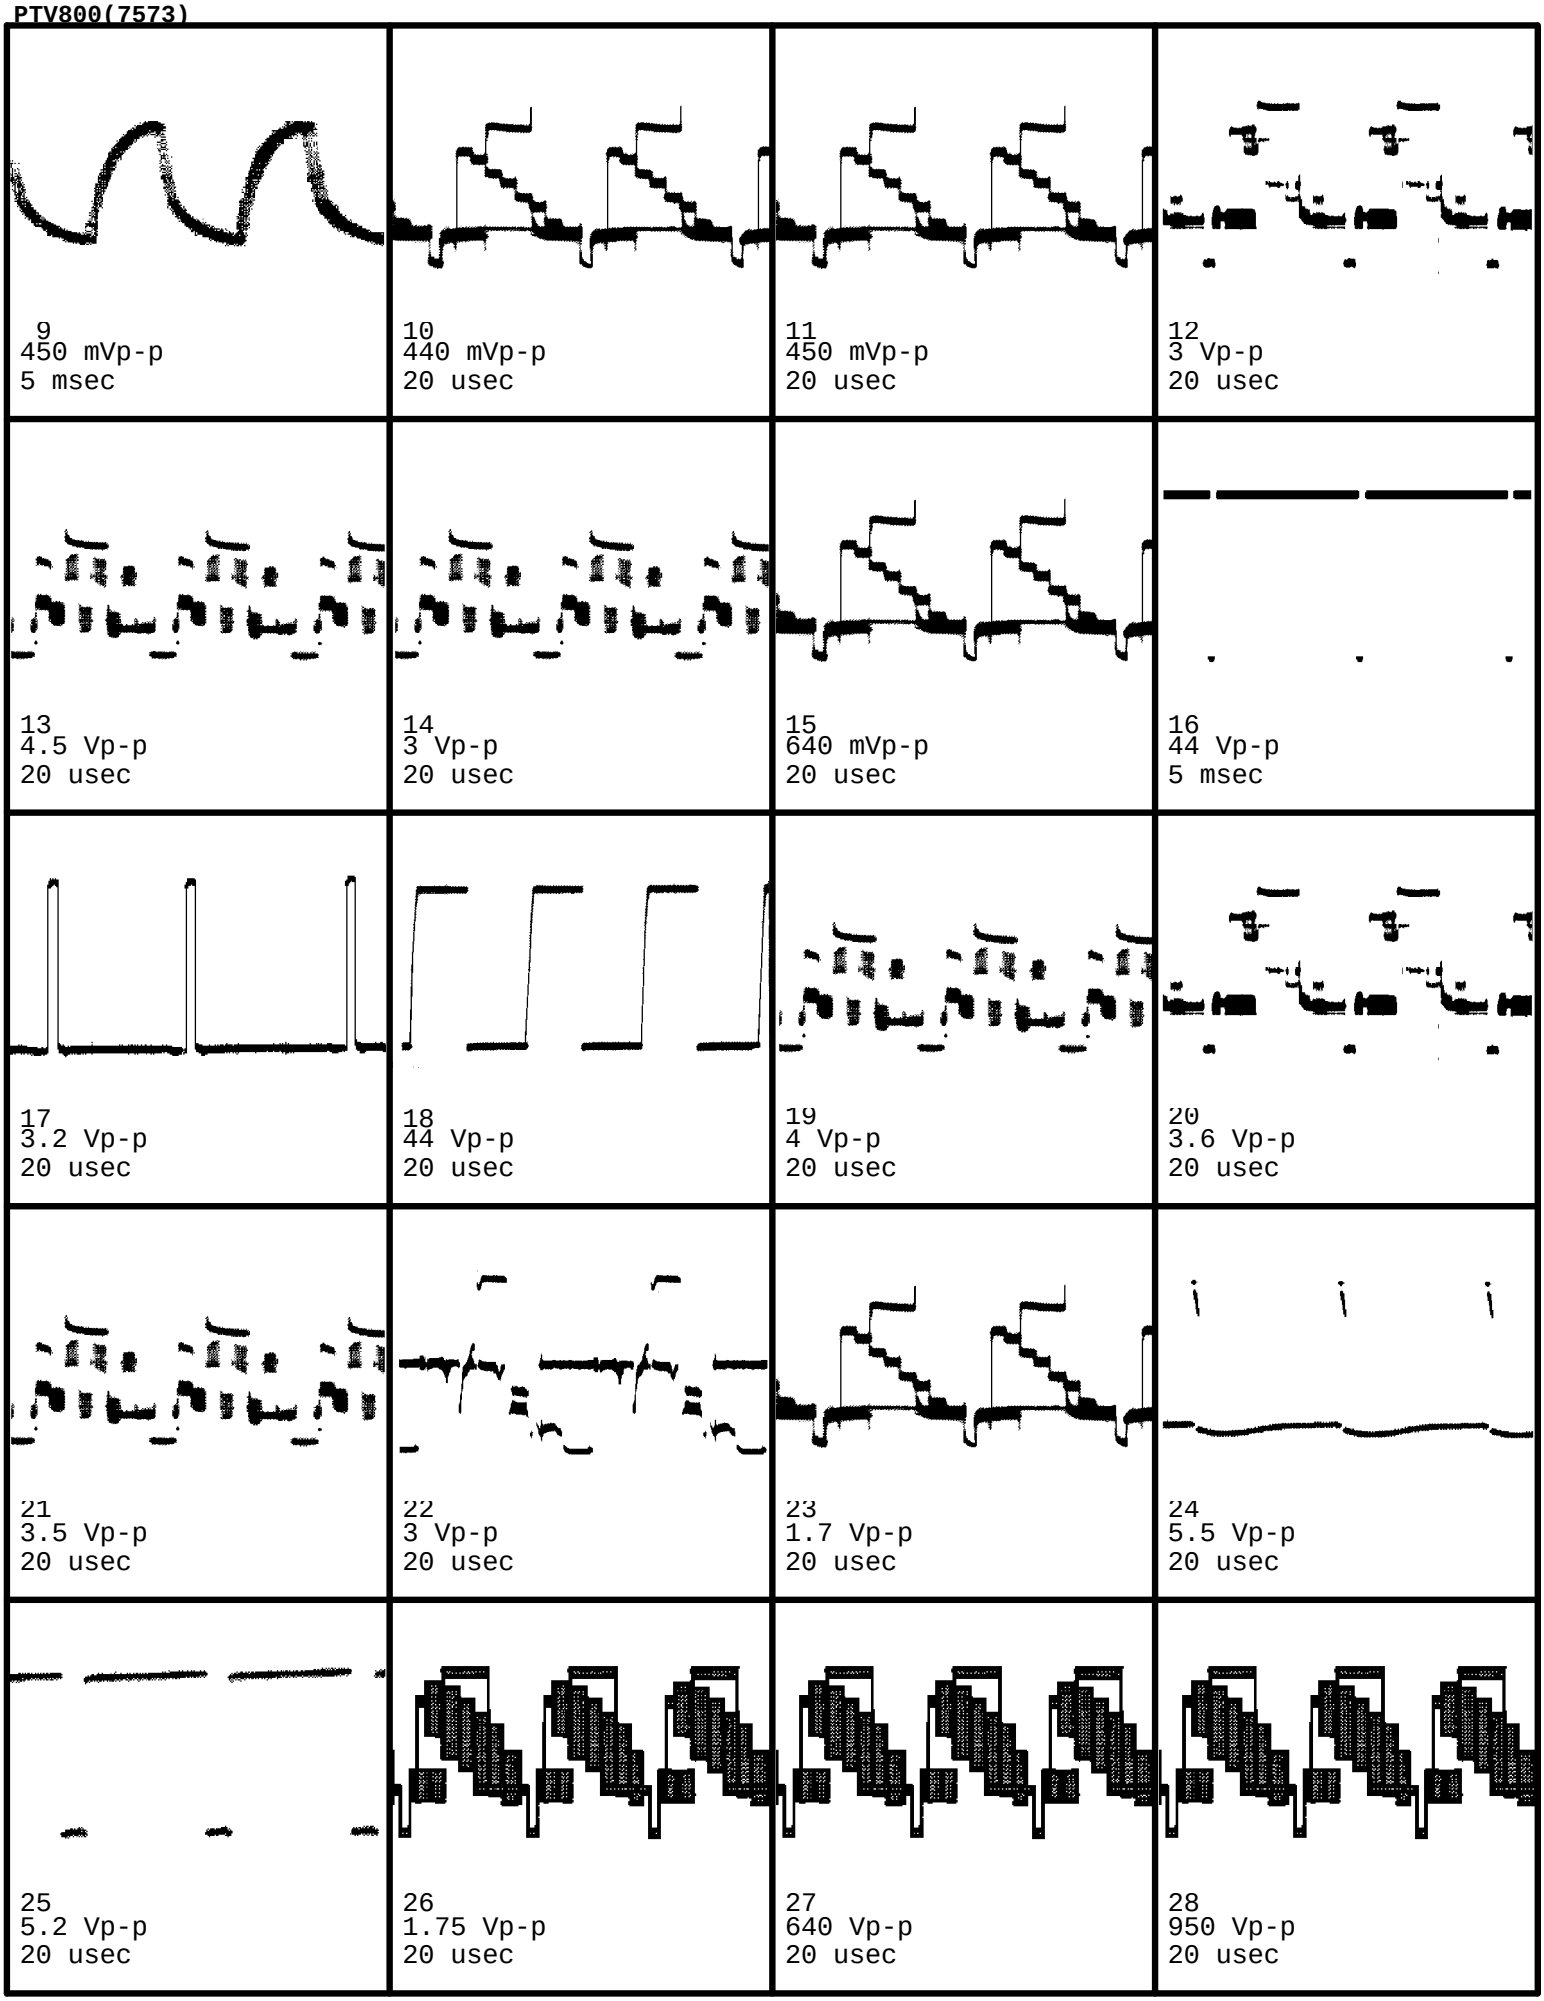
9
450 mVp-p
5 msec
10
440 mVp-p
20 usec
11
450 mVp-p
20 usec
12
3 Vp-p
20 usec
13
4.5 Vp-p
20 usec
14
3 Vp-p
20 usec
15
640 mVp-p
20 usec
16
44 Vp-p
5 msec
17
3.2 Vp-p
20 usec
18
44 Vp-p
20 usec
19
4 Vp-p
20 usec
20
3.6 Vp-p
20 usec
21
3.5 Vp-p
20 usec
22
3 Vp-p
20 usec
23
1.7 Vp-p
20 usec
24
5.5 Vp-p
20 usec
25
5.2 Vp-p
20 usec
26
1.75 Vp-p
20 usec
27
640 Vp-p
20 usec
28
950 Vp-p
20 usec


PTV800(7573)

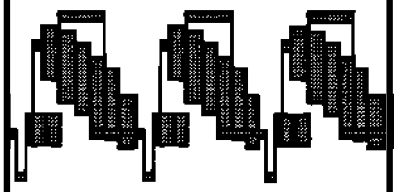


29
1.8 Vp-p
20 usec

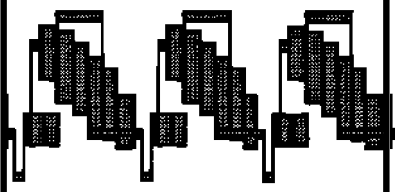


30
1.75 Vp-p
20 usec

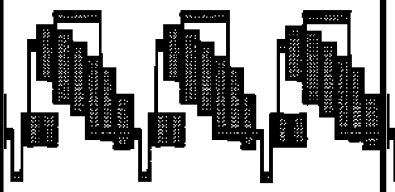


31
1.75 Vp-p
20 usec

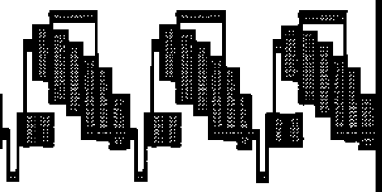


32A
1.2 Vp-p
20 usec

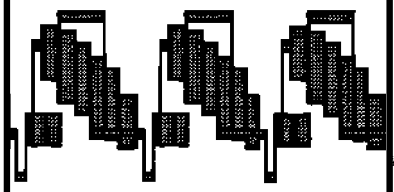


32B
1.7 Vp-p
20 usec

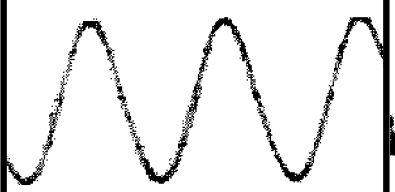


33
1.2 Vp-p
0.1usec

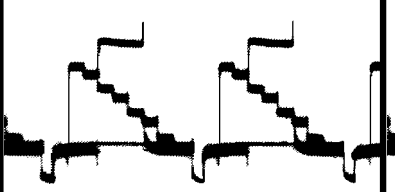

34A
0.8 Vp-p
20 usec

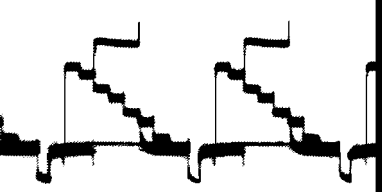


34C
1.4 Vp-p
20 usec

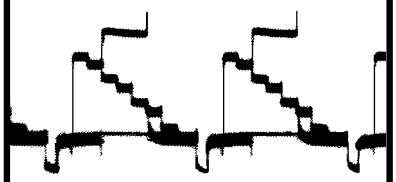


34B
1.4 Vp-p
20 usec

USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - PTV 800 & 805 WIRING DIAGRAM

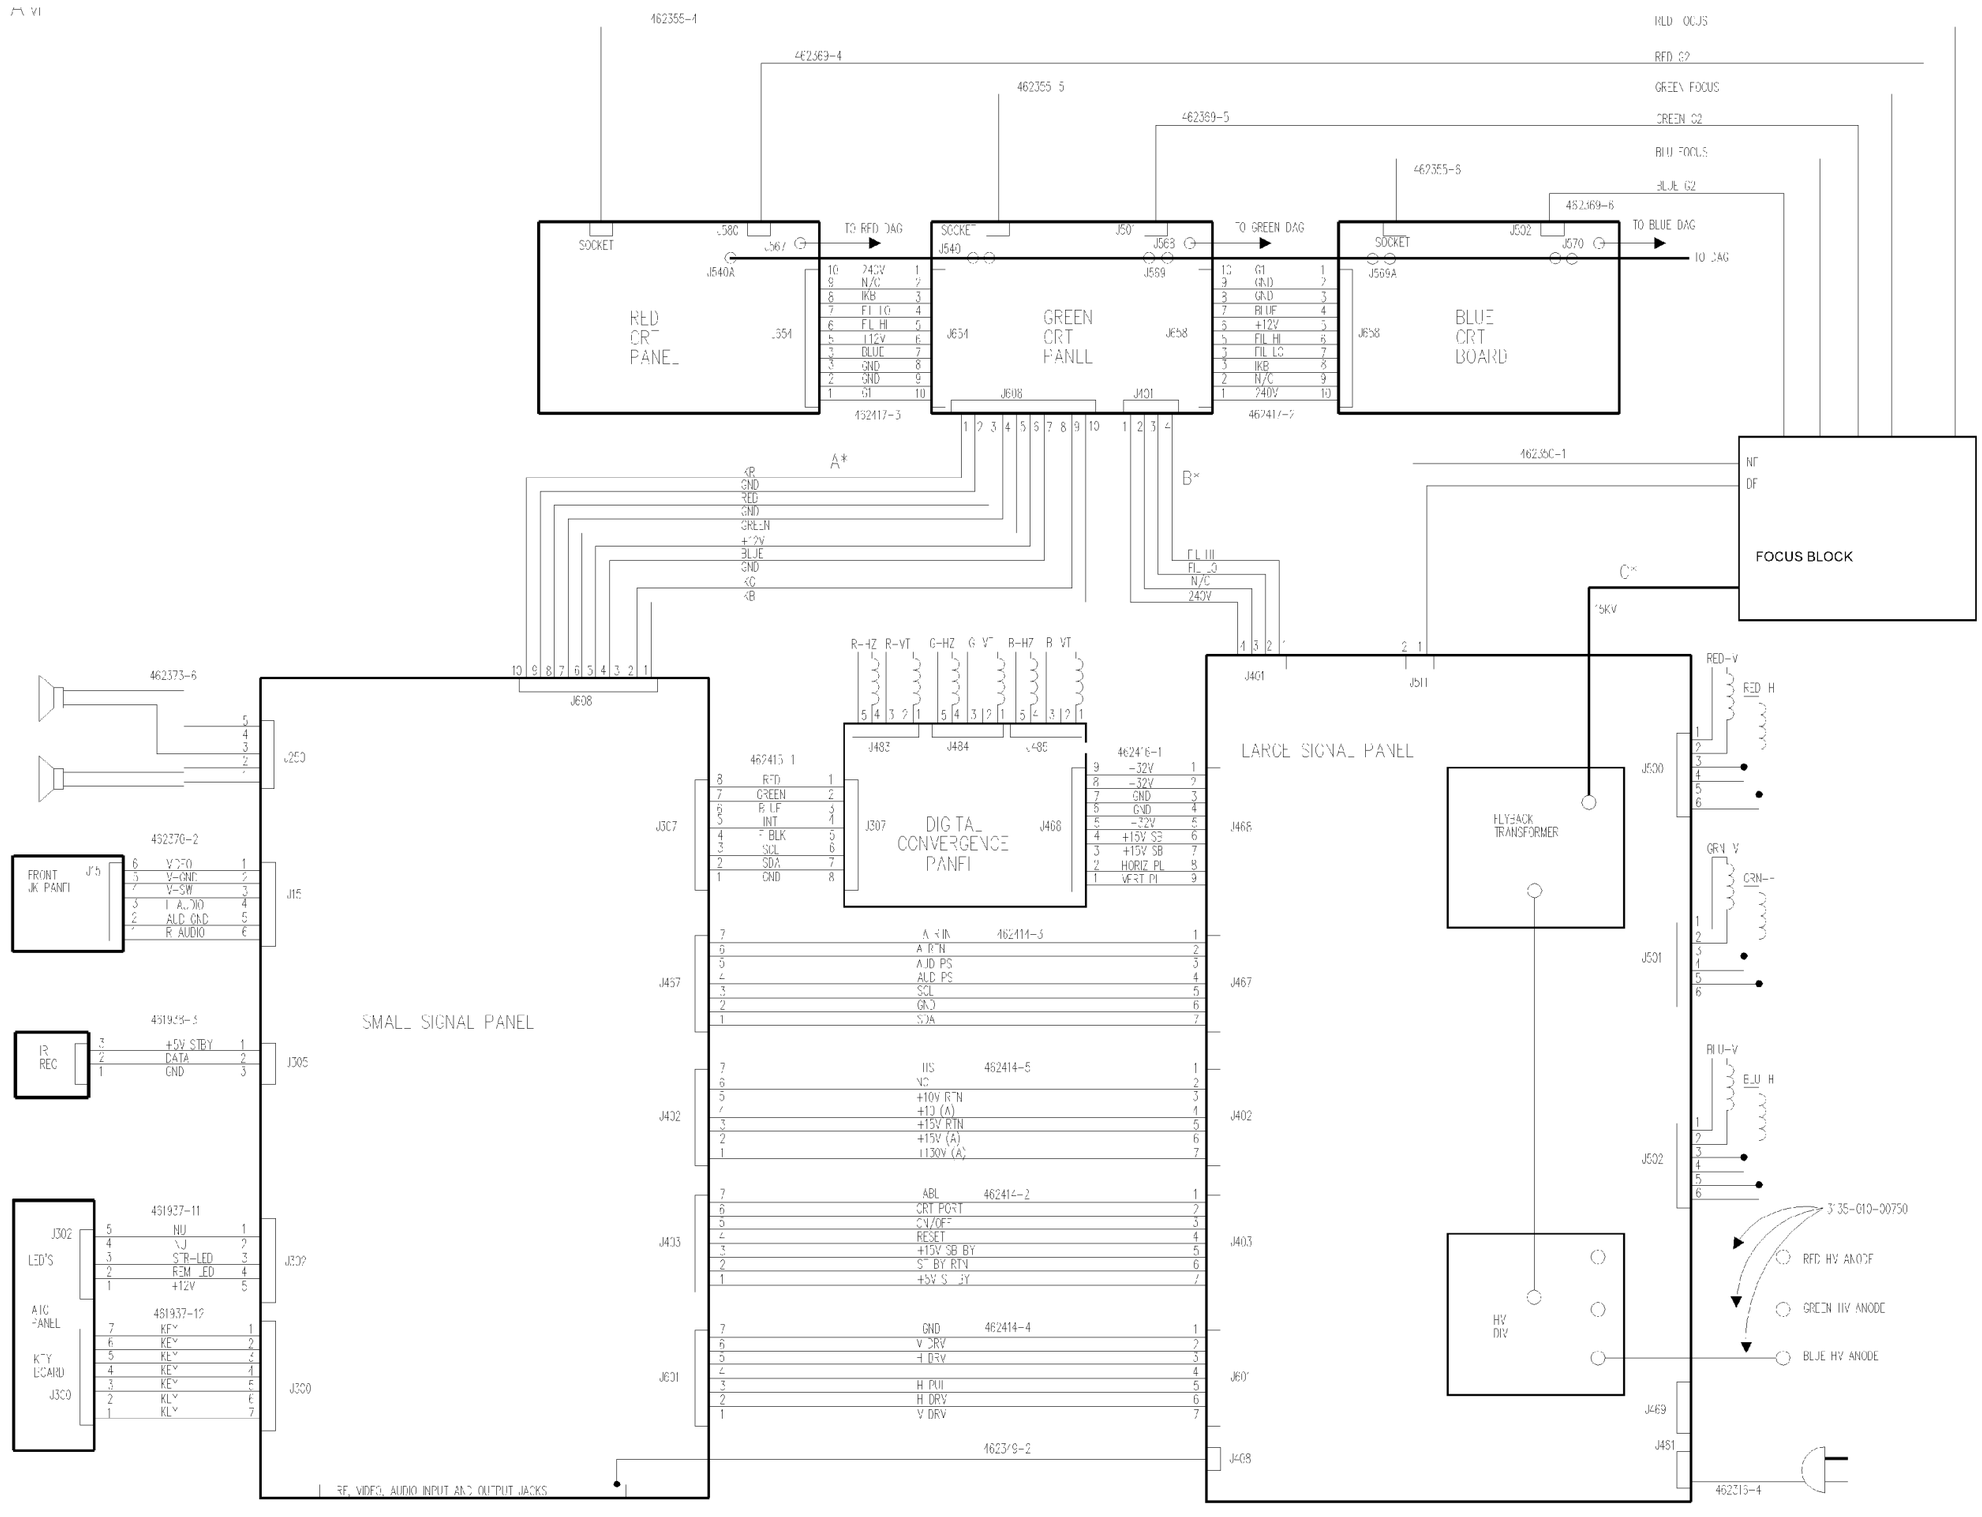


USED ONLY IN MODELS: 8P4841C, 8P4844C, 8P5441C, 8P5444C, 8P6041C, 8P6044C, 8P6051C, 8P6054 (7573) - PTV 810 & 811 WIRING DIAGRAM


PTV810 & PTV811 WIRING DIAGRAM

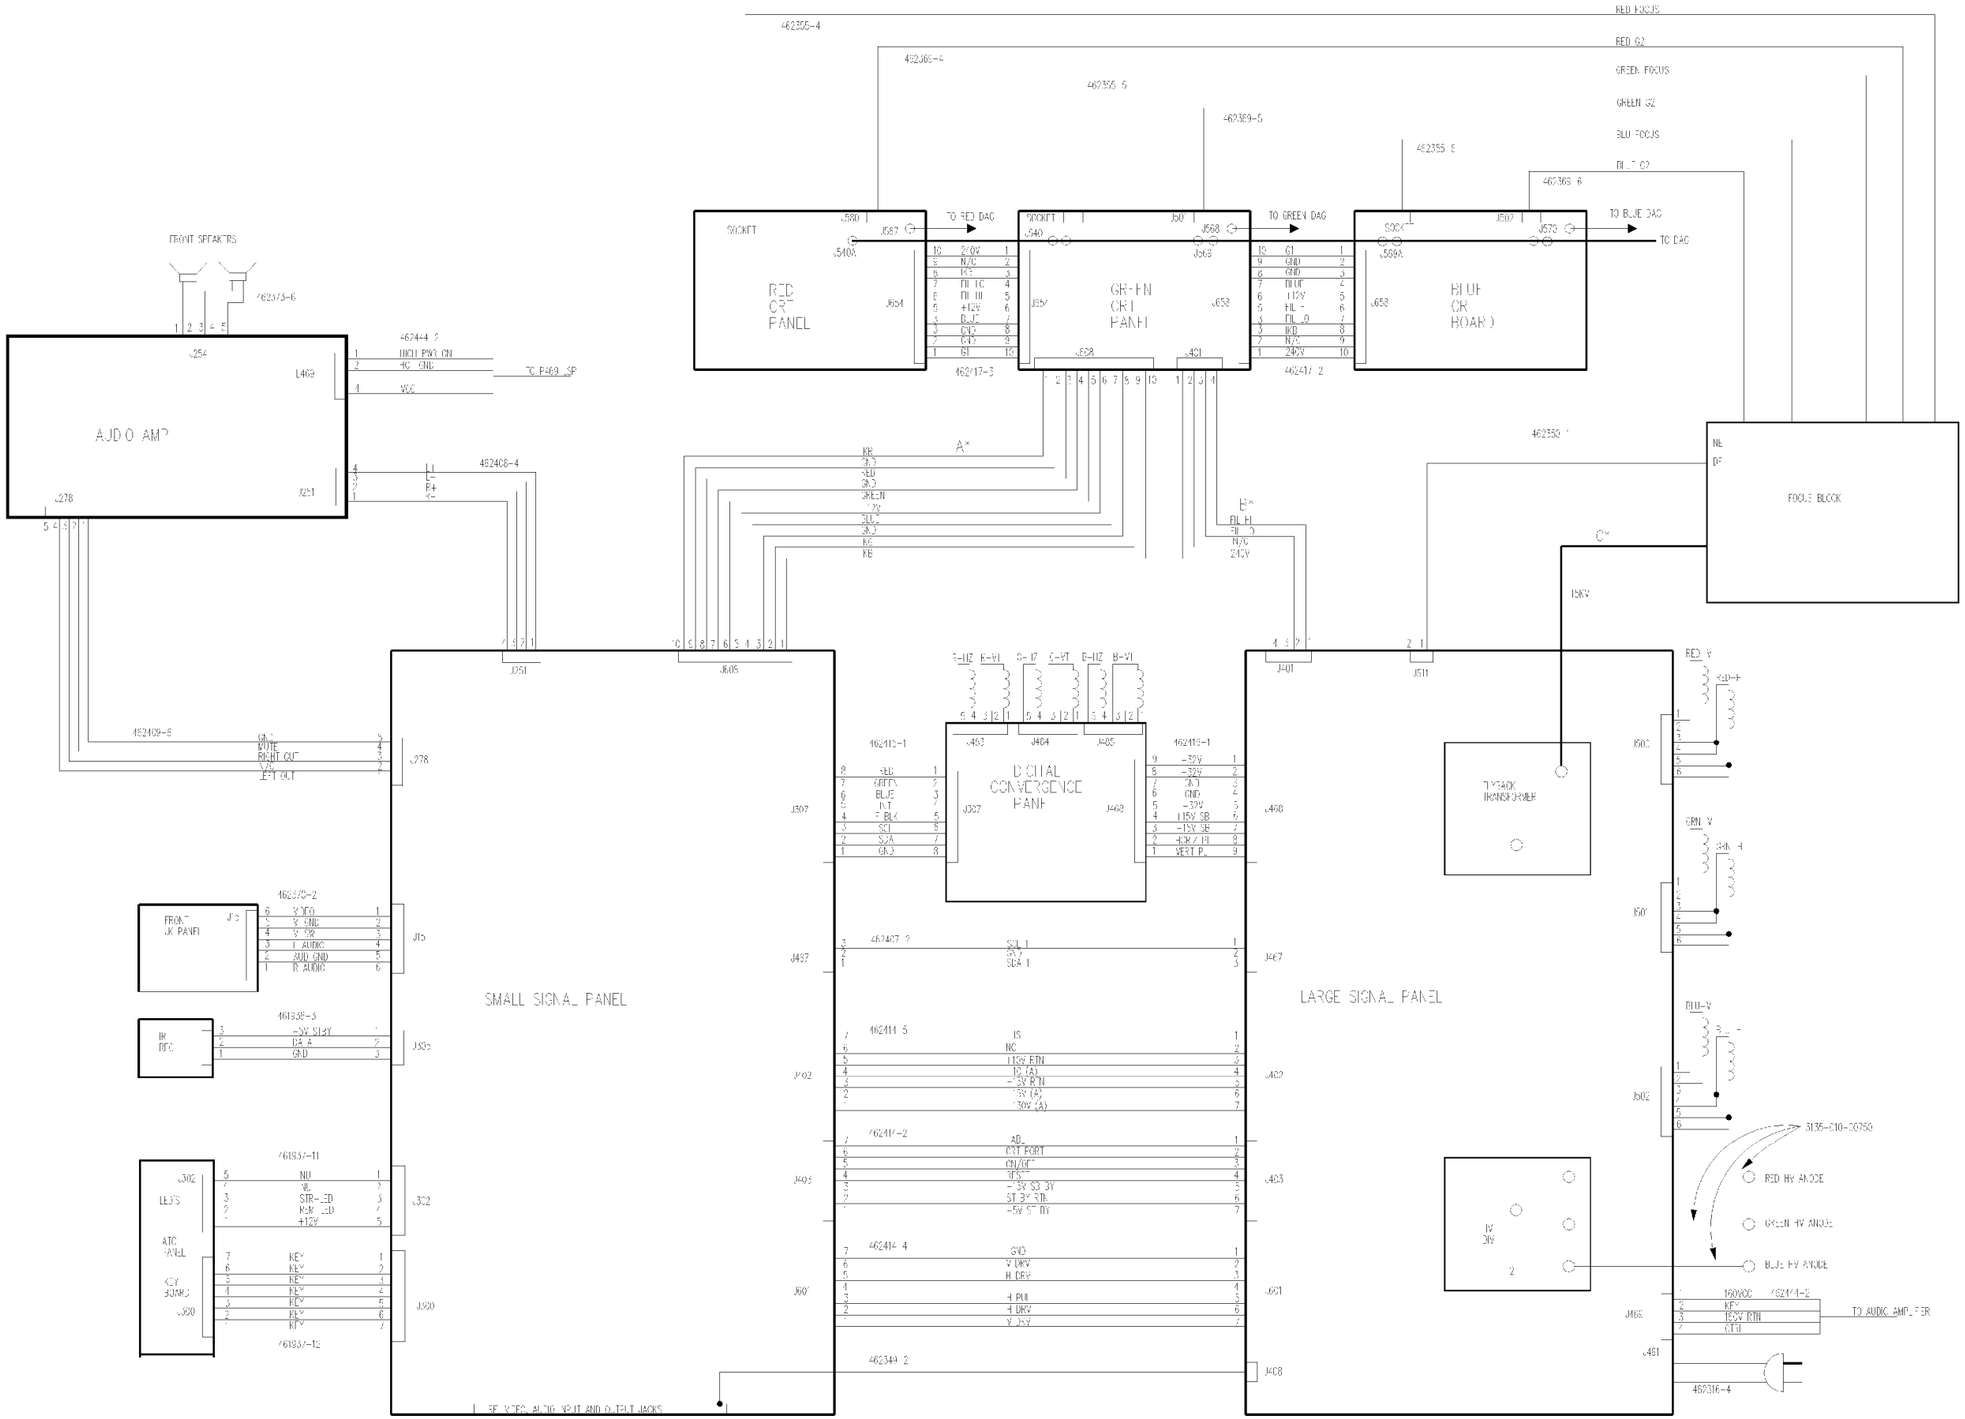


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - PTV 815, 820 & 825 WIRING DIAGRAM

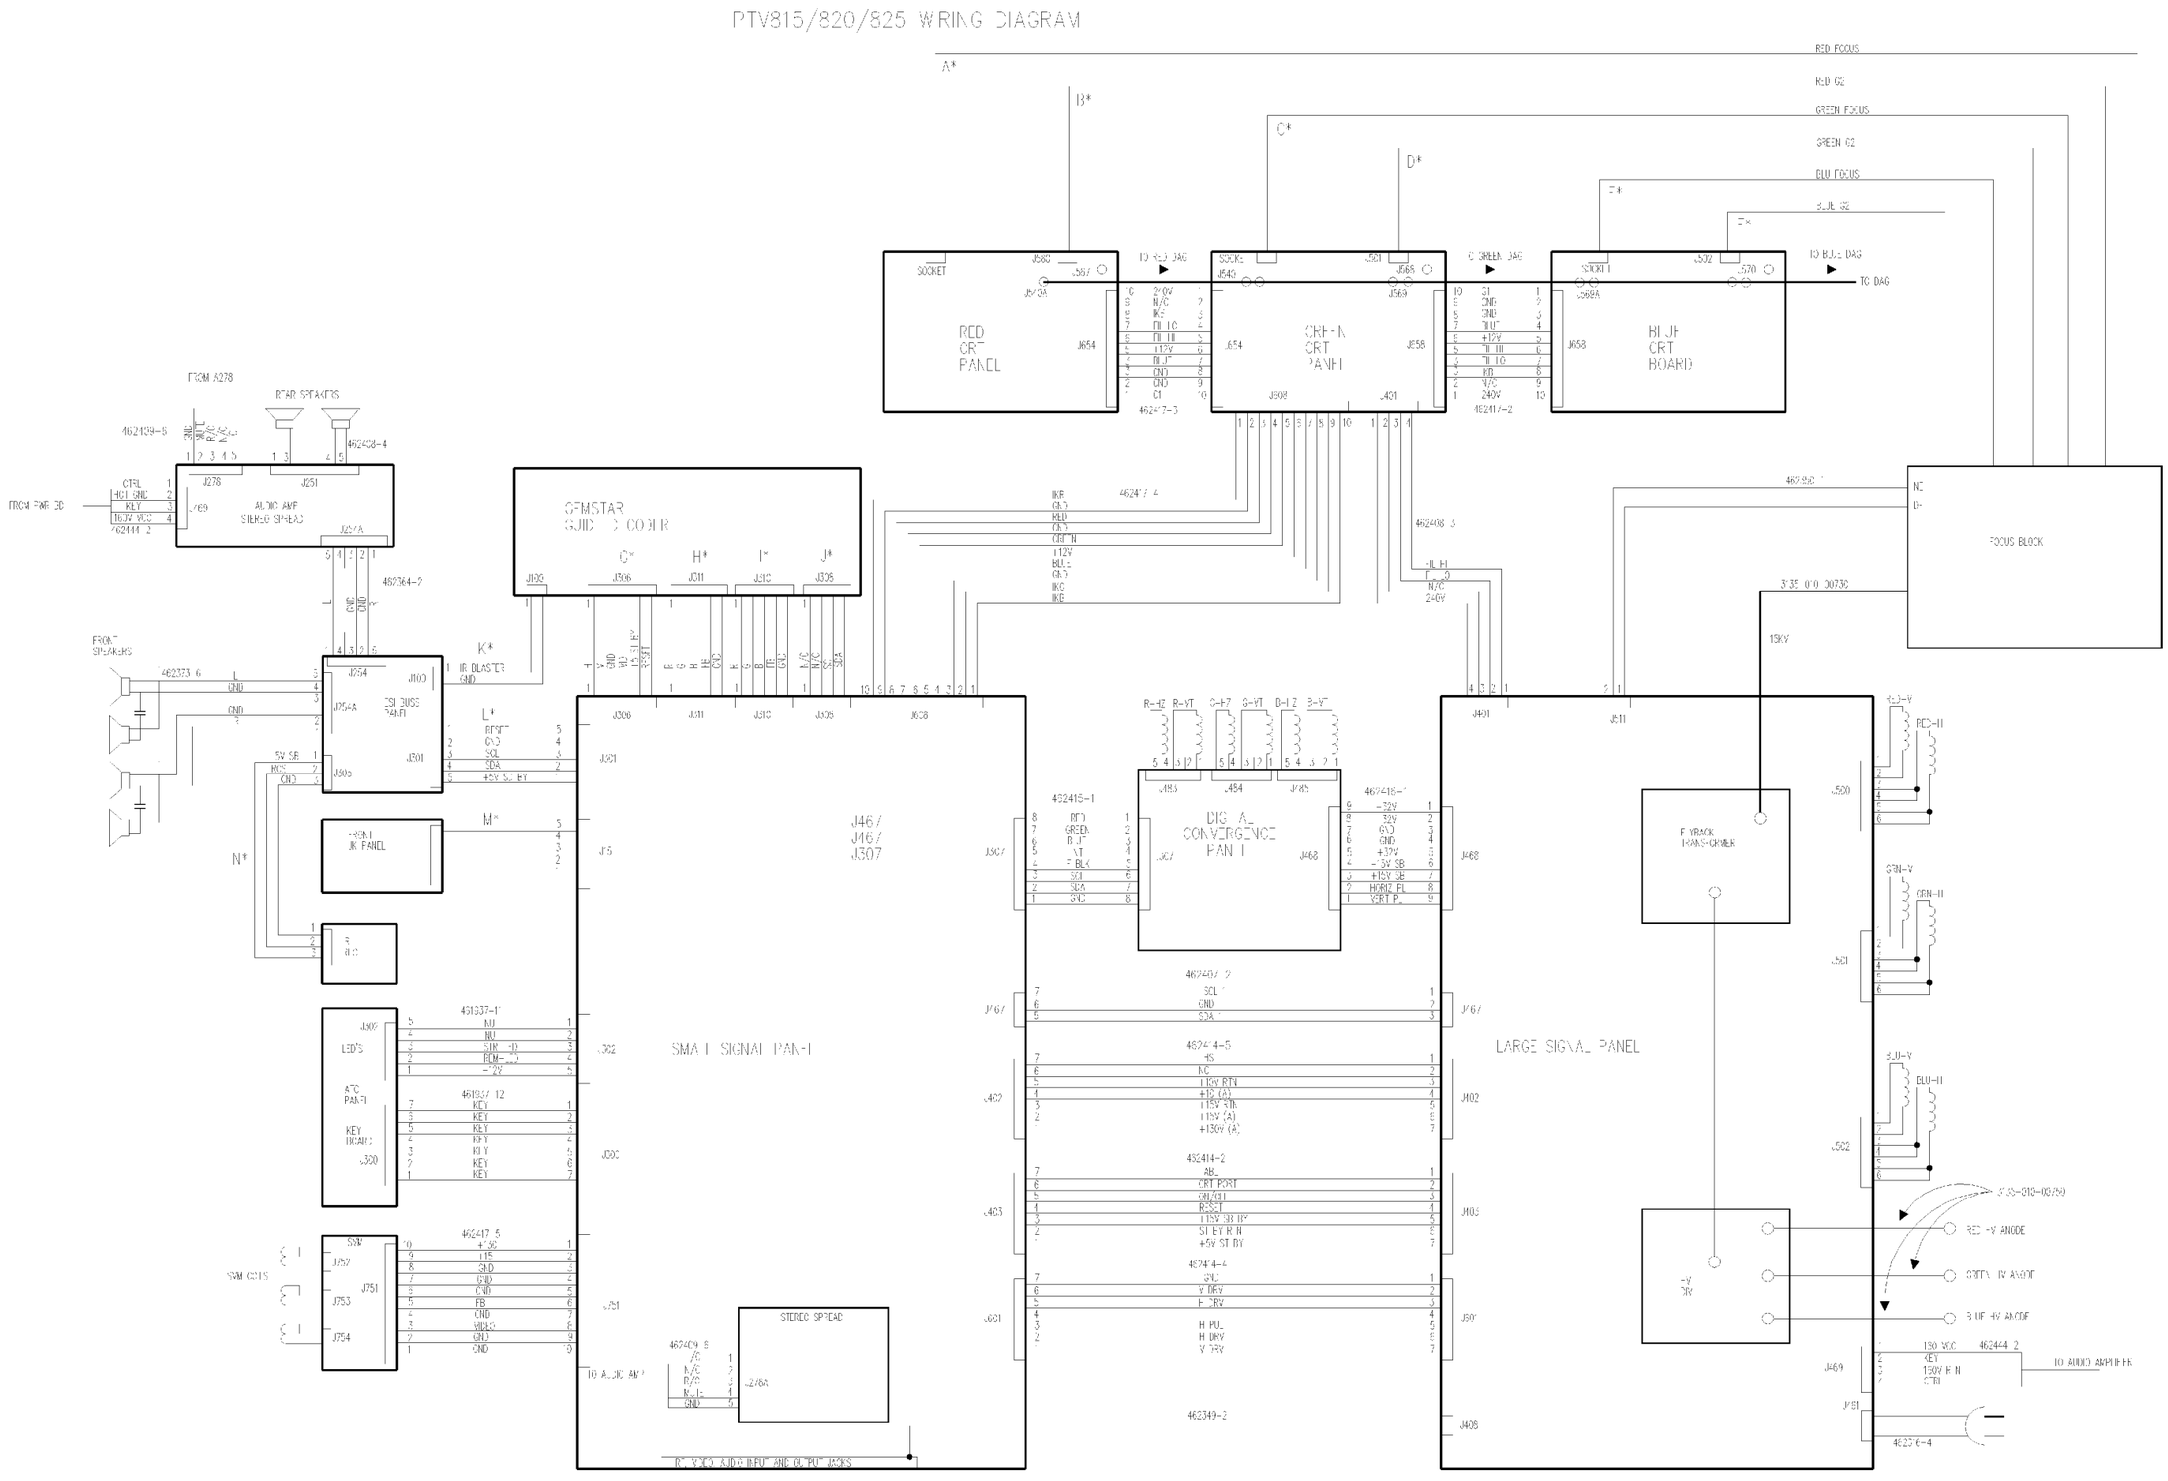


USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - SECTION 1 SCHEMATIC

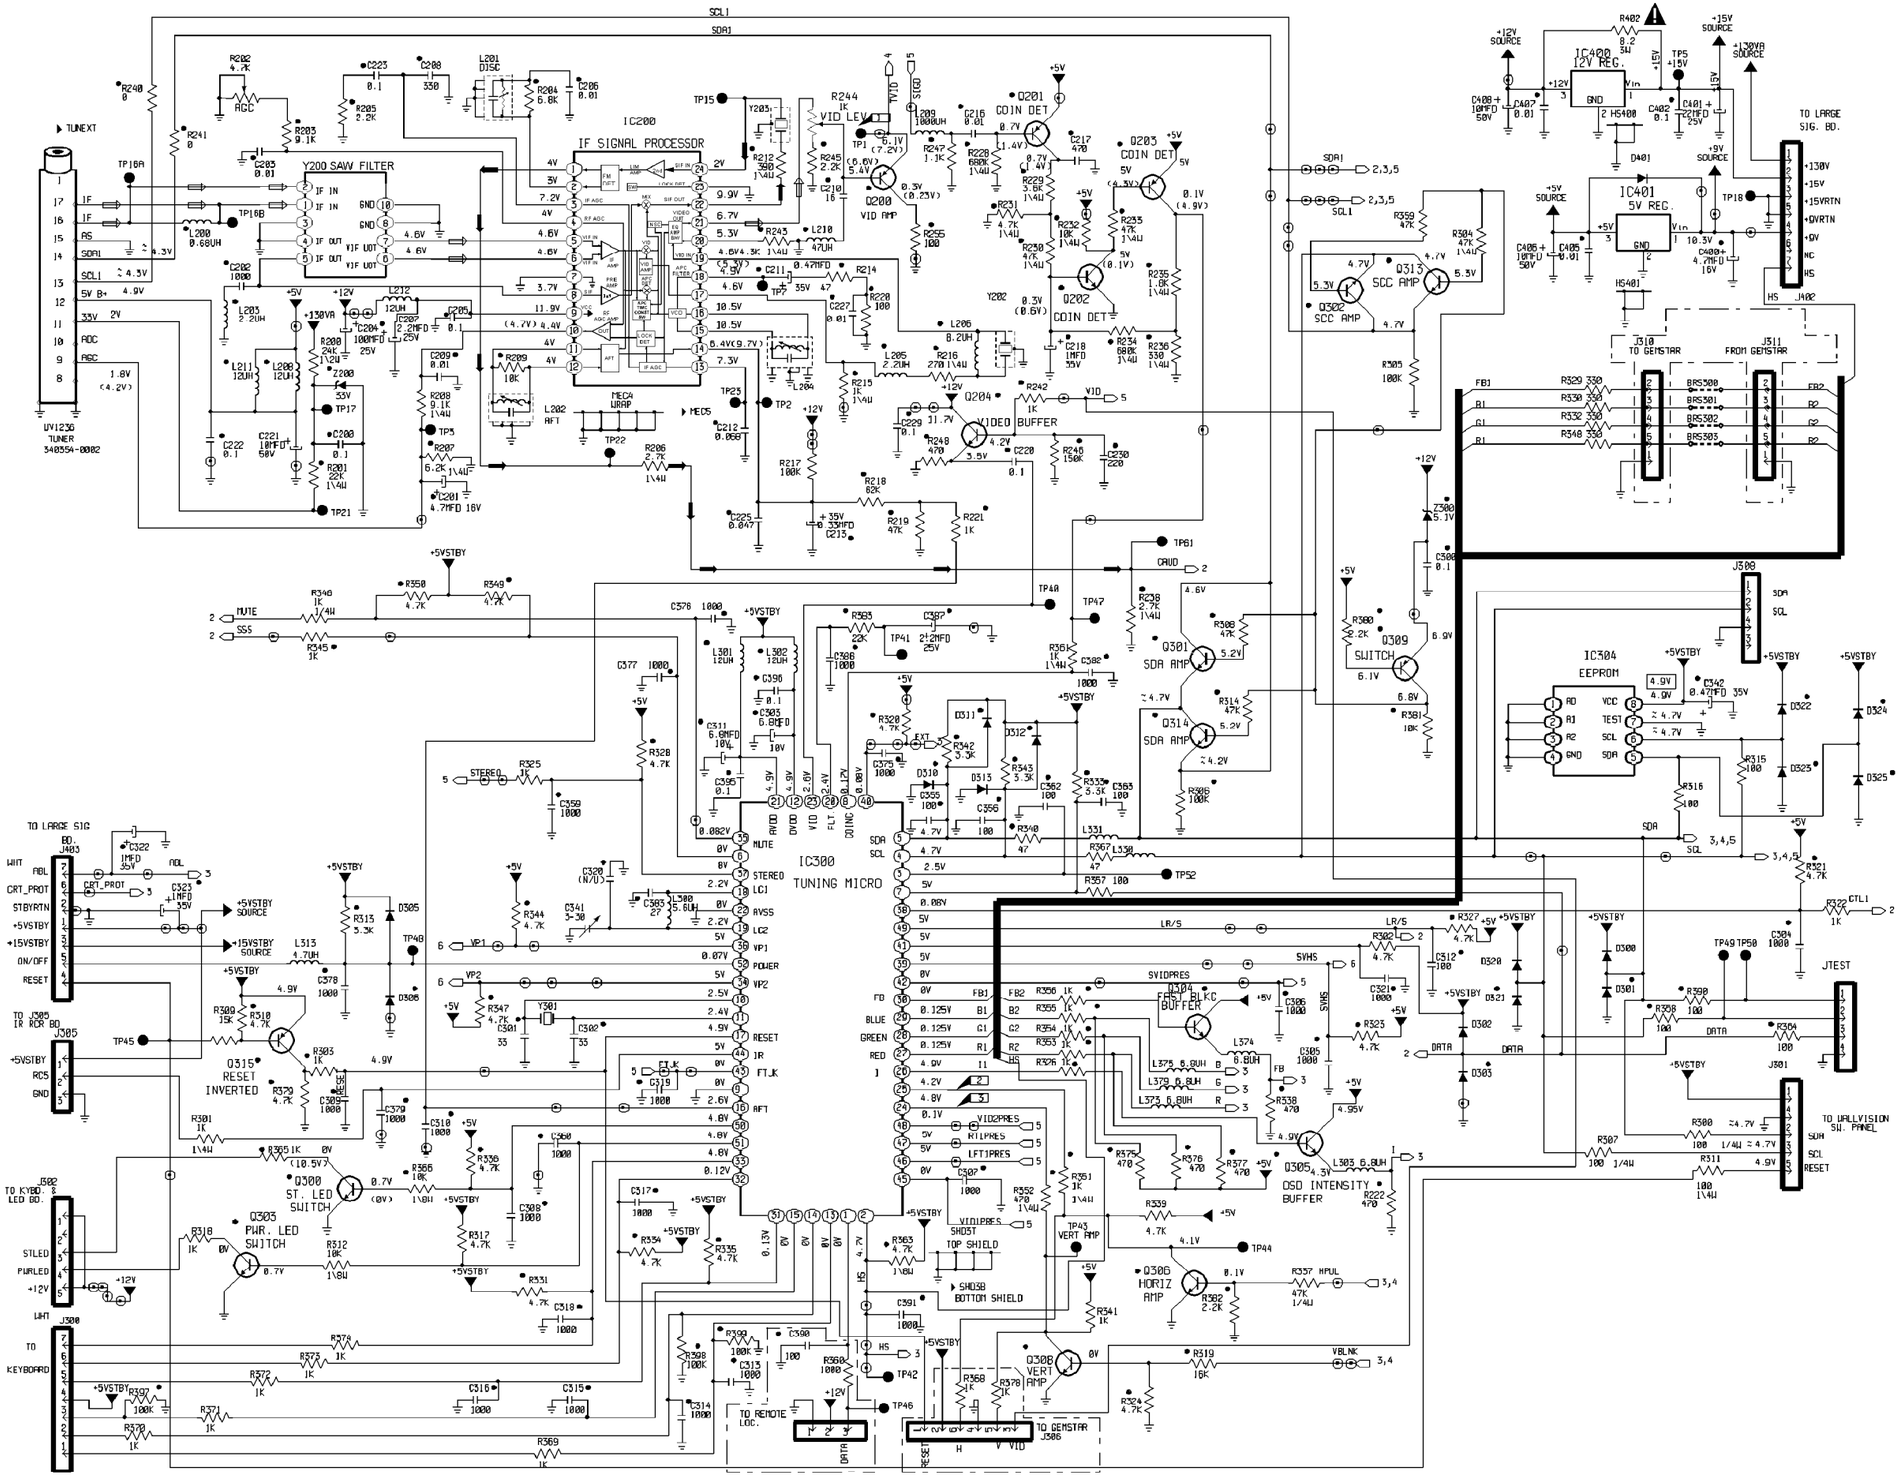


USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - SECTION 2 SCHEMATIC

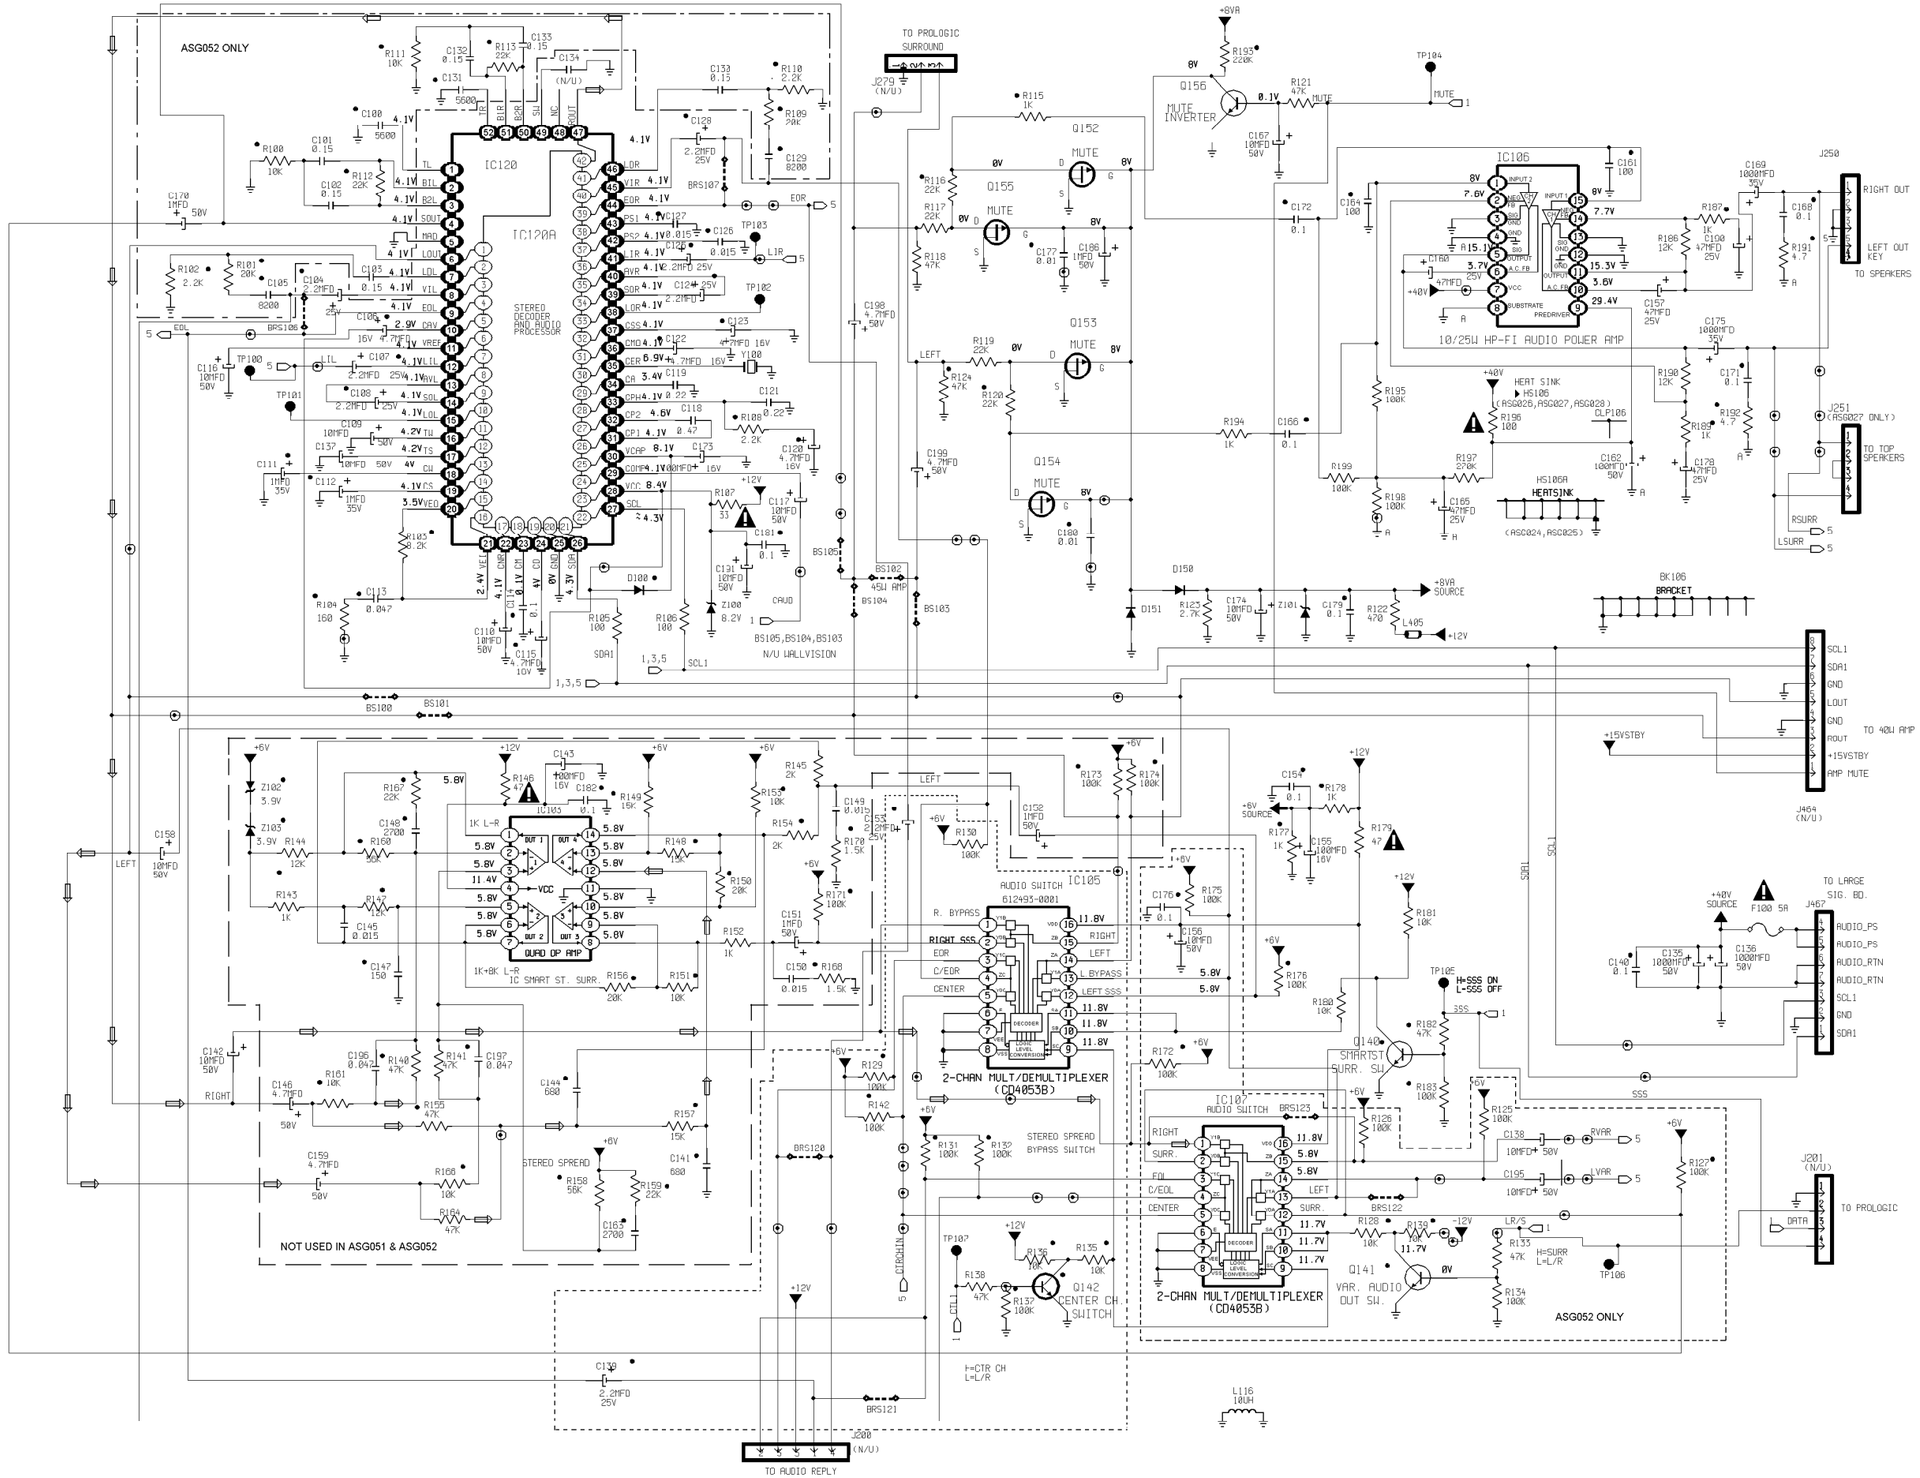


USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - SECTION 3 SCHEMATIC

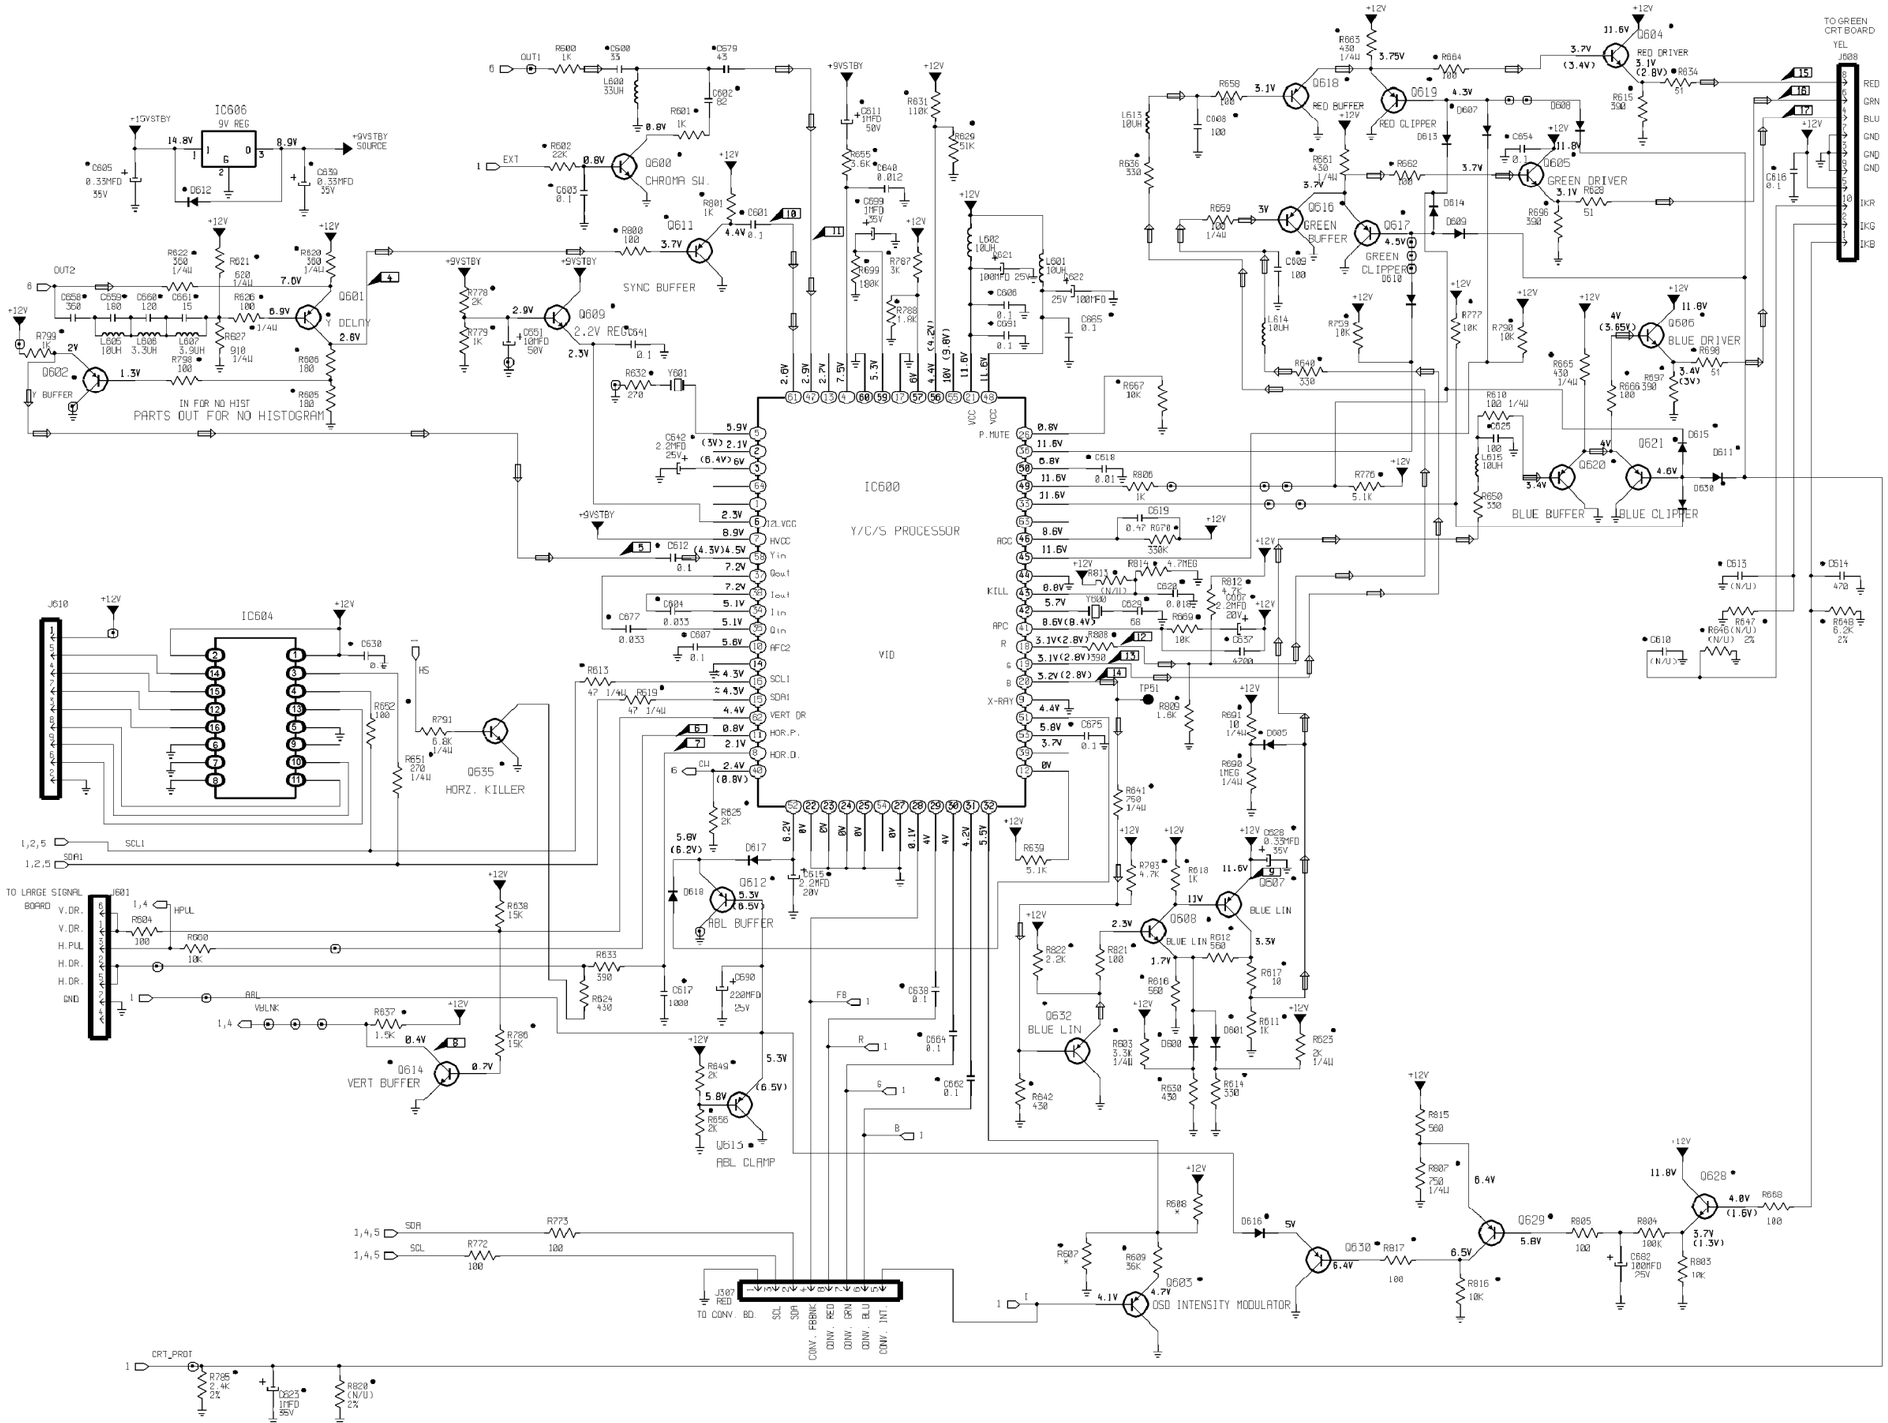


USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - SECTION 4 SCHEMATIC

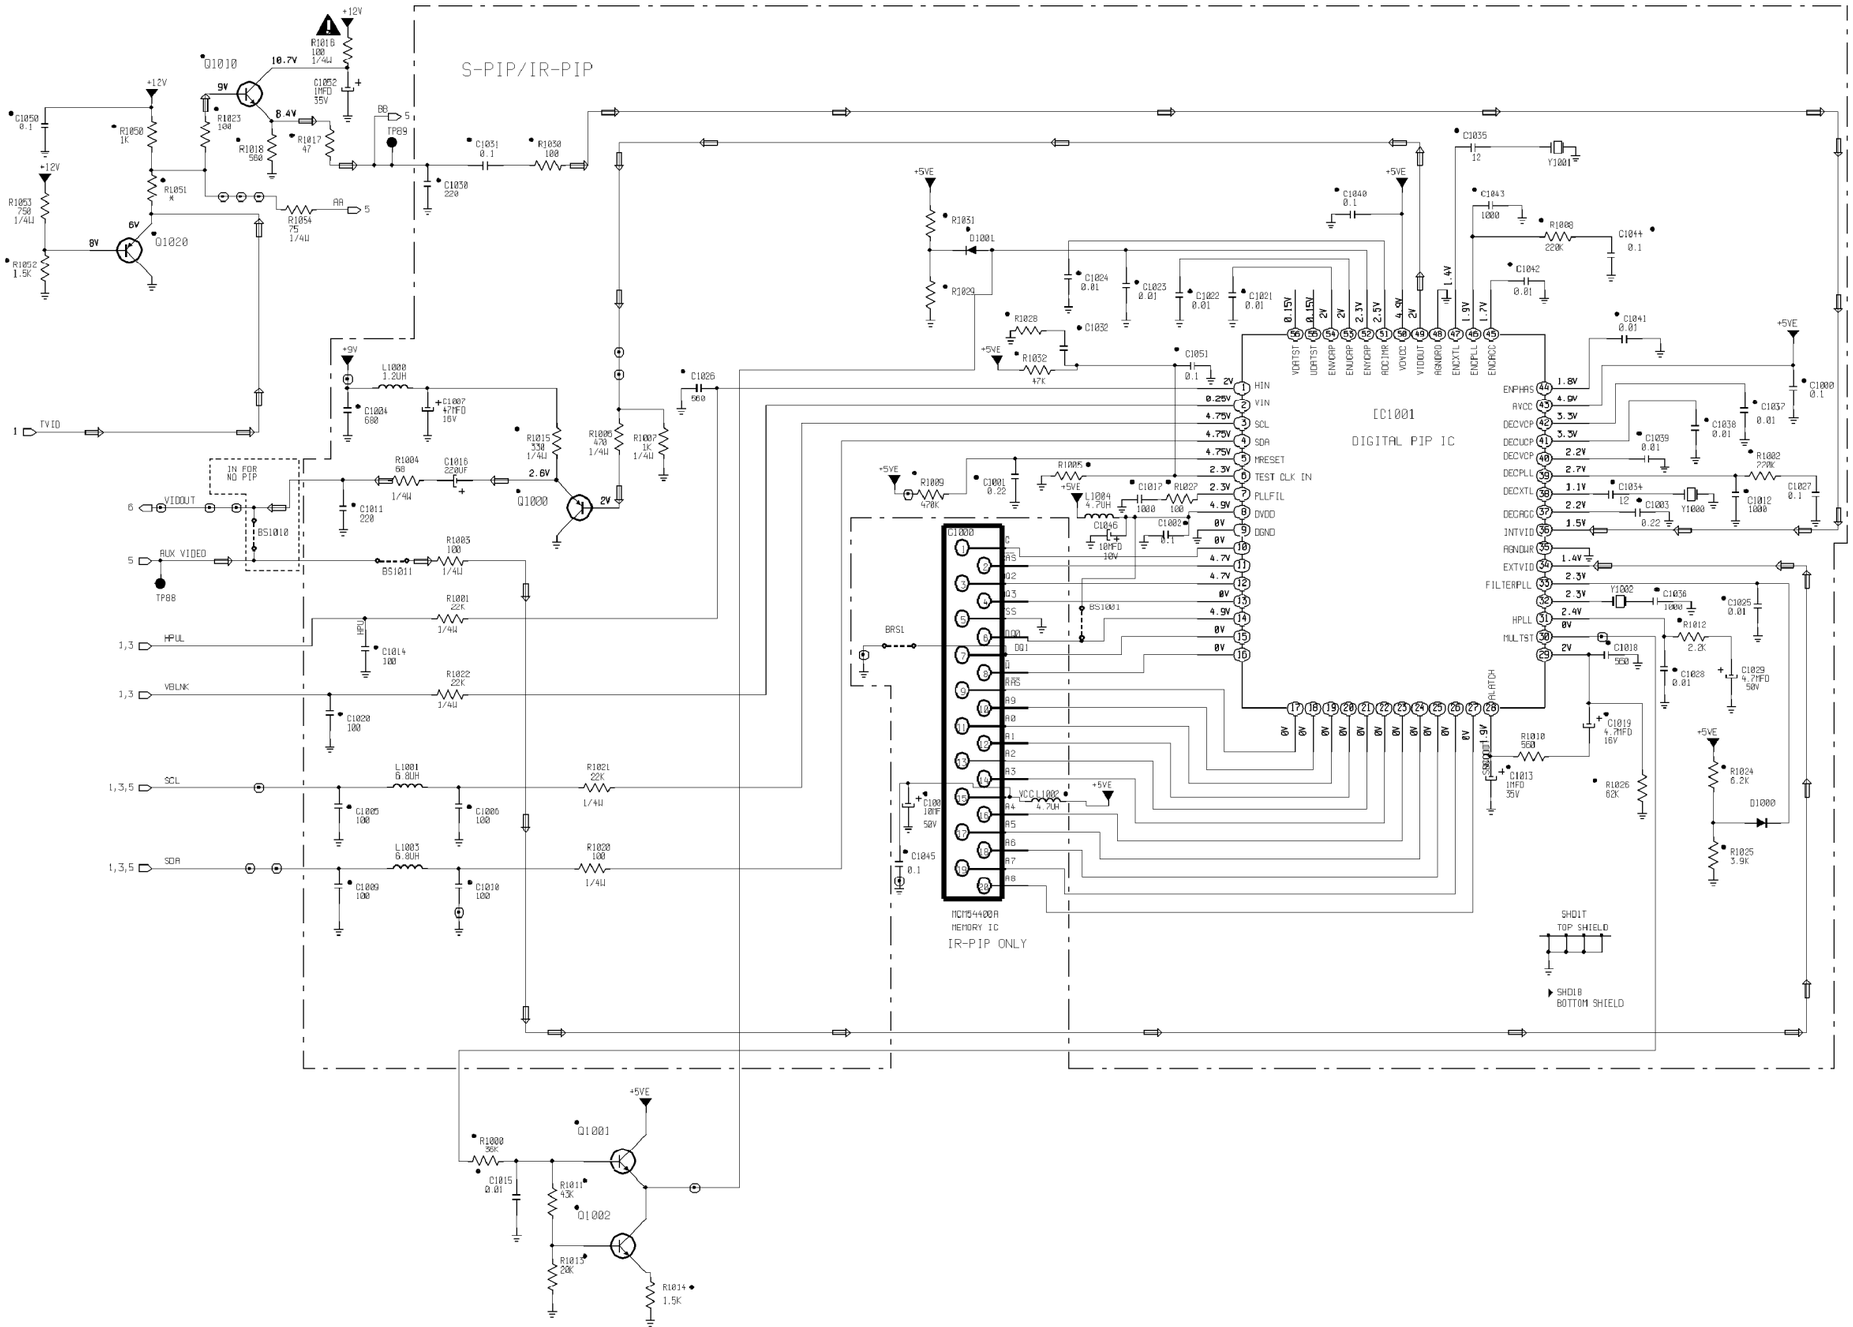


USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - SECTION 5 SCHEMATIC

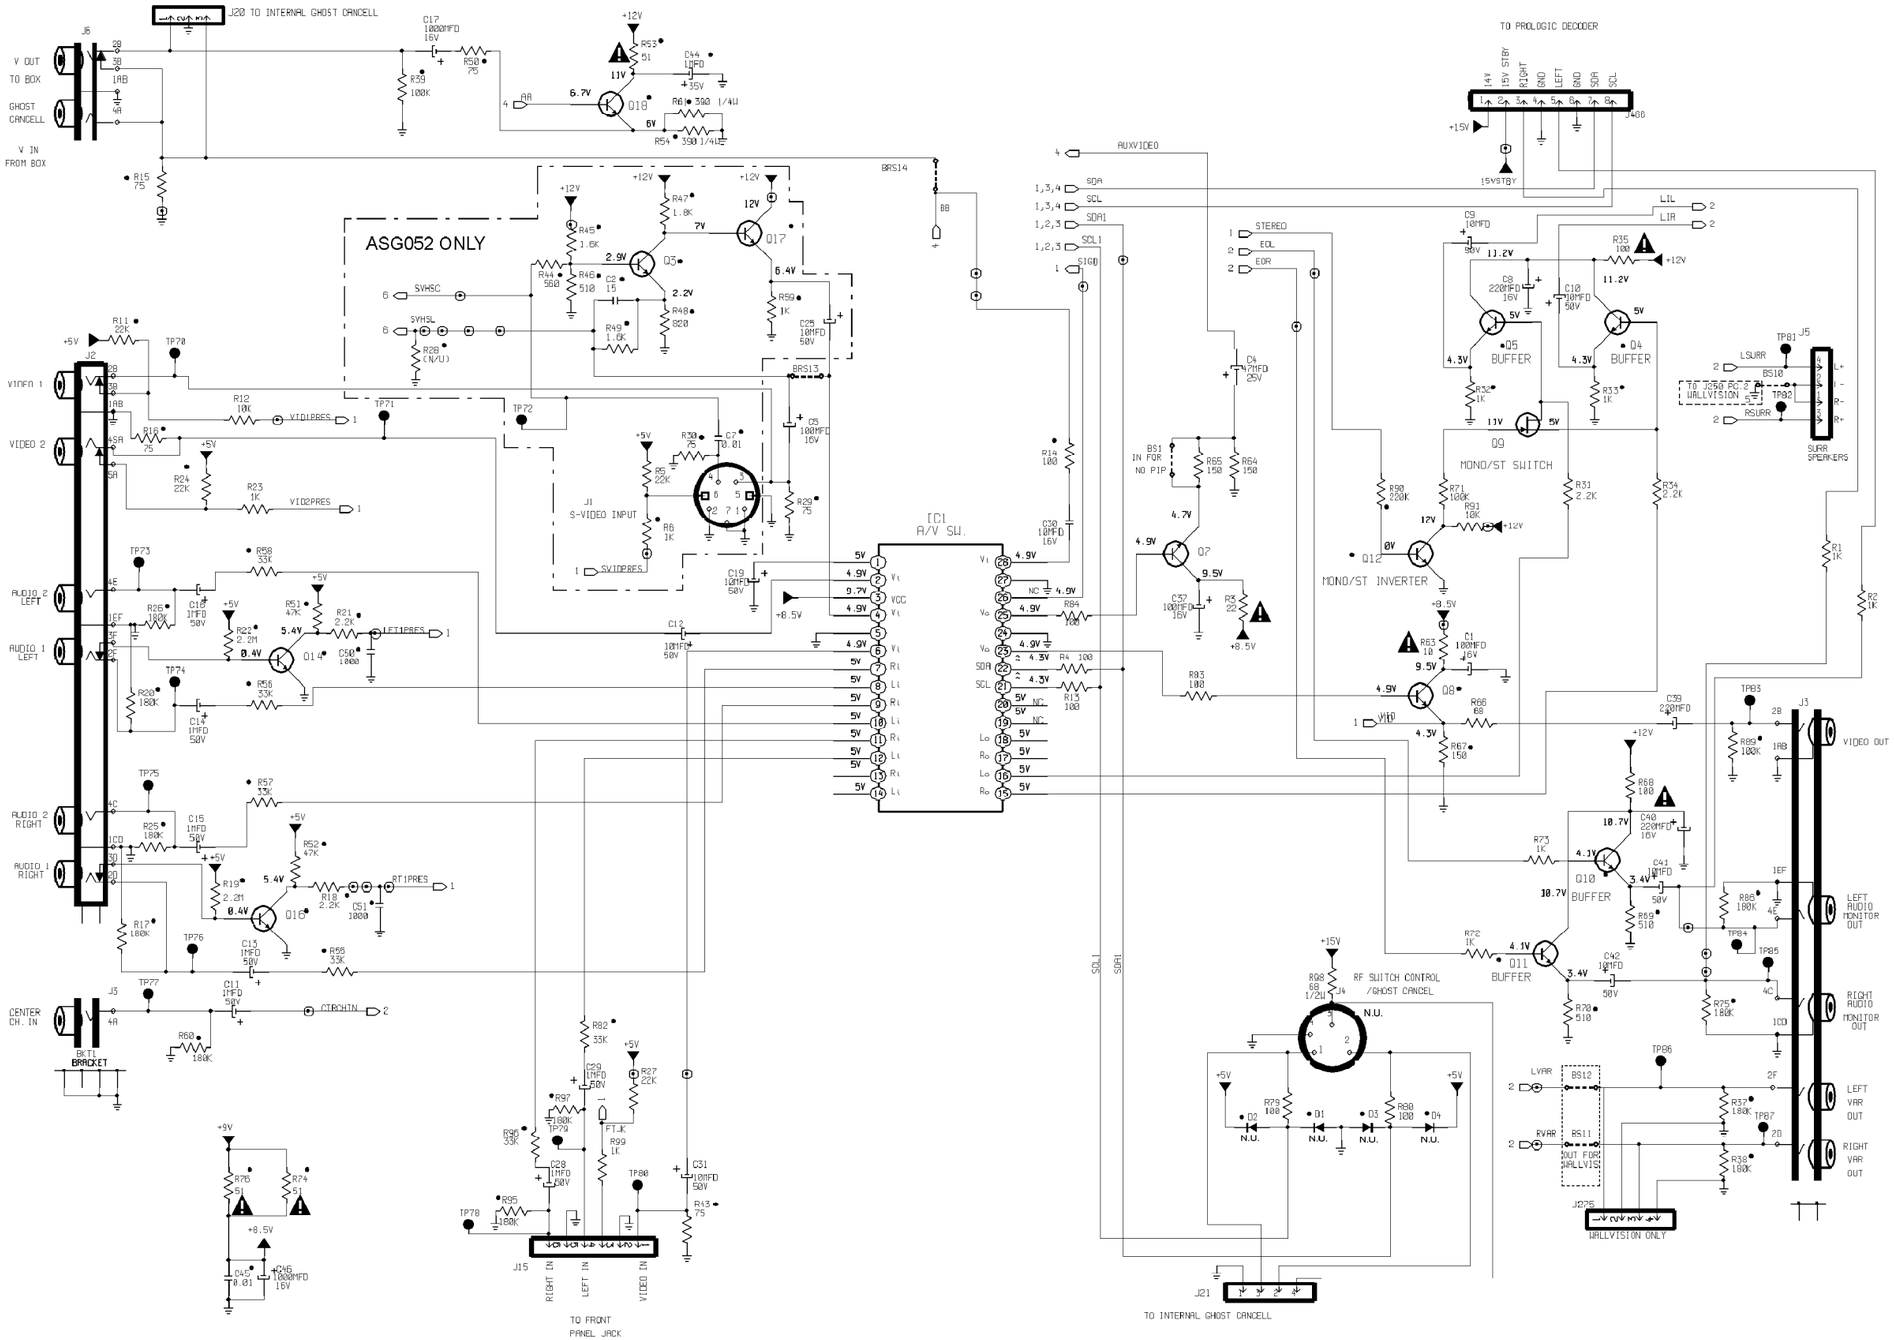


USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - SECTION 6 SCHEMATIC

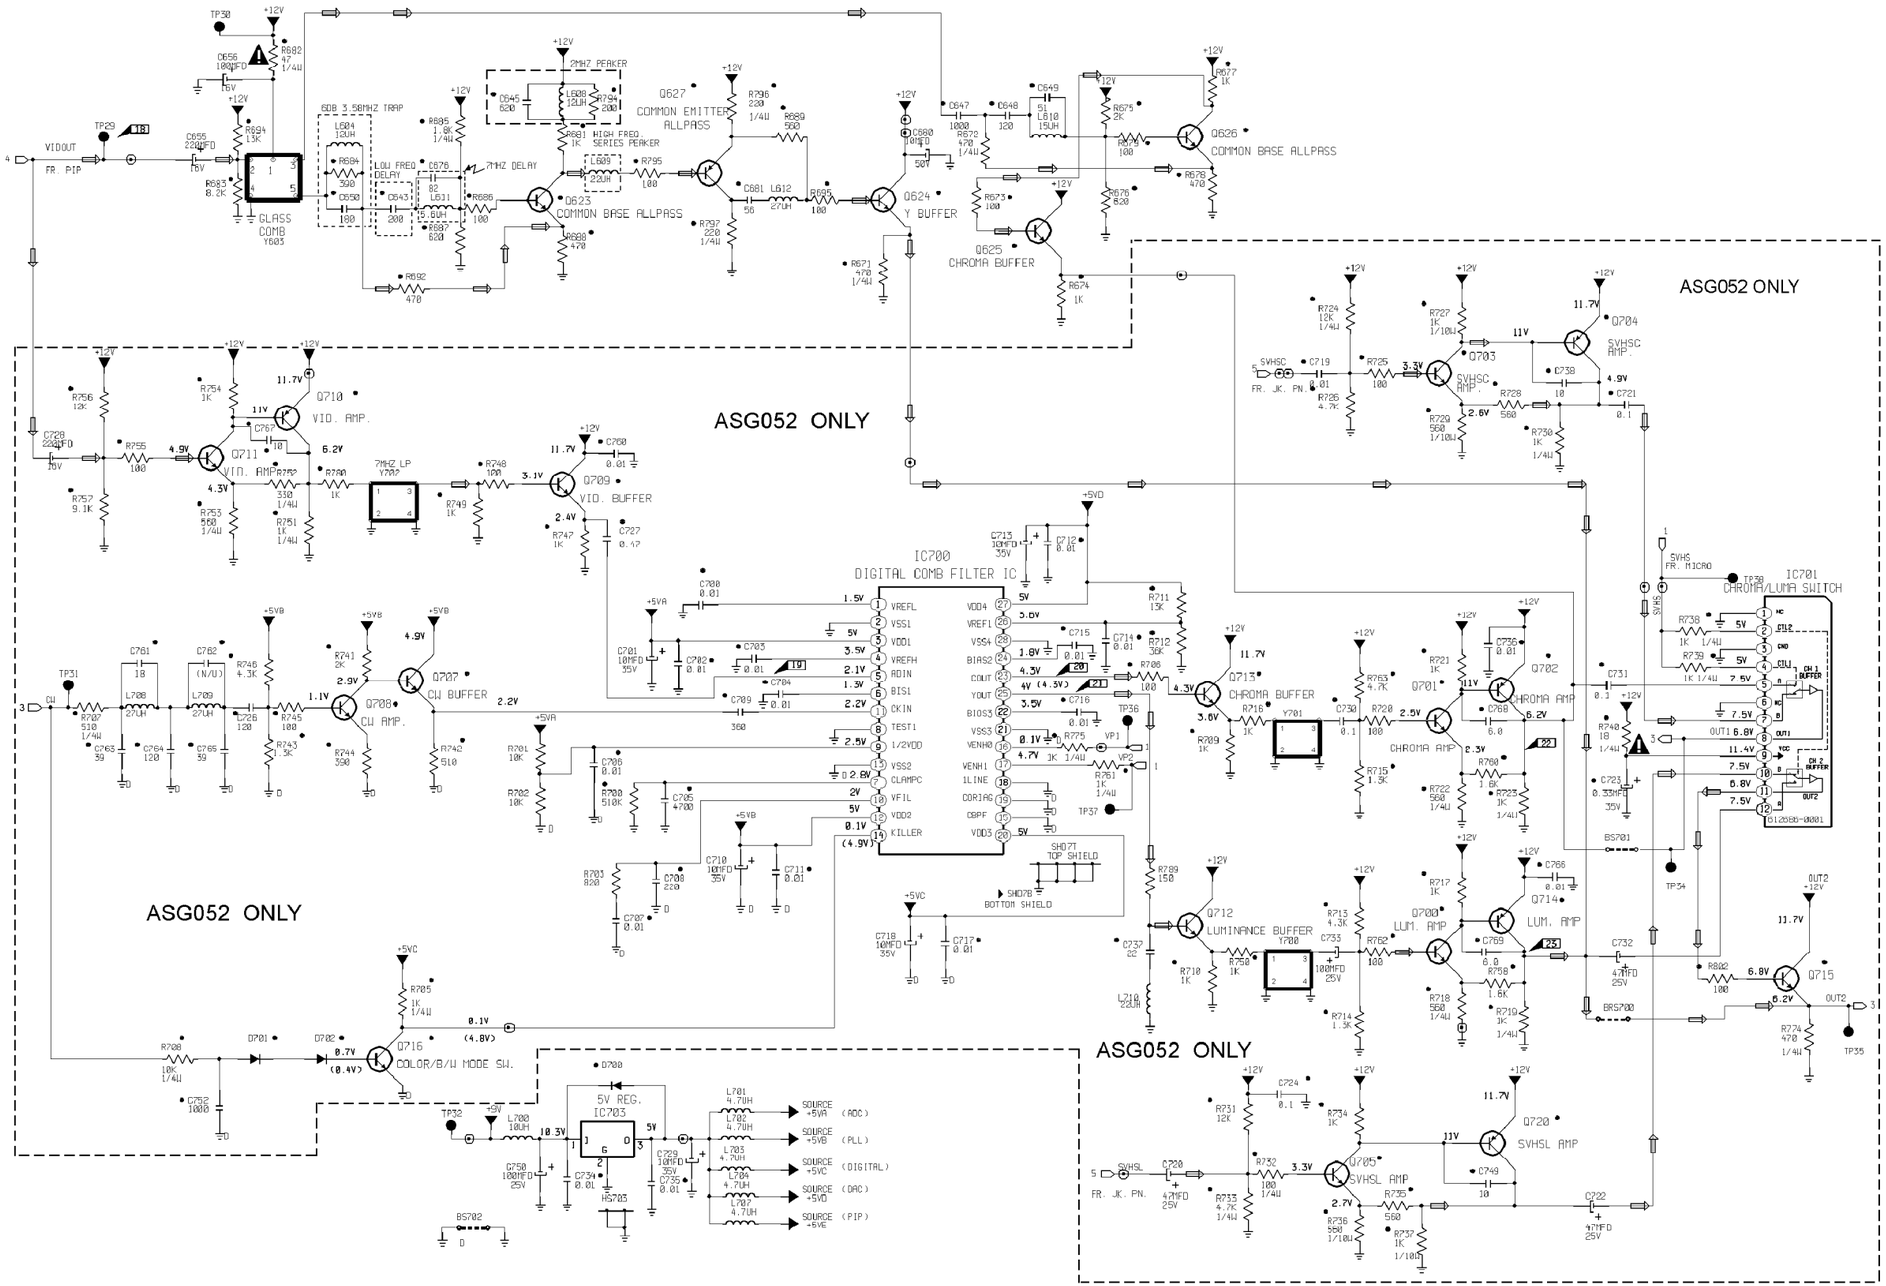


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - SECTION 1 SCHEMATIC

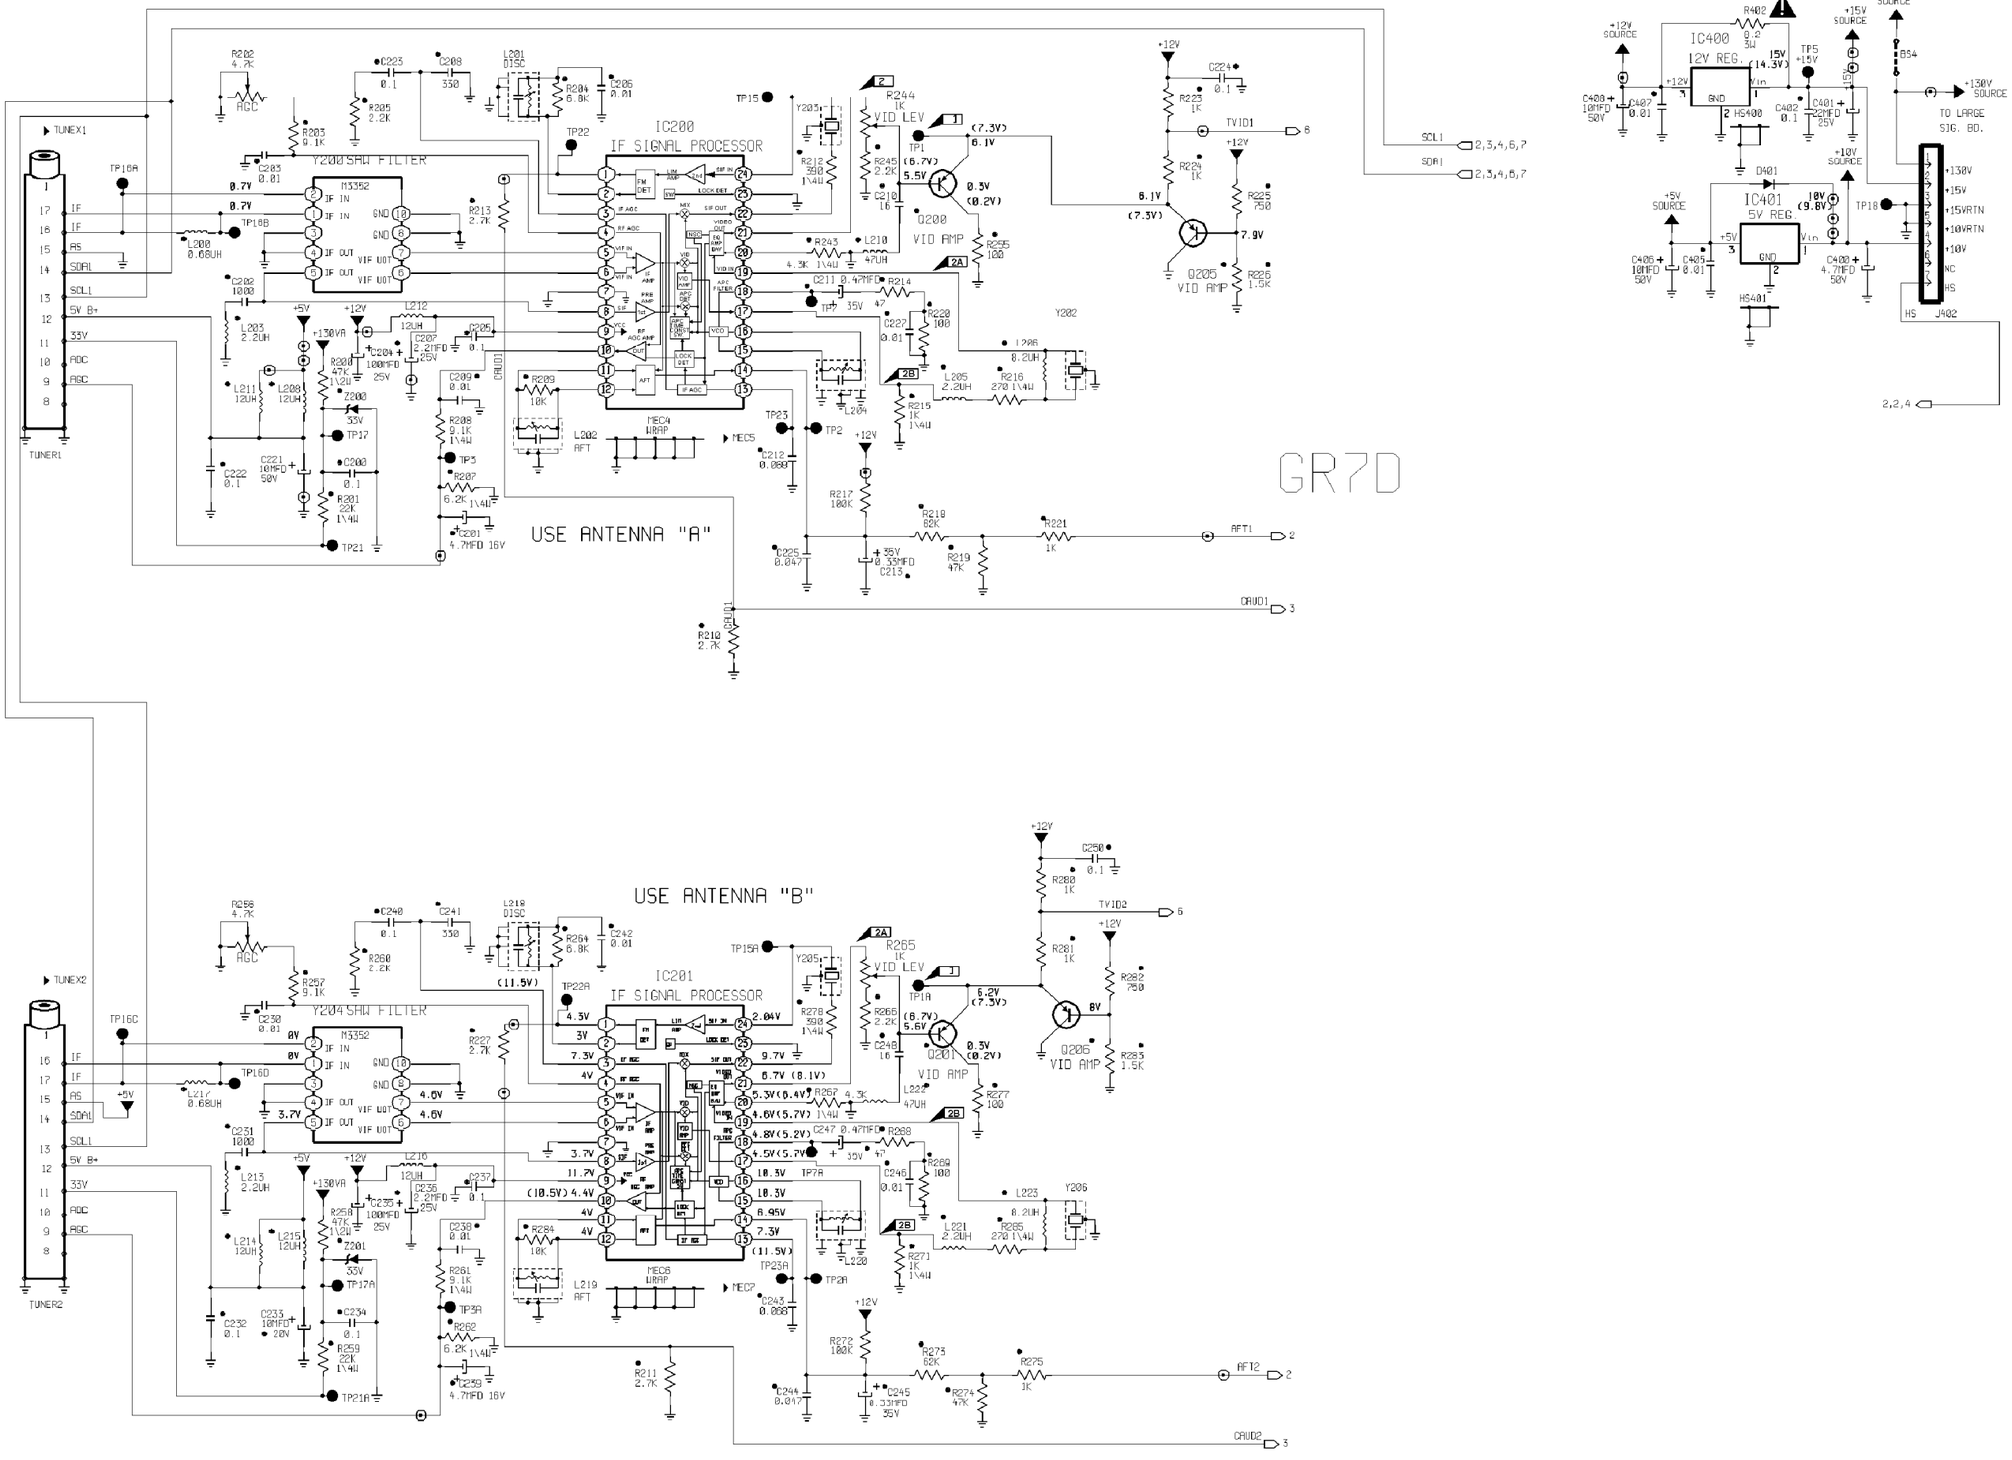


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - SECTION 2 SCHEMATIC

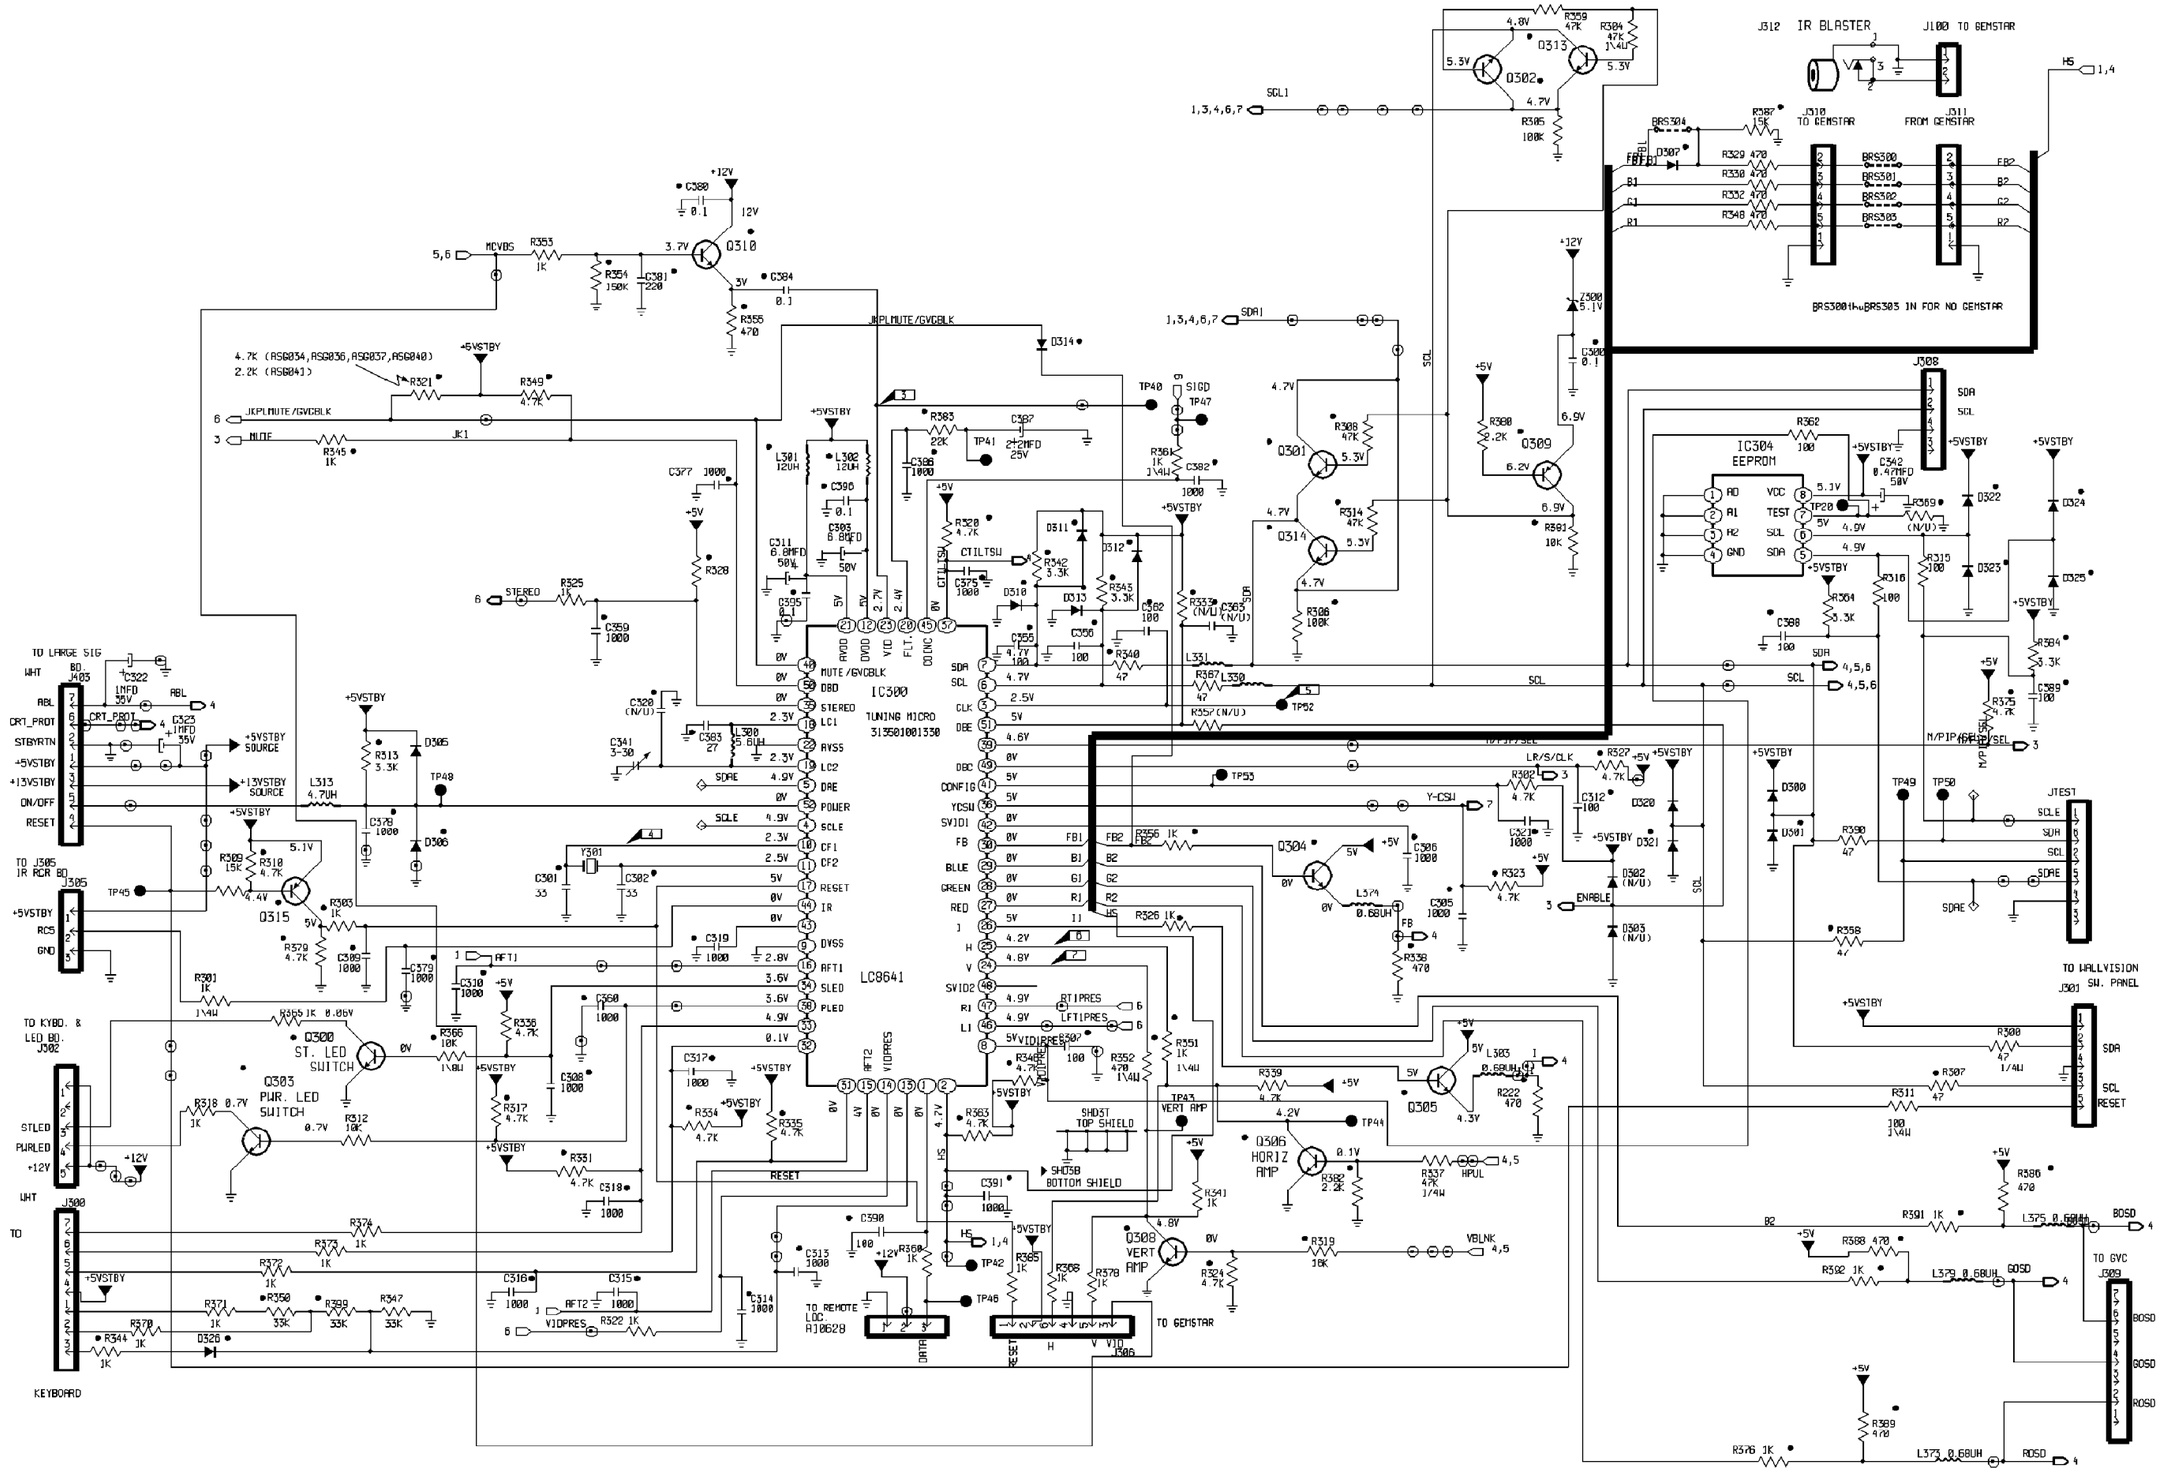


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - SECTION 3 SCHEMATIC

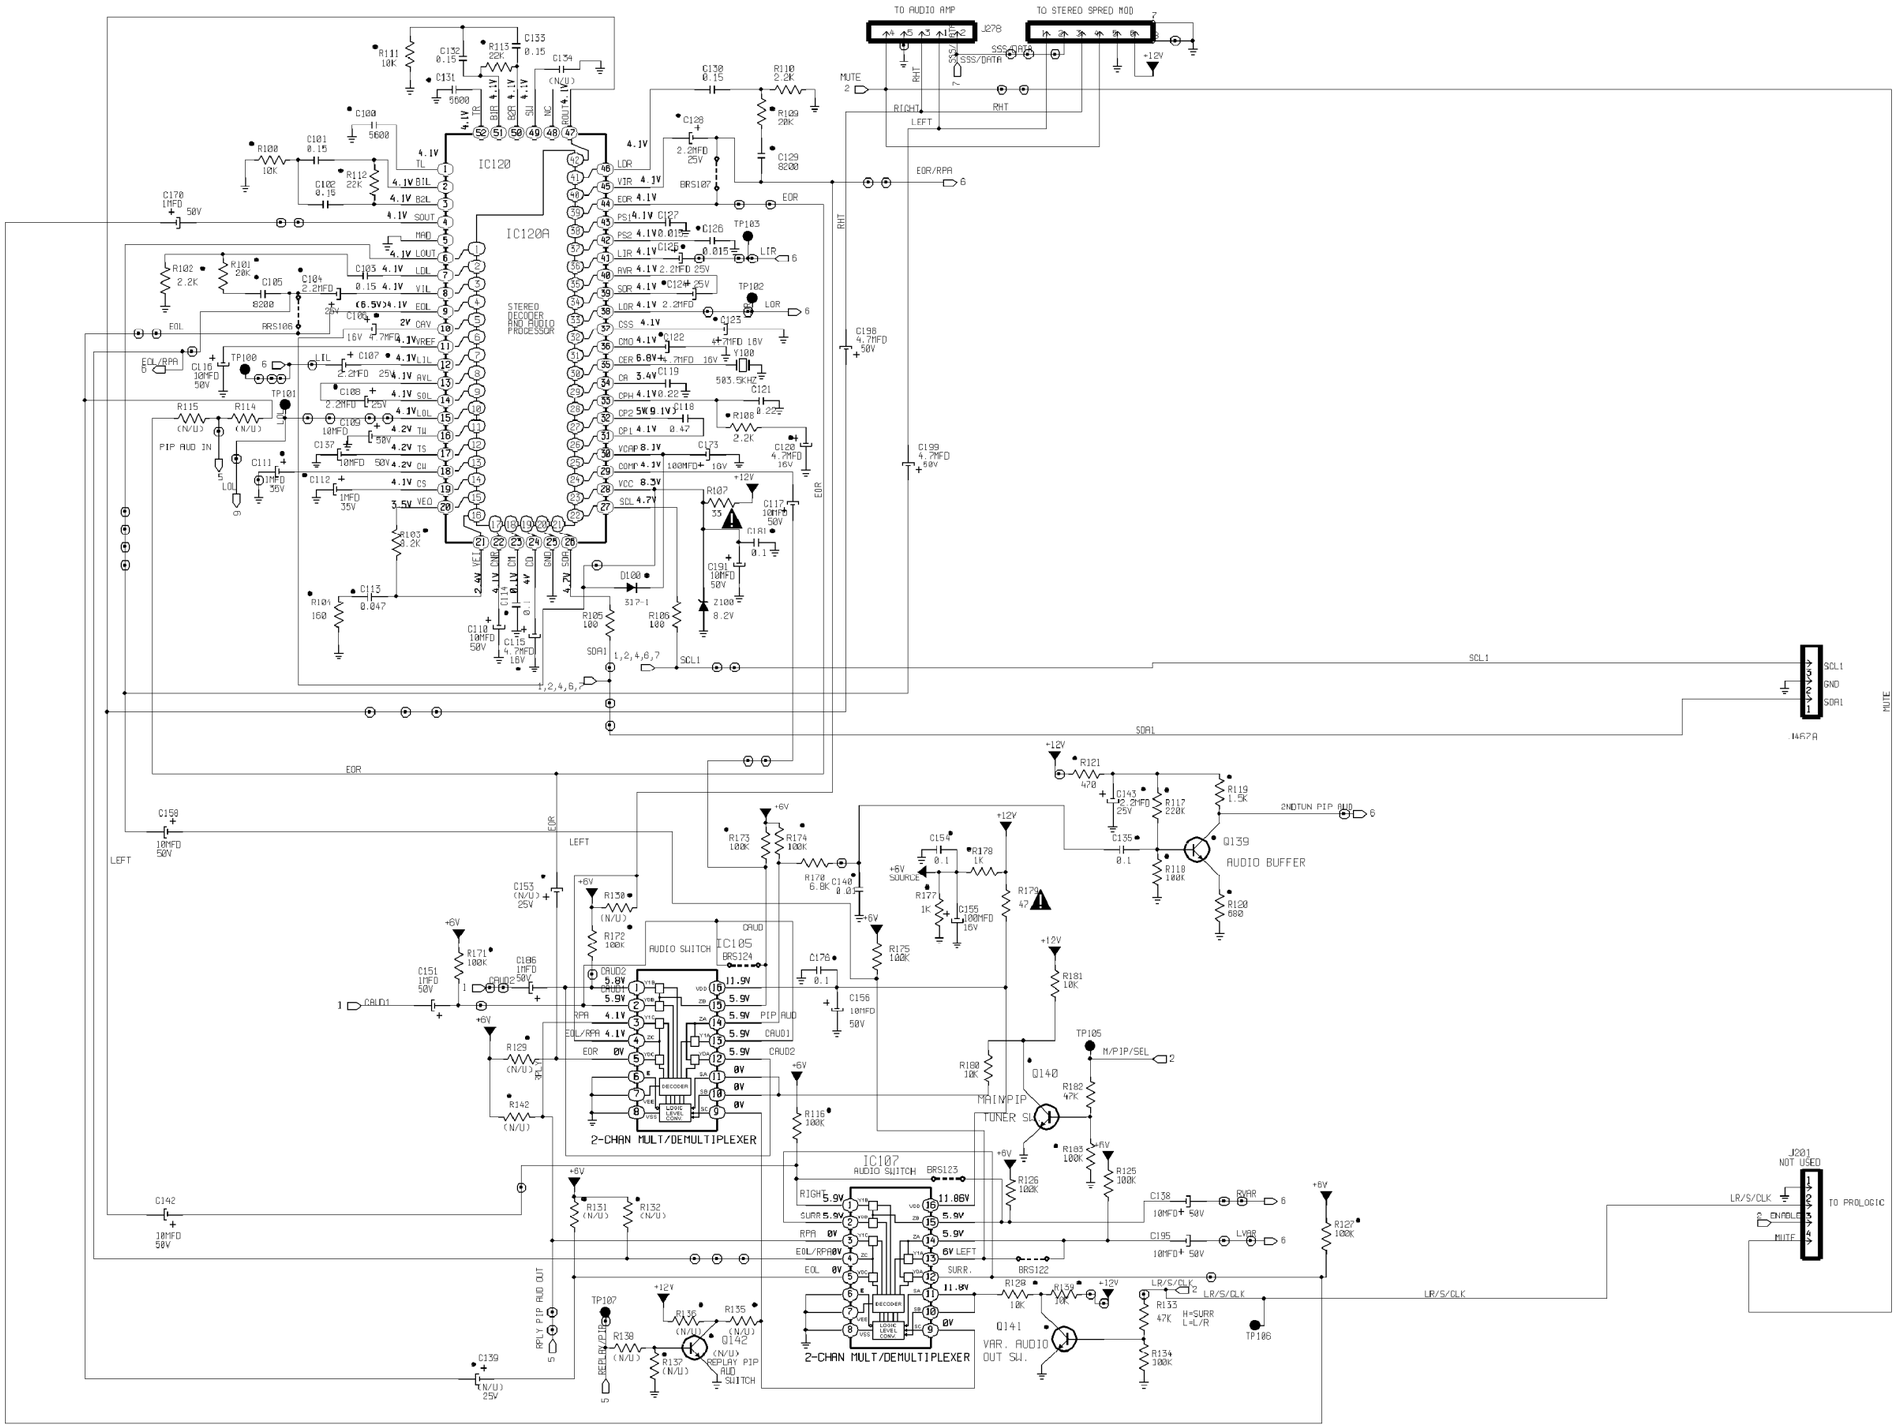


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - SECTION 4 SCHEMATIC

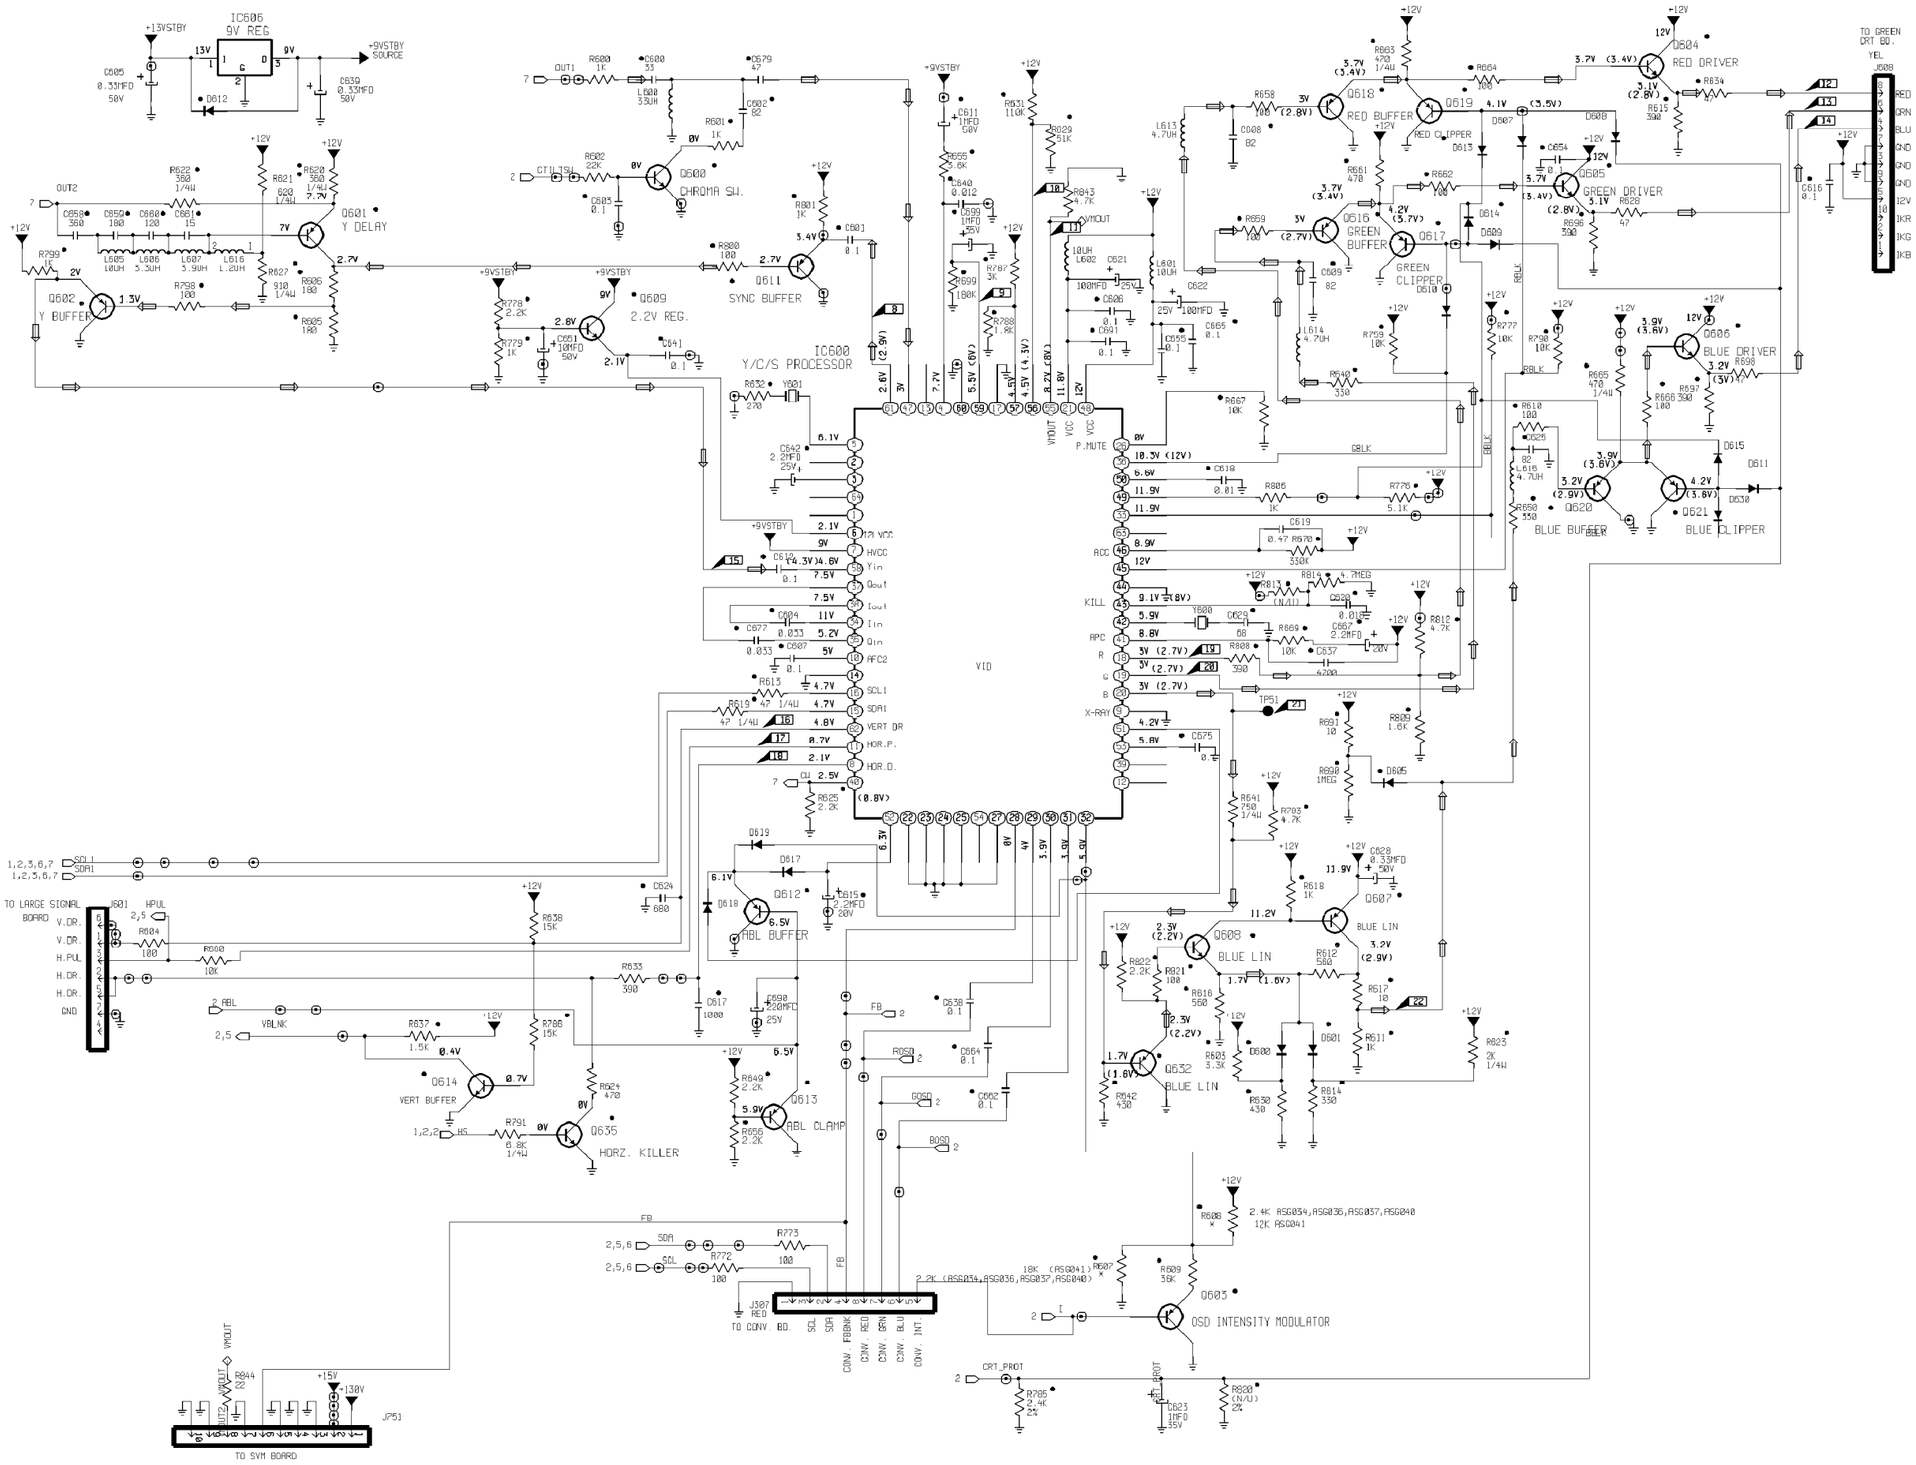


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - SECTION 5 SCHEMATIC

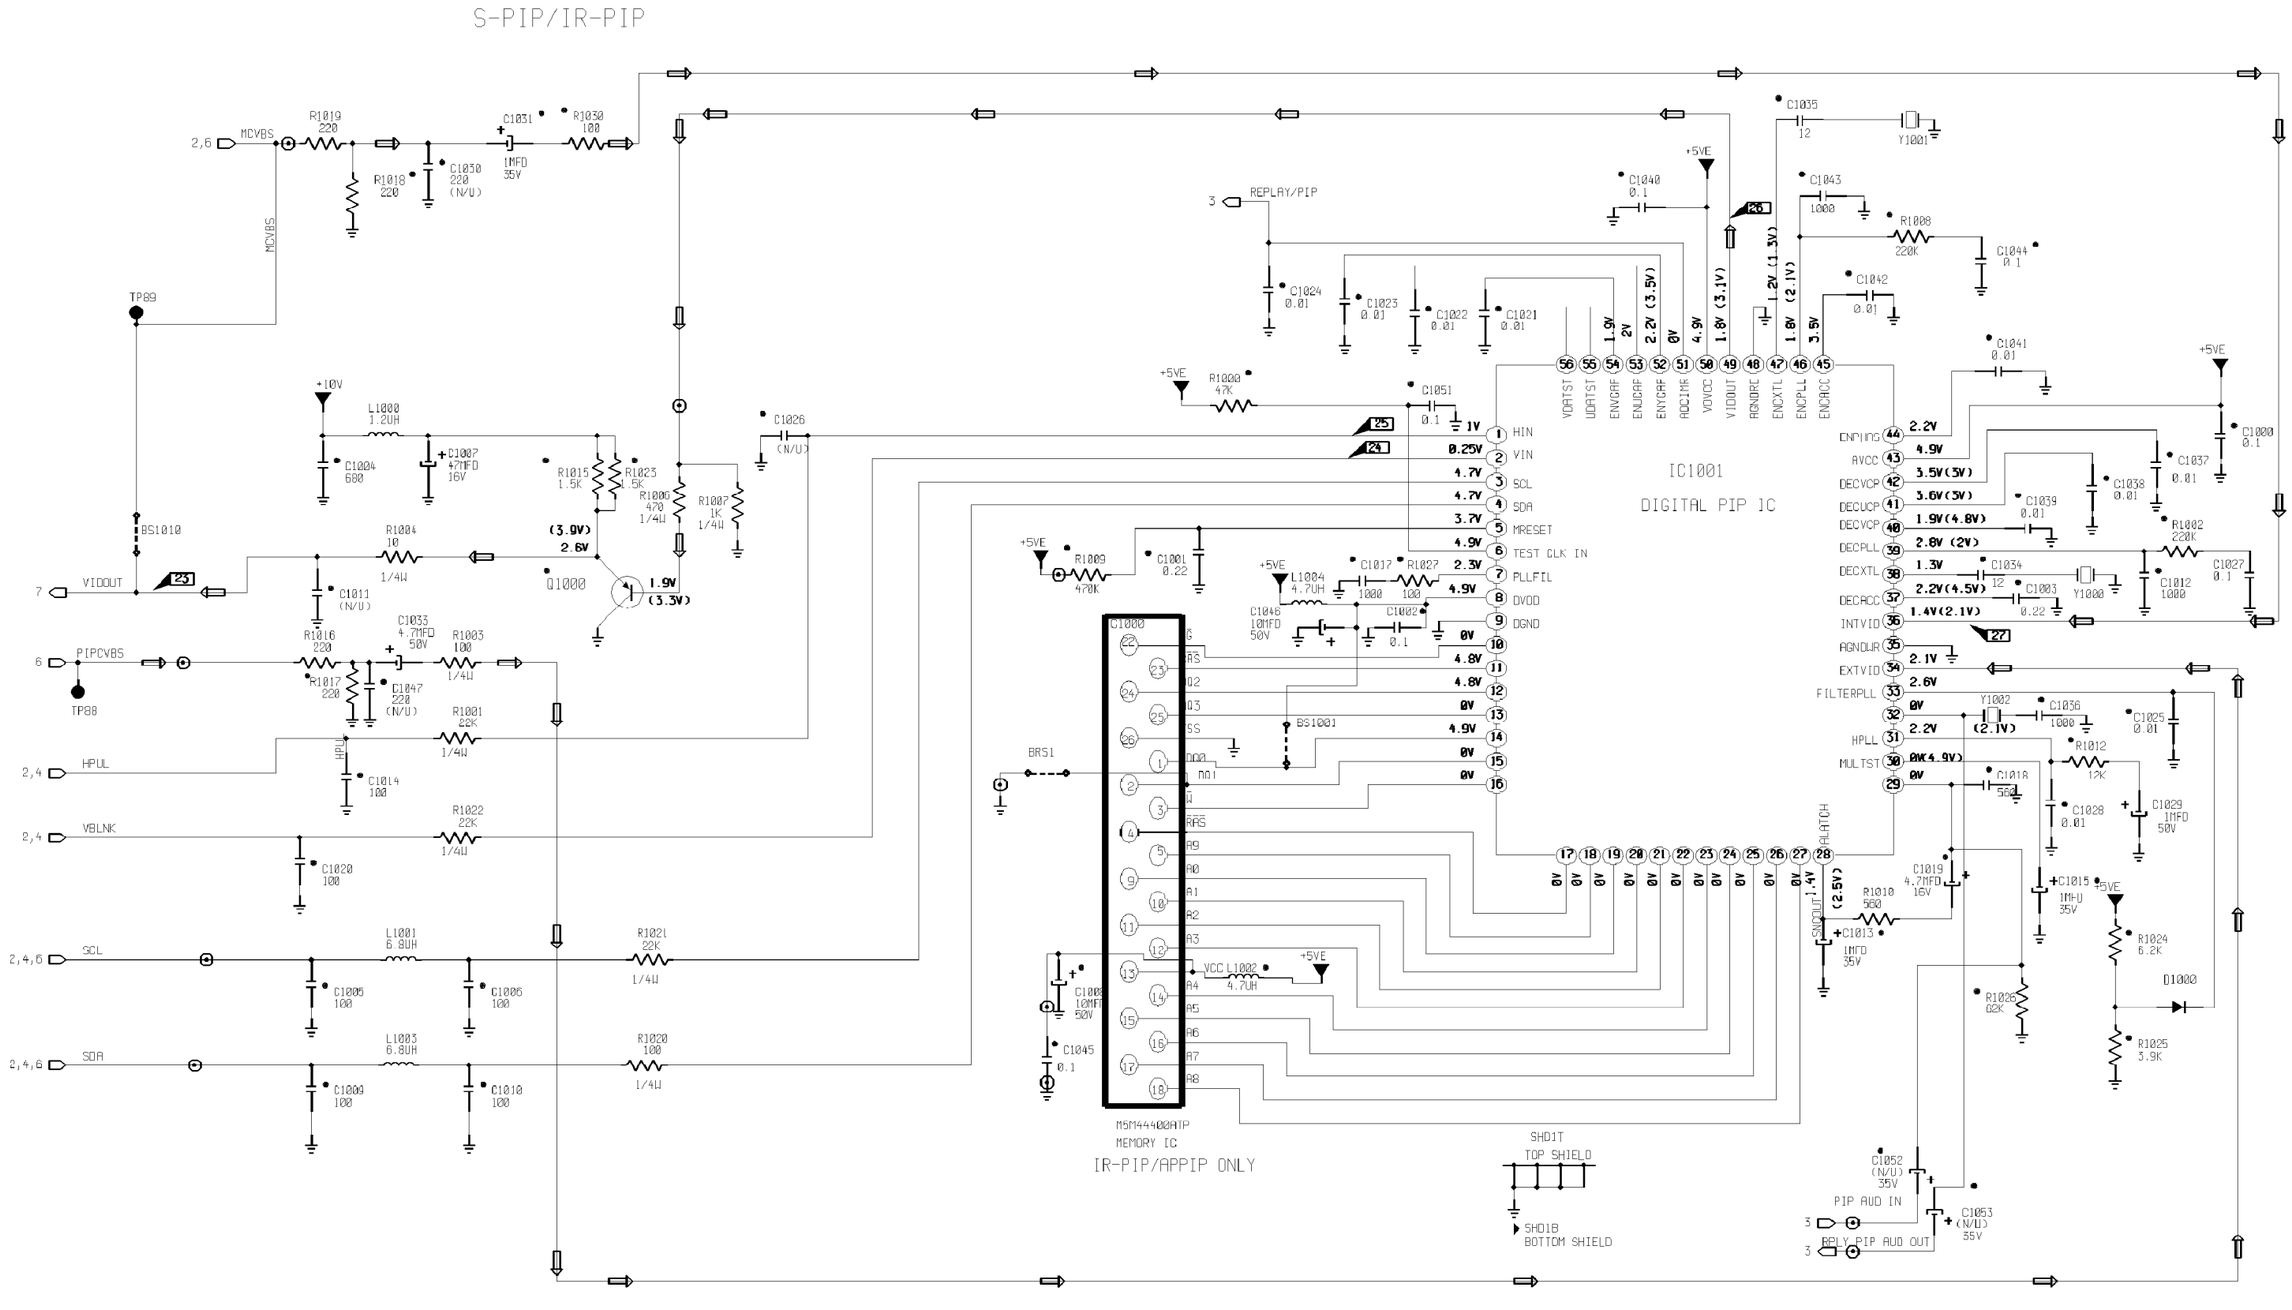


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - SECTION 6 SCHEMATIC

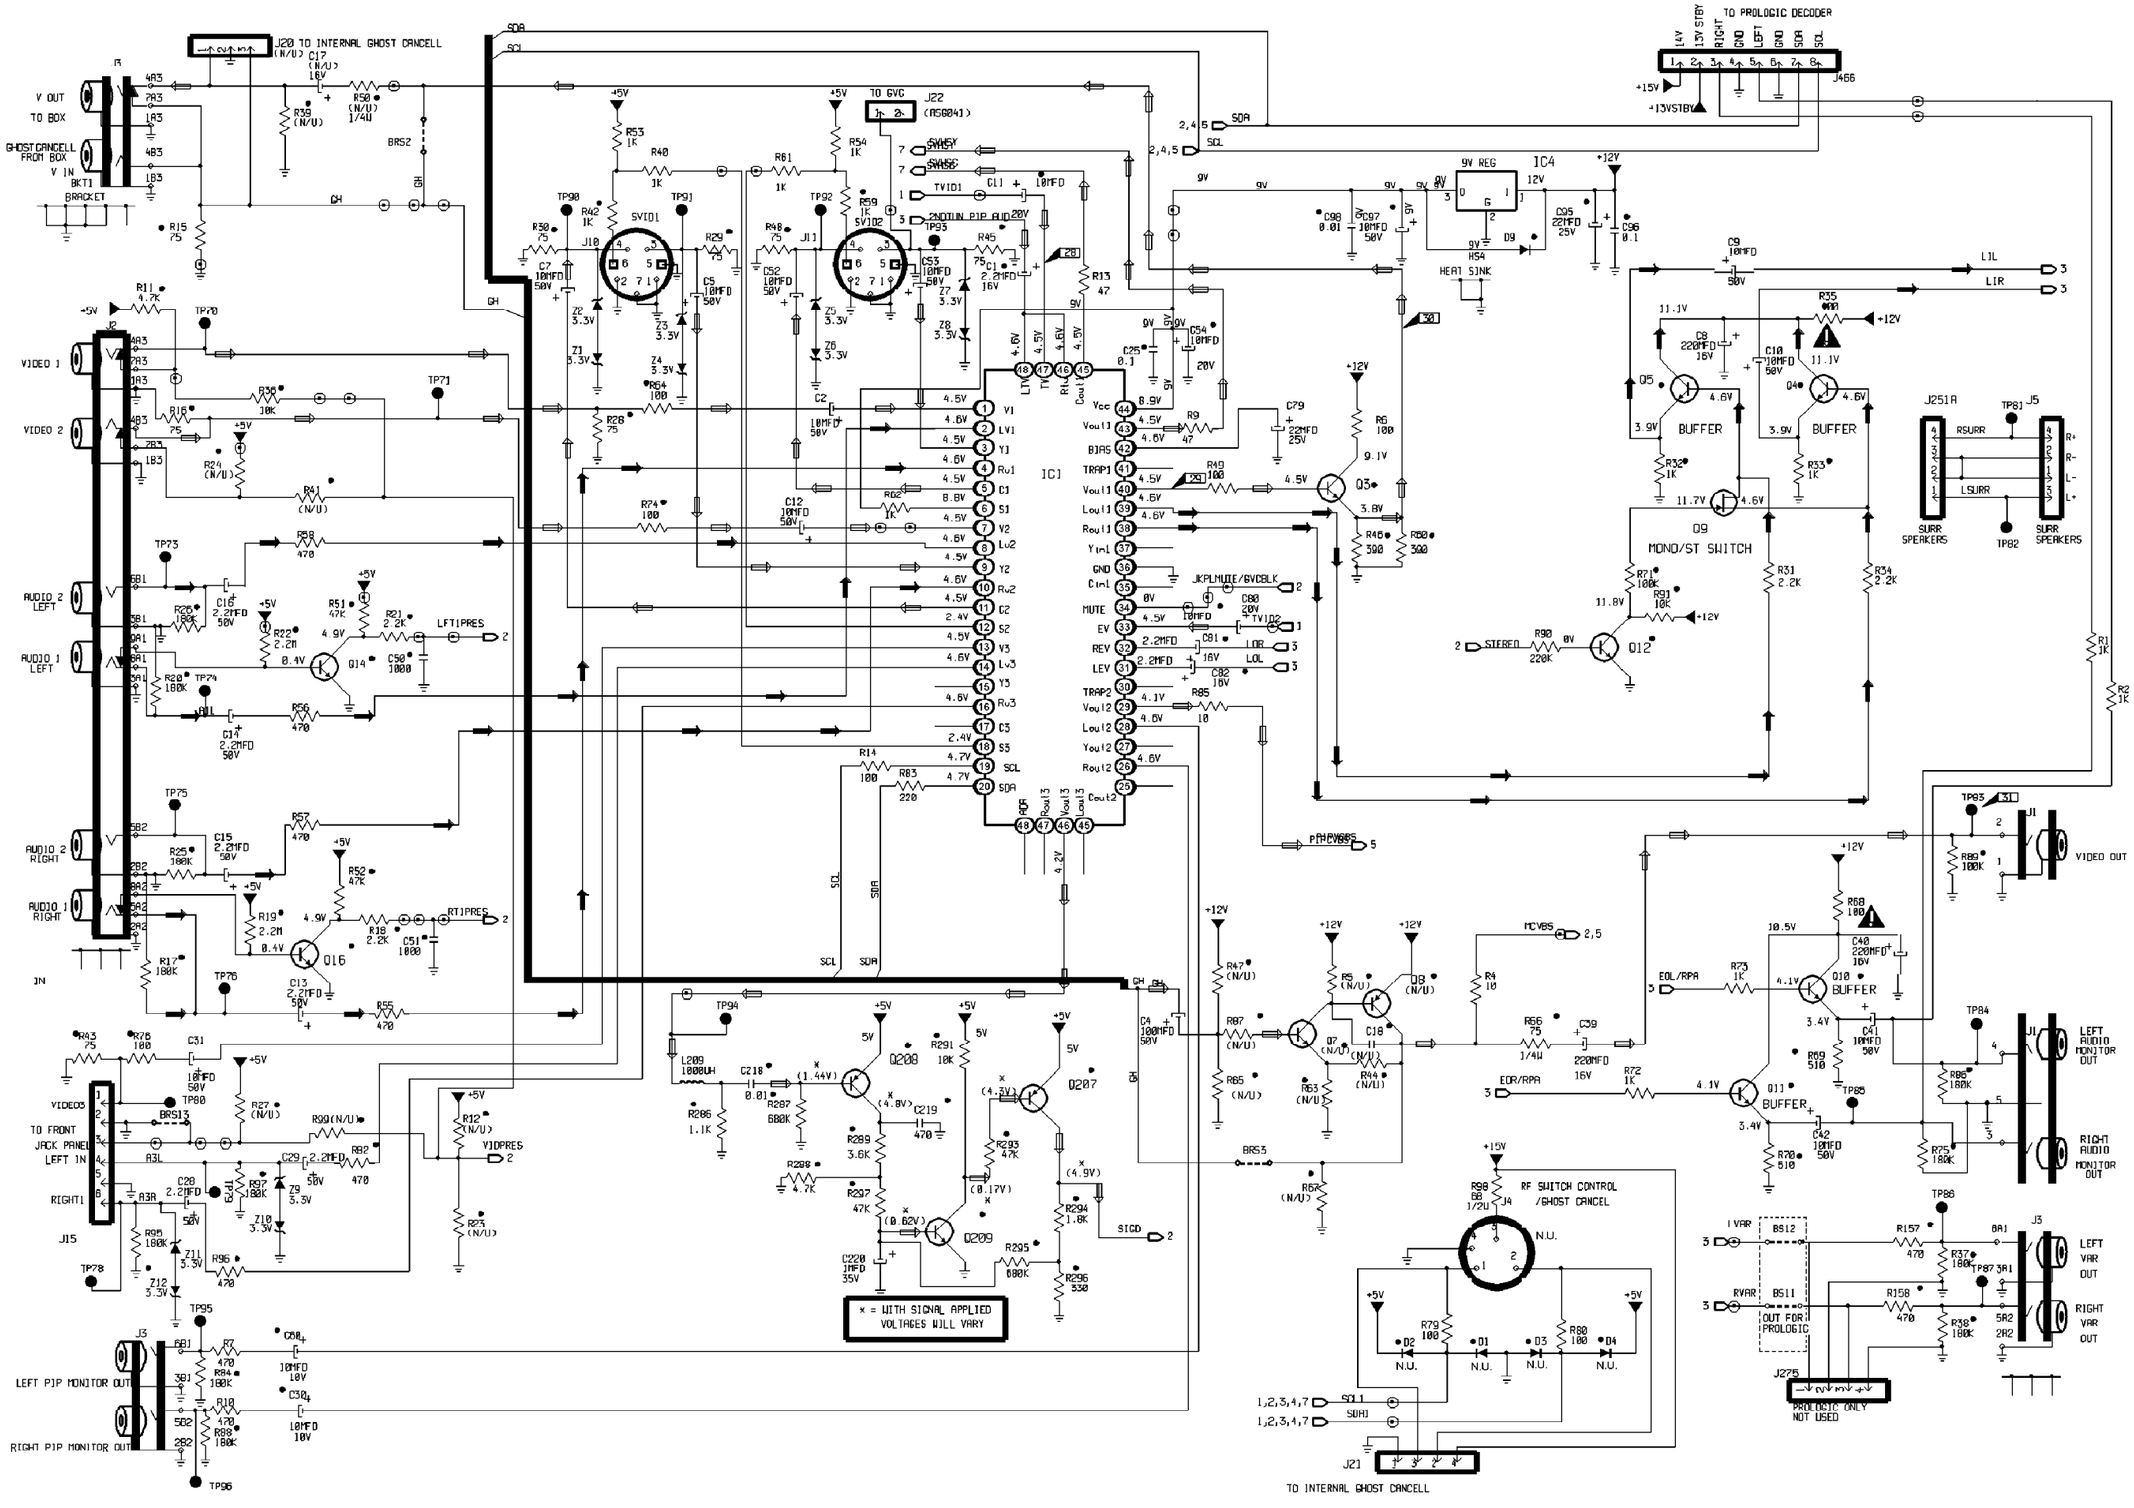


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - SECTION 7 SCHEMATIC

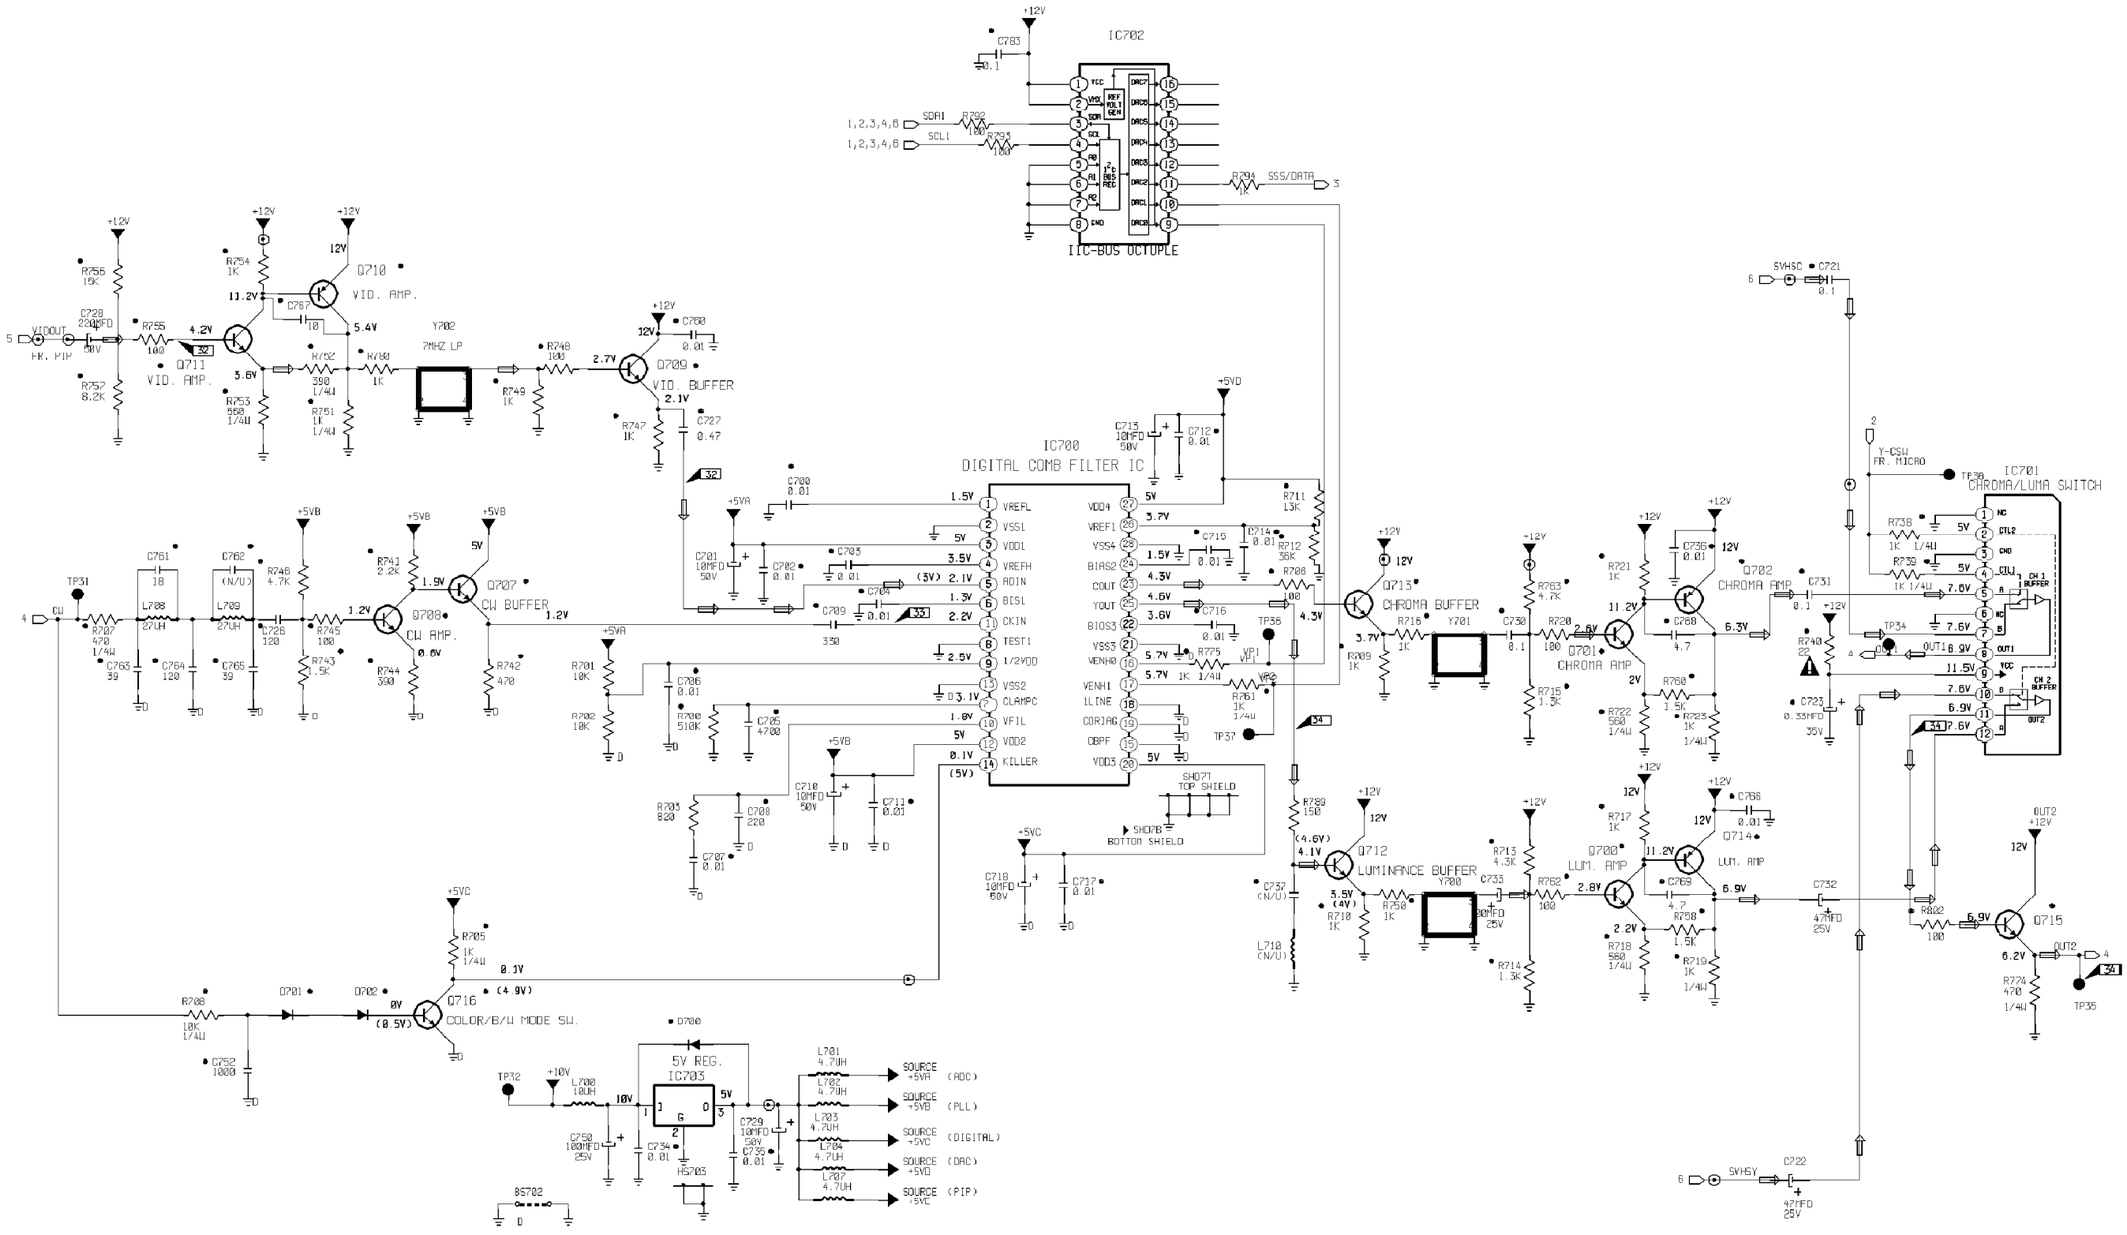


All Models (7573) - LARGE SIGNAL PANEL - APD019, APD020 & APD021- SECTION 1 SCHEMATIC

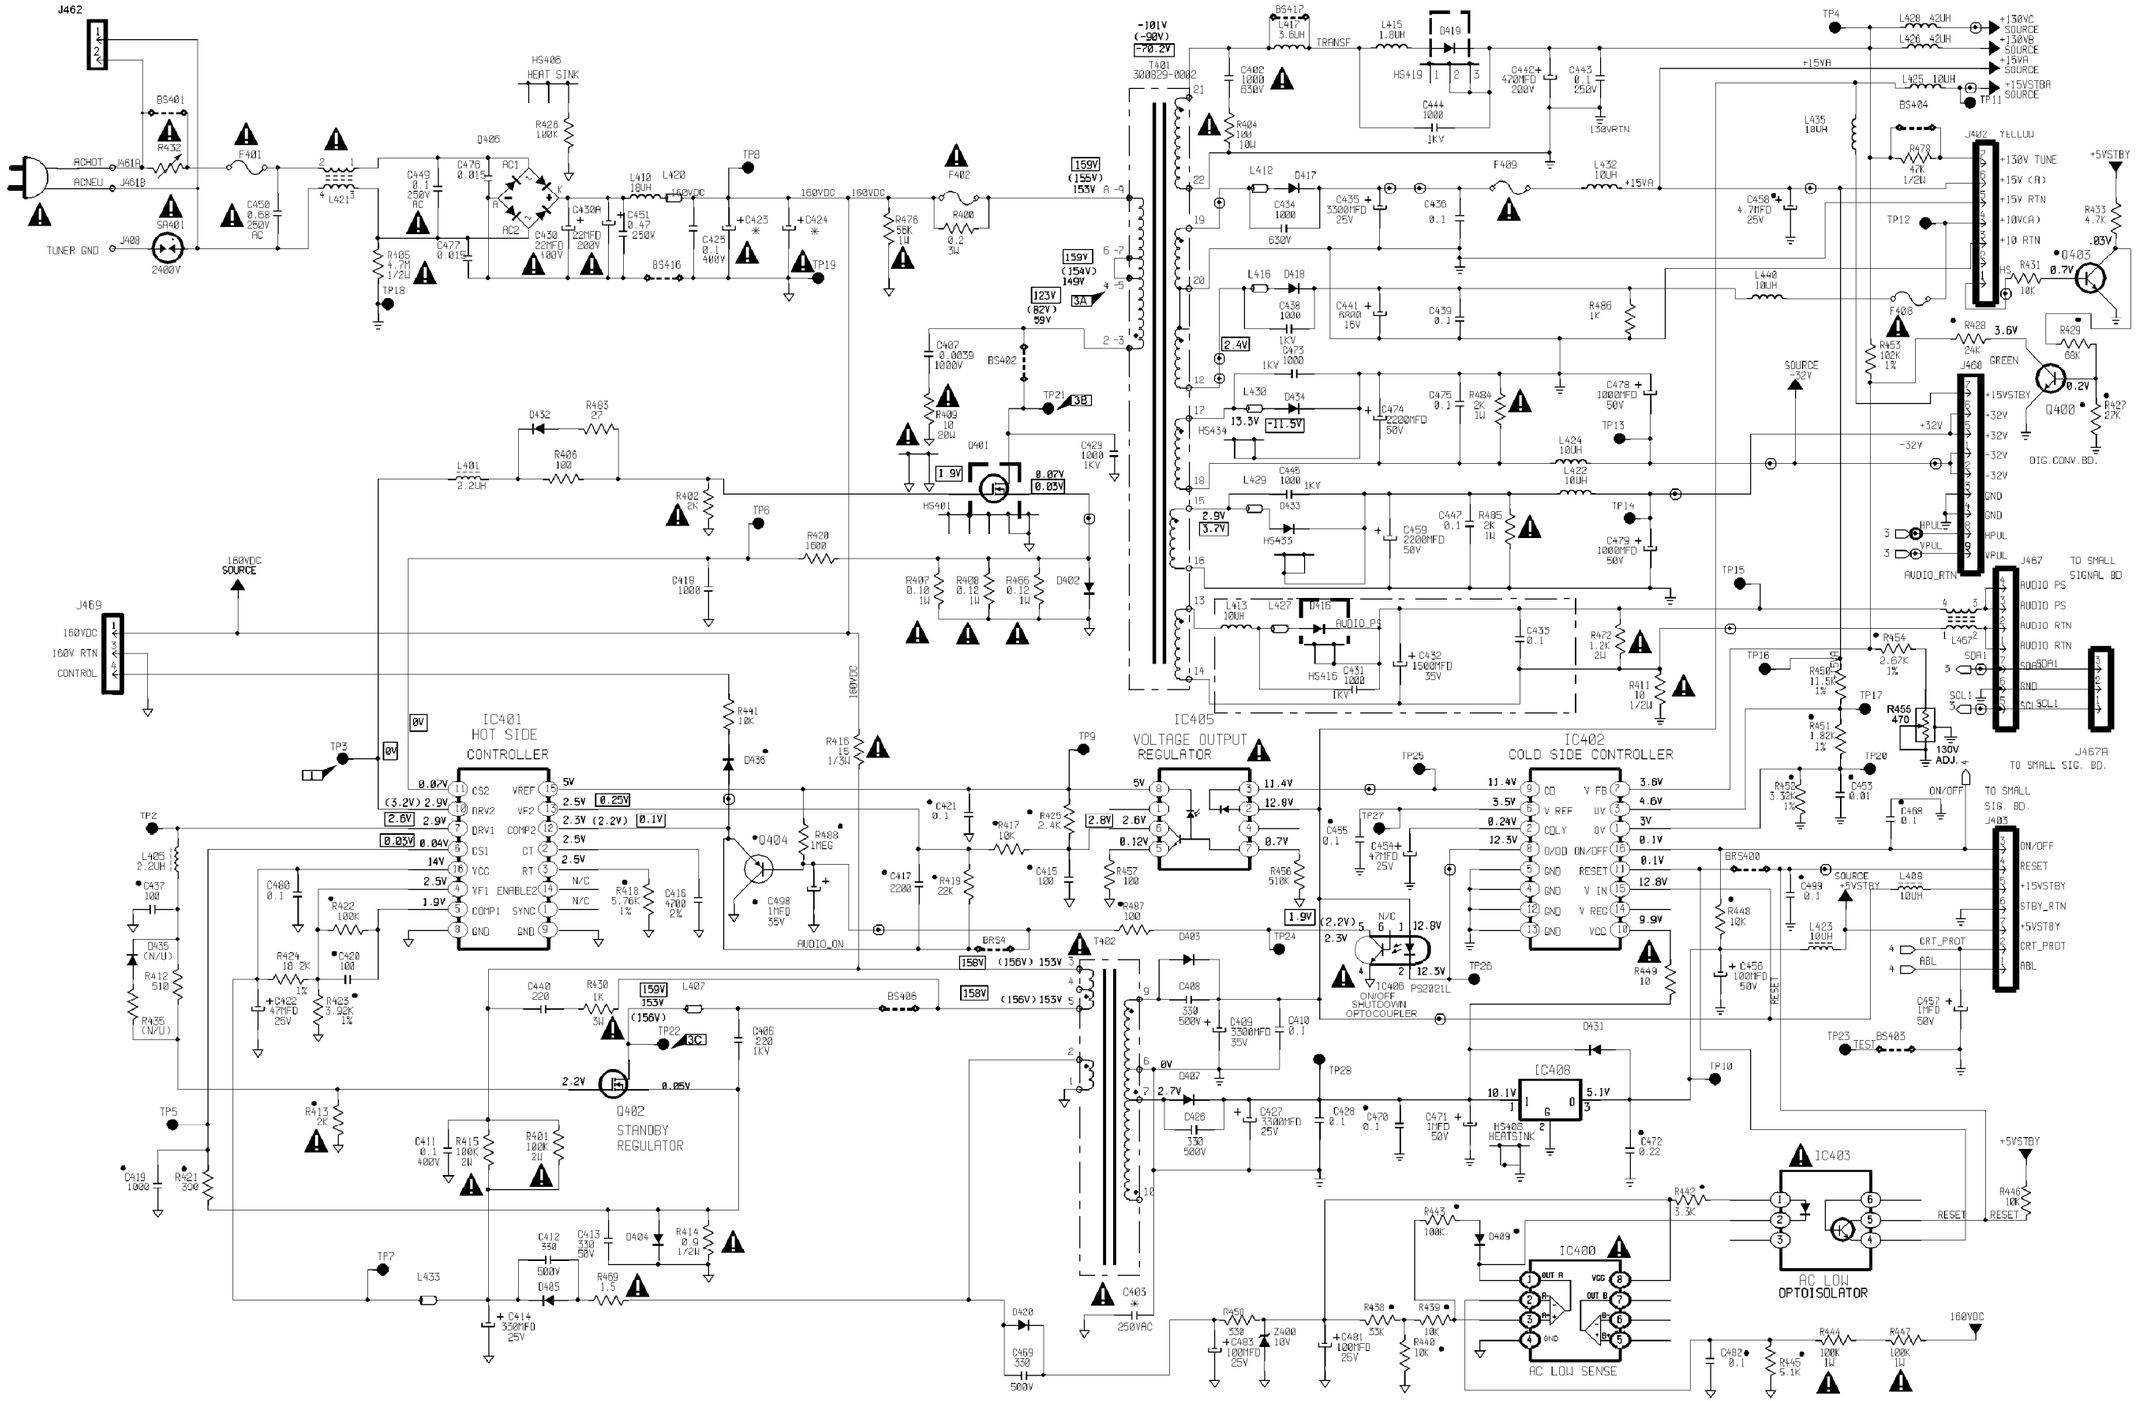


All Models (7573) - LARGE SIGNAL PANEL - APD019, APD020 & APD021- SECTION 2 SCHEMATIC

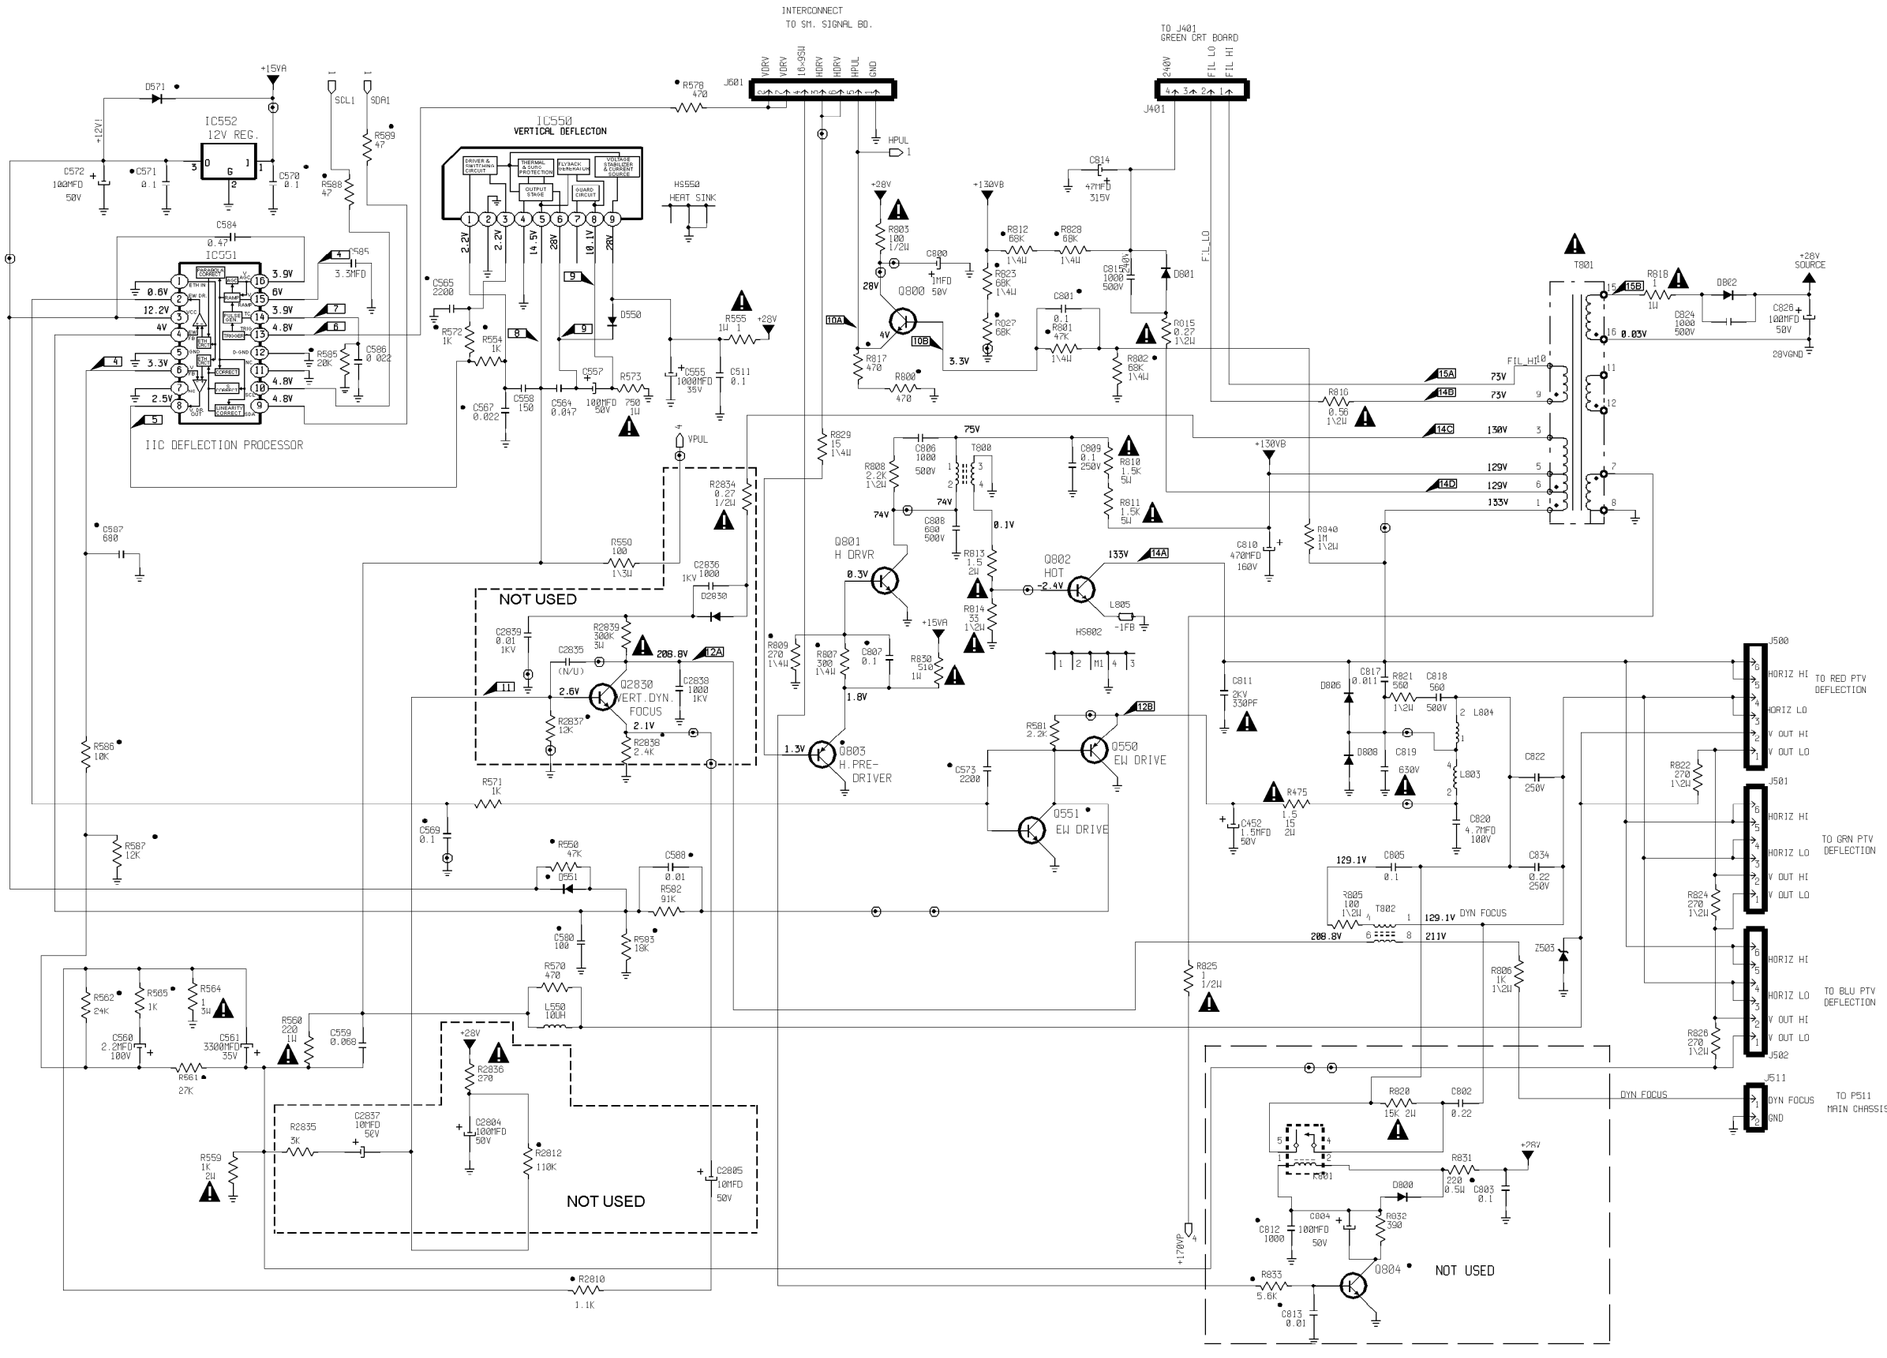



All Models (7573) - LARGE SIGNAL PANEL - APD019, APD020 & APD021- SECTION 3 SCHEMATIC

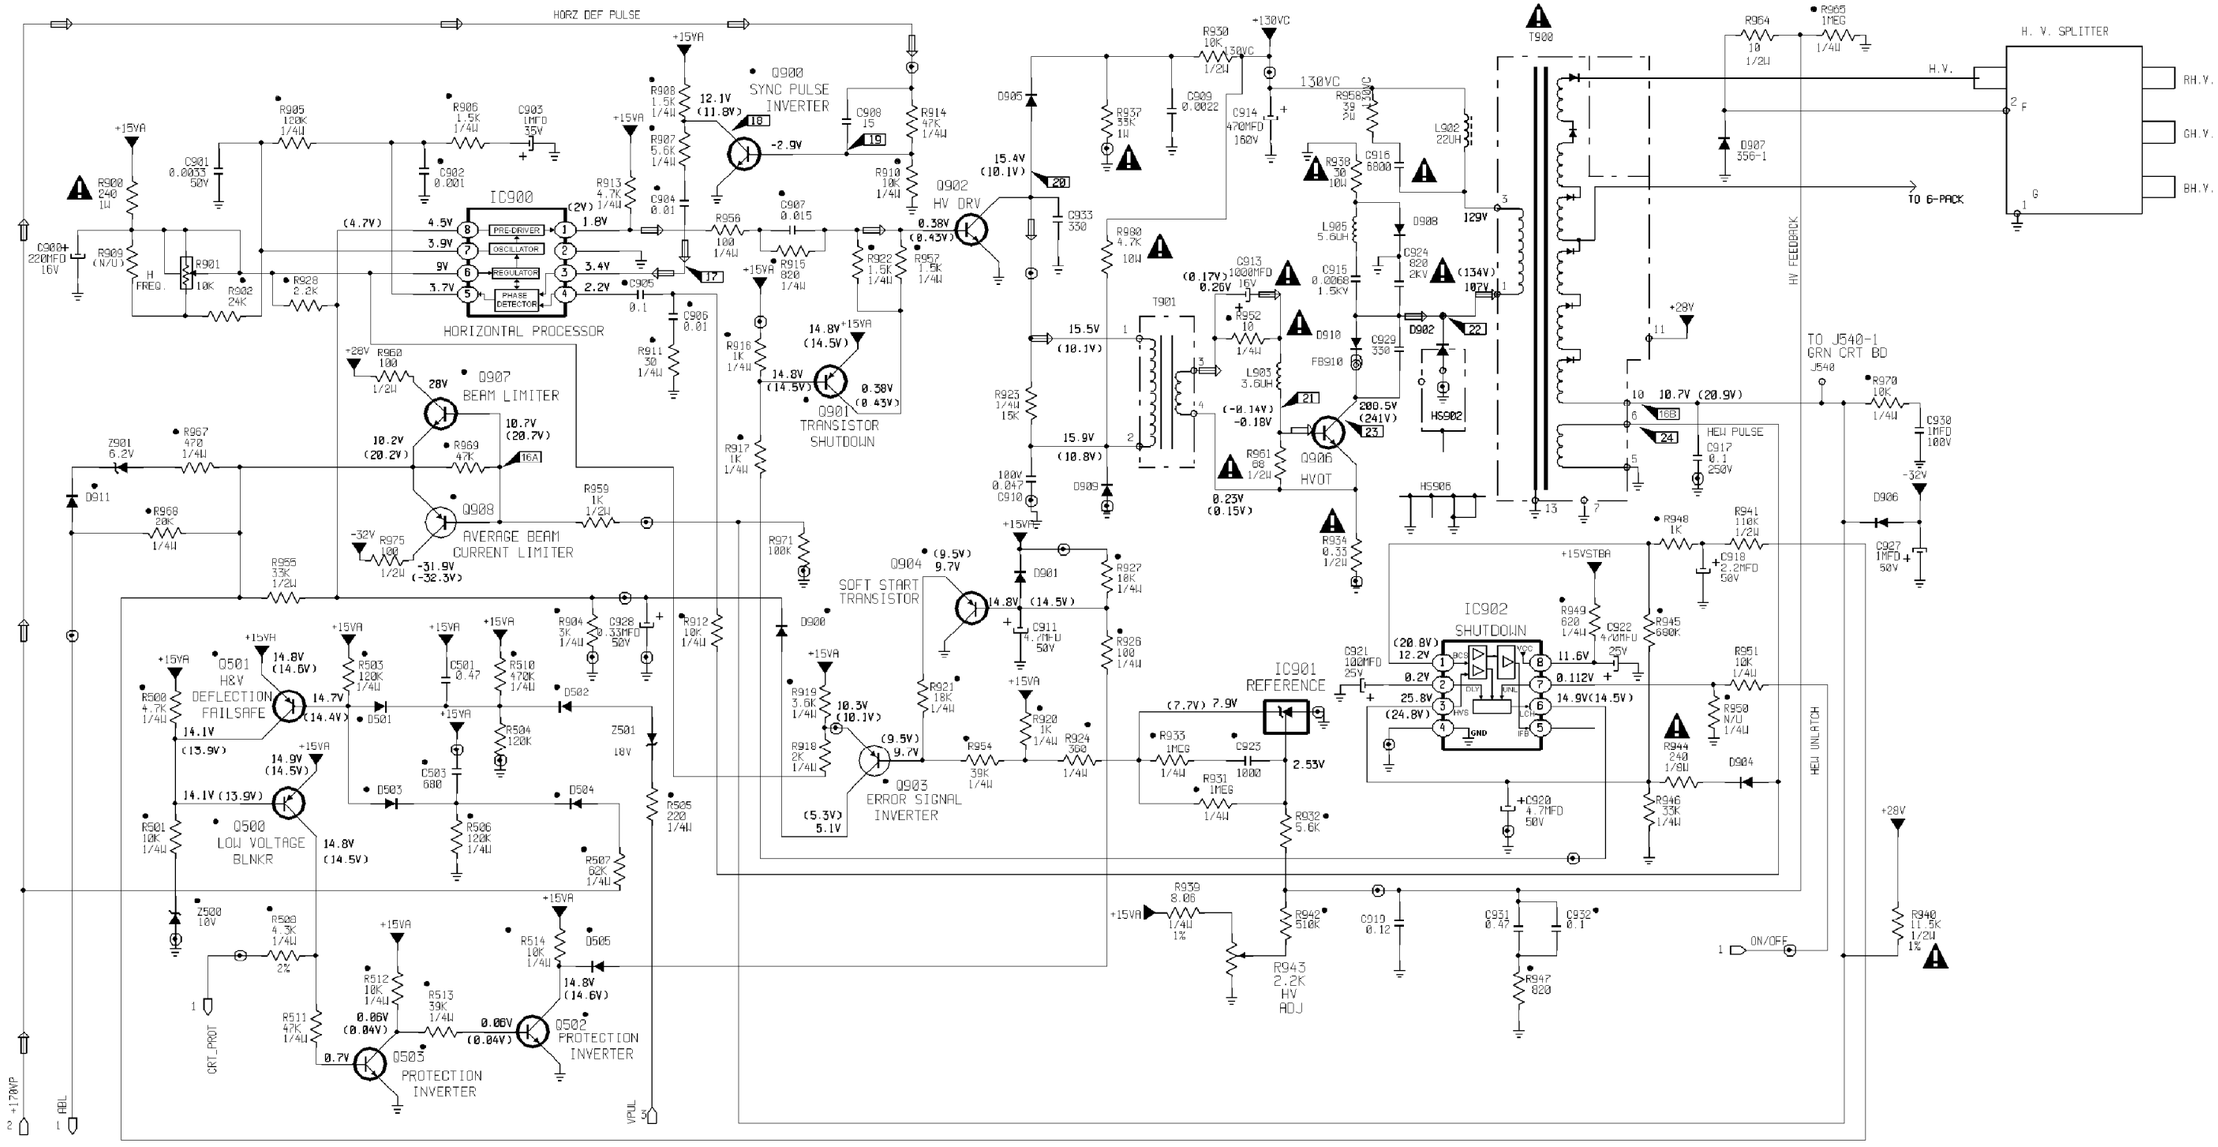



All Models (7573) - DIGITAL CONVERGENCE PANEL - A10688 - SECTION 1 SCHEMATIC

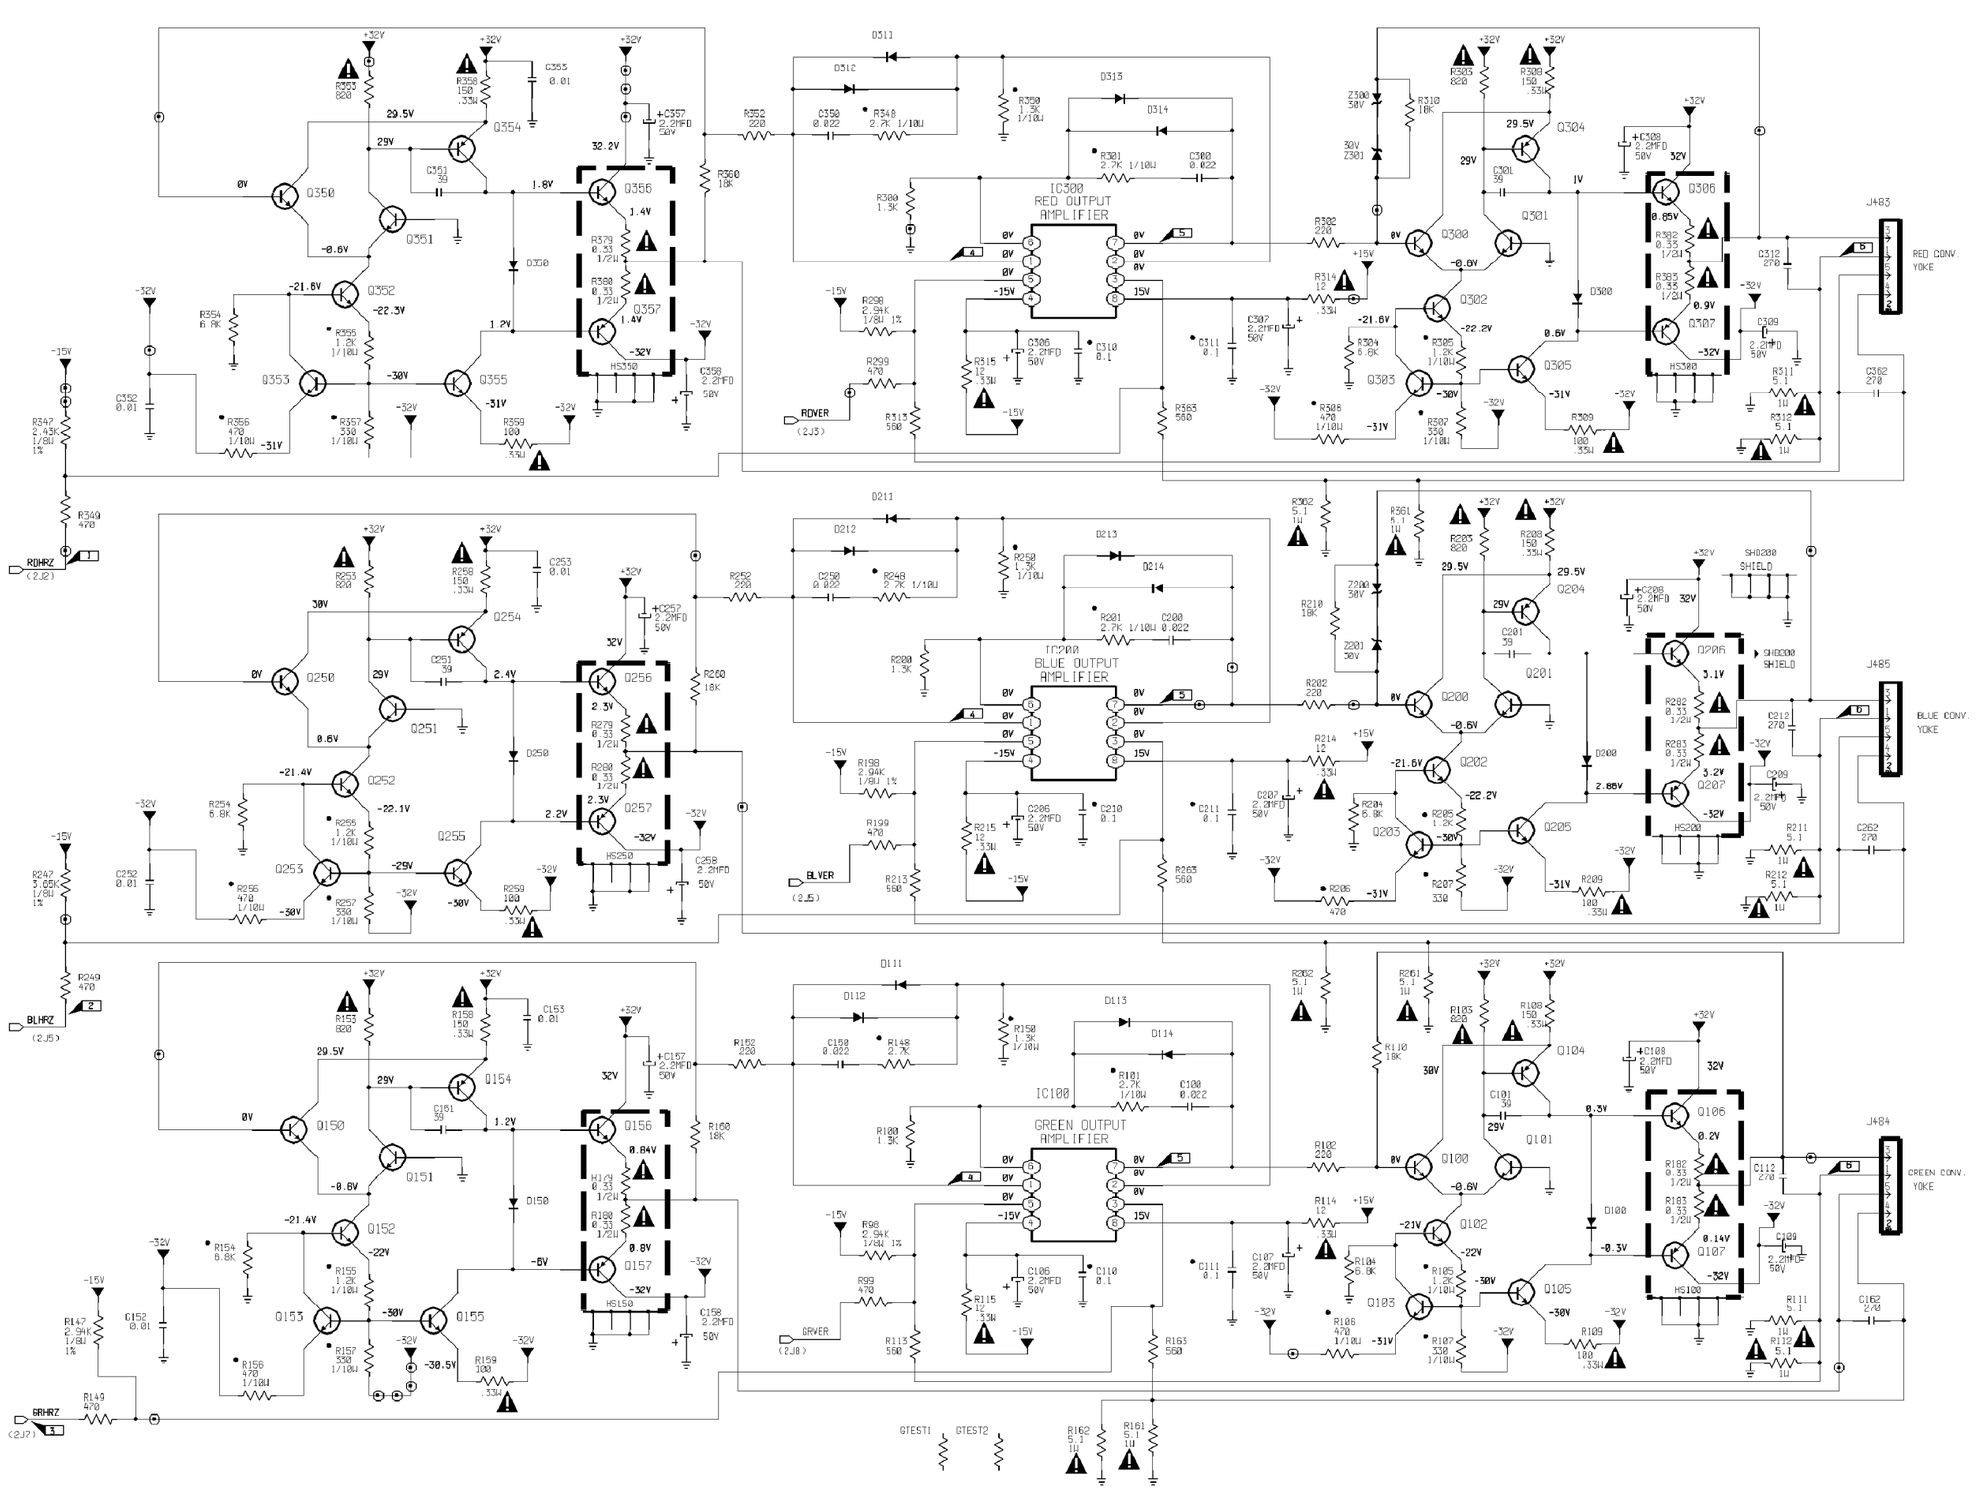

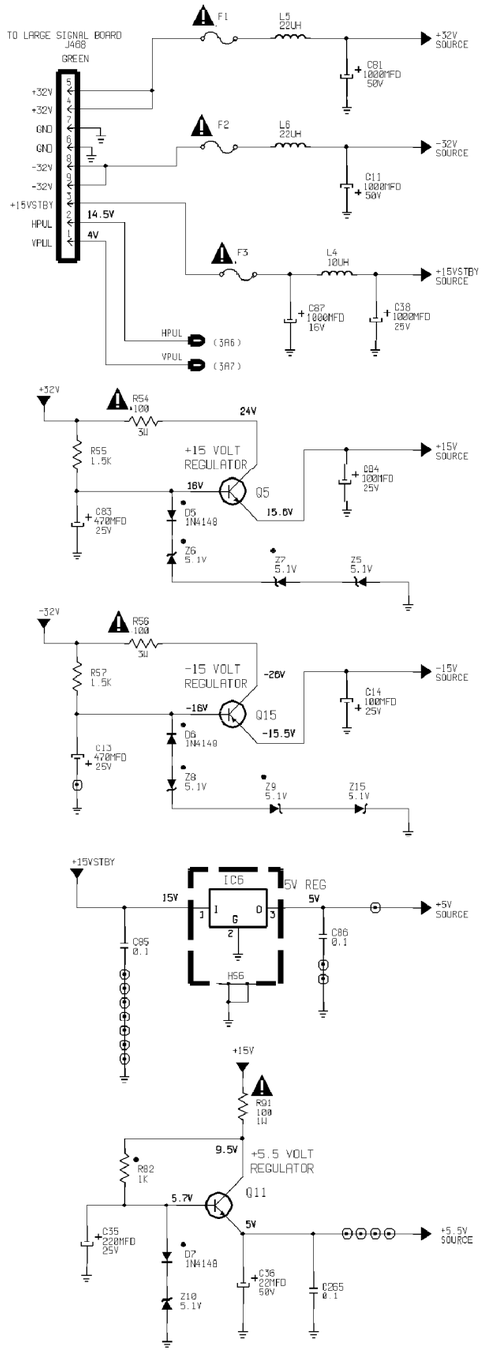

TO LARGE SIGNAL BOARD
J468
GREEN
+32V
+32V
GND
GND
-32V
-32V
+15VSTBY
HPUL
VPUL
14.5V
4V
F1
L5
22UH
+32V SOURCE
C81
1000MFD
50V
F2
L6
22UH
-32V SOURCE
C11
1000MFD
50V
F3
L4
10UH
+15VSTBY SOURCE
C87
1000MFD
16V
C38
1000MFD
25V
HPUL (3A6)
VPUL (3A7)
+32V
R54
100
5W
24V
R55
1.5K
+15 VOLT
REGULATOR
18V
Q5
15.6V
C83
470MFD
25V
D5
1N4148
Z6
5.1V
Z7
5.1V
Z5
5.1V
+15V SOURCE
C84
100MFD
25V
-32V
R56
100
5W
R57
1.5K
-15 VOLT
REGULATOR
-26V
-16V
Q15
-15.5V
C13
470MFD
25V
D6
1N4148
Z8
5.1V
Z9
5.1V
Z15
5.1V
C14
100MFD
25V
-15V SOURCE
+15VSTBY
IC6
5V REG
15V
5V
+5V SOURCE
C85
0.1
C86
0.1
HSG
+15V
R91
100
1W
9.5V
+5.5 VOLT
REGULATOR
R82
1K
5.7V
Q11
5V
+5.5V SOURCE
C35
220MFD
25V
D7
1N4148
Z10
5.1V
C36
22MFD
50V
C265
0.1

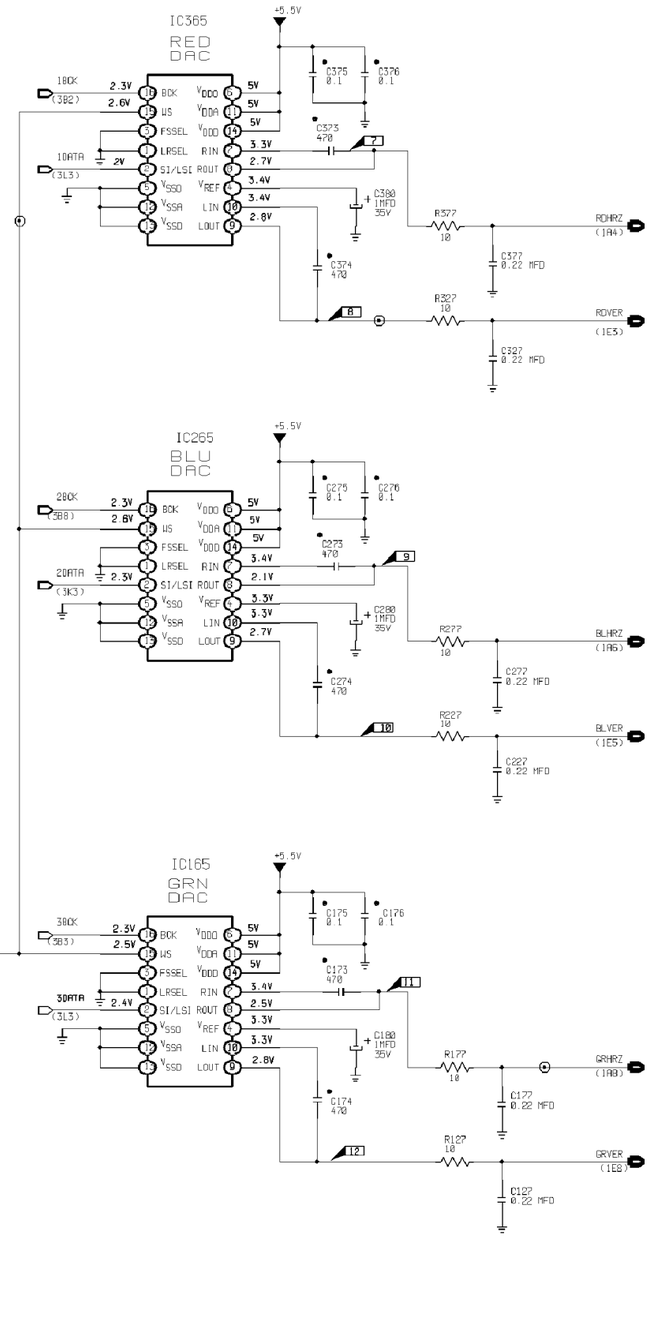

IC365
RED
DAC
+5.5V
18CK
(3B2)
18DATA
(3L3)
2.3V
2.6V
2V
BCK
WS
FSSEL
LRSEL
SI/LSI
VSSO
VSSA
VSSO
VDDO
VDDA
VDDO
RIN
ROUT
VREF
LIN
LOUT
5V
3.3V
2.7V
3.4V
2.8V
C375
0.1
C376
0.1
C373
470
C380
1MFD
35V
C374
470
R377
10
C377
0.22 MFD
R227
10
C327
0.22 MFD
ROHRZ
(1A4)
ROVER
(1E5)
IC265
BLU
DAC
28CK
(3B8)
28DATA
(3K3)
2.1V
C275
0.1
C276
0.1
C273
470
C280
1MFD
35V
C274
470
R277
10
C277
0.22 MFD
R227
10
C227
0.22 MFD
BLHRZ
(1A5)
BLVER
(1E5)
IC165
GRN
DAC
38CK
(3B3)
38DATA
(3L3)
2.4V
2.5V
3.4V
C175
0.1
C176
0.1
C173
470
C180
1MFD
35V
C174
470
R177
10
C177
0.22 MFD
R127
10
C127
0.22 MFD
GRHRZ
(1A8)
GRVER
(1E8)

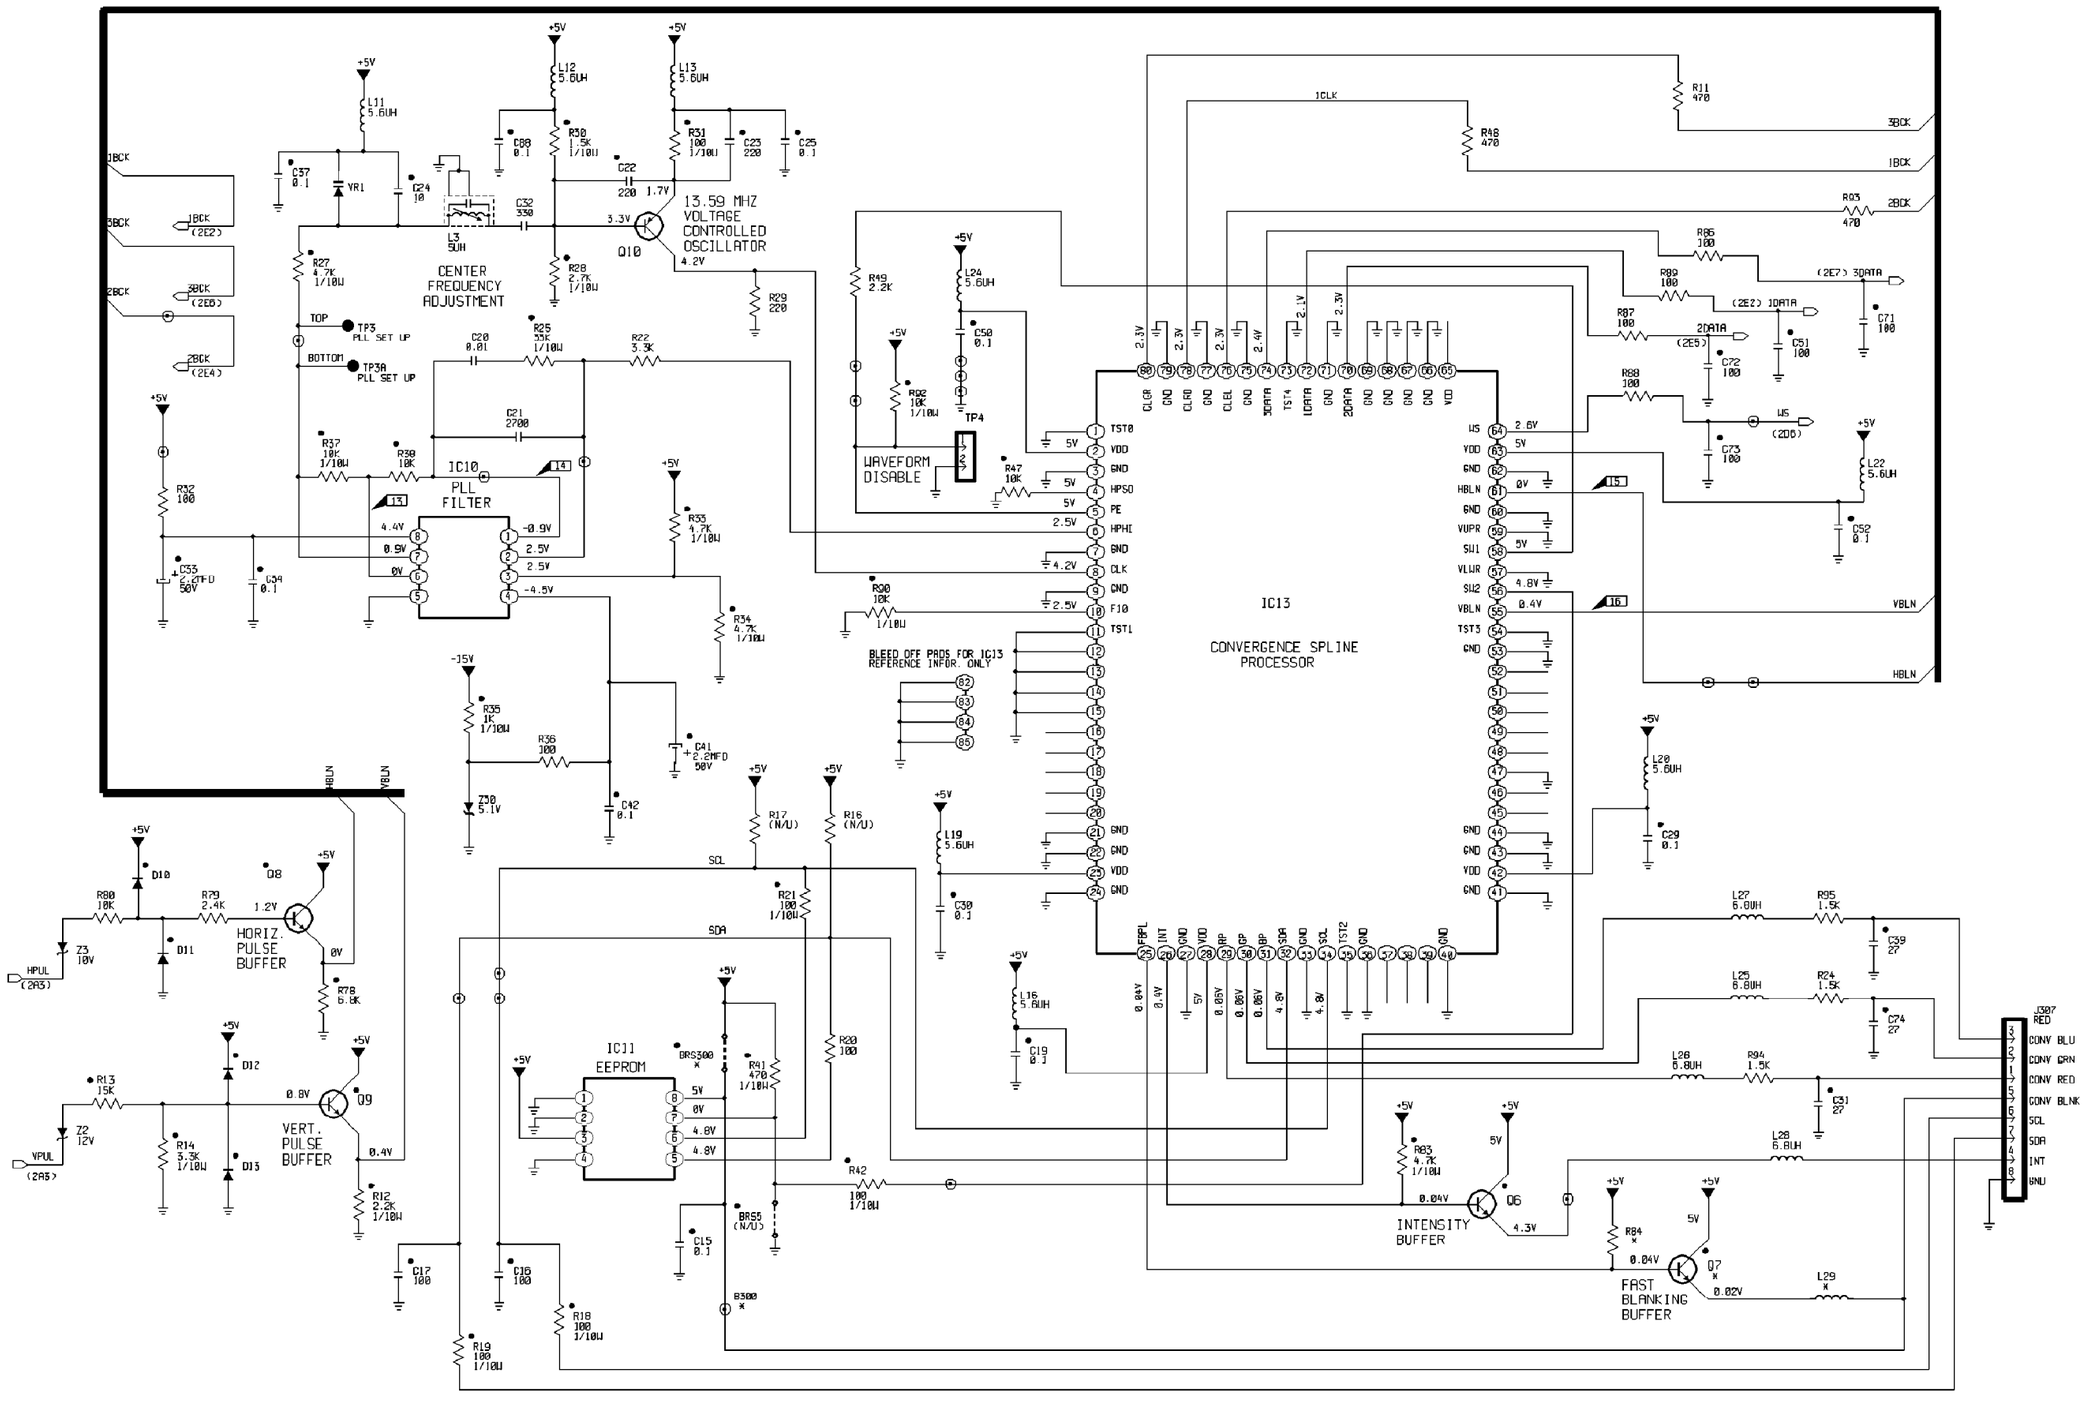
13.59 MHZ VOLTAGE CONTROLLED OSCILLATOR
CENTER FREQUENCY ADJUSTMENT
WAVEFORM DISABLE
IC10 PLL FILTER
IC13 CONVERGENCE SPLINE PROCESSOR
IC11 EEPROM
HORIZ. PULSE BUFFER
VERT. PULSE BUFFER
INTENSITY BUFFER
FAST BLANKING BUFFER
BLEED OFF PADS FOR IC13 REFERENCE INFOR. ONLY
CONV BLU
CONV GRN
CONV RED
CONV BLNK
SCL
SDA
INT
BNU

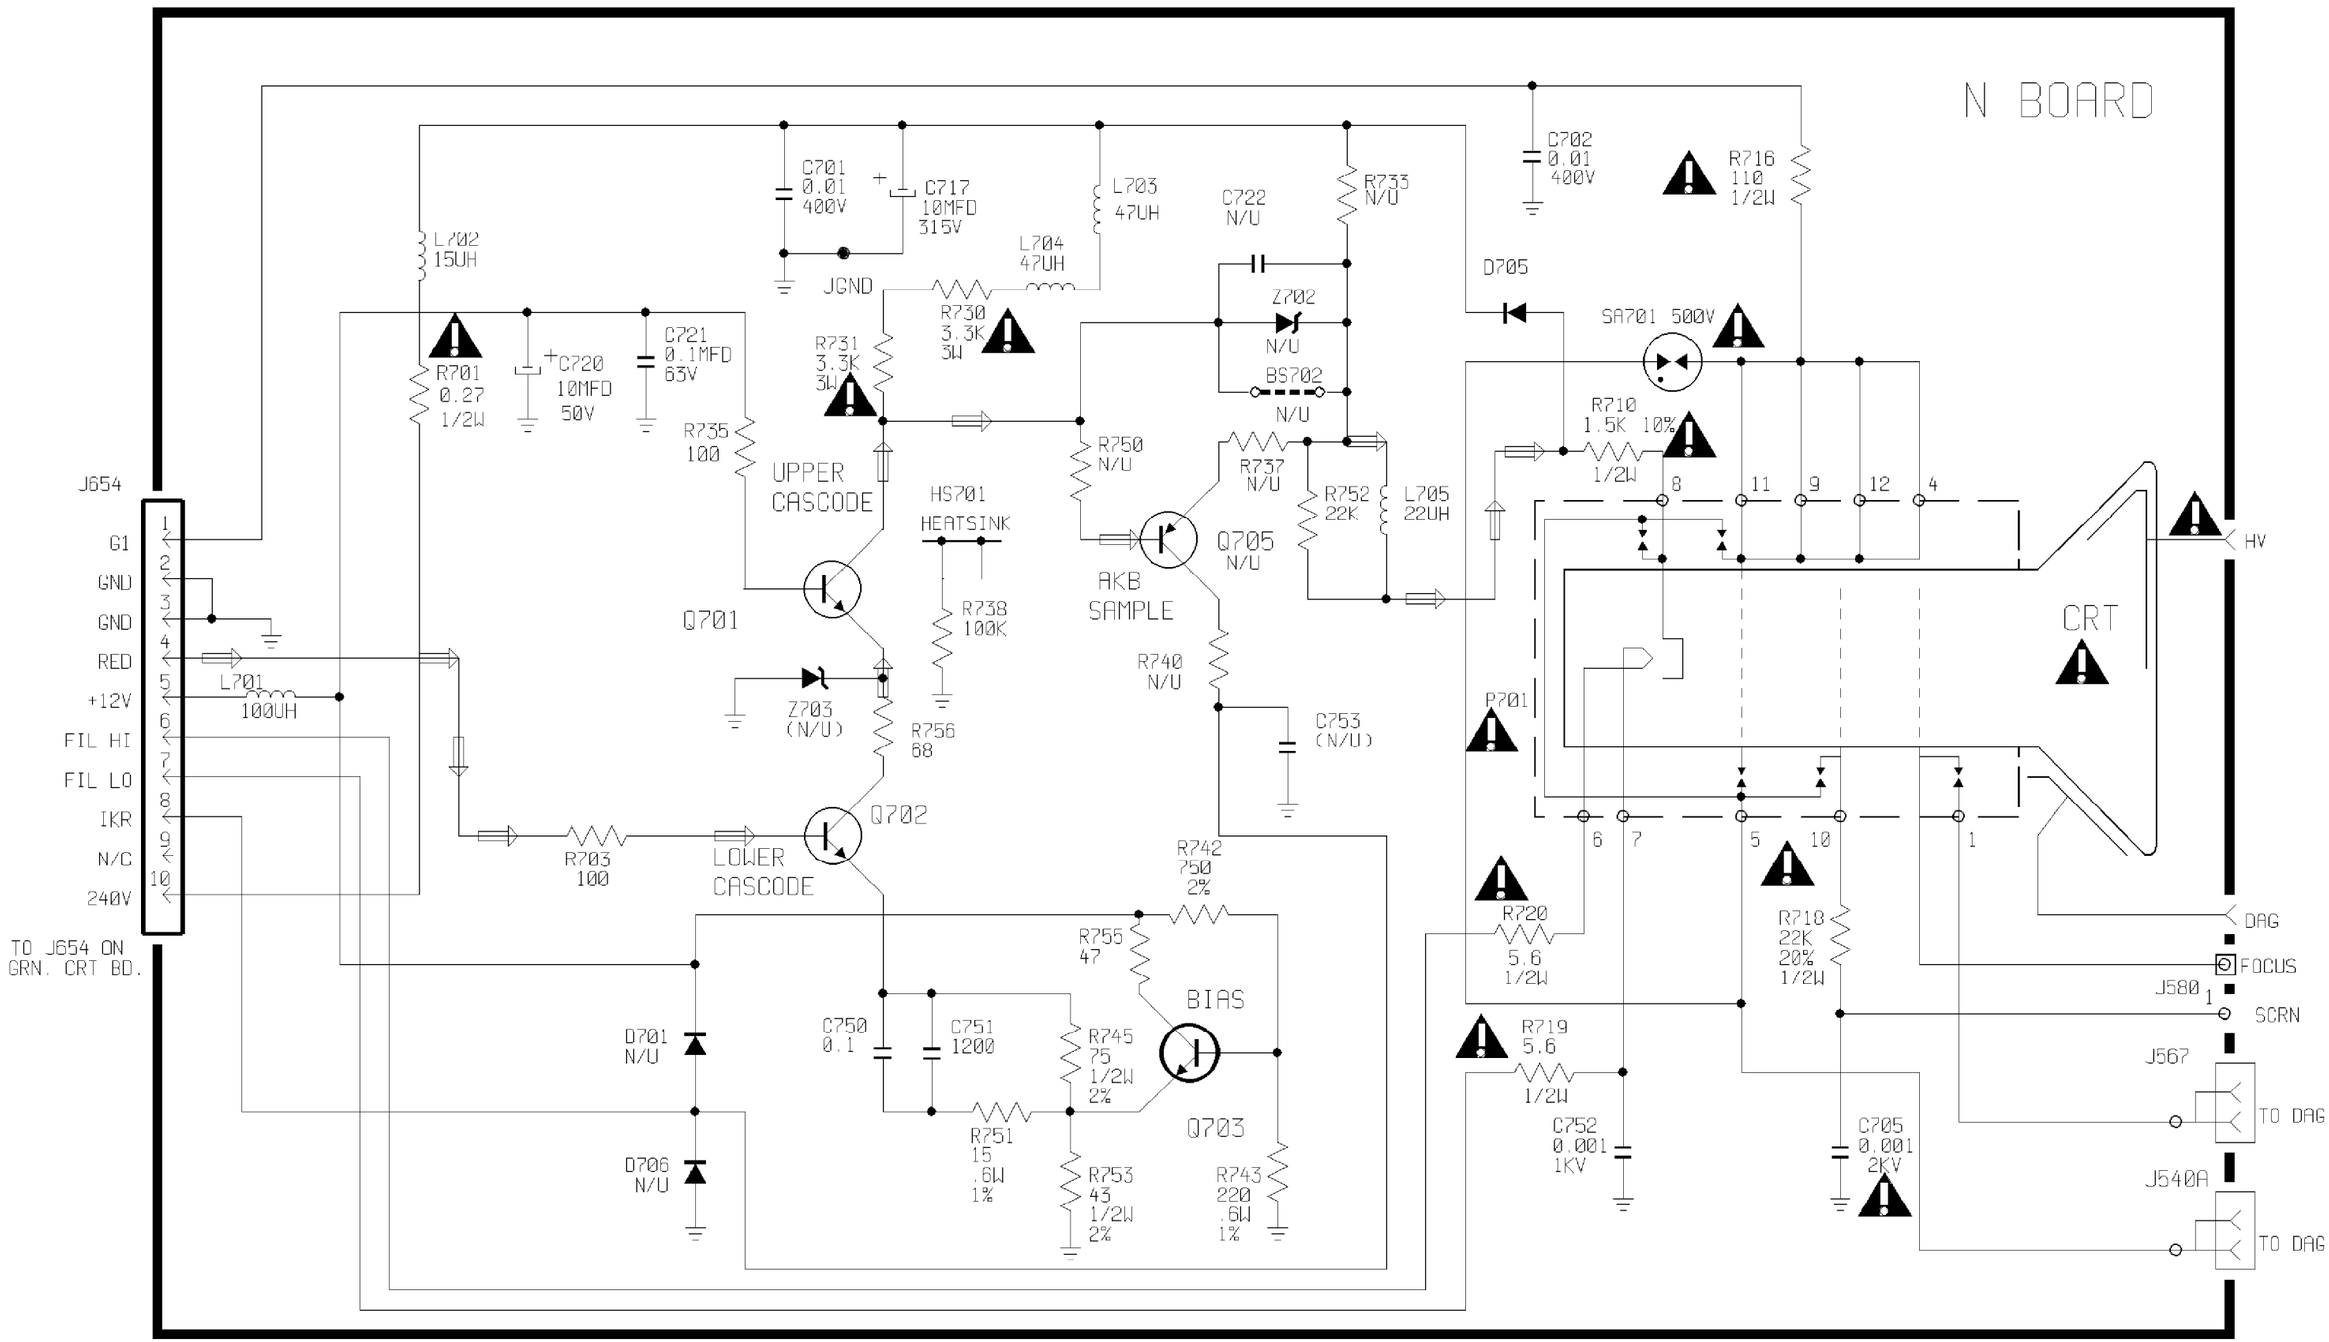

N BOARD
J654
G1
GND
GND
RED
+12V
FIL HI
FIL LO
IKR
N/C
240V
TO J654 ON GRN. CRT BD.
L701 100UH
L702 15UH
R701 0.27 1/2W
C720 10MFD 50V
C721 0.1MFD 63V
R735 100
C701 0.01 400V
C717 10MFD 315V
JGND
L703 47UH
L704 47UH
R730 3.3K 3W
R731 3.3K 3W
UPPER CASCODE
Q701
HS701 HEATSINK
R738 100K
Z703 (N/U)
R756 68
Q702
R703 100
LOWER CASCODE
C722 N/U
R733 N/U
Z702 N/U
BS702 N/U
R750 N/U
R737 N/U
R752 22K
L705 22UH
Q705 N/U
AKB SAMPLE
R740 N/U
C753 (N/U)
R742 750 2%
R755 47
BIAS
Q703
C750 0.1
C751 1200
R745 75 1/2W 2%
R751 15 .6W 1%
R753 43 1/2W 2%
R743 220 .6W 1%
D701 N/U
D706 N/U
C702 0.01 400V
D705
R716 110 1/2W
SA701 500V
R710 1.5K 10% 1/2W
8
11
9
12
4
HV
CRT
R701
6
7
5
10
1
R720 5.6 1/2W
R719 5.6 1/2W
C752 0.001 1KV
R718 22K 20% 1/2W
C705 0.001 2KV
DAG
FOCUS
J580
1
SCRN
J567
TO DAG
J540A
TO DAG

All Models (7573) - GREEN CRT PANEL SCHEMATIC

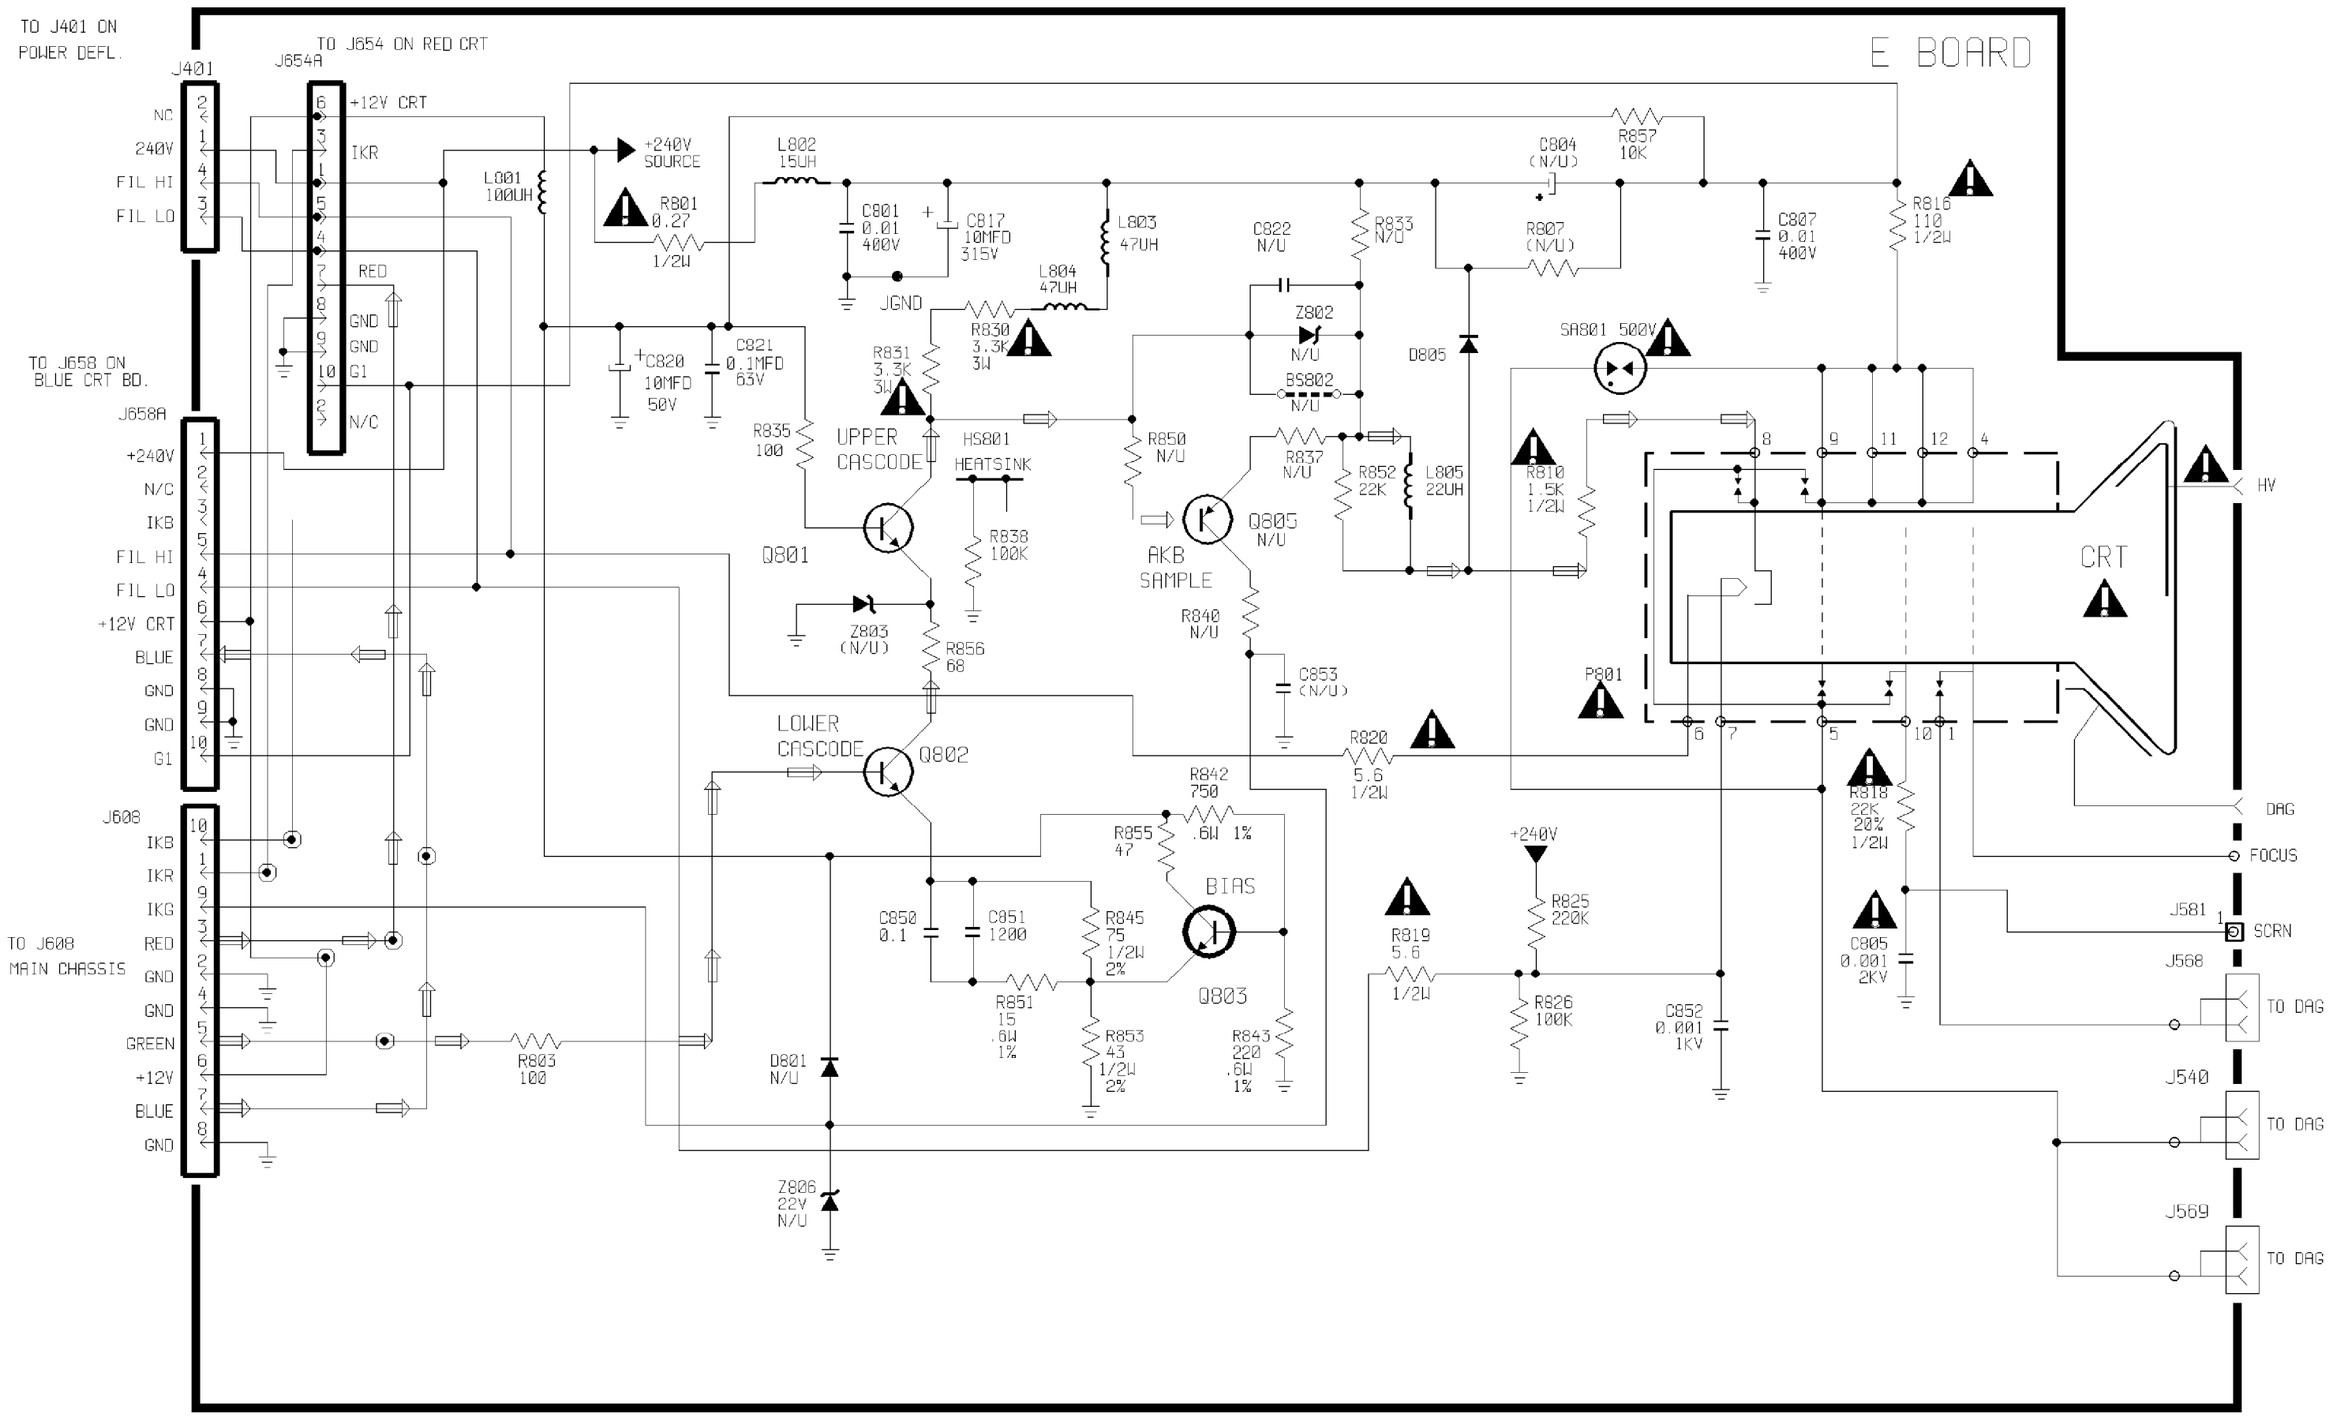


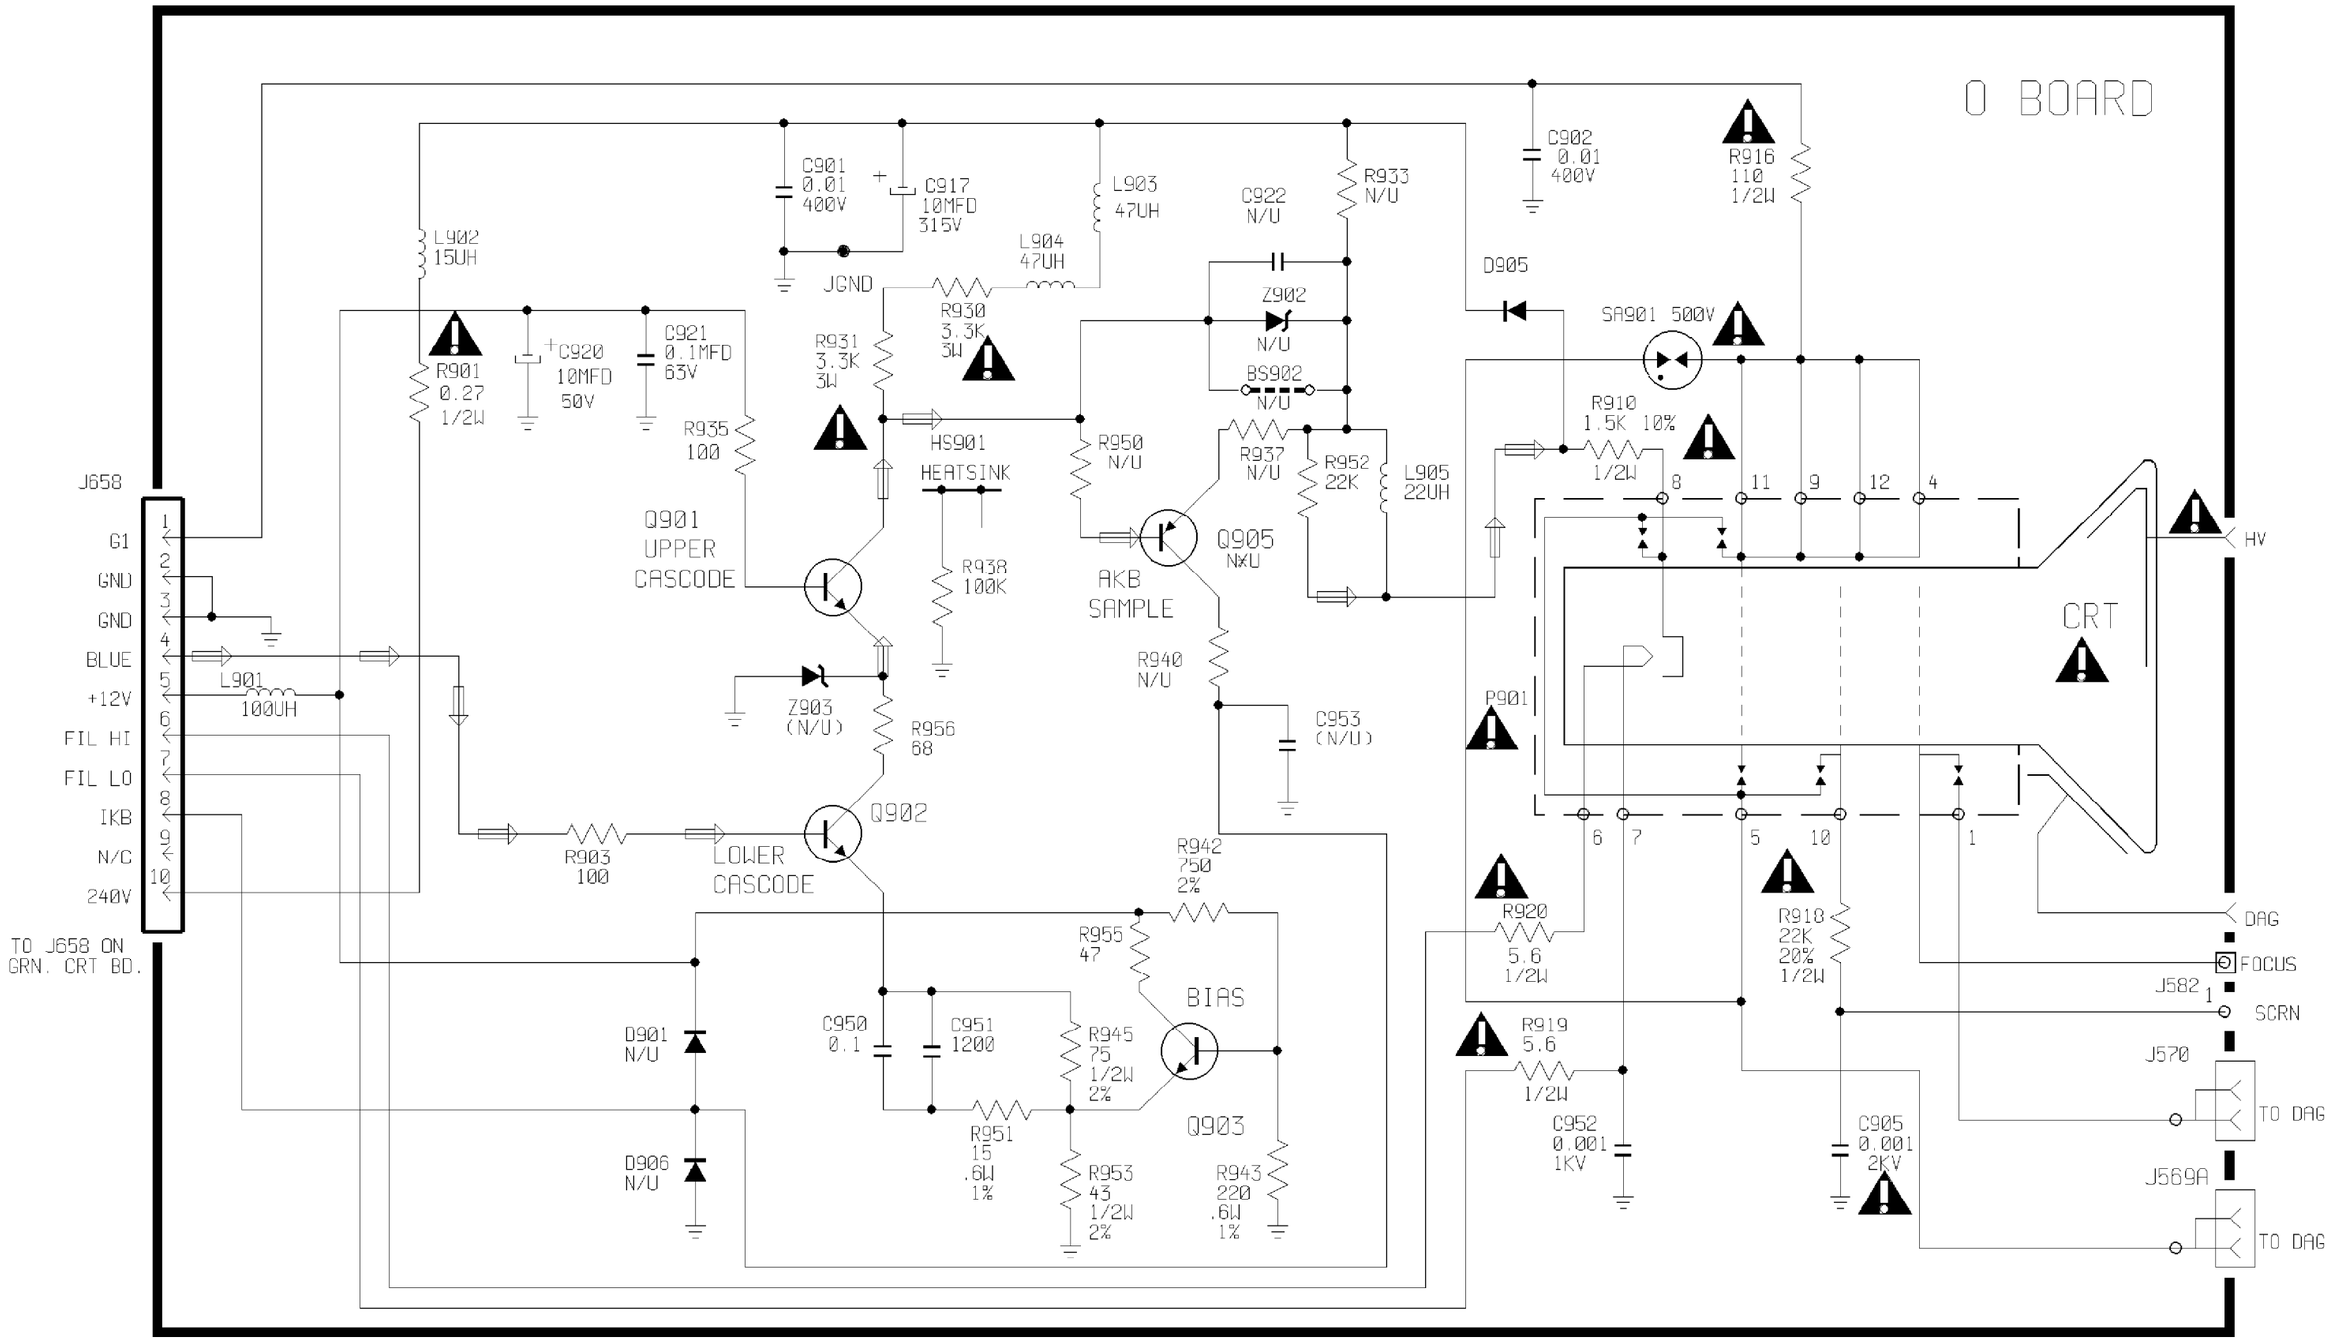
O BOARD
J658
G1
GND
GND
BLUE
+12V
FIL HI
FIL LO
IKB
N/C
240V
TO J658 ON GRN. CRT BD.
L902 15UH
R901 0.27 1/2W
C920 10MFD 50V
C921 0.1MFD 63V
R935 100
C901 0.01 400V
C917 10MFD 315V
JGND
L903 47UH
L904 47UH
R930 3.3K 3W
R931 3.3K 3W
HS901 HEATSINK
Q901 UPPER CASCODE
R938 100K
Z903 (N/U)
R956 68
Q902
R903 100
LOWER CASCODE
L901 100UH
C922 N/U
Z902 N/U
BS902 N/U
R933 N/U
R950 N/U
R937 N/U
R952 22K
L905 22UH
Q905 N/U
AKB SAMPLE
R940 N/U
C953 (N/U)
C902 0.01 400V
D905
R916 110 1/2W
SA901 500V
R910 1.5K 10% 1/2W
8 11 9 12 4
HV
CRT
P901
6 7 5 10 1
R942 750 2%
R955 47
BIAS
Q903
C950 0.1
C951 1200
R945 75 1/2W 2%
R951 15 .6W 1%
R953 43 1/2W 2%
R943 220 .6W 1%
D901 N/U
D906 N/U
R920 5.6 1/2W
R919 5.6 1/2W
C952 0.001 1KV
R918 22K 20% 1/2W
C905 0.001 2KV
DAG
FOCUS
J582 1
SCRN
J570
TO DAG
J569A
TO DAG

USED ONLY IN MODELS: 48PP72A, 48XP43C, 48XP44, 54PP72, 54XP43, 54XP44, 60XP43, MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - 25 WATT AMP SCHEMATIC

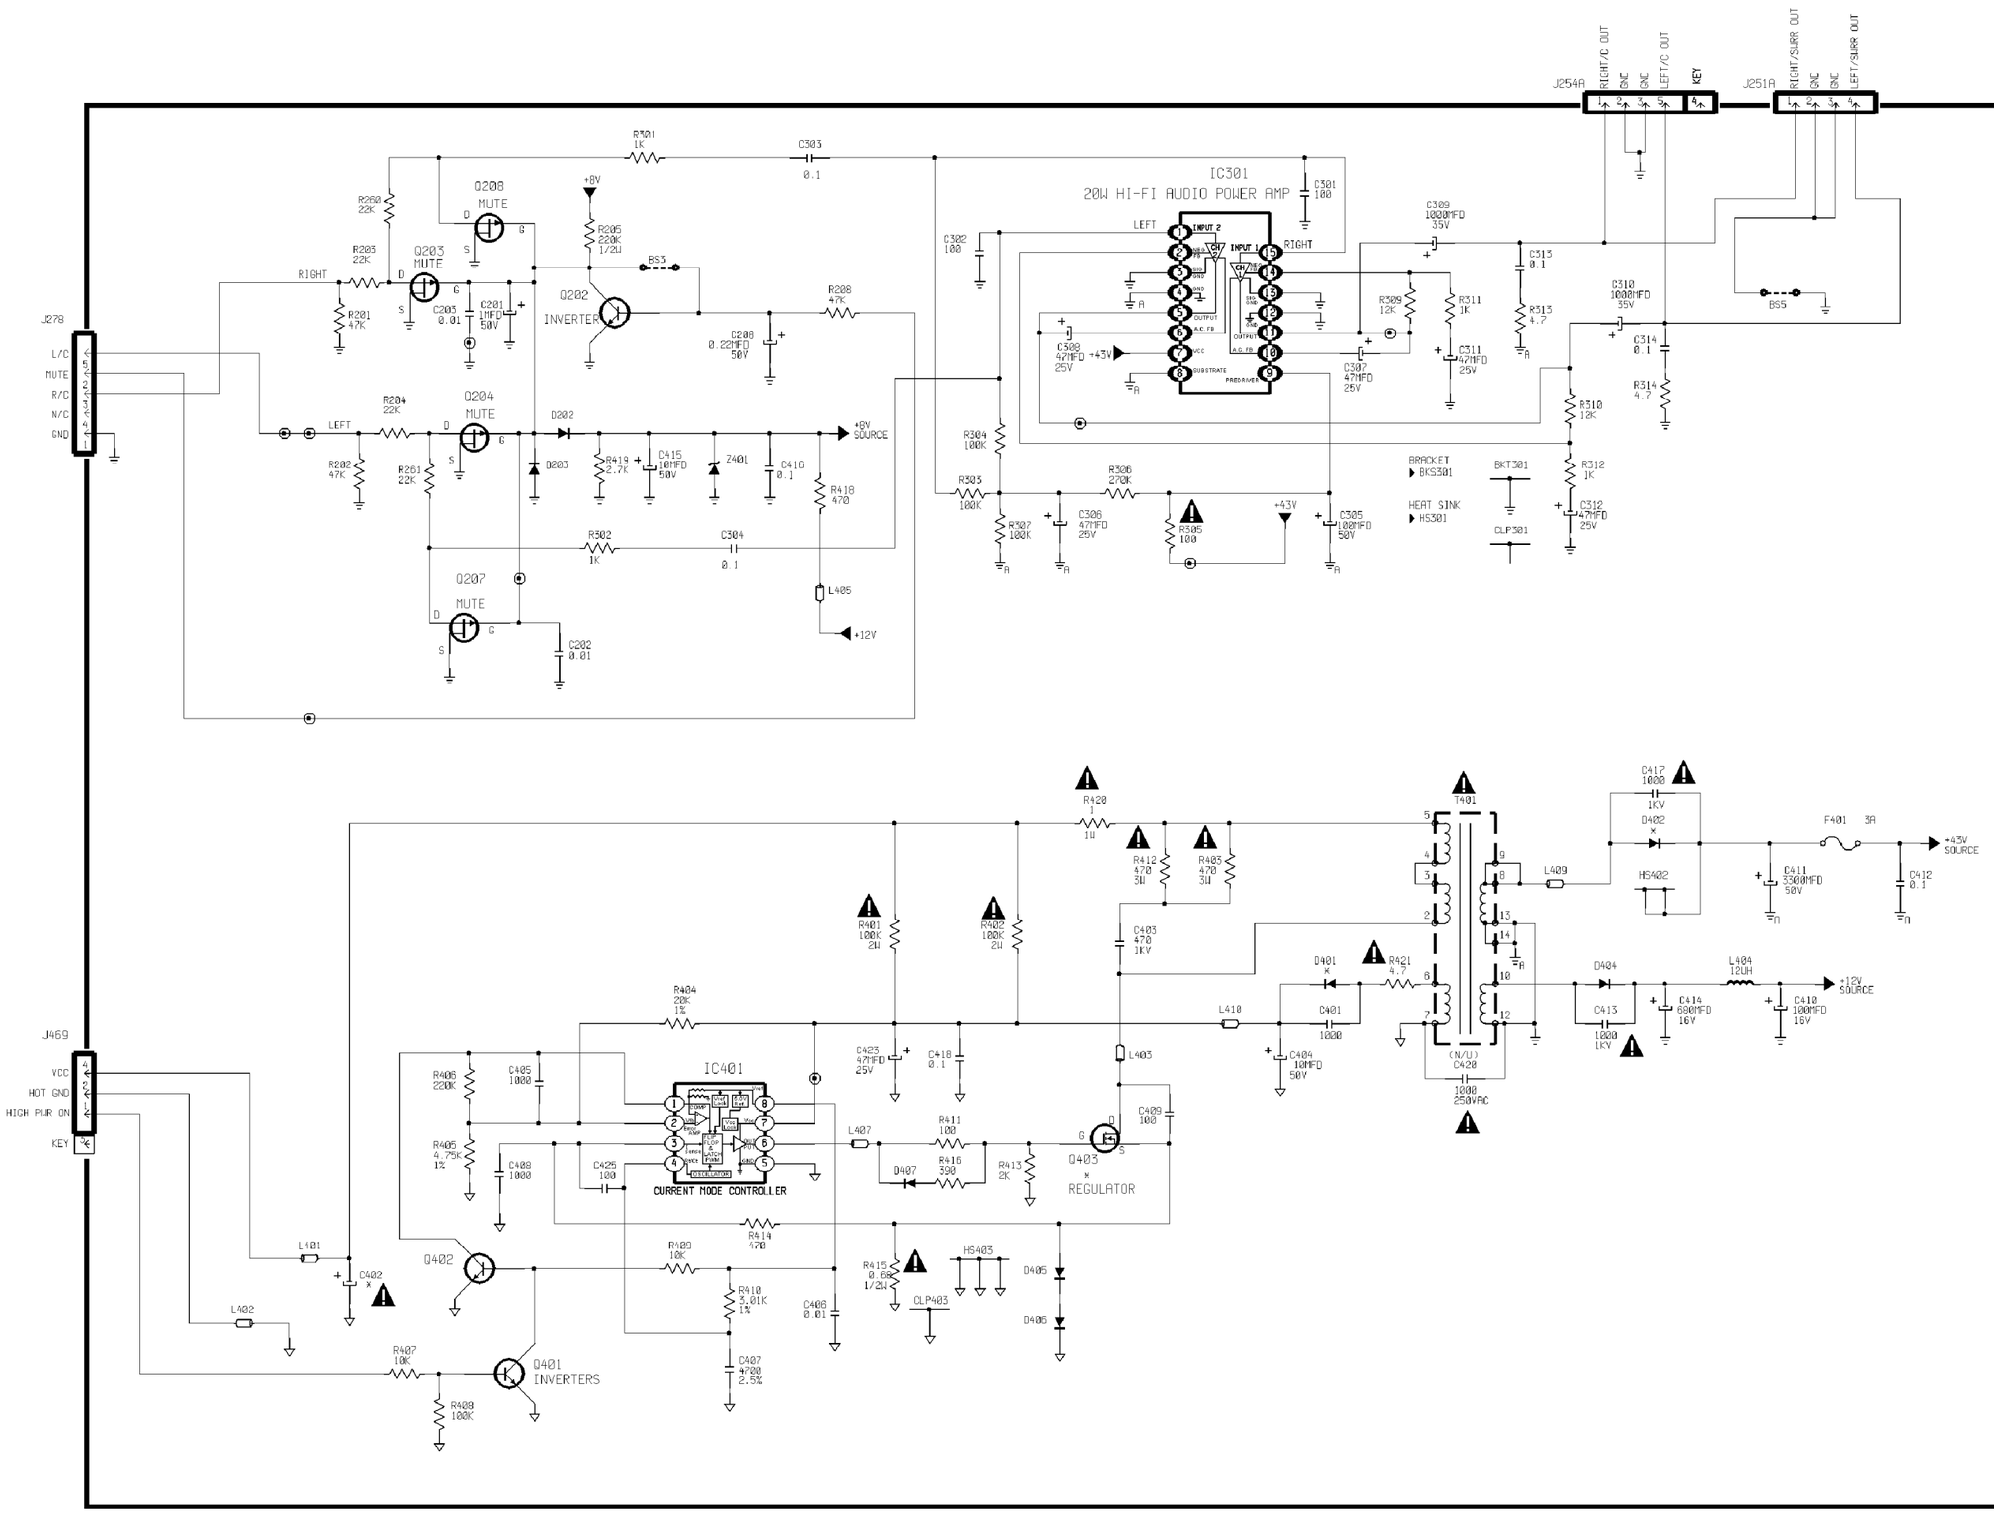

USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - WALLVISION SWITCH PANEL SCHEMATIC

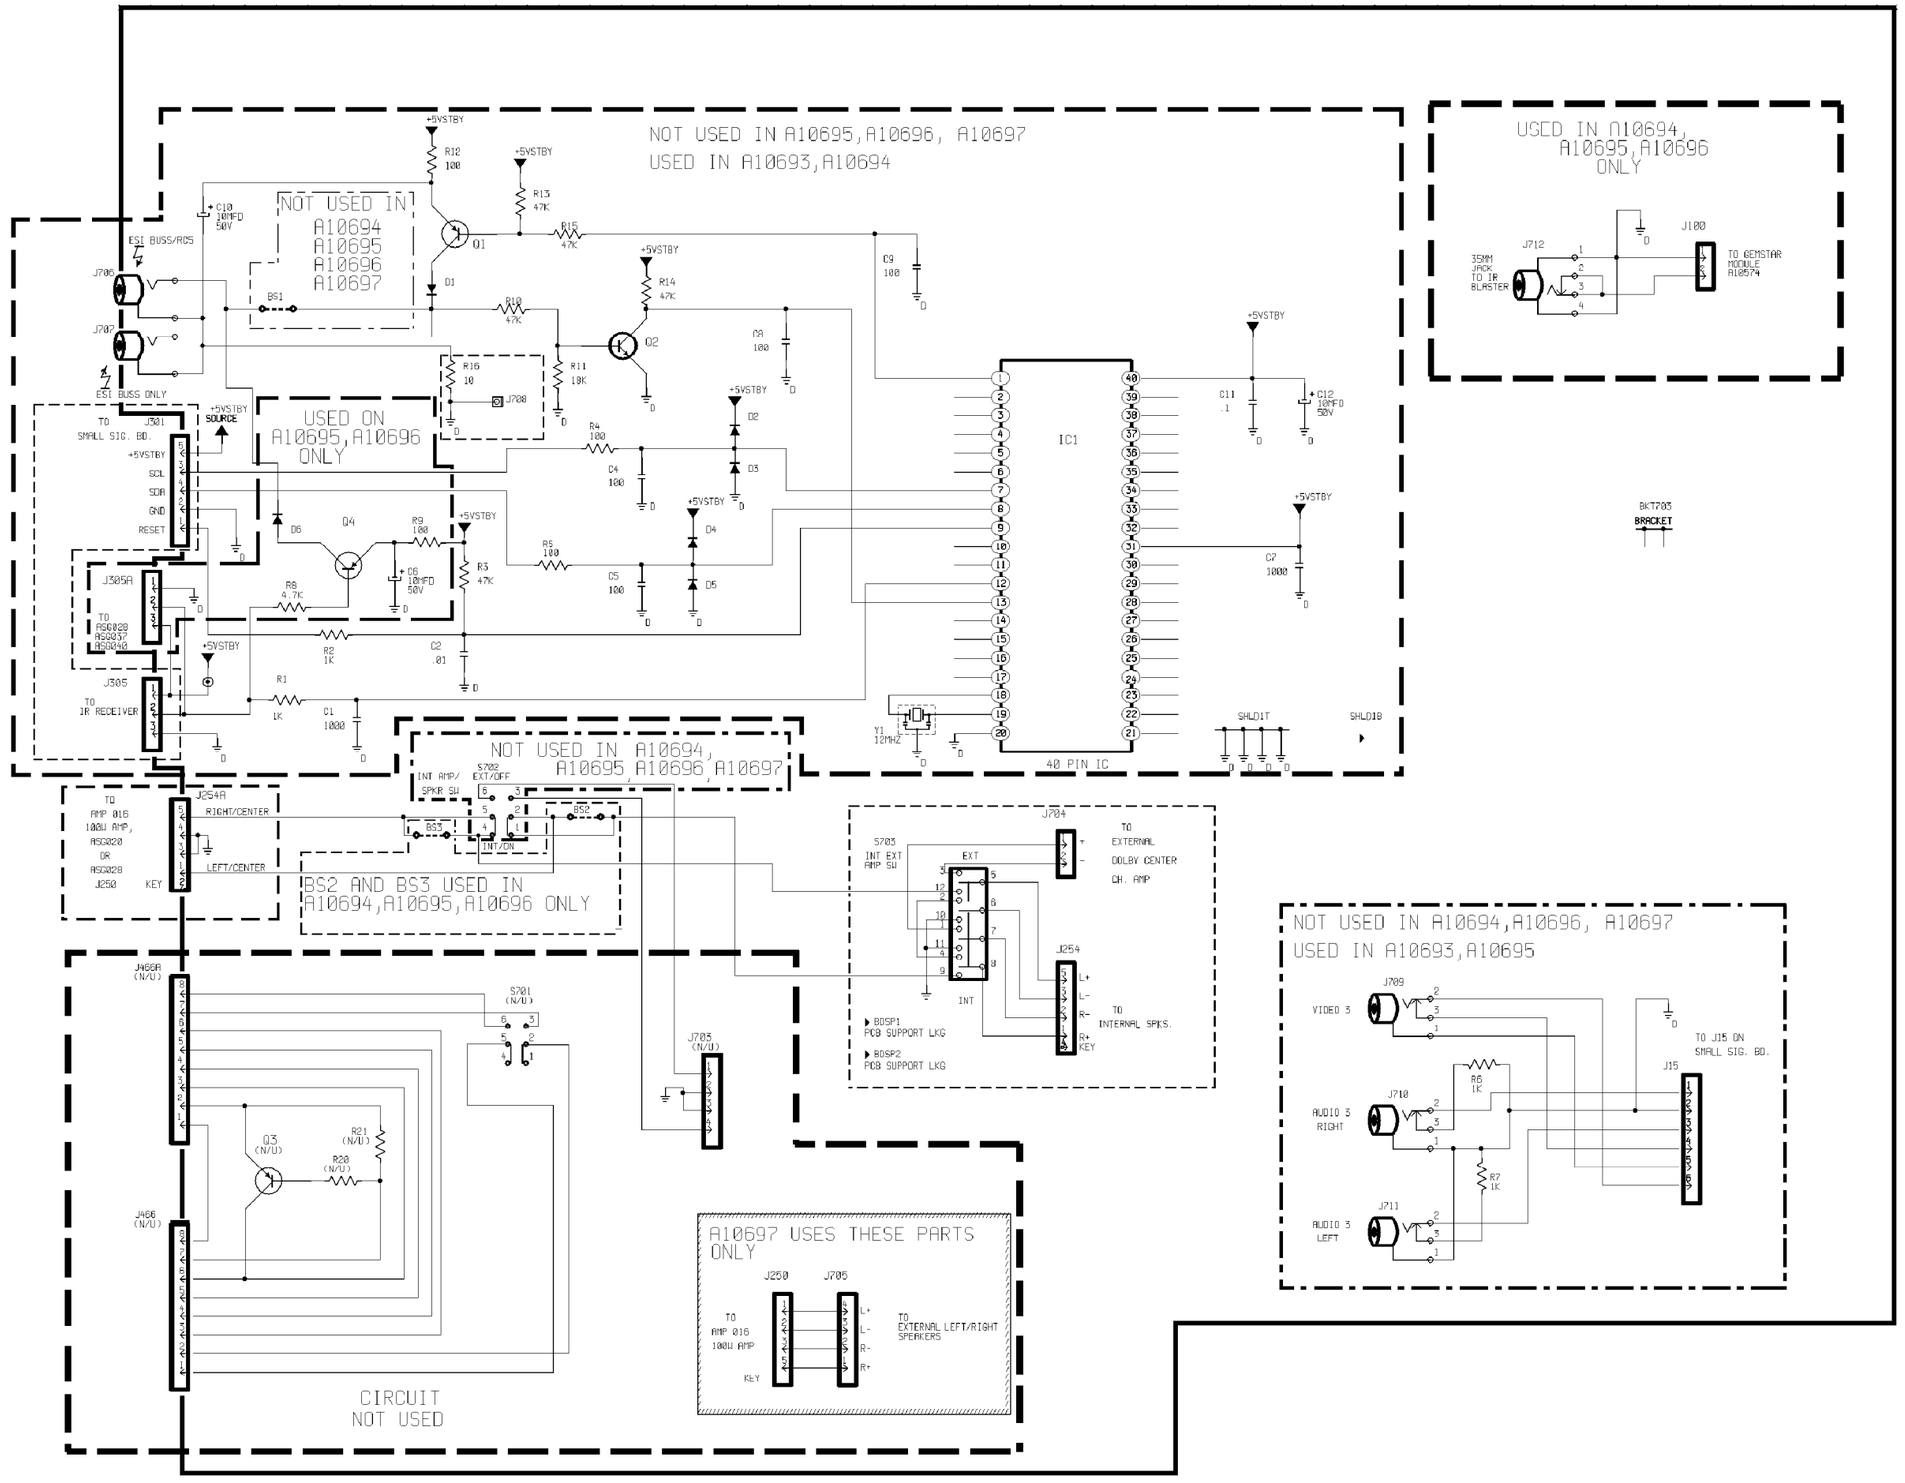

NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C, PV5470, PV6070, XV5270 (7573) - SVM SCHEMATIC

SVM MODULE SCHEMATIC

3135 013 3029

Z board

J751 +130V +15V FB VIDEO

+130V SOURCE

+15V SOURCE

Q751 BC548

Q753 BC558

Q754 BC548

Q755 BC548

Q756 BC548

Q757 BC337-25

Q758 BC327-25

Q759 588-1

Q760 589-1

Q761 BC548

D751 1N4148

D752 1N4148

D753 1N4148

D760 IN4148

D761 356-3

D762 356-3

FB751

FB752

HS76 HEATSINK

L751 3.3UH USED WITH 2 TUBE ONLY

L752 10UH

J752


J753

J754 USED WITH 3 TUBE ONLY


DKT1 BRACKET


	3 TUBE USA	2 TUBE USA
	A10690	A10707
L751	N/U	USED
J754	USED	N/U


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - STEREO SPREAD MODULE SCHEMATIC

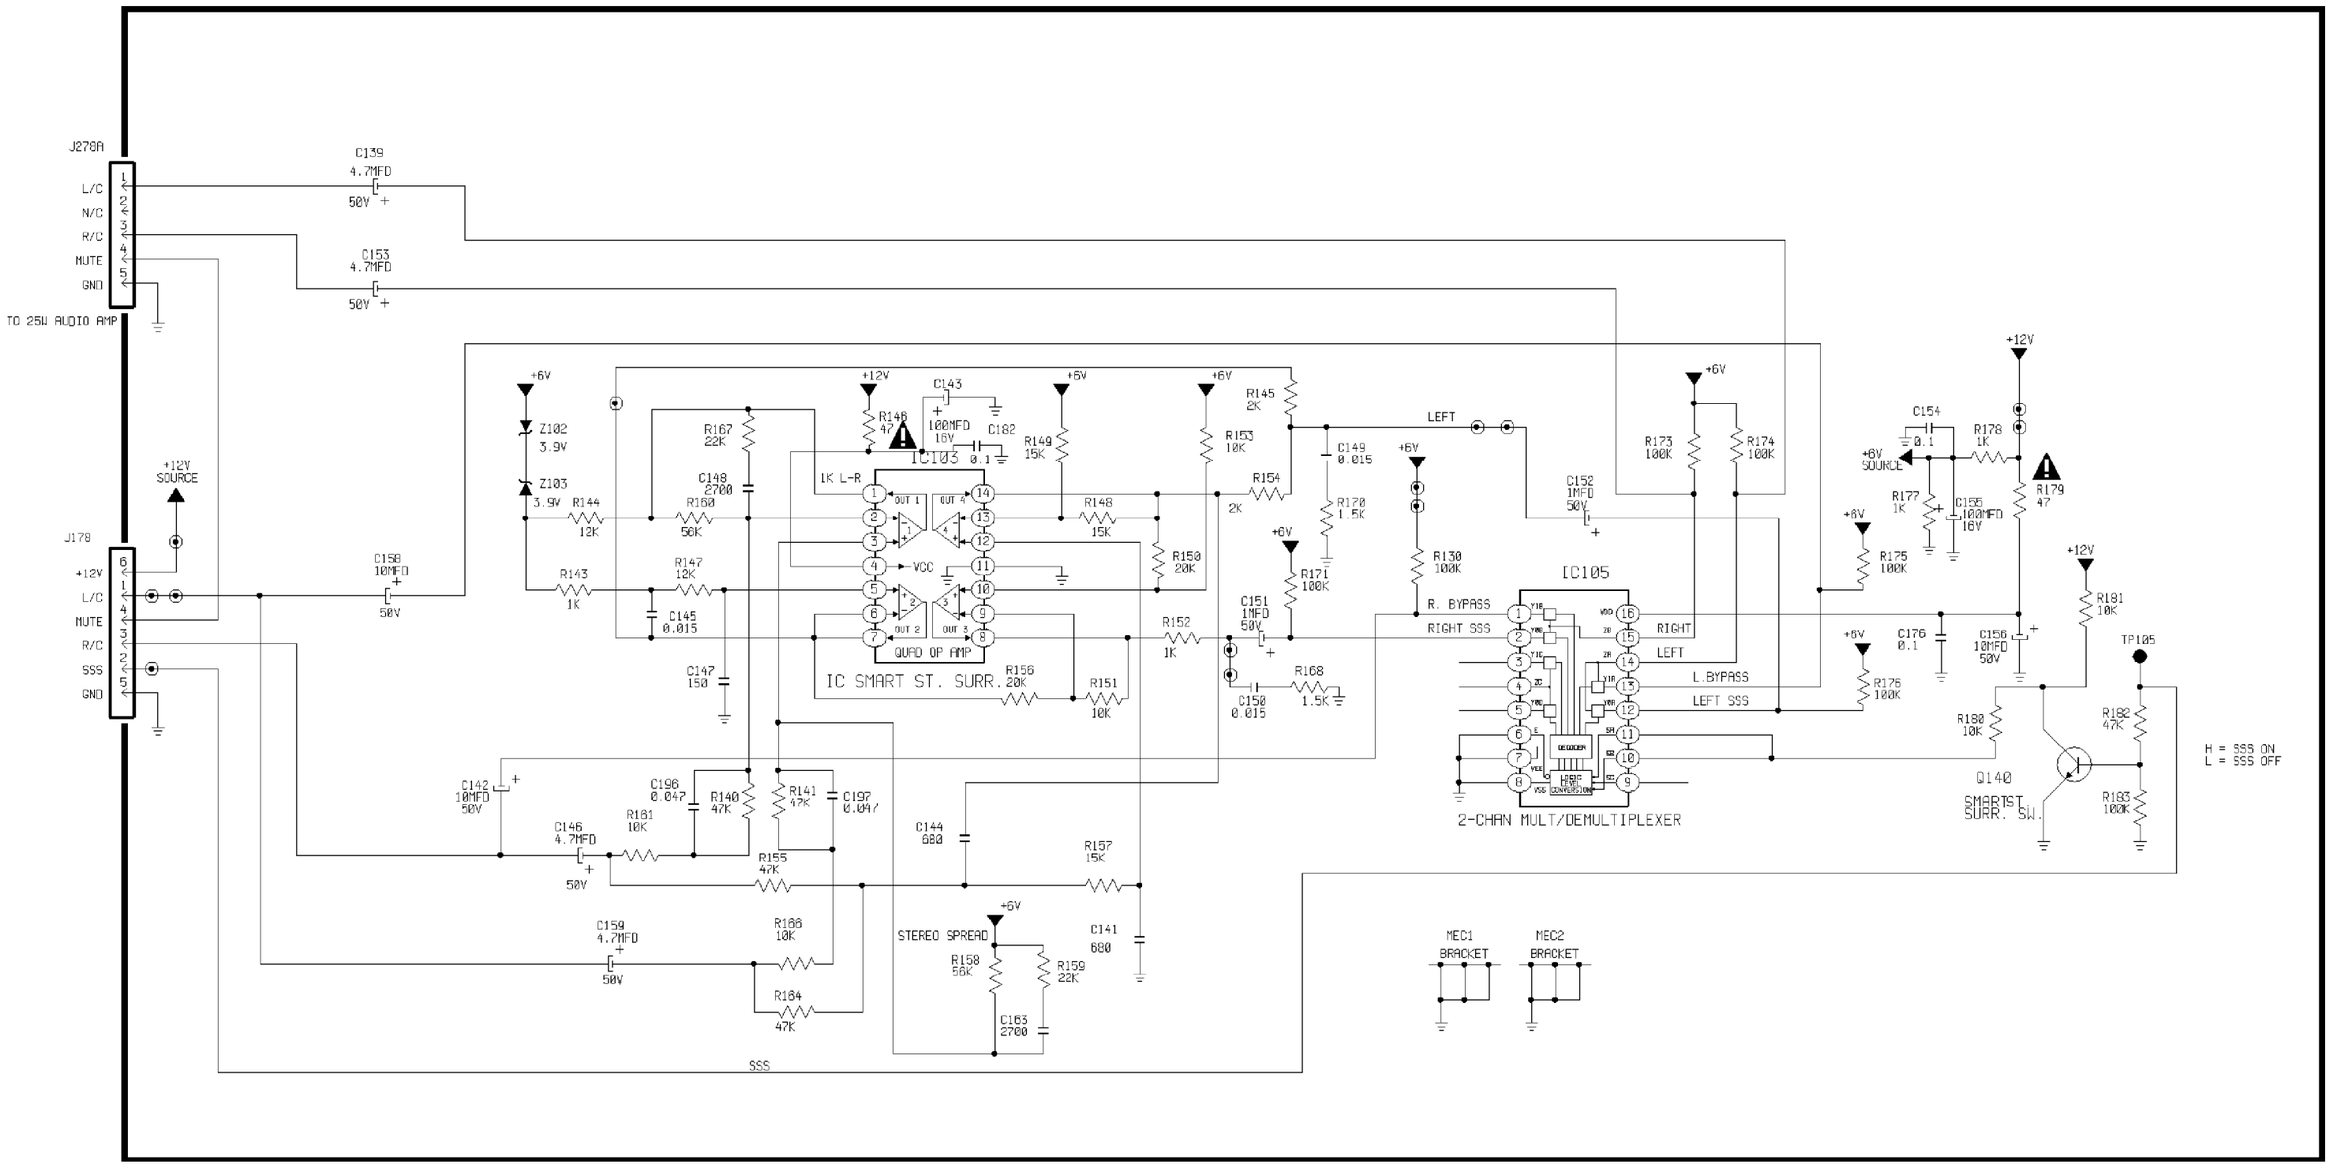


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - GUIDE PLUS SCHEMATIC

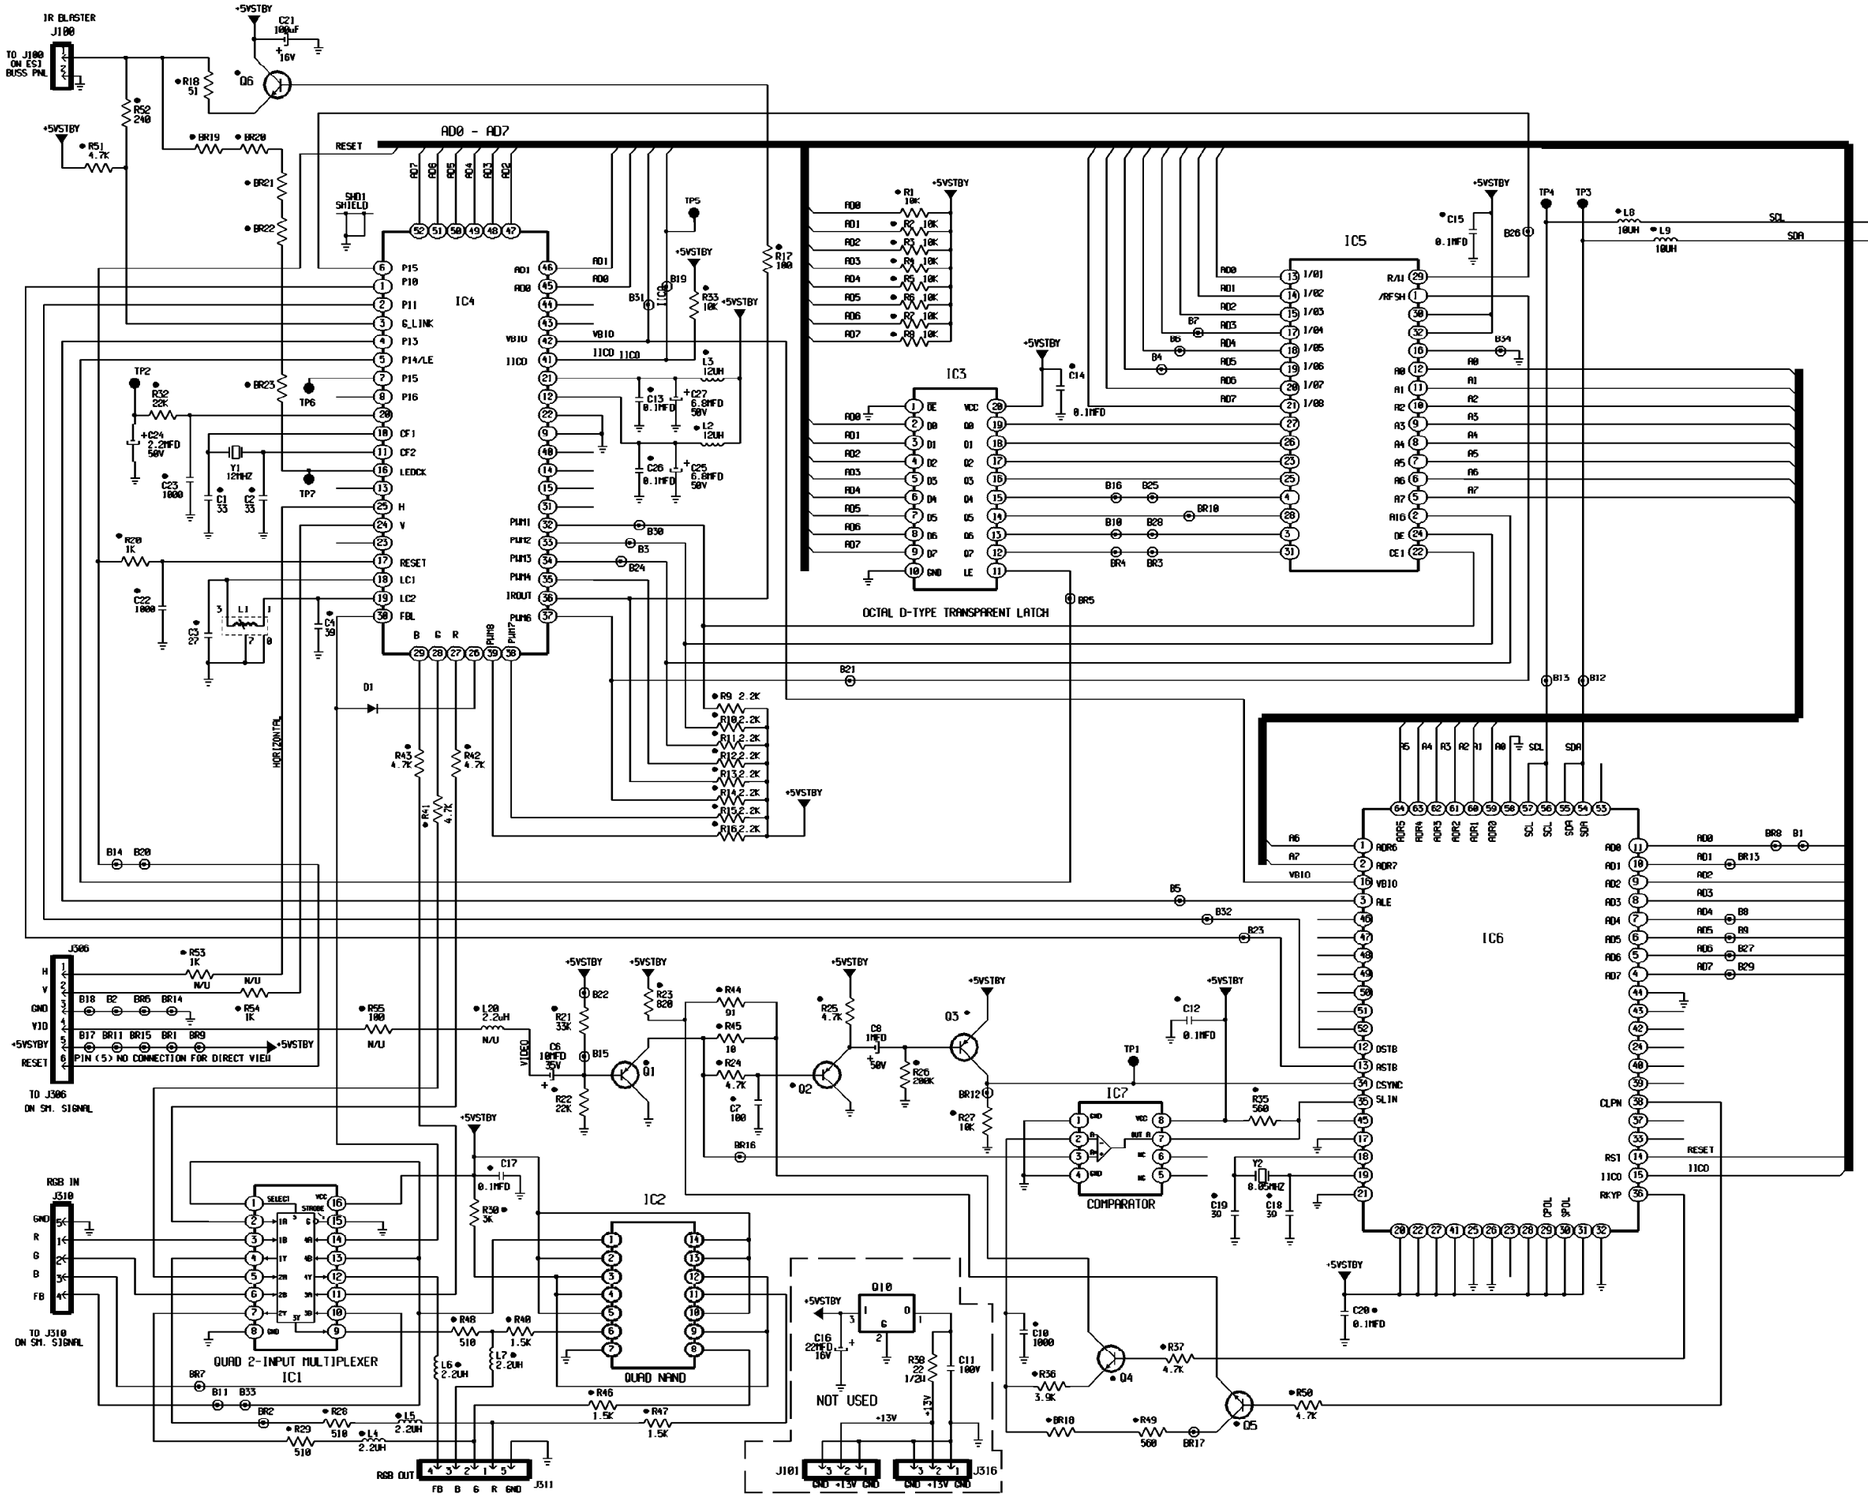

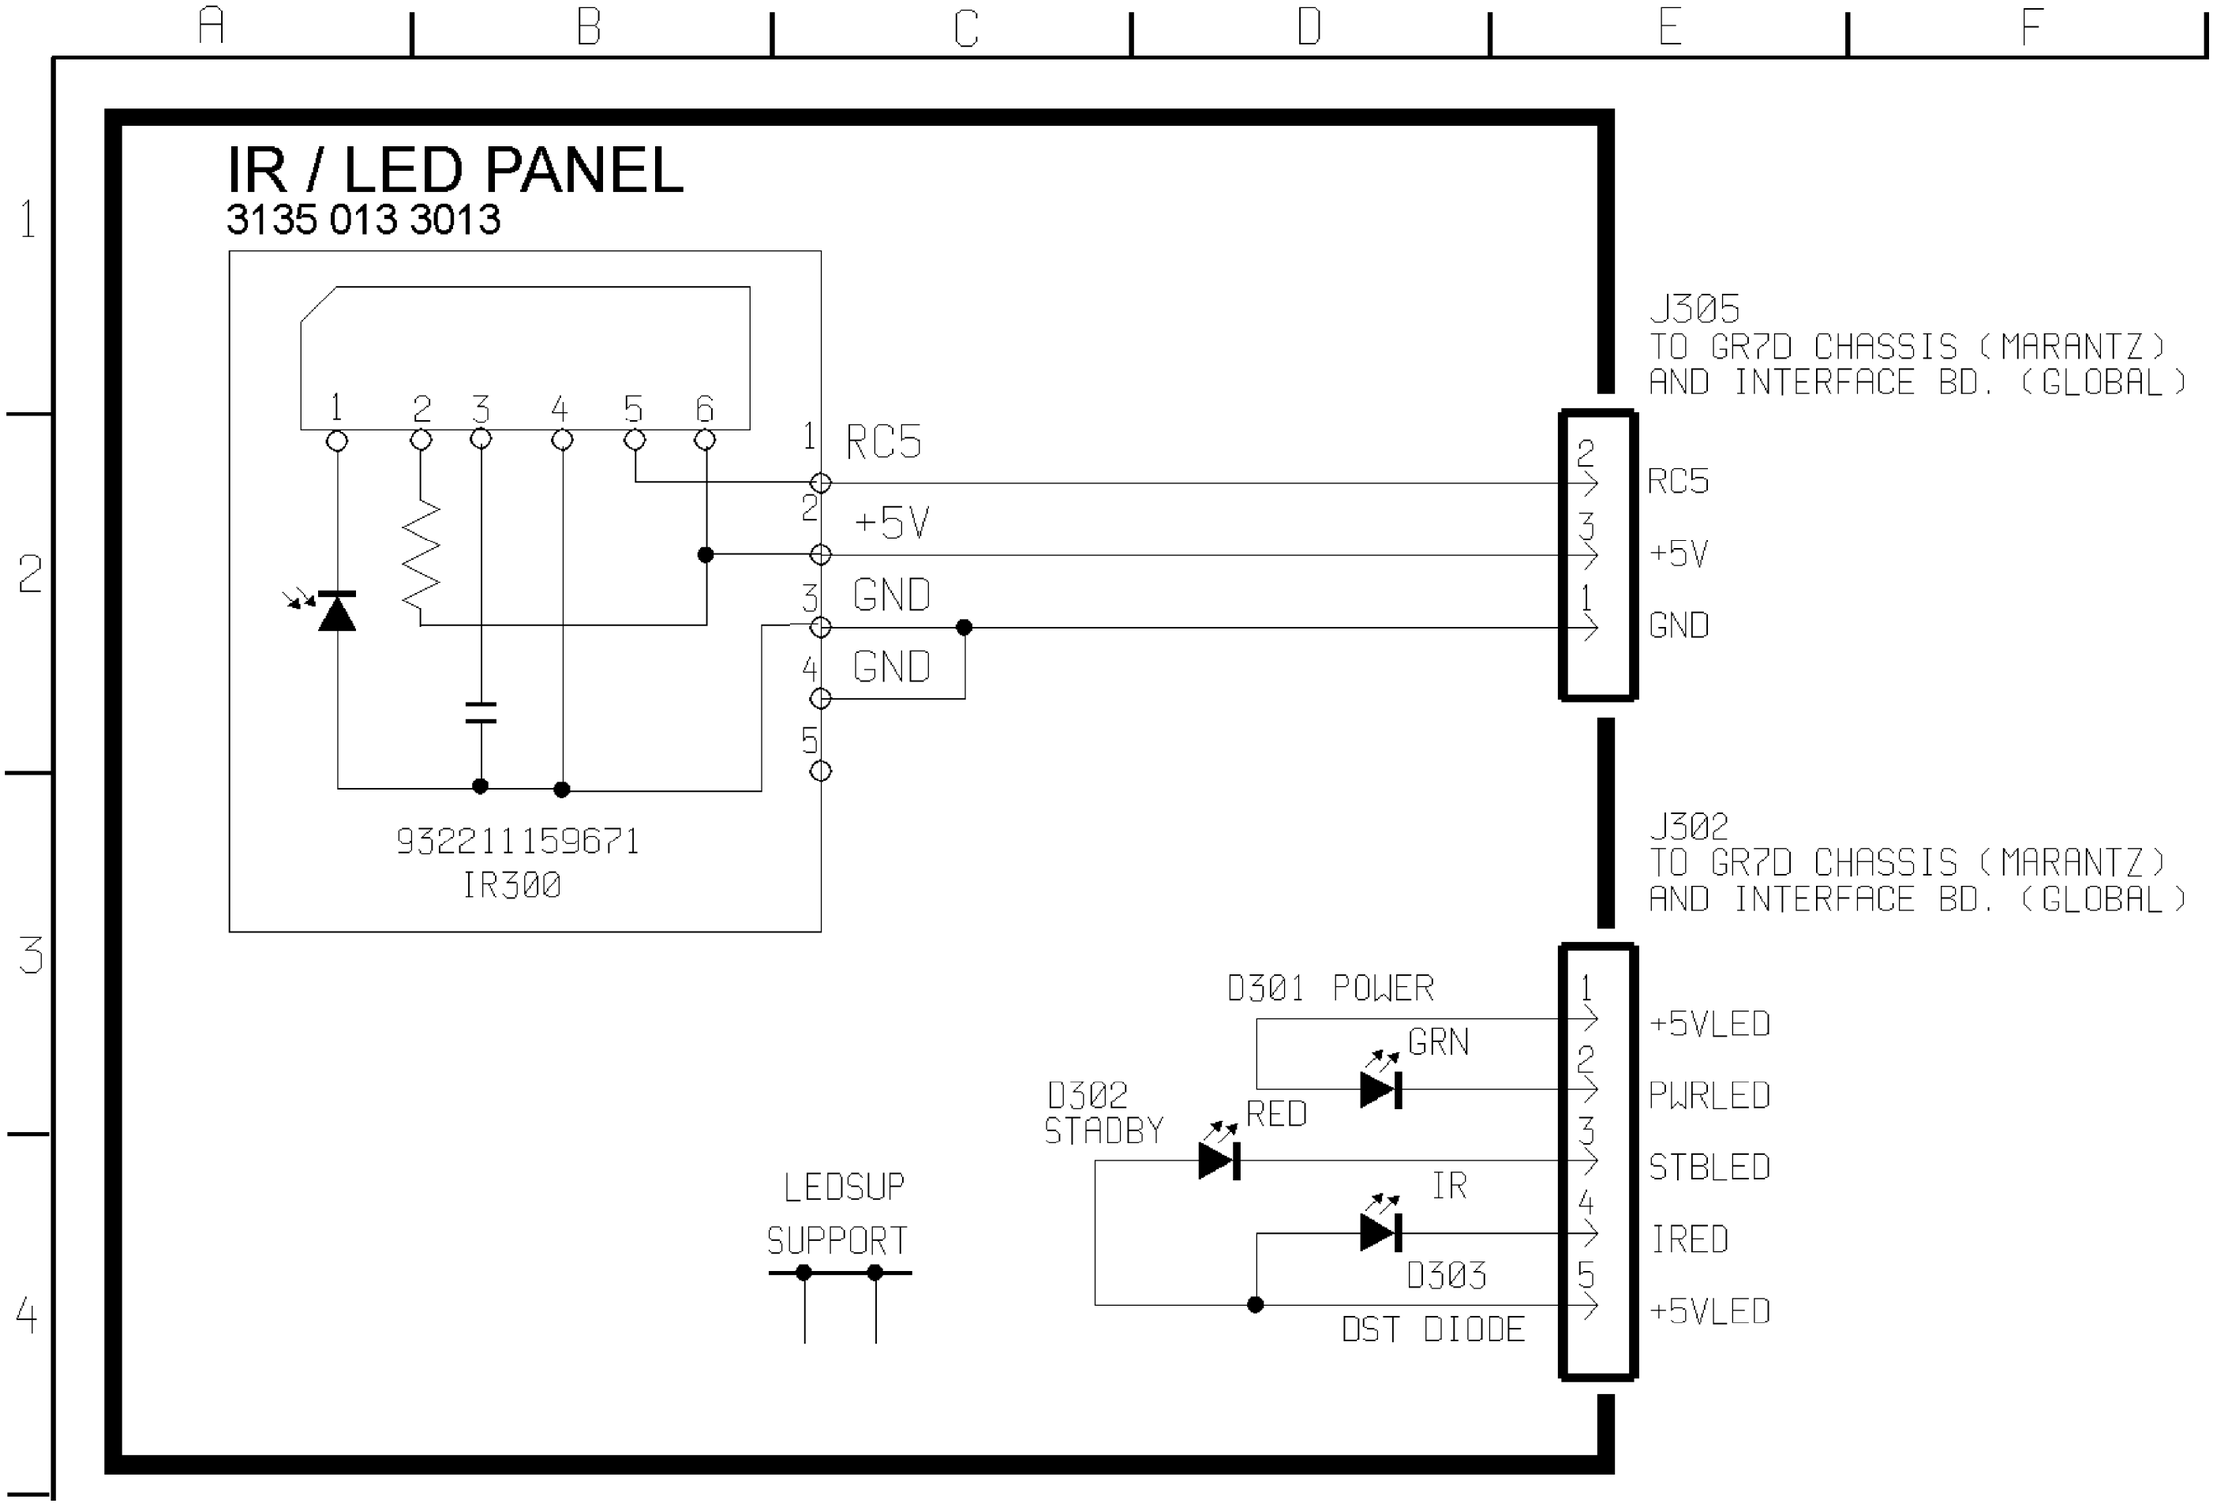

A
B
C
D
E
F
1
2
3
4
IR / LED PANEL
3135 013 3013
1 2 3 4 5 6
1 RC5
2 +5V
3 GND
4 GND
5
932211159671
IR300
J305
TO GR7D CHASSIS (MARANTZ)
AND INTERFACE BD. (GLOBAL)
2 RC5
3 +5V
1 GND
J302
TO GR7D CHASSIS (MARANTZ)
AND INTERFACE BD. (GLOBAL)
D301 POWER
GRN
D302
STADBY
RED
IR
D303
DST DIODE
LEDSUP
SUPPORT
1 +5VLED
2 PWRLED
3 STBLED
4 IRED
5 +5VLED

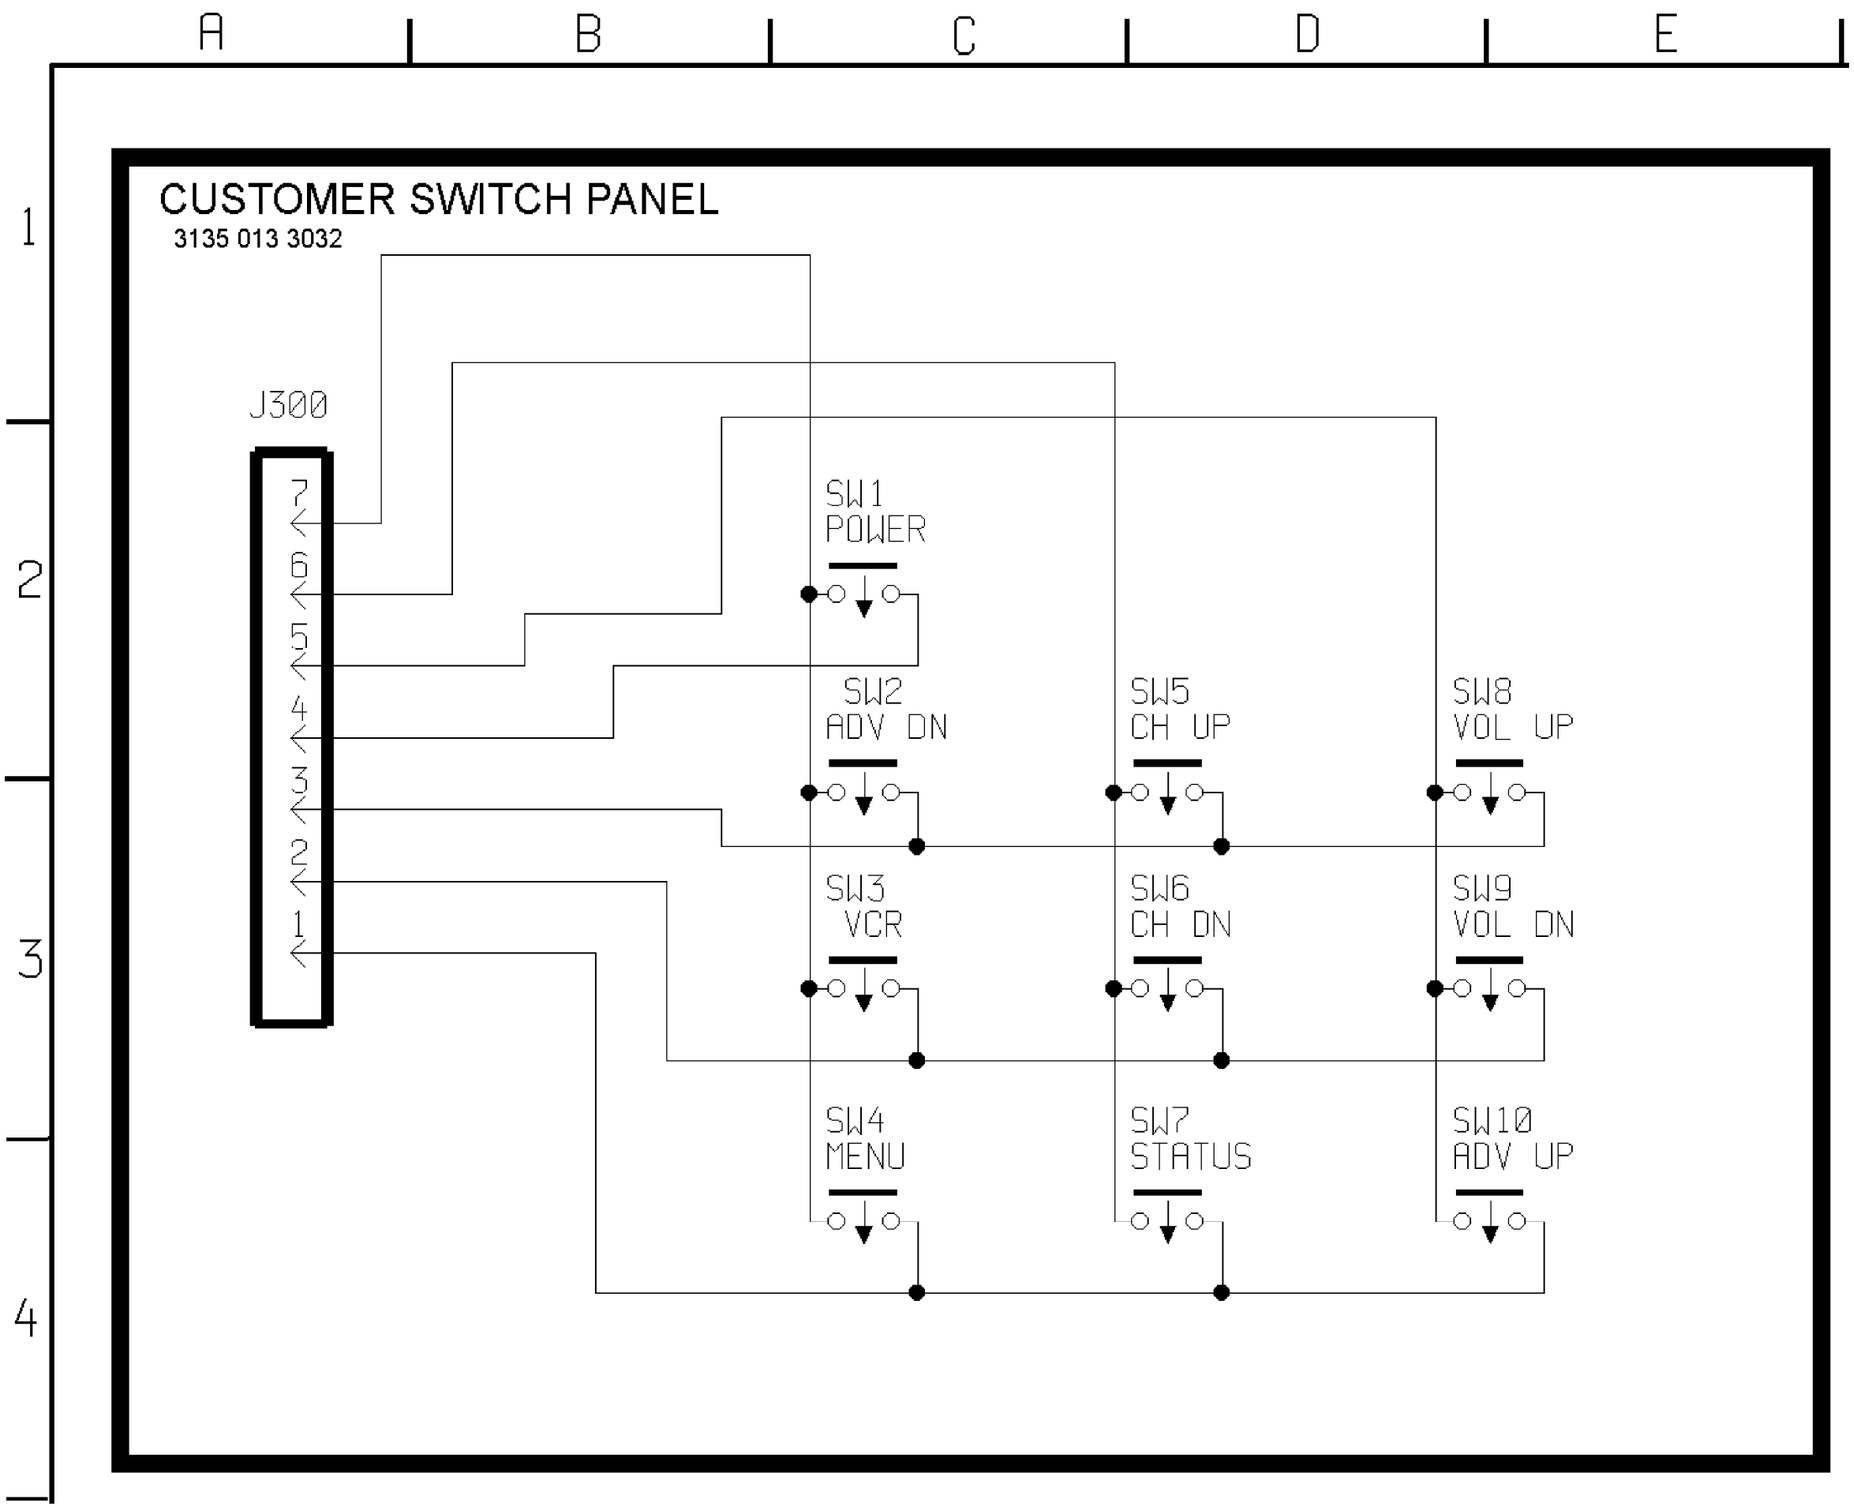
A
B
C
D
E
1
2
3
4
CUSTOMER SWITCH PANEL
3135 013 3032
J300
7
6
5
4
3
2
1
SW1
POWER
SW2
ADV DN
SW3
VCR
SW4
MENU
SW5
CH UP
SW6
CH DN
SW7
STATUS
SW8
VOL UP
SW9
VOL DN
SW10
ADV UP


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, PV5470, PV6070 (7573) - REMOTE LOCATOR SCHEMATIC

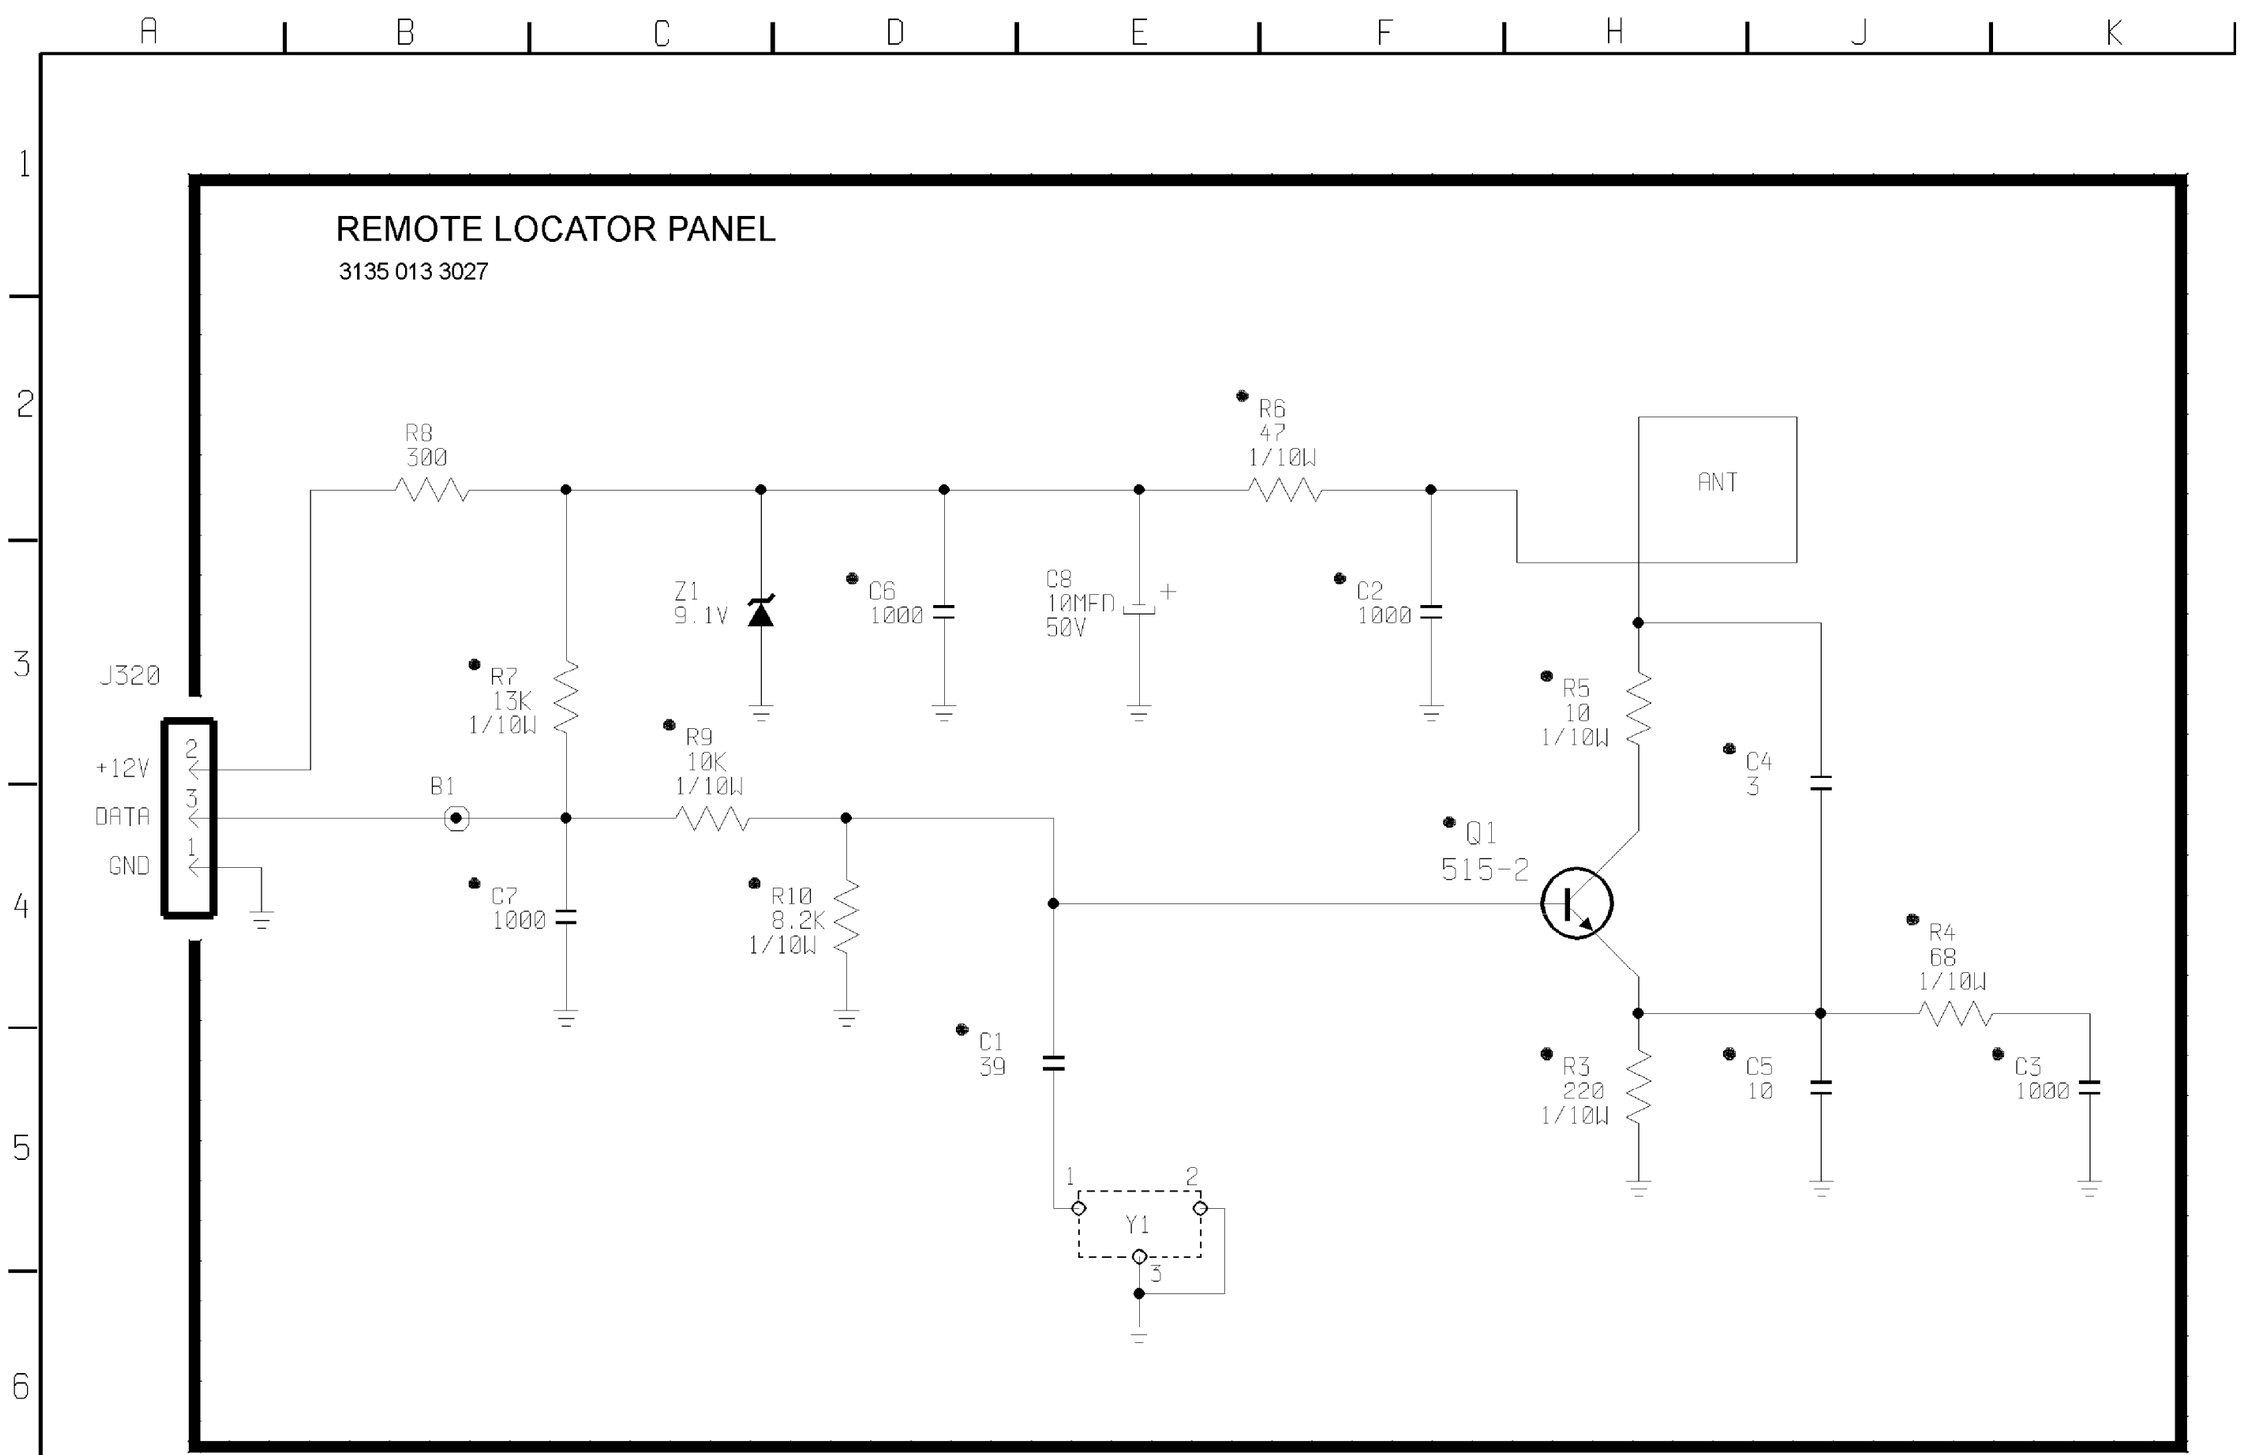


USED ONLY IN MODELS: 48PP72A, 48XP43C, 48XP44, 54PP72, 54XP43, 54XP44, 60XP43, MX5472C, MX6072C, MX6472C, PV5470, PV6070 (7573) - FRONT JACK PANEL SCHEMATIC

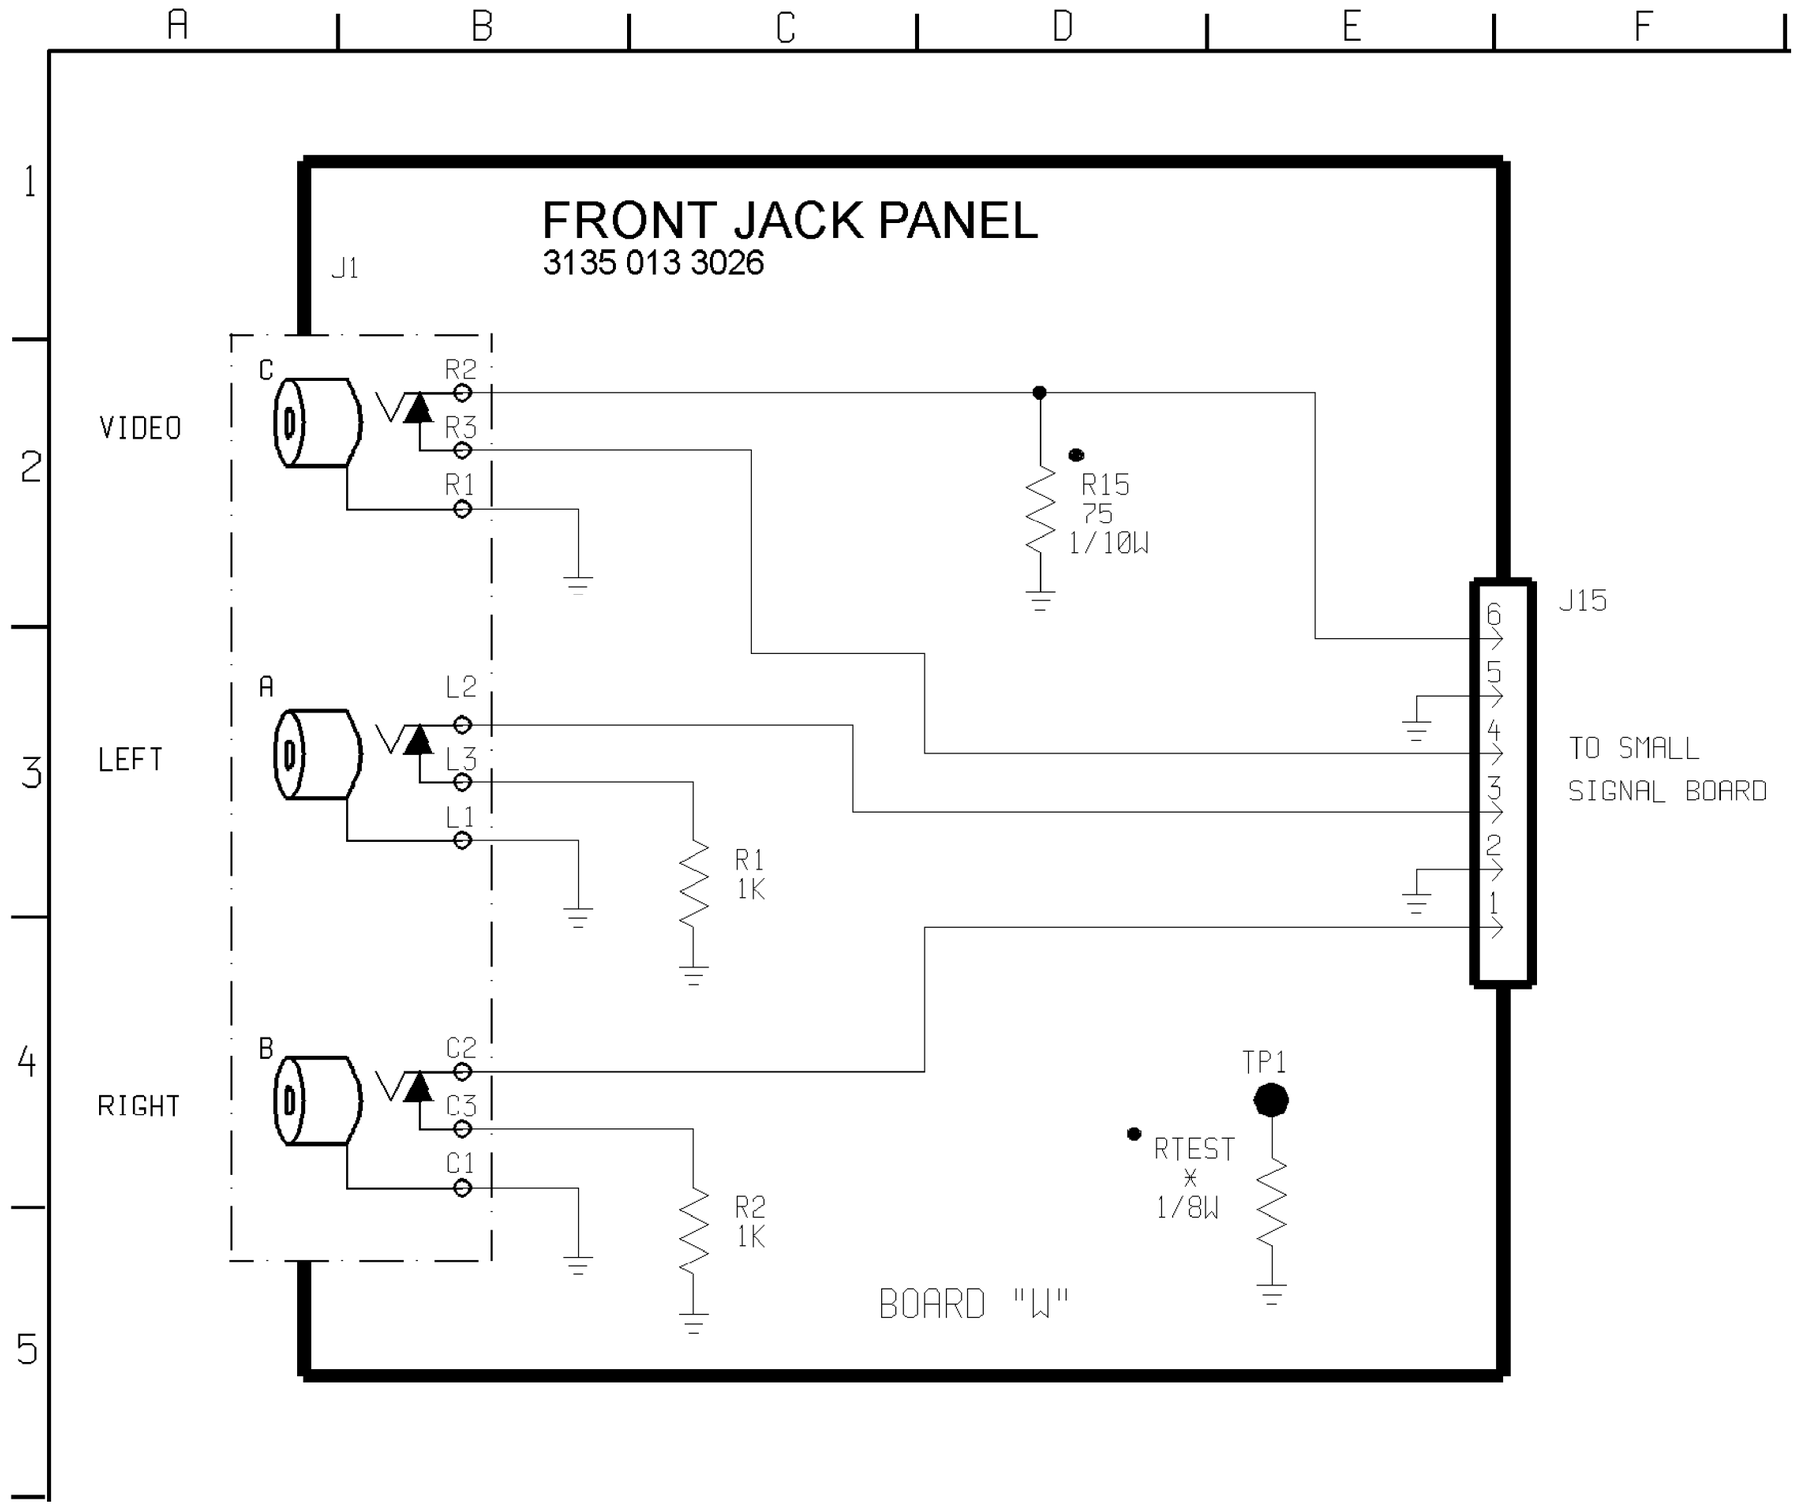


USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - CBA (TOP VIEW)

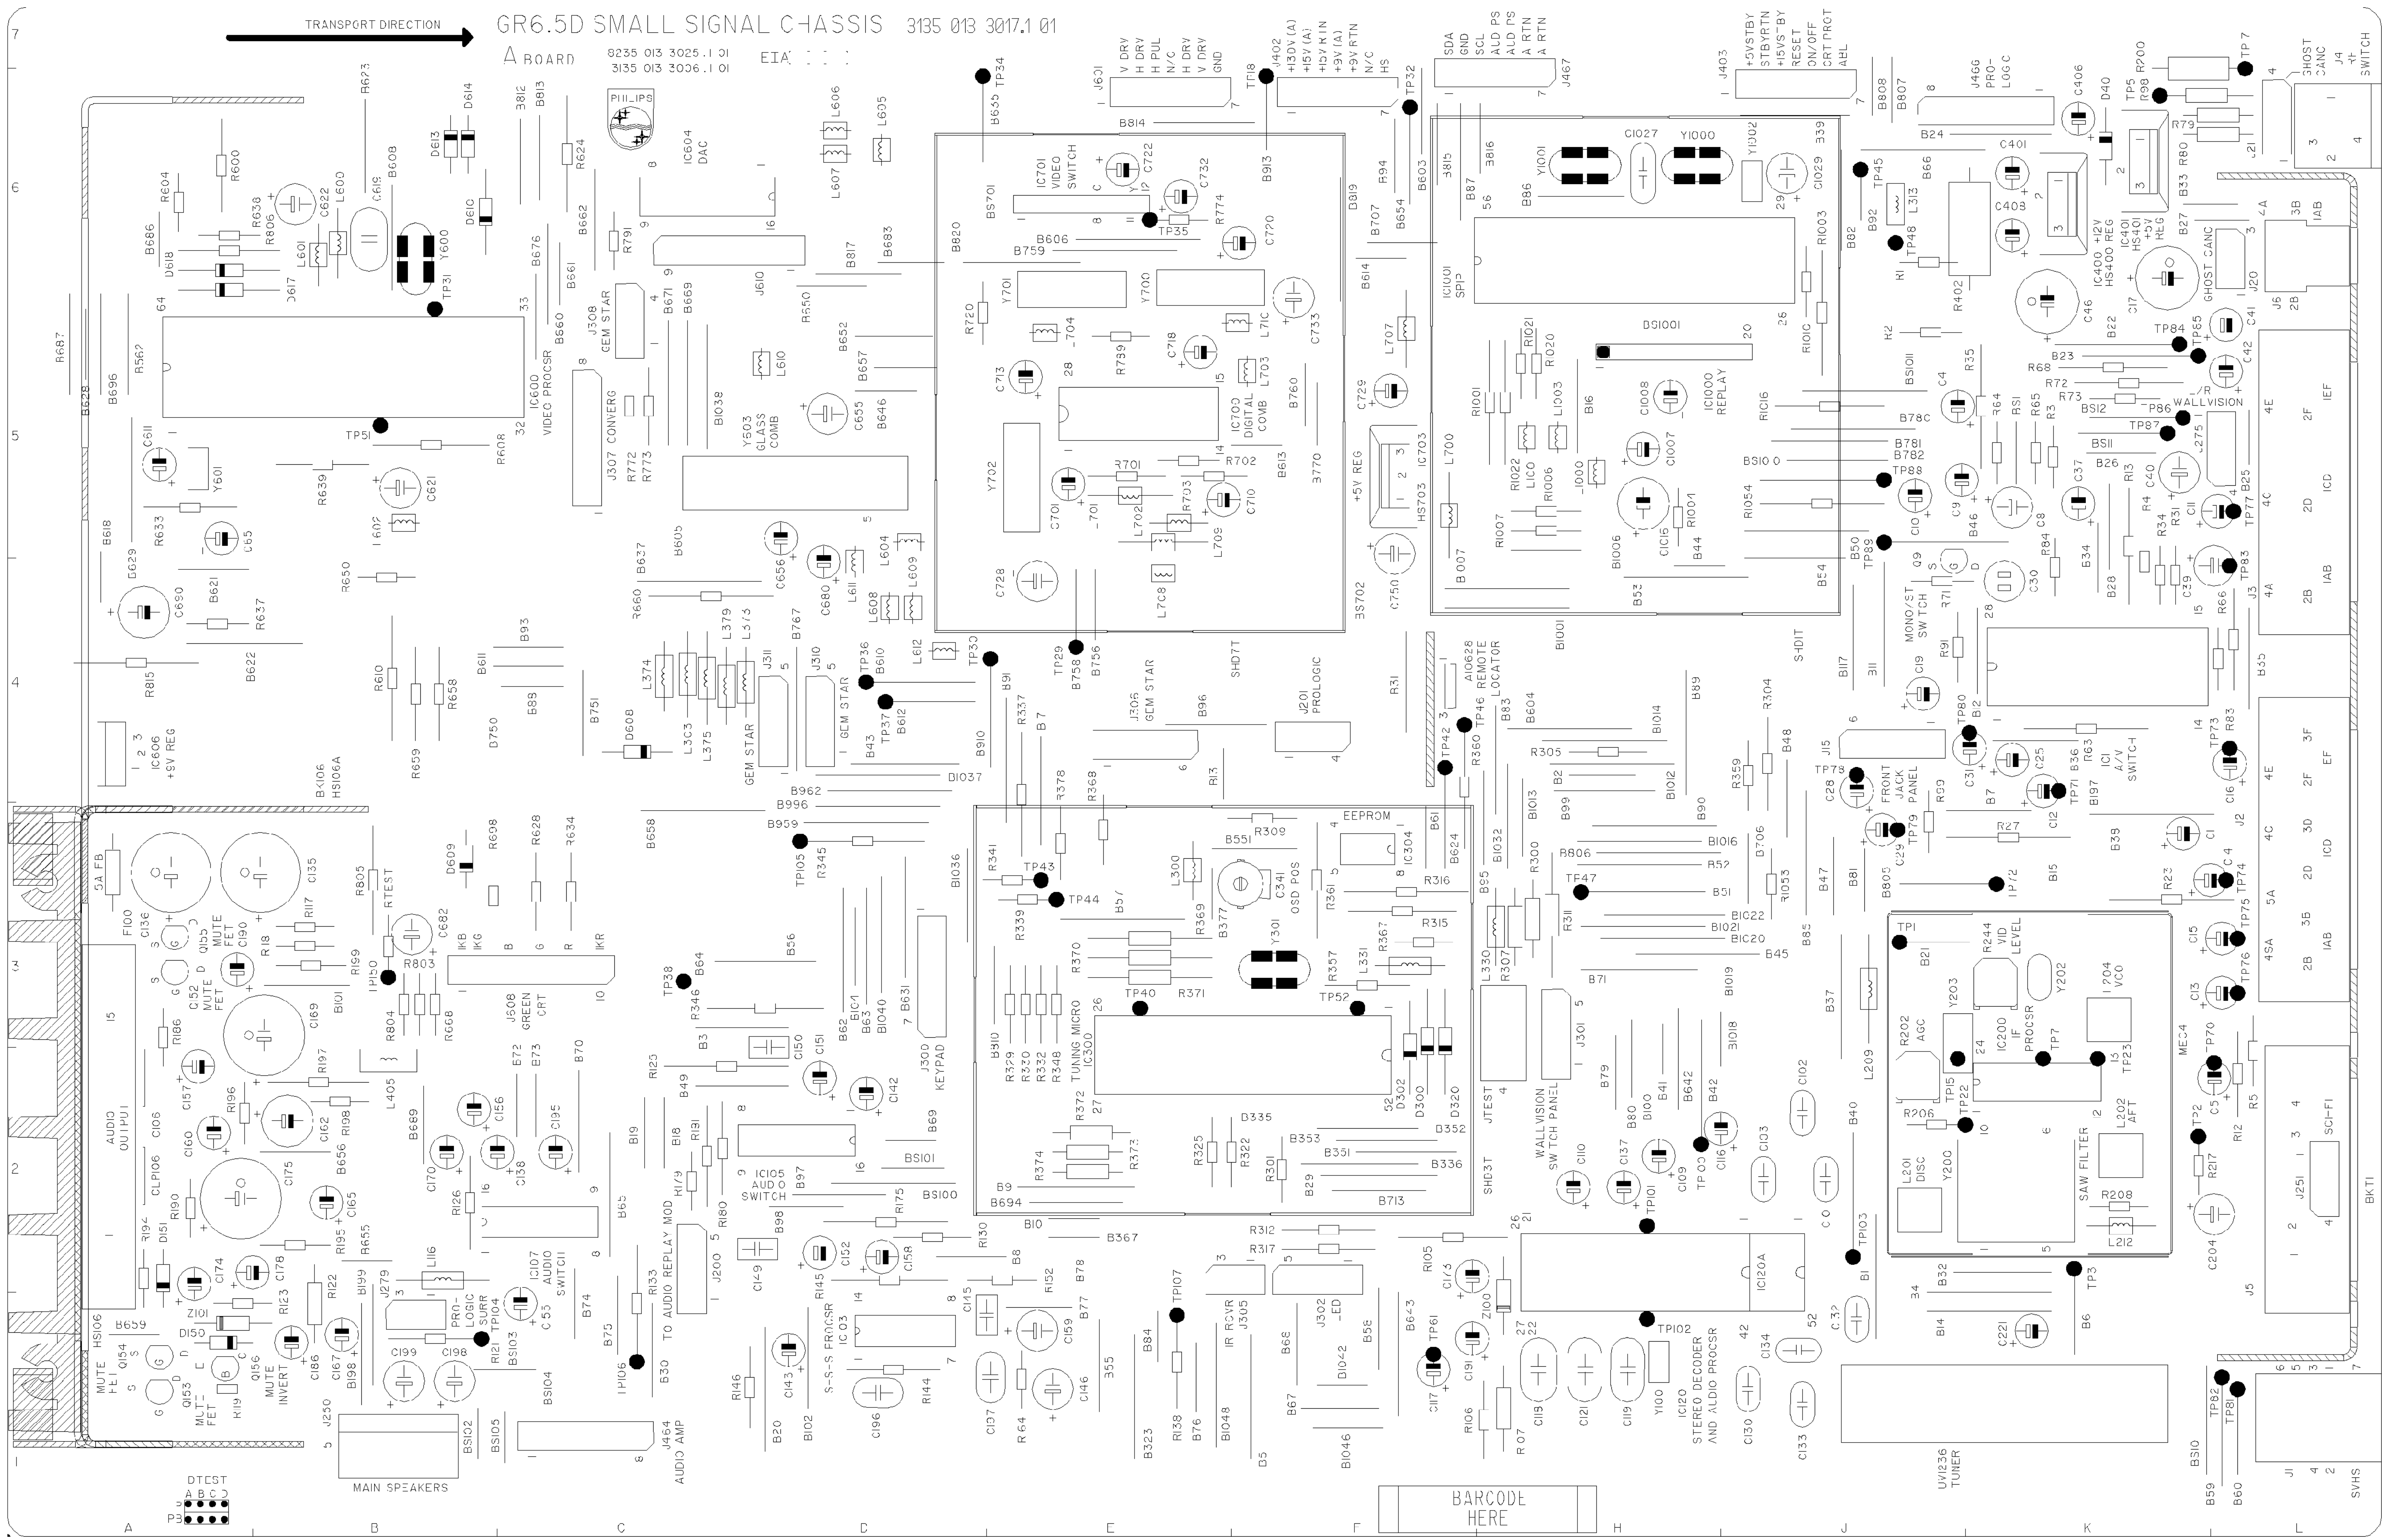

USED ONLY IN MODELS: 1152980001, , 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG051 & ASG052 - CBA (BOTTOM VIEW)

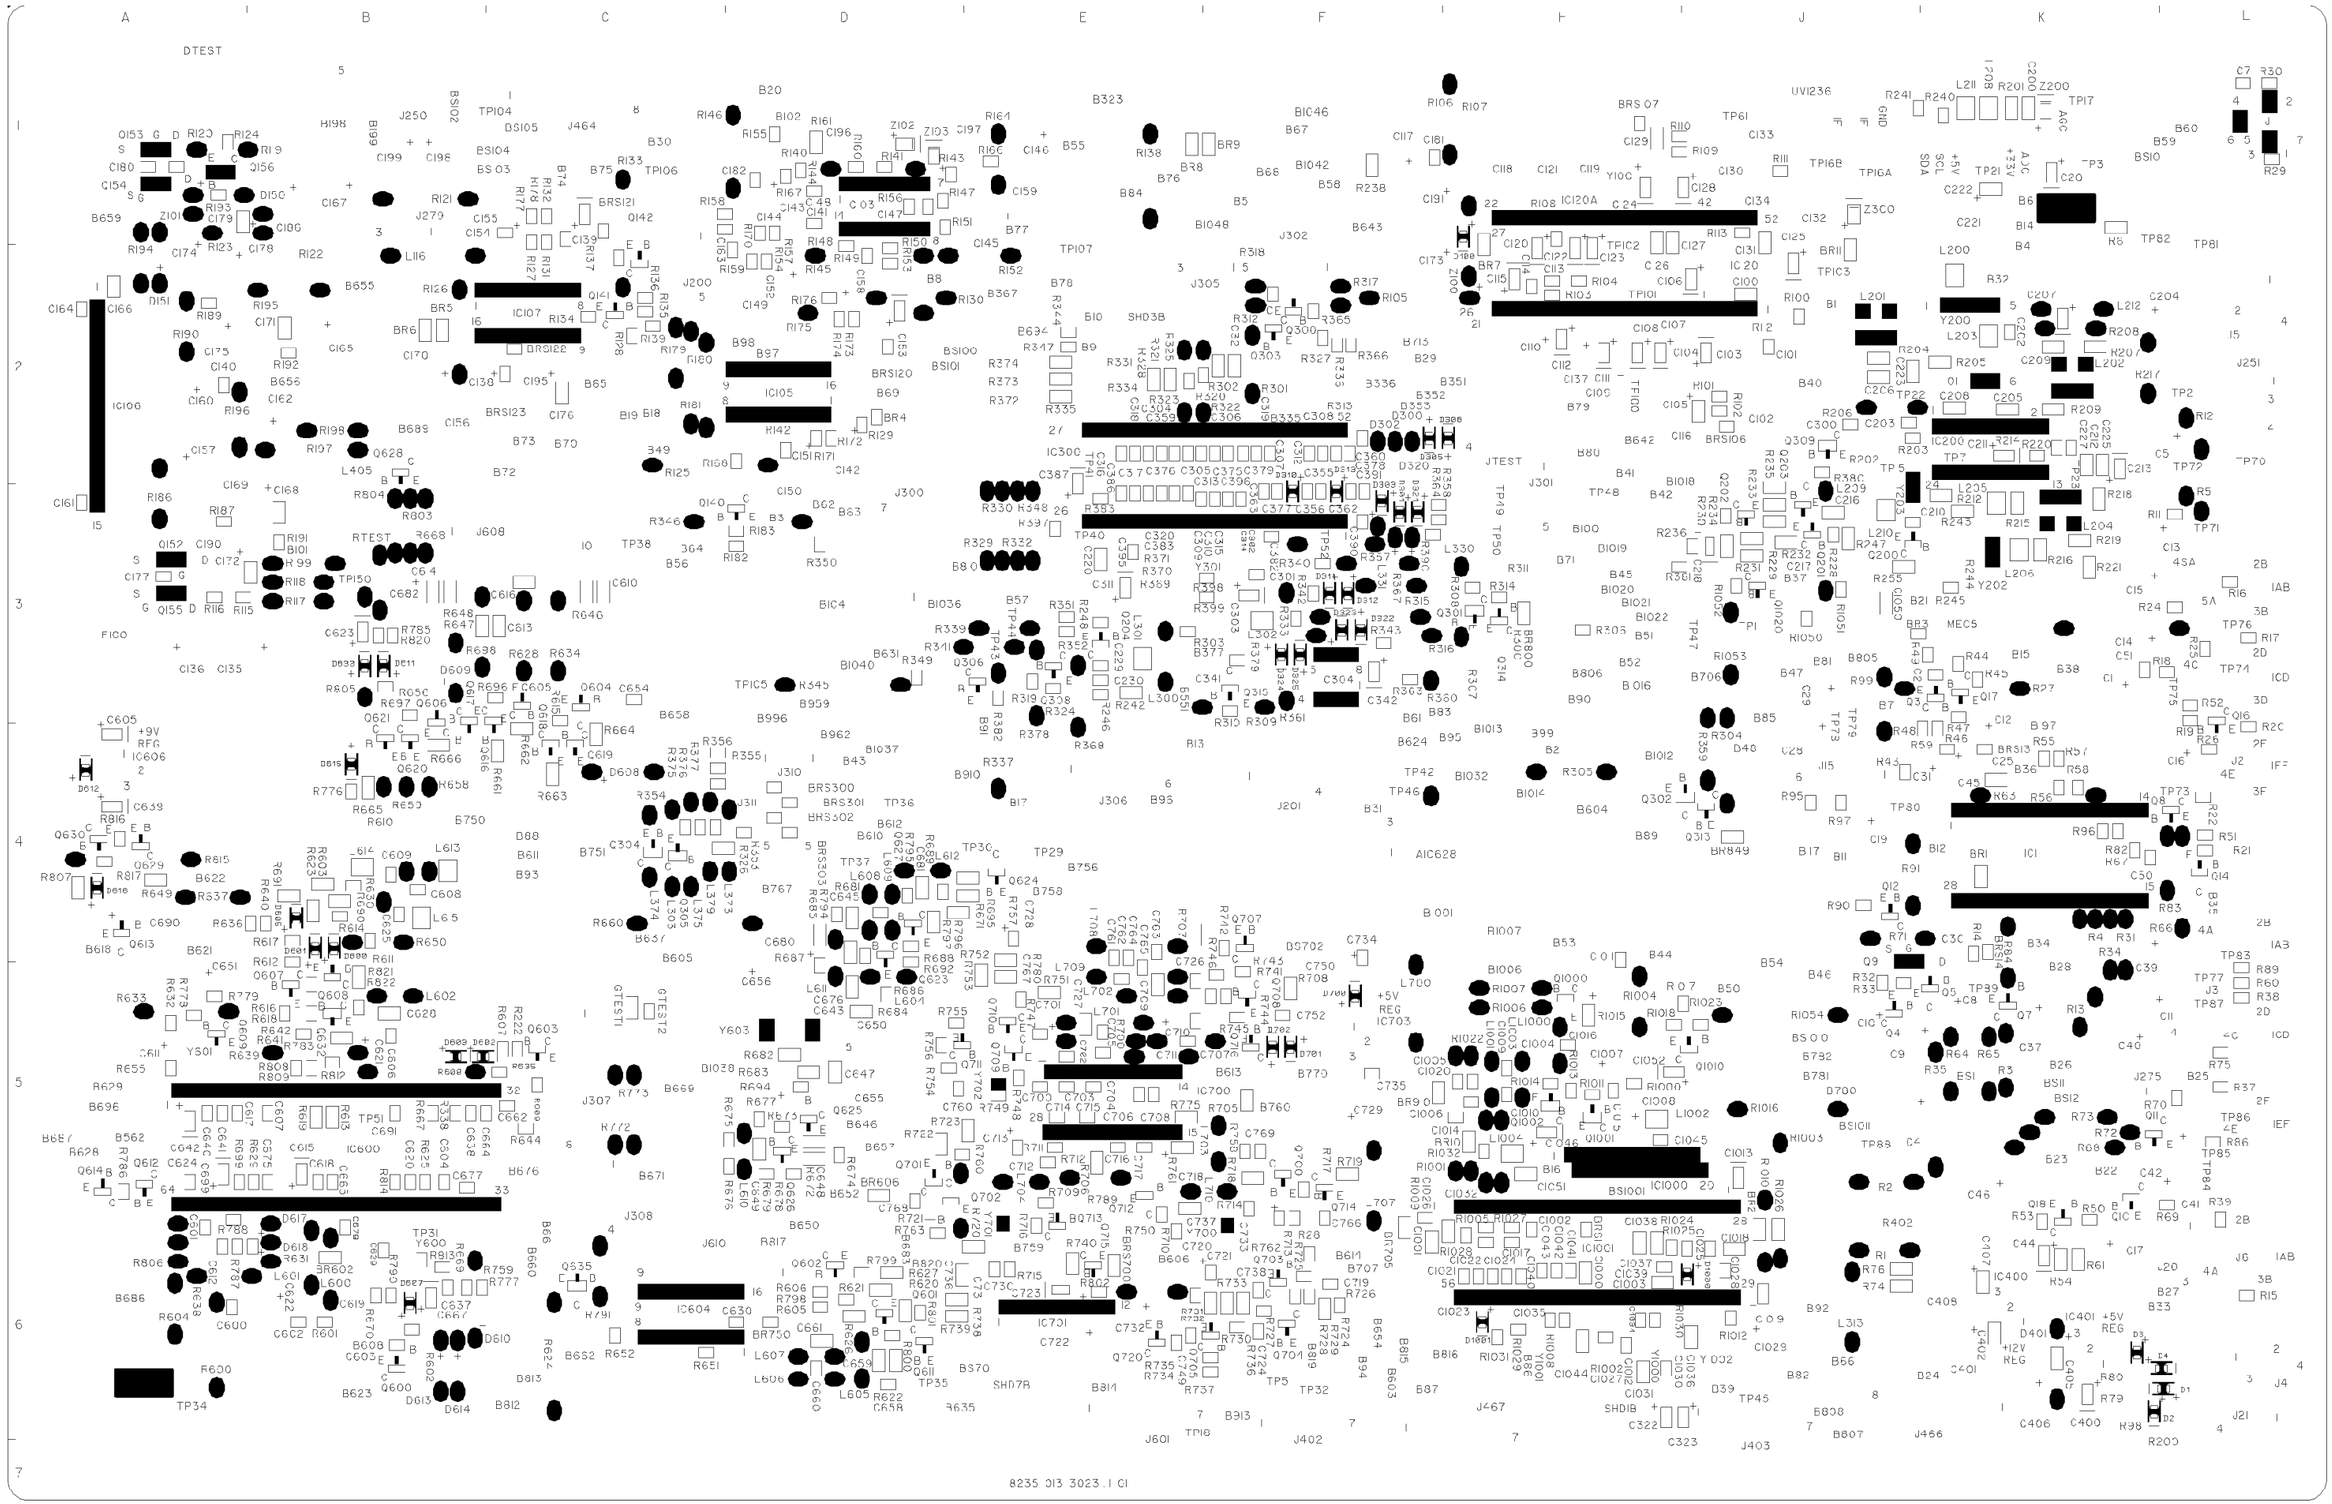


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - CBA (TOP VIEW)

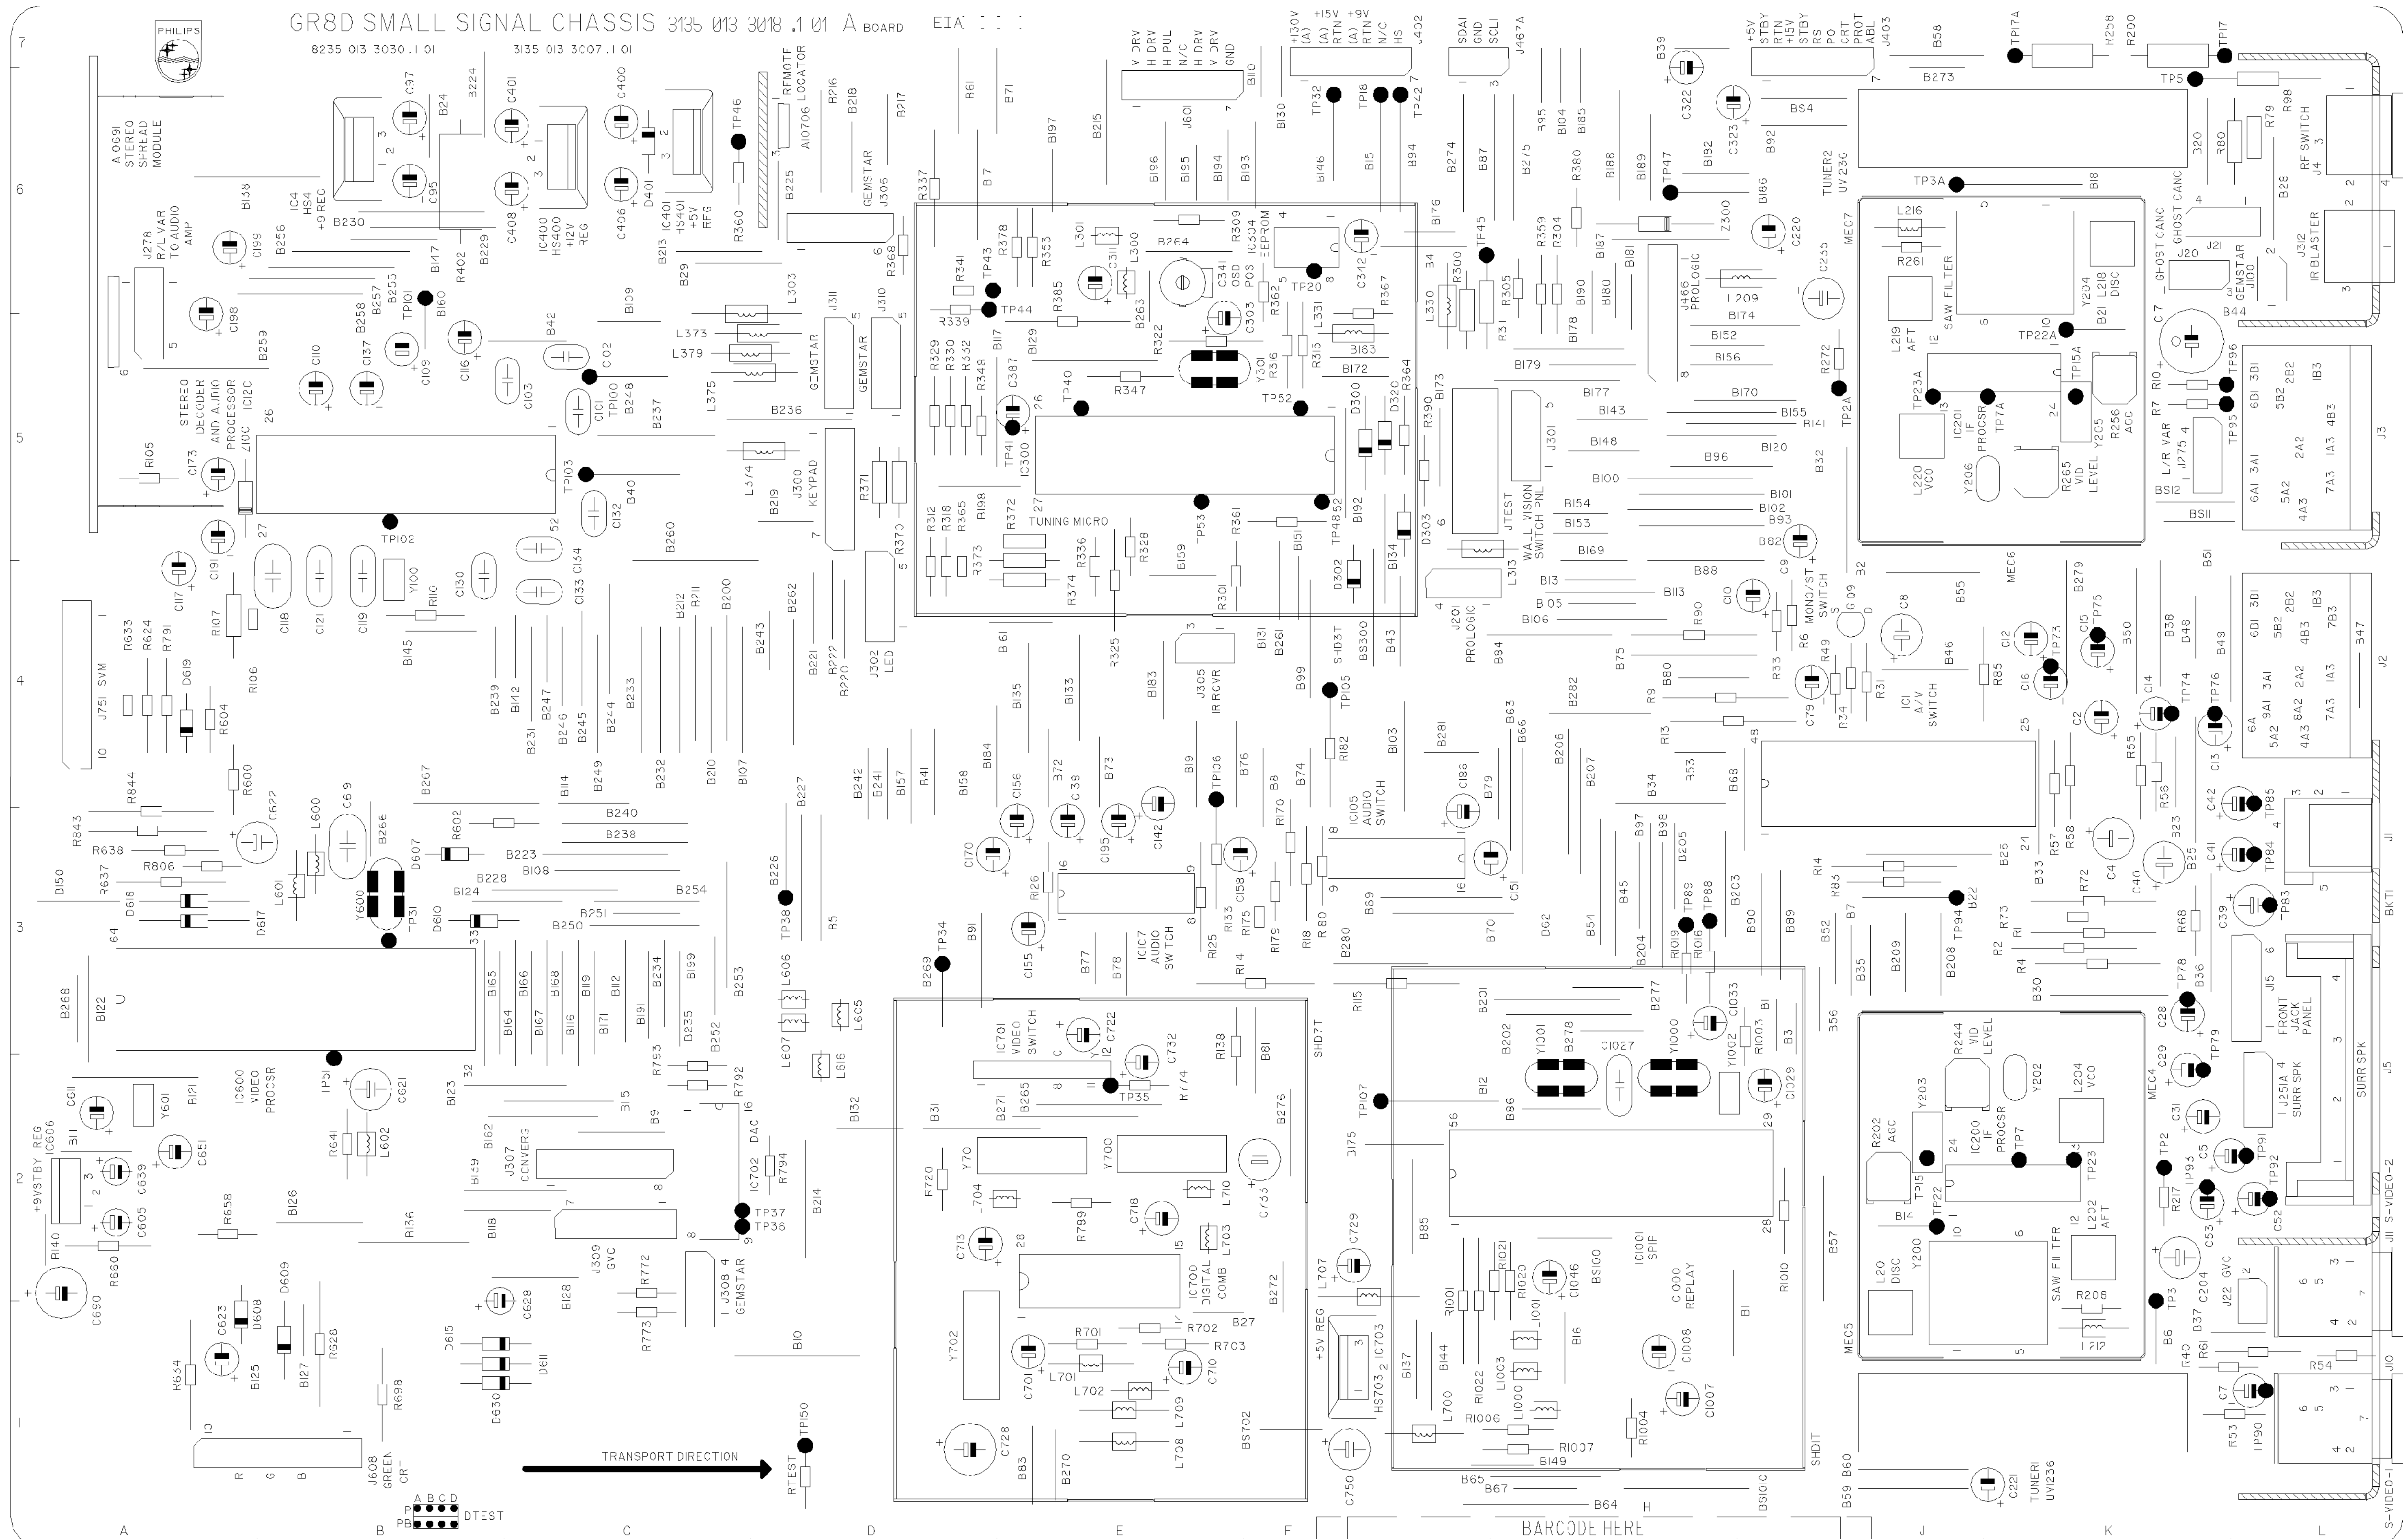


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C (7573) - SMALL SIGNAL PANEL - ASG053, ASG054 & ASG056 - CBA (BOTTOM VIEW)




All Models (7573) - LARGE SIGNAL PANEL CBA (TOP VIEW)

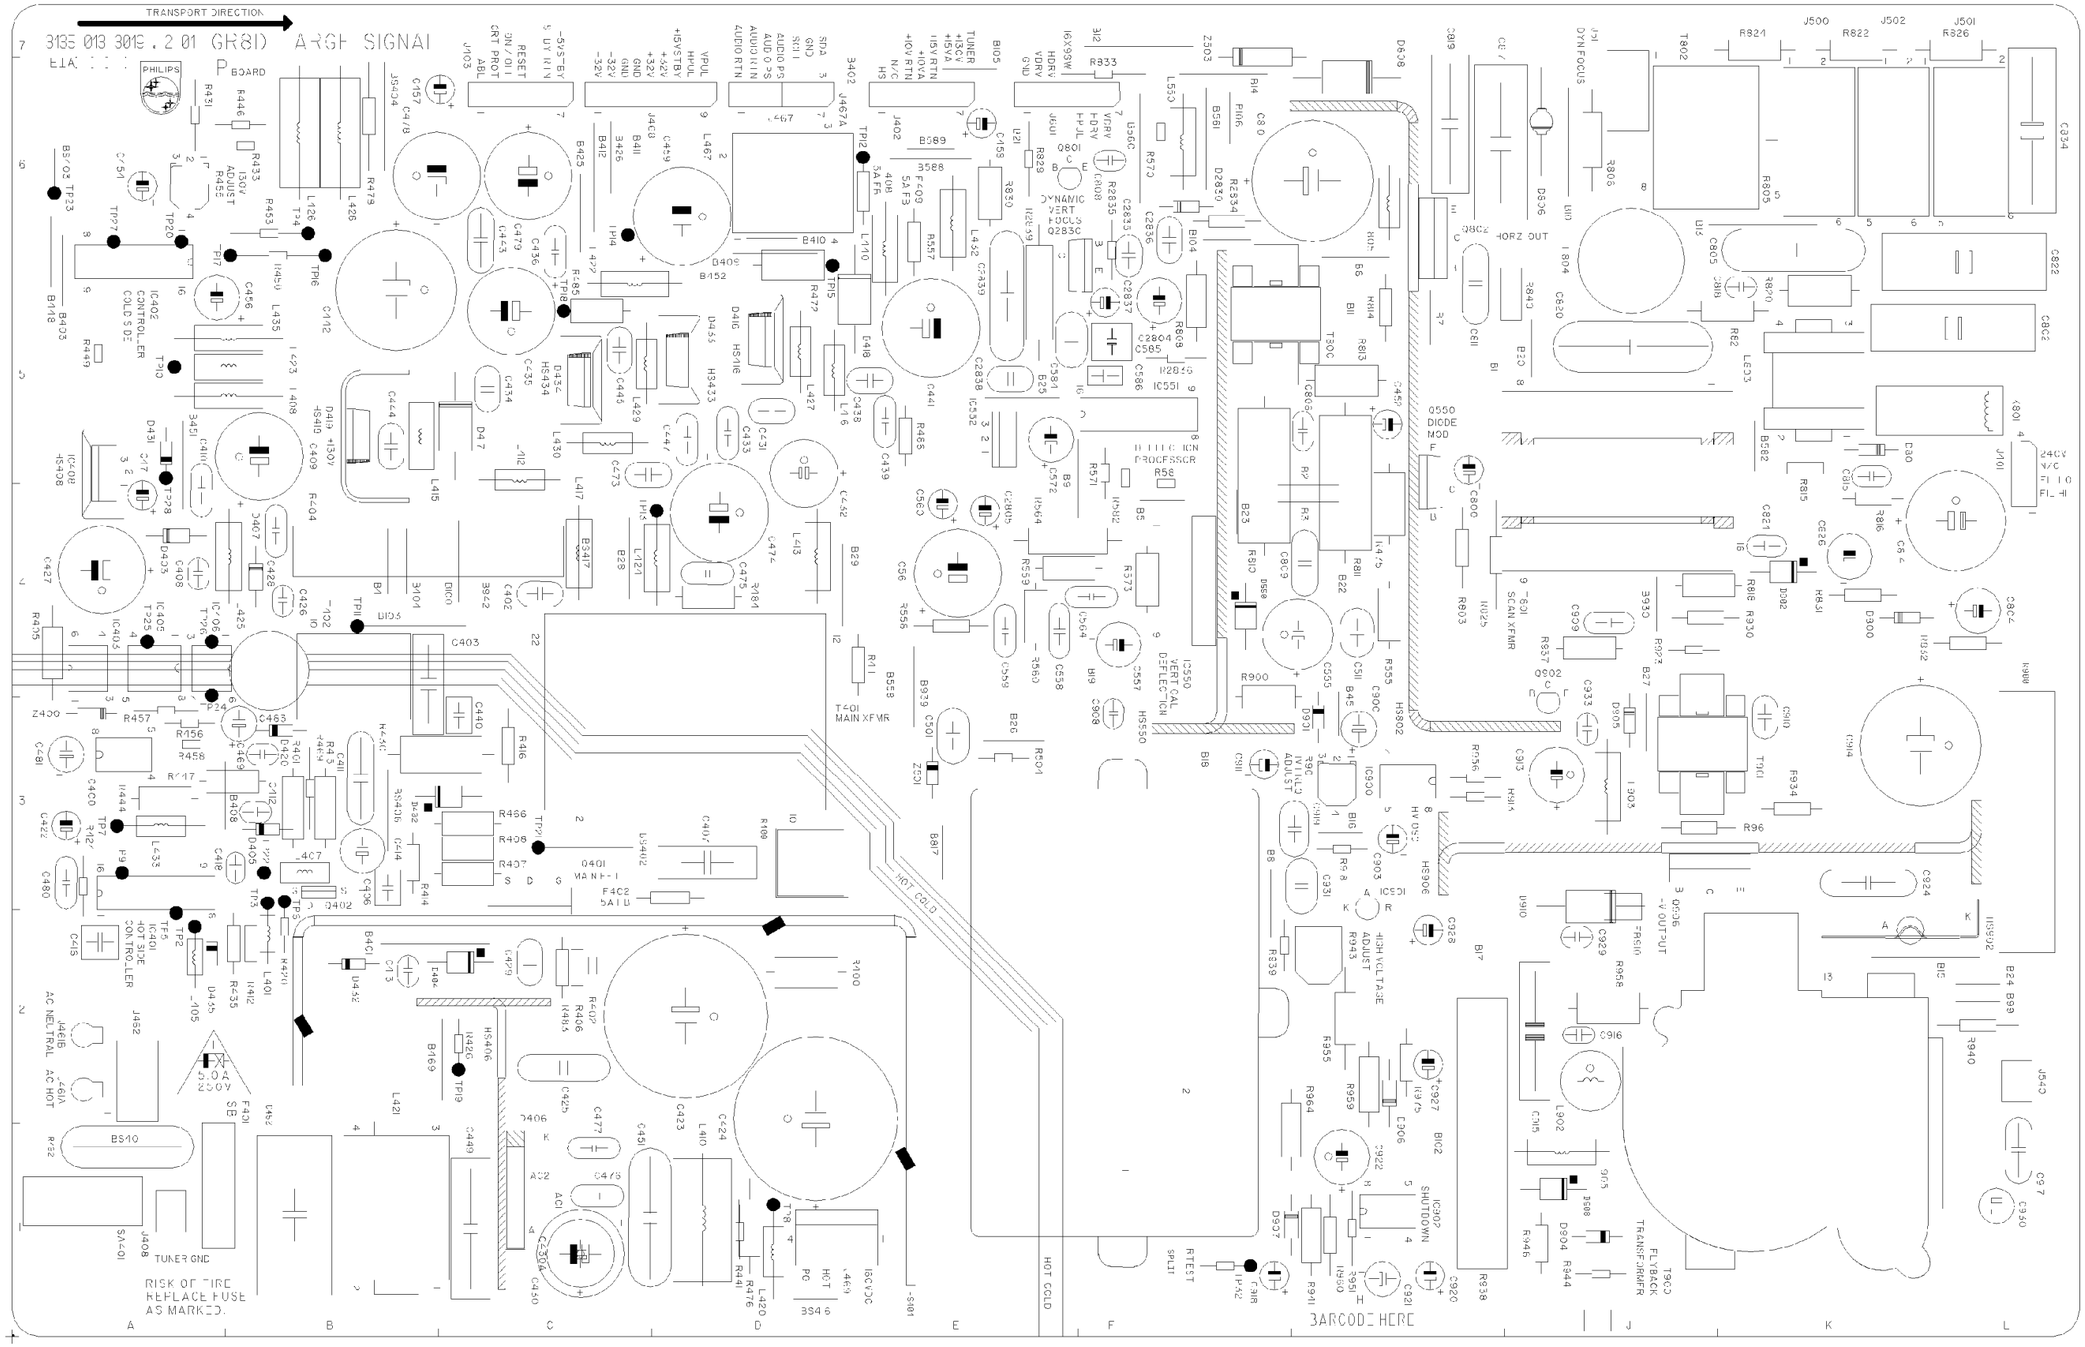

All Models (7573) - LARGE SIGNAL PANEL CBA (BOTTOM VIEW)

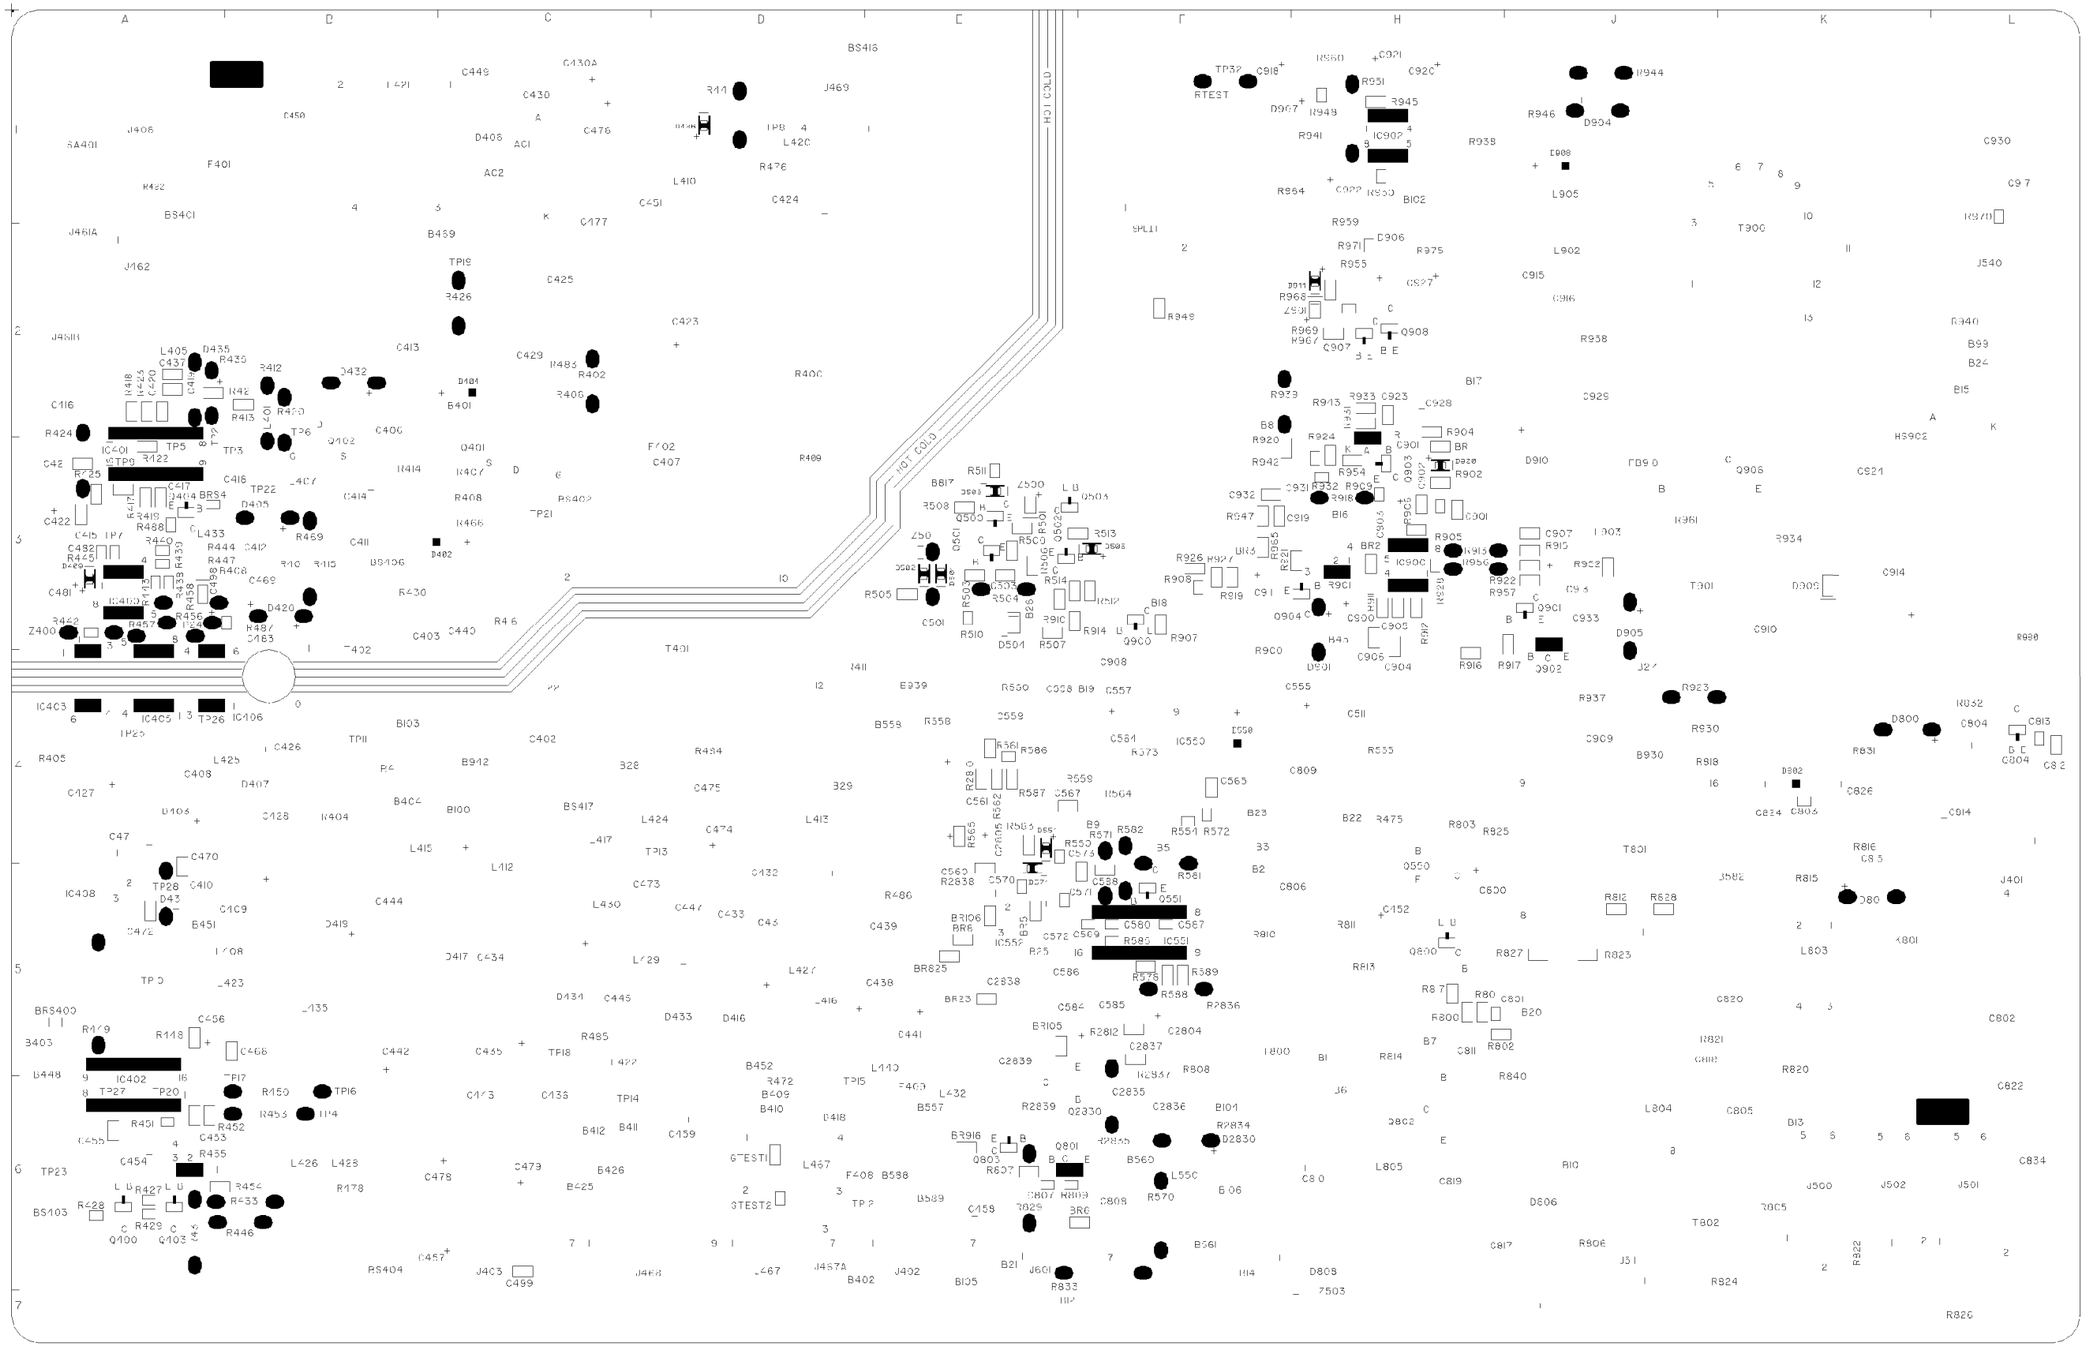


All Models (7573) - DIGITAL CONVERGENCE PANEL - CBA (TOP VIEW)

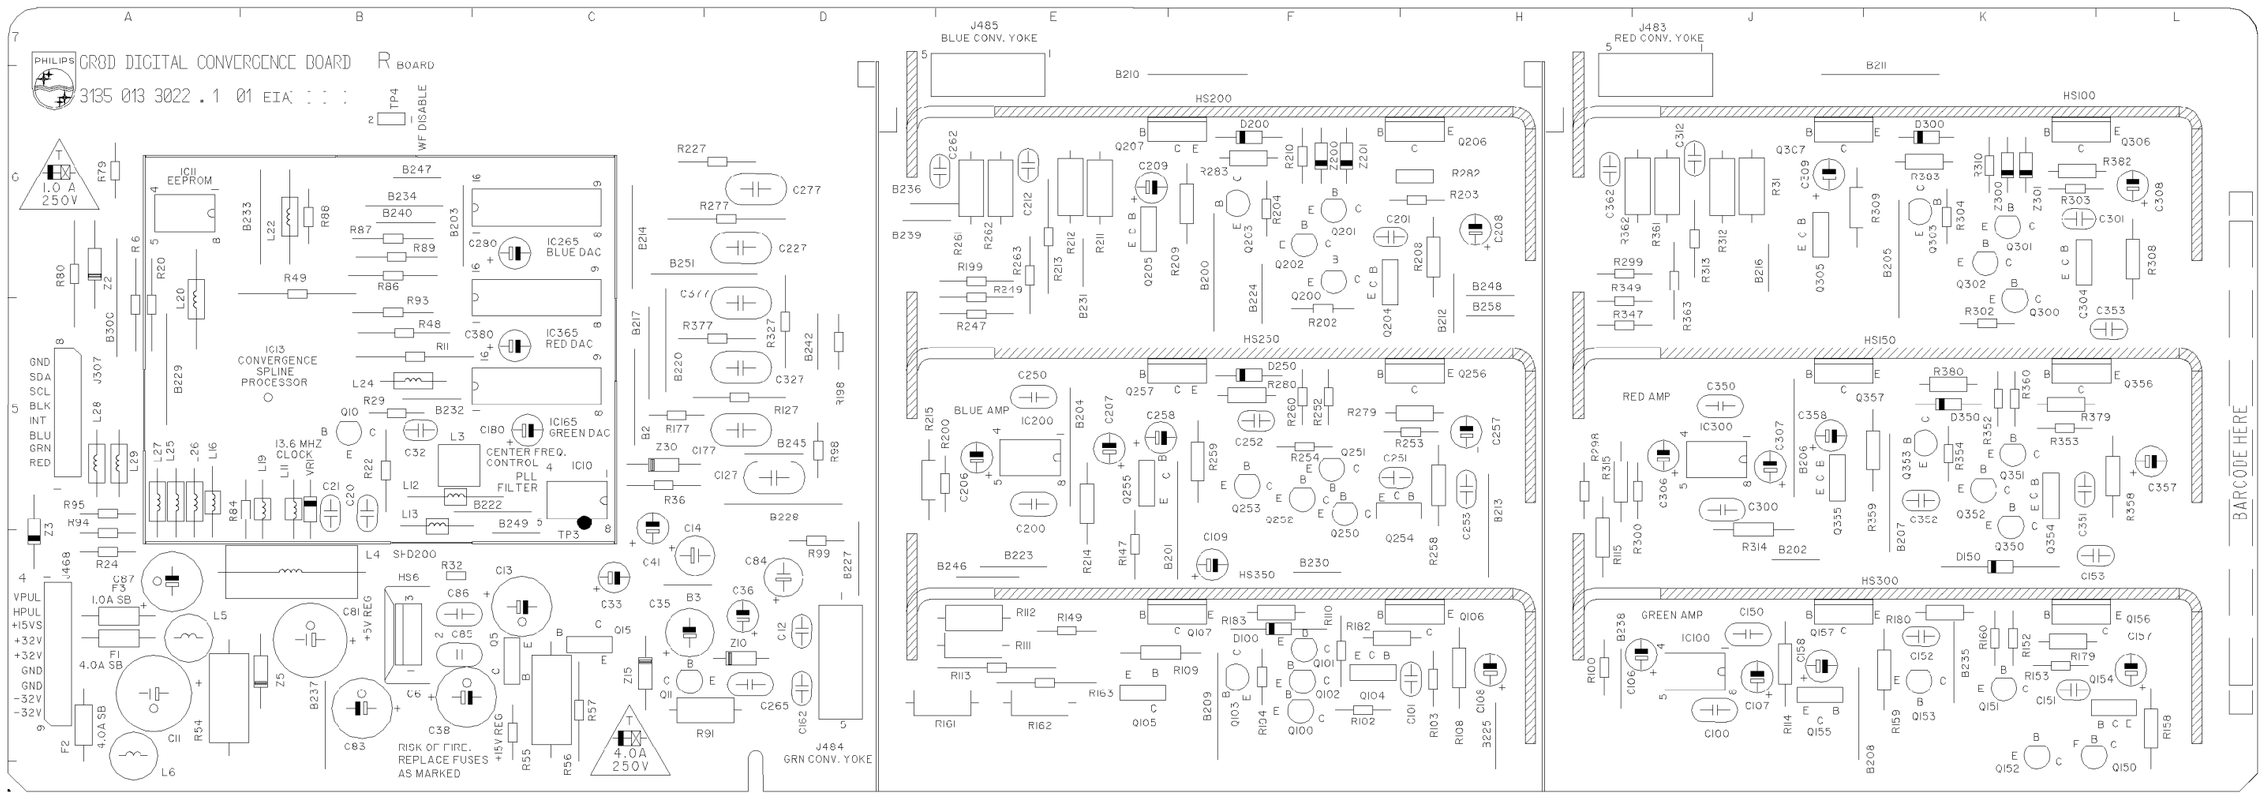


All Models (7573) - DIGITAL CONVERGENCE PANEL - CBA (BOTTOM VIEW)




All Models (7573) - RED CRT PANEL CBA (TOP VIEW)

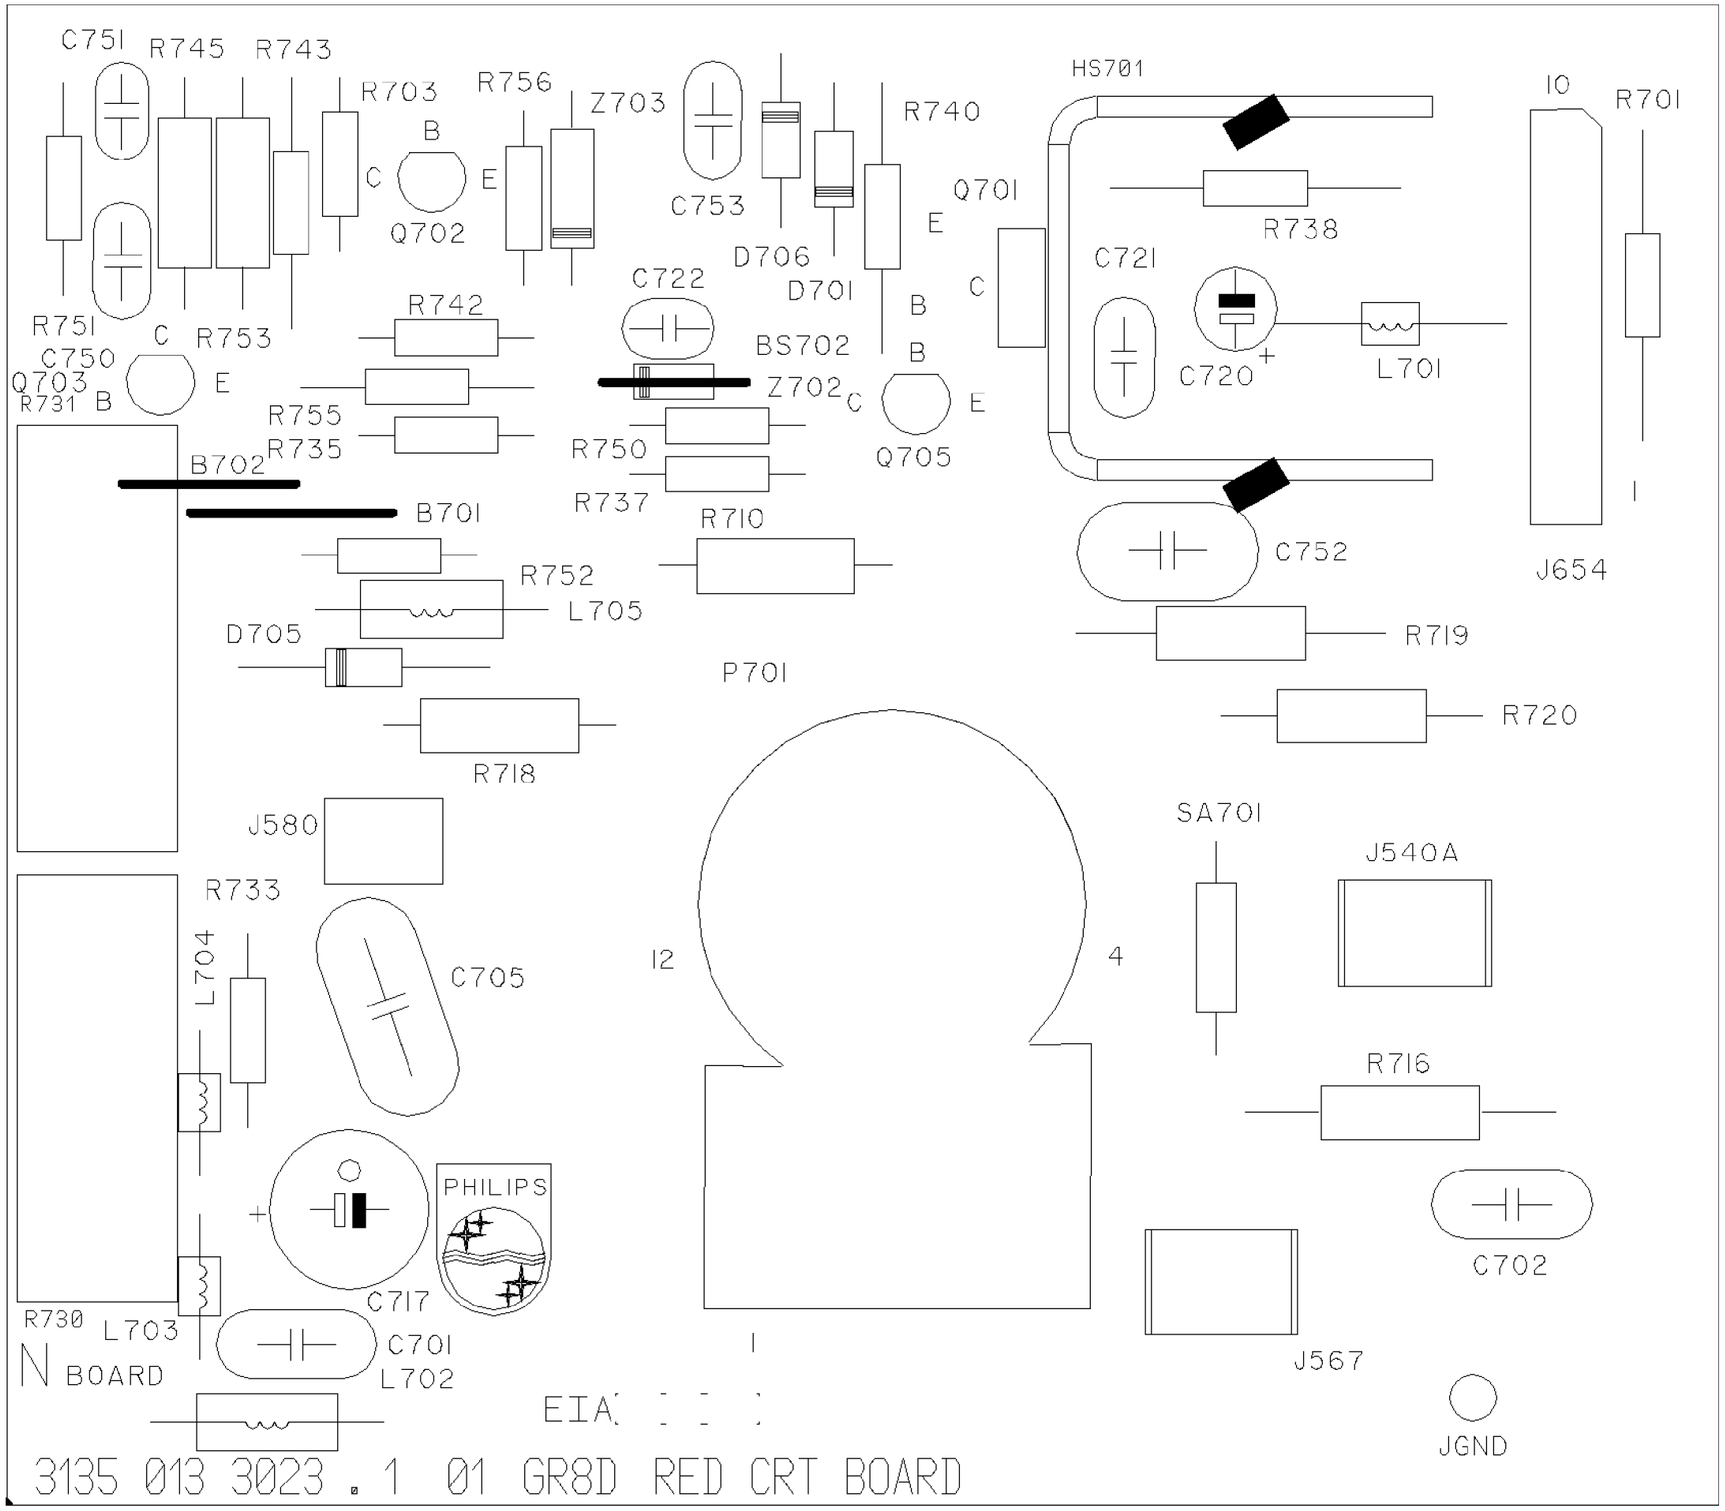


All Models (7573) - RED CRT PANEL CBA (BOTTOM VIEW)

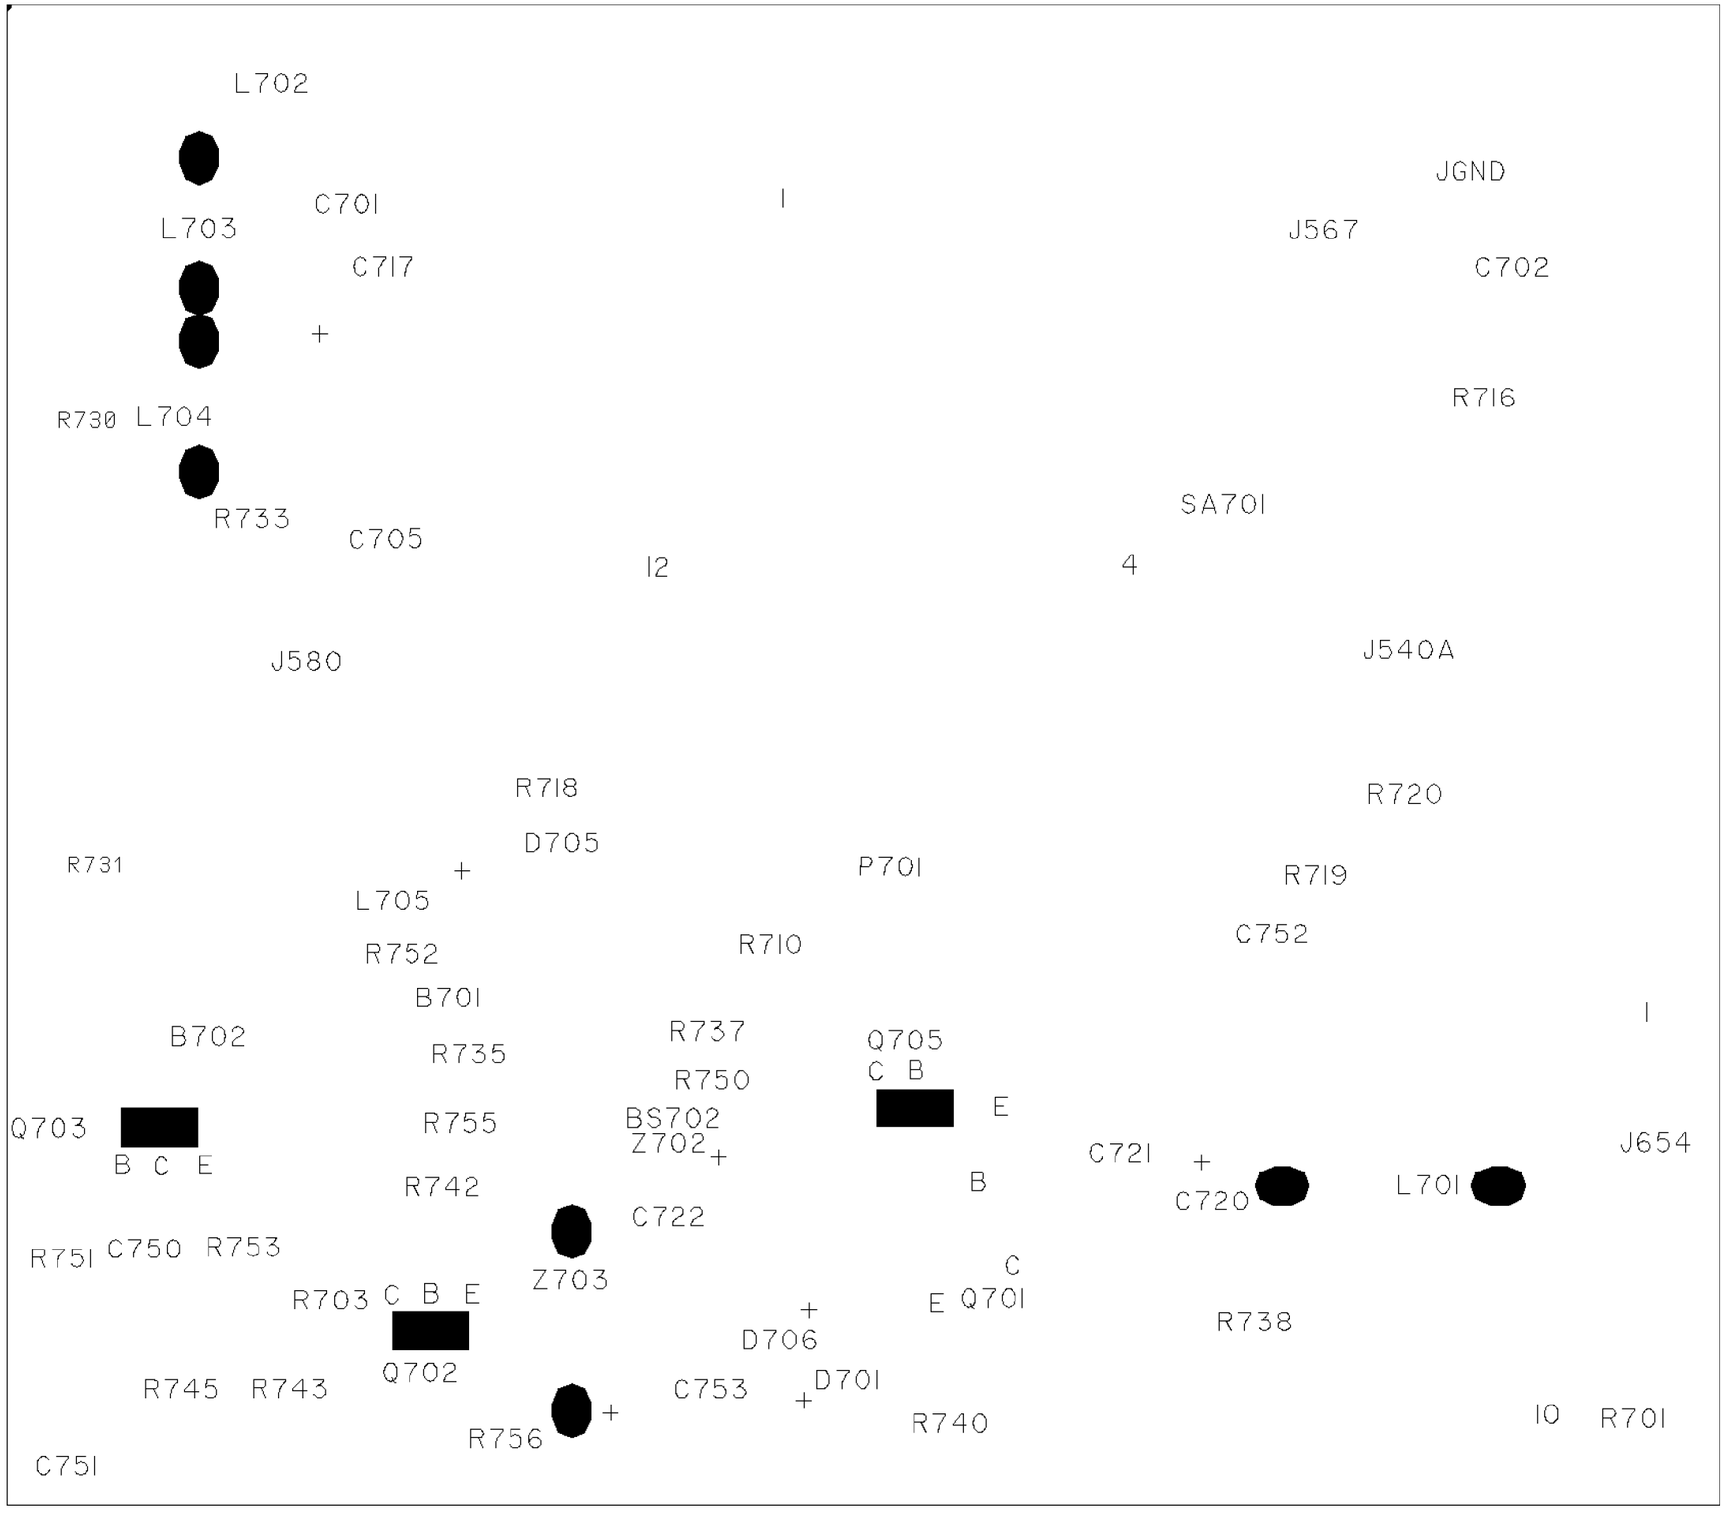


All Models (7573) - GREEN CRT PANEL CBA (TOP VIEW)

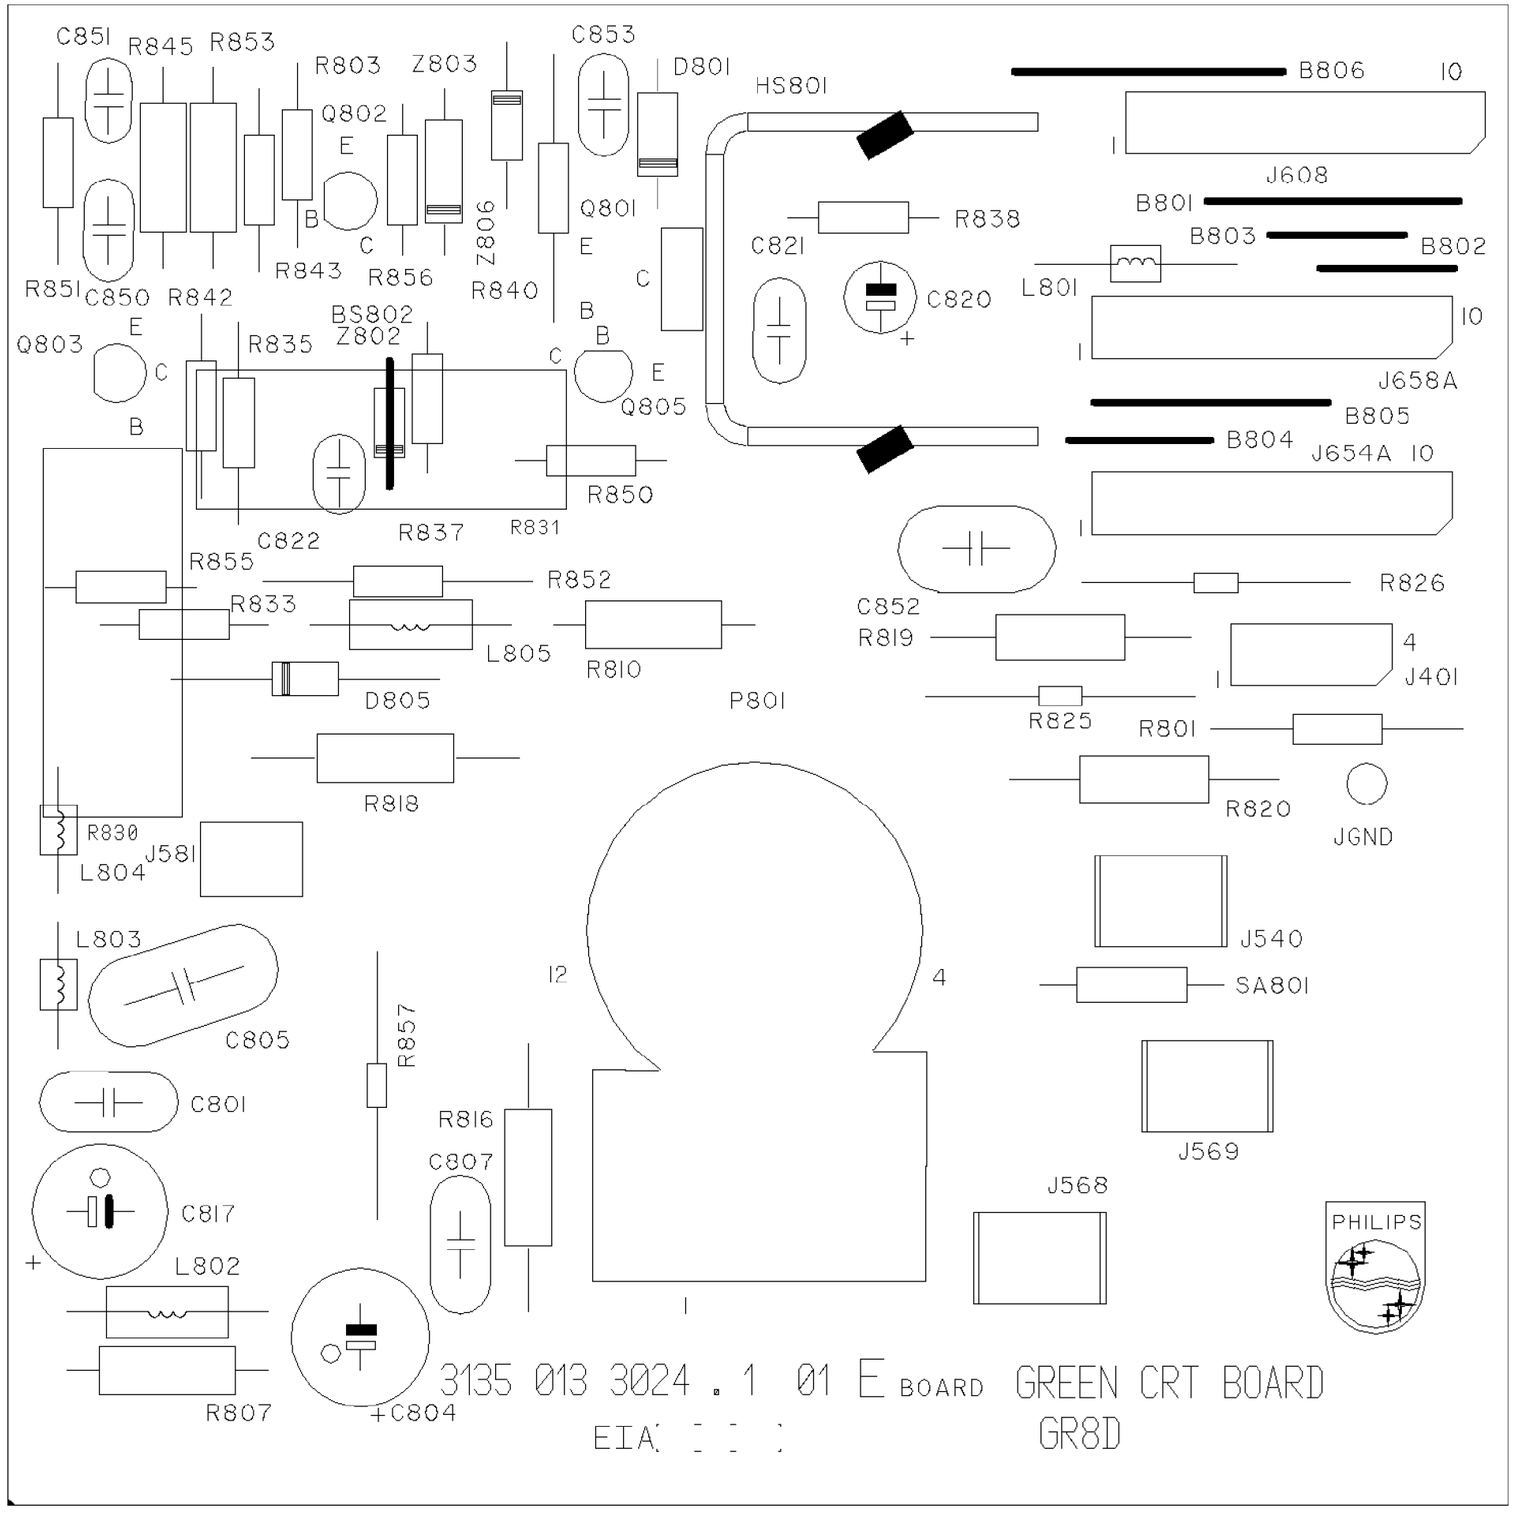


All Models (7573) - GREEN CRT PANEL CBA (BOTTOM VIEW)

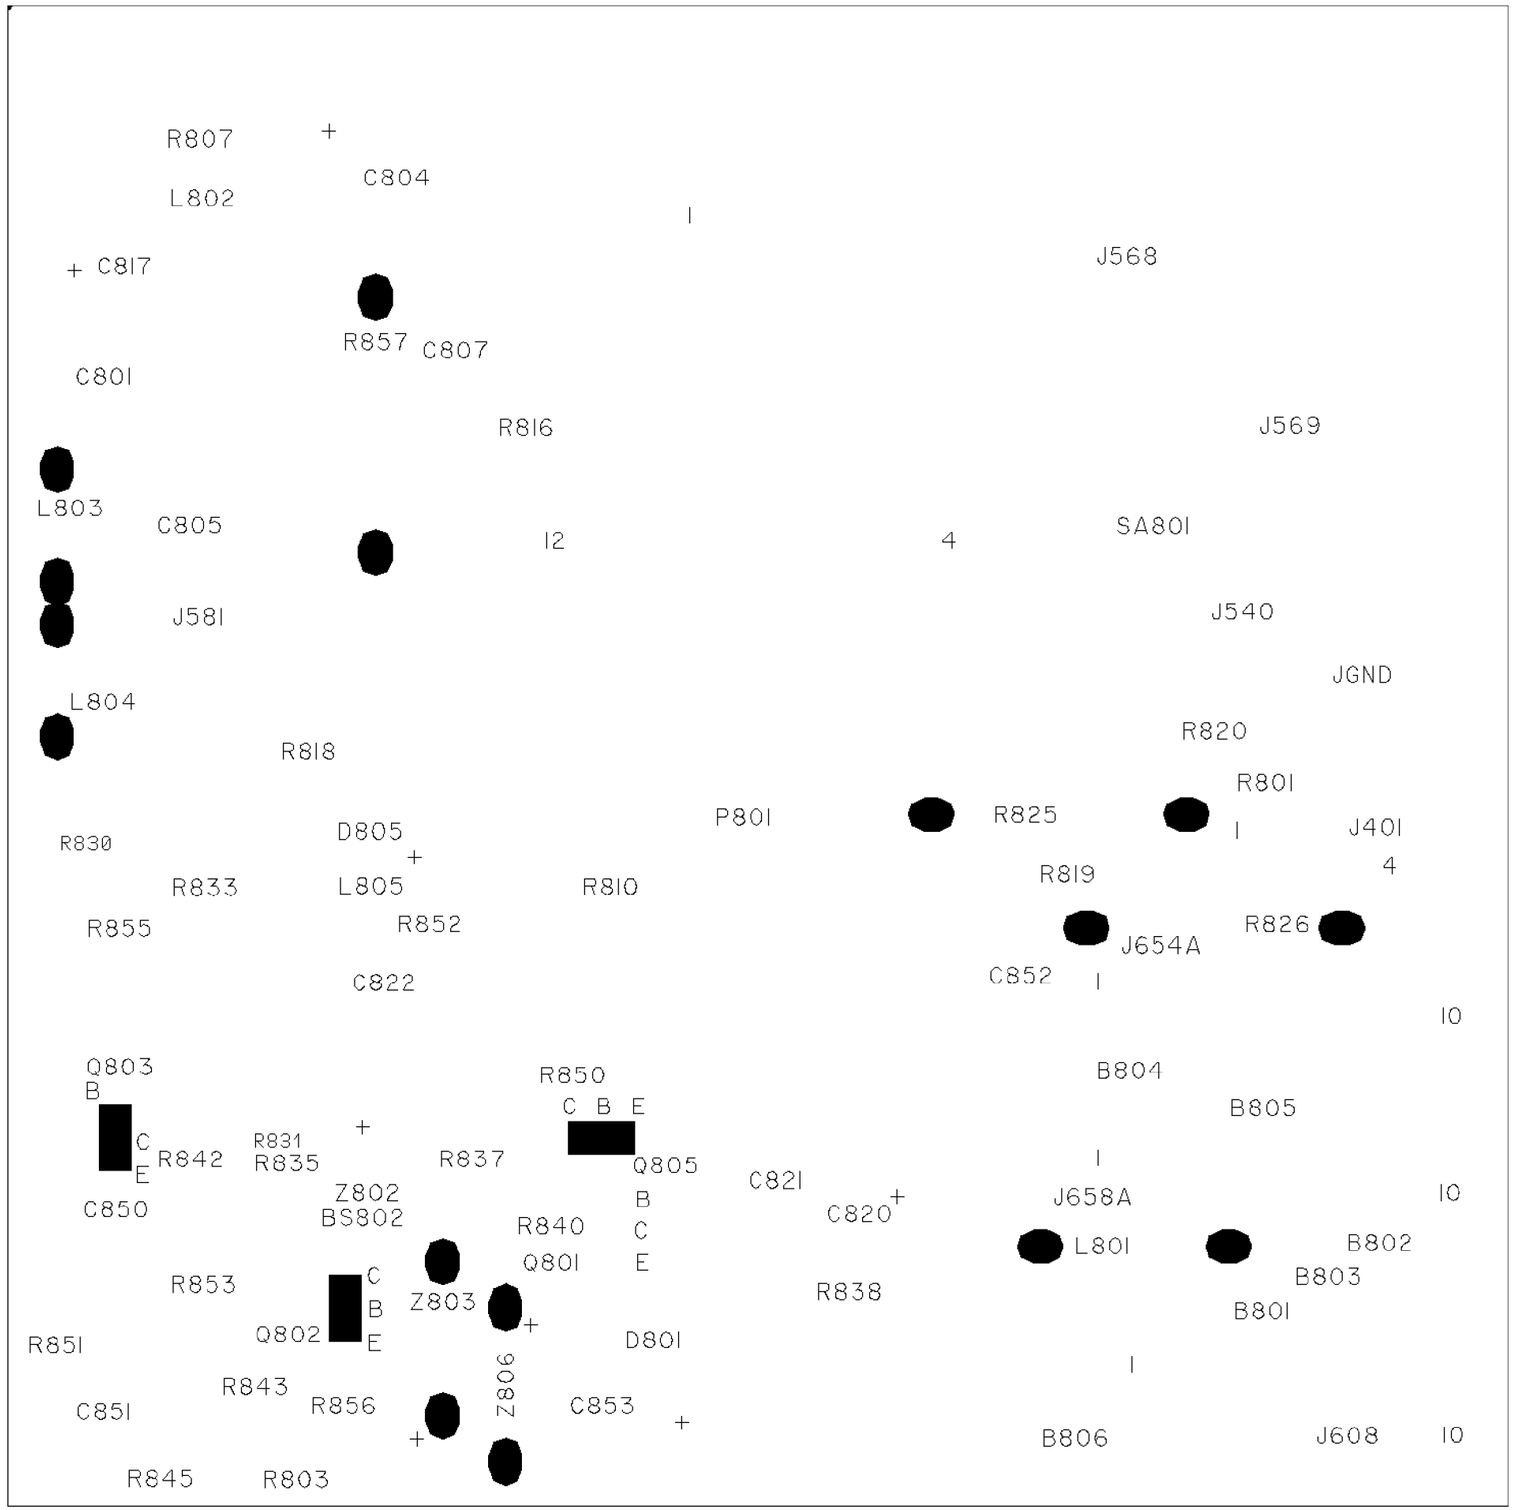


All Models (7573) - BLUE CRT PANEL CBA (TOP VIEW)

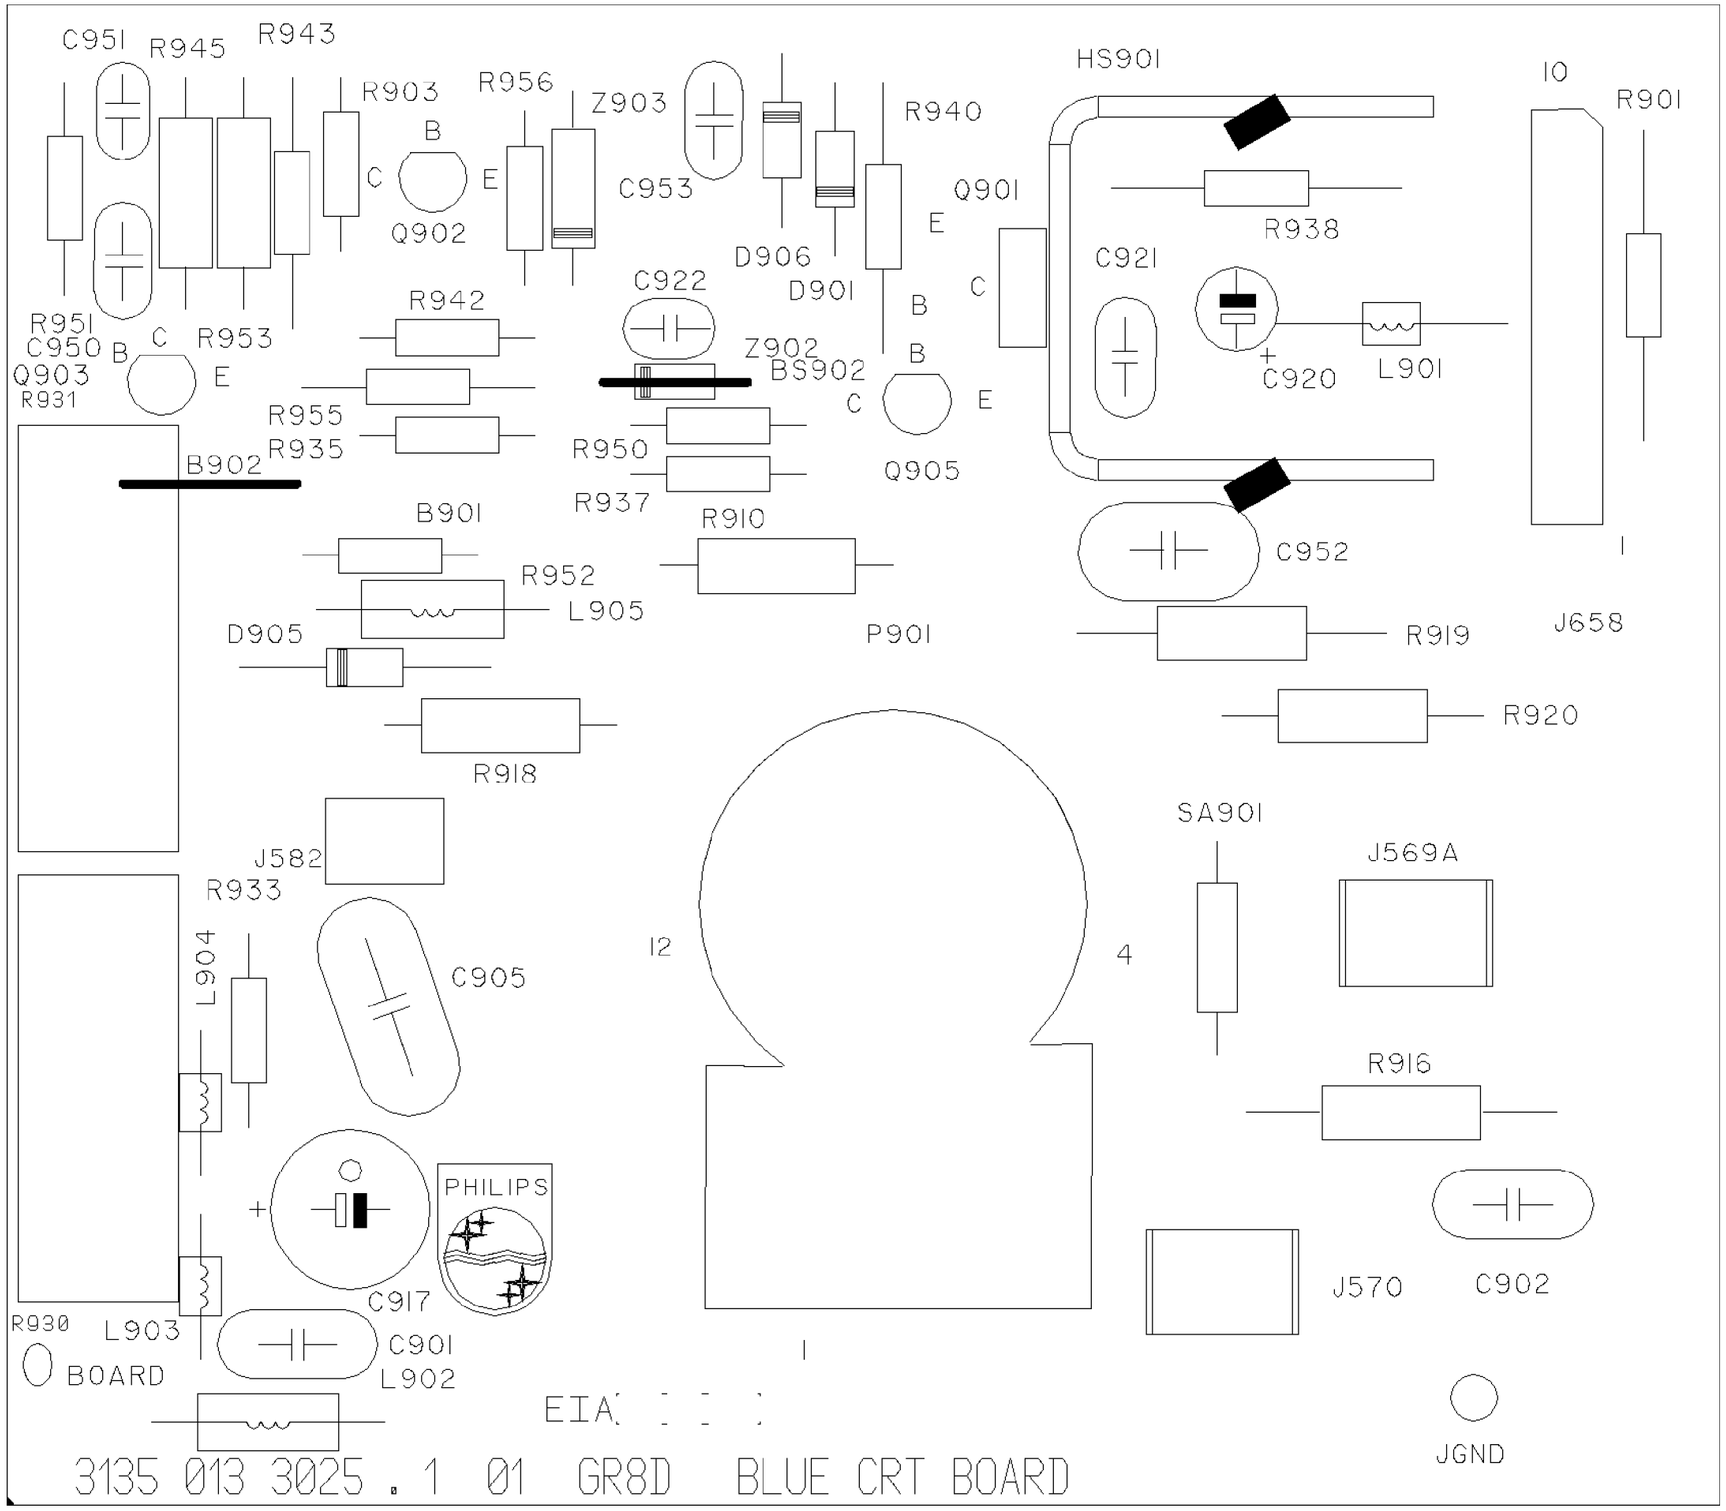


All Models (7573) - BLUE CRT PANEL CBA (BOTTOM VIEW)

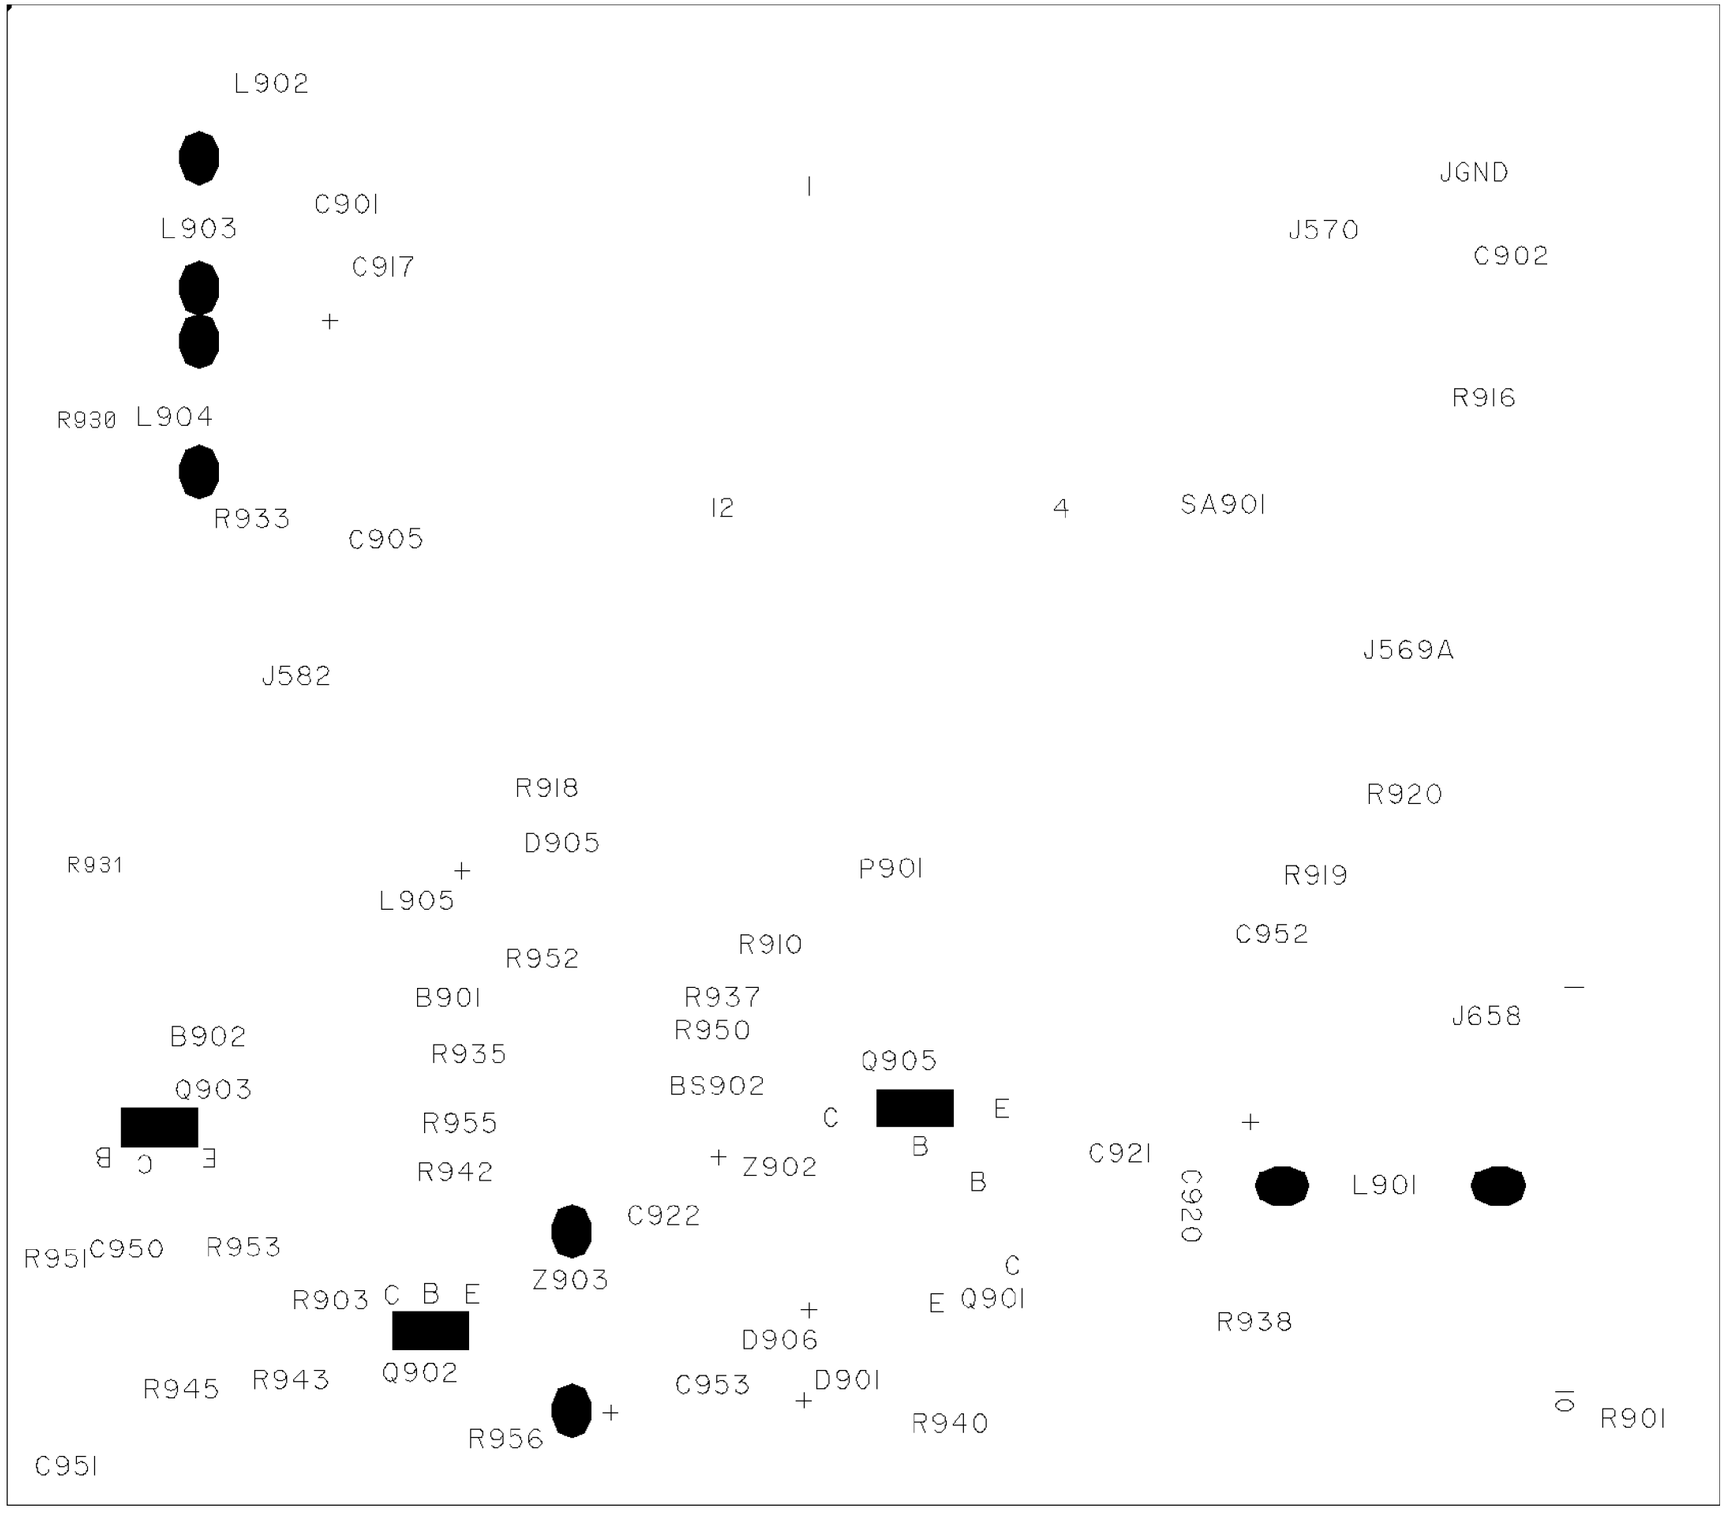


USED ONLY IN MODELS: 48PP72A, 48XP43C, 48XP44, 54PP72, 54XP43, 54XP44, 60XP43, MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - 25 WATT AMP CBA (TOP VIEW)

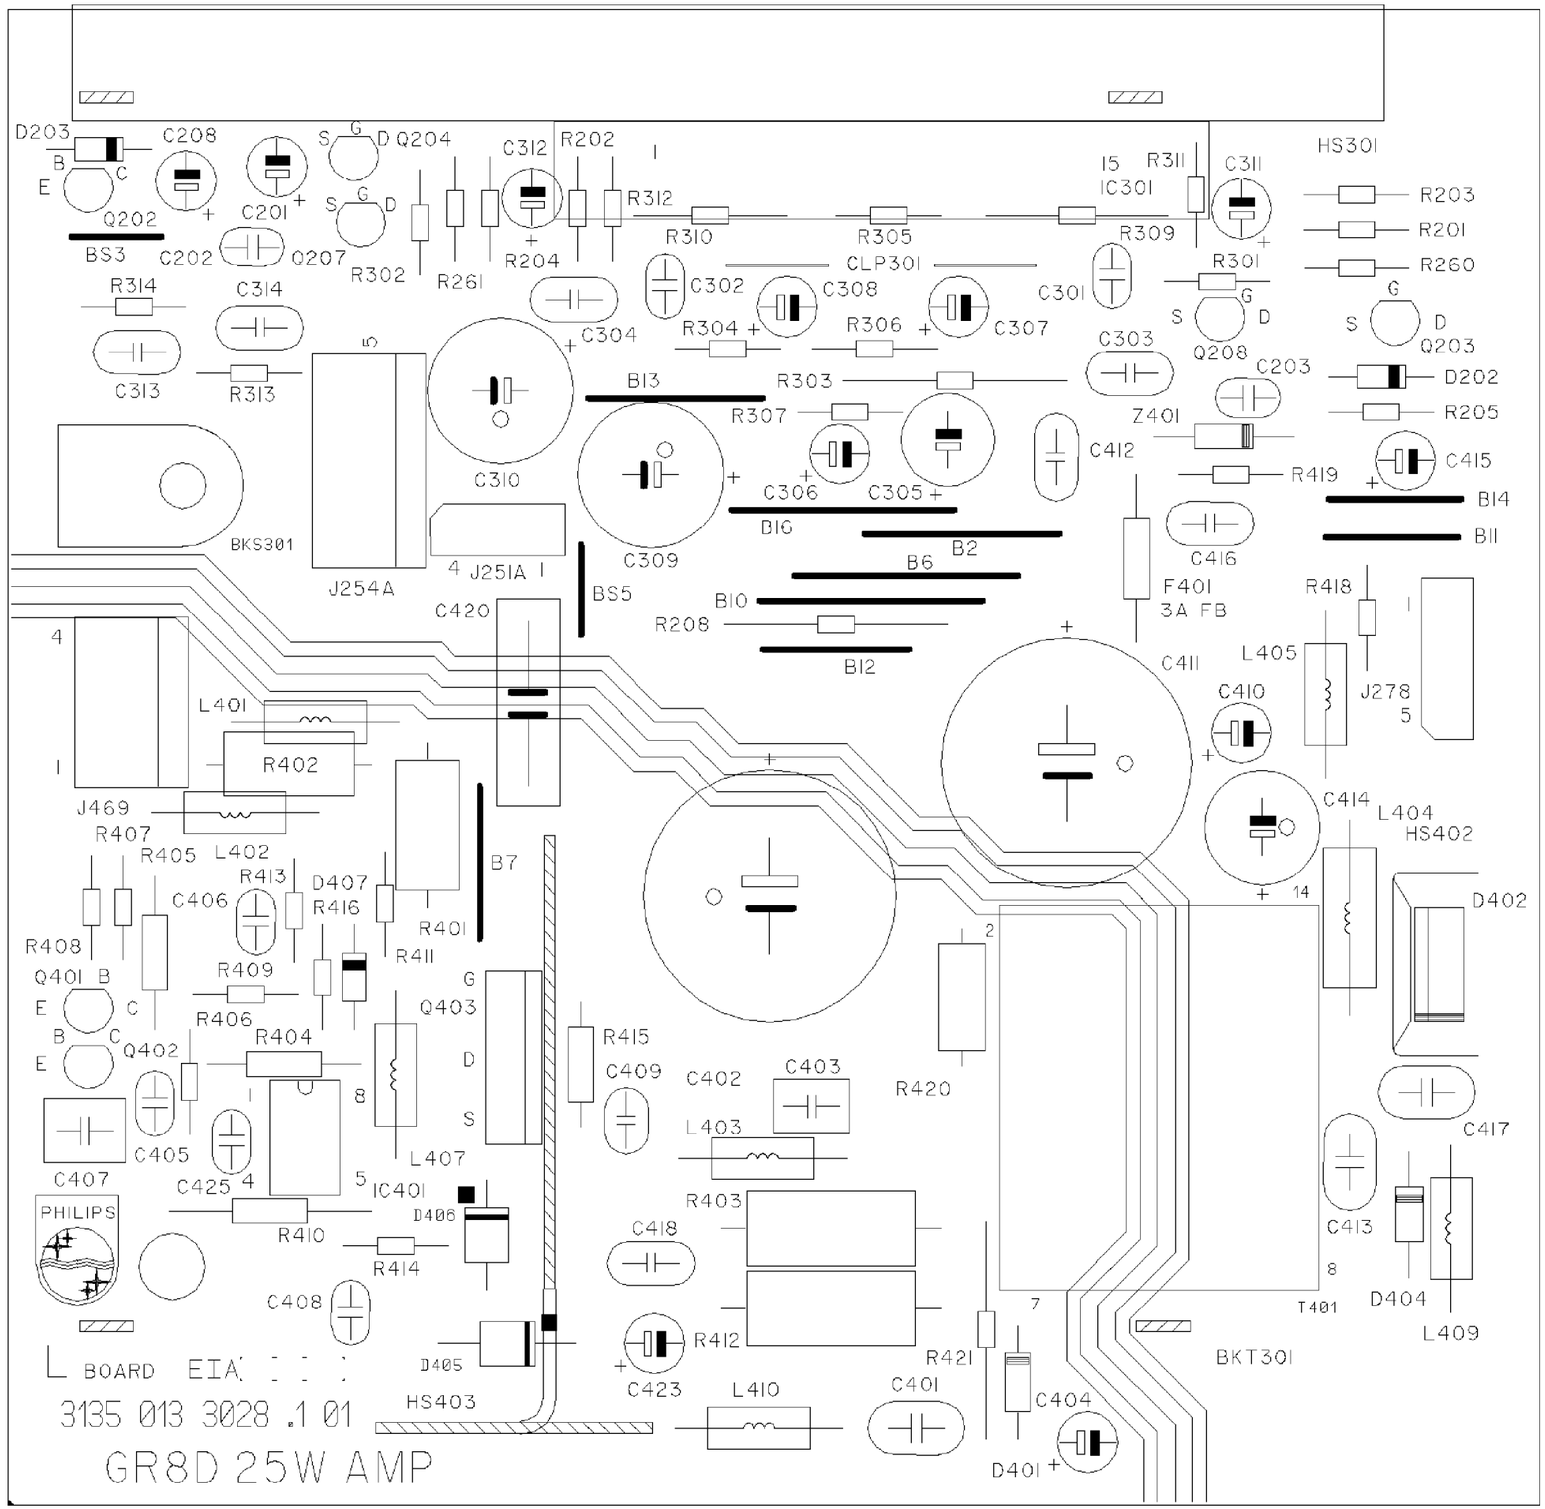


USED ONLY IN MODELS: 48PP72A, 48XP43C, 48XP44, 54PP72, 54XP43, 54XP44, 60XP43, MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - 25 WATT AMP CBA (BOTTOM VIEW)

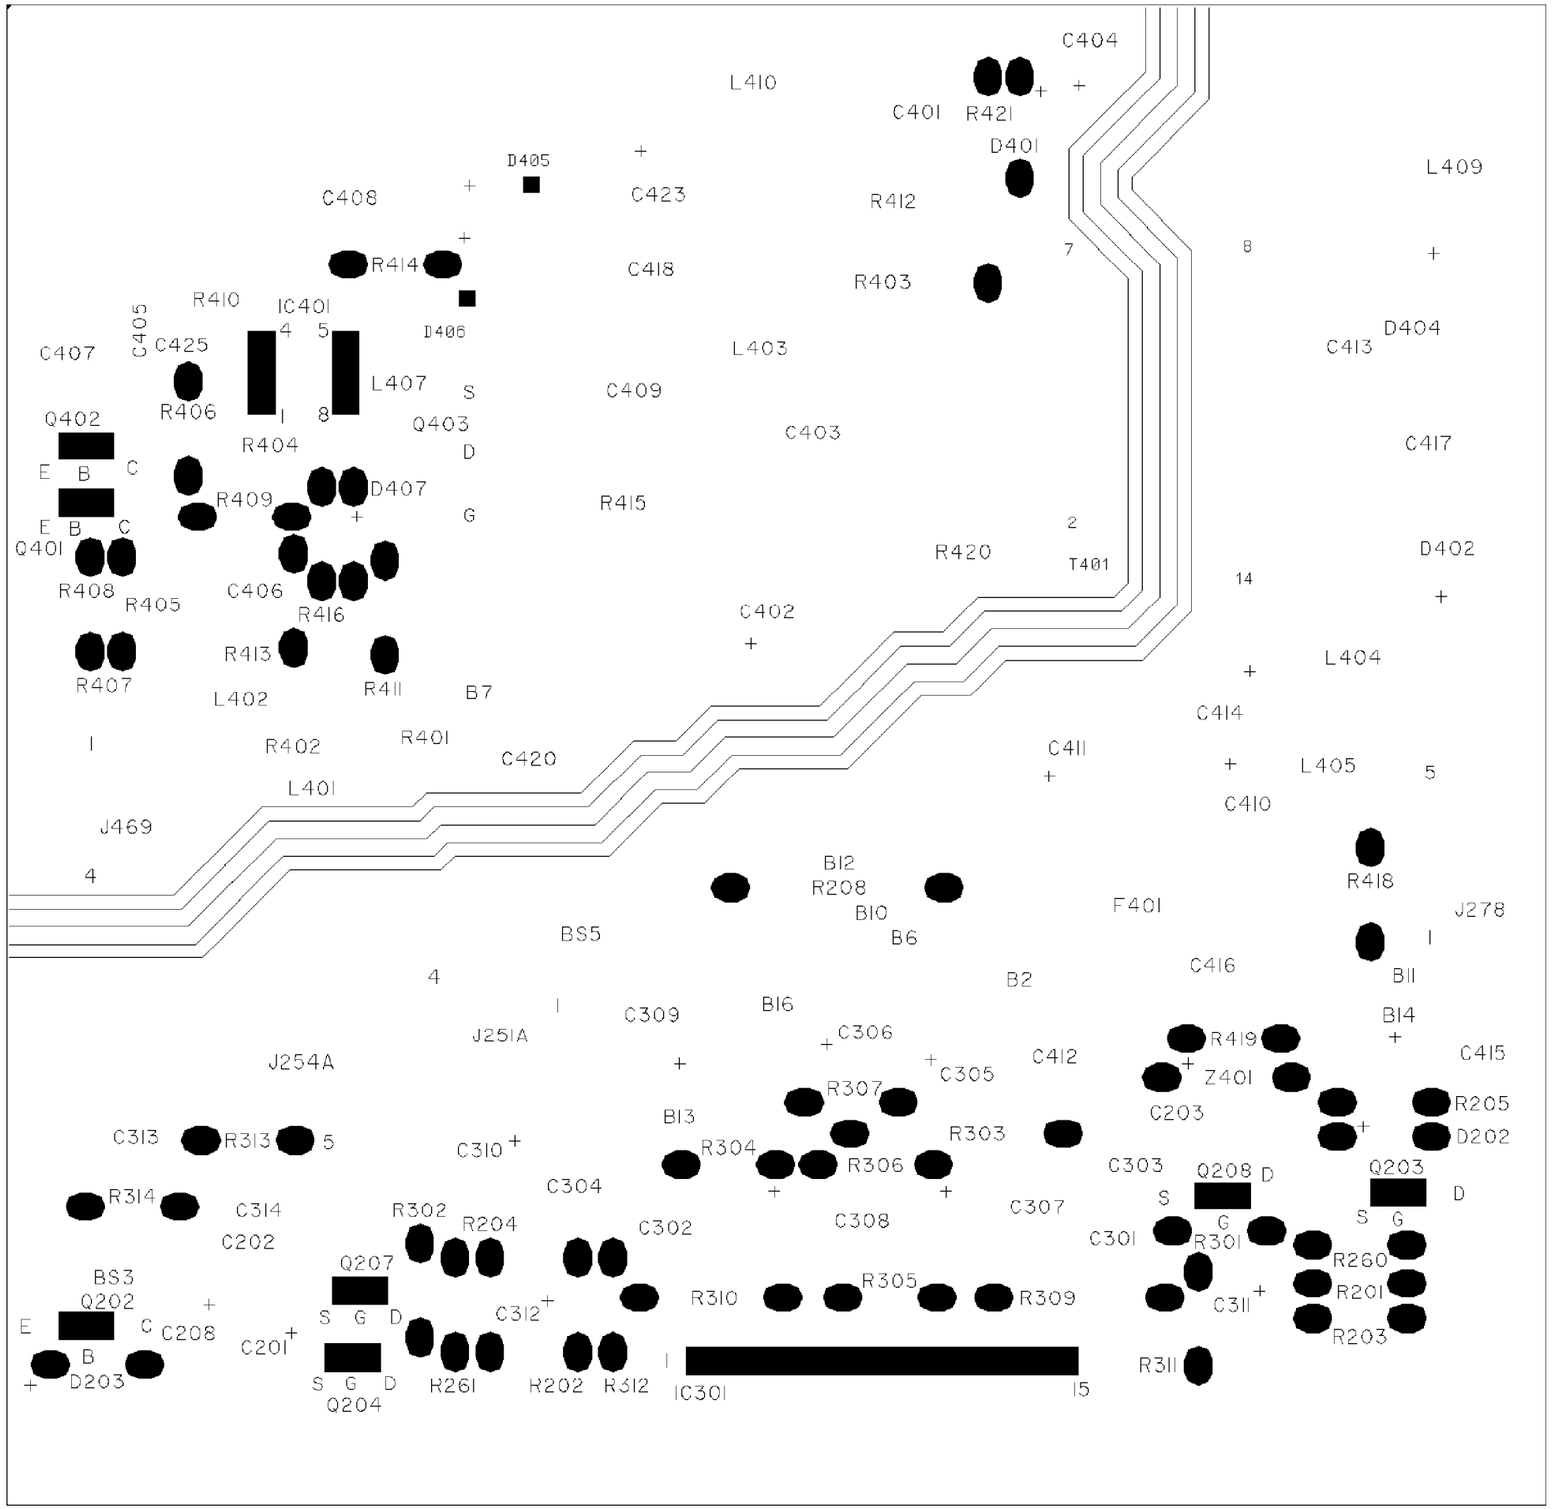


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - WALLVISION SWITCH PANEL CBA (TOP VIEW)

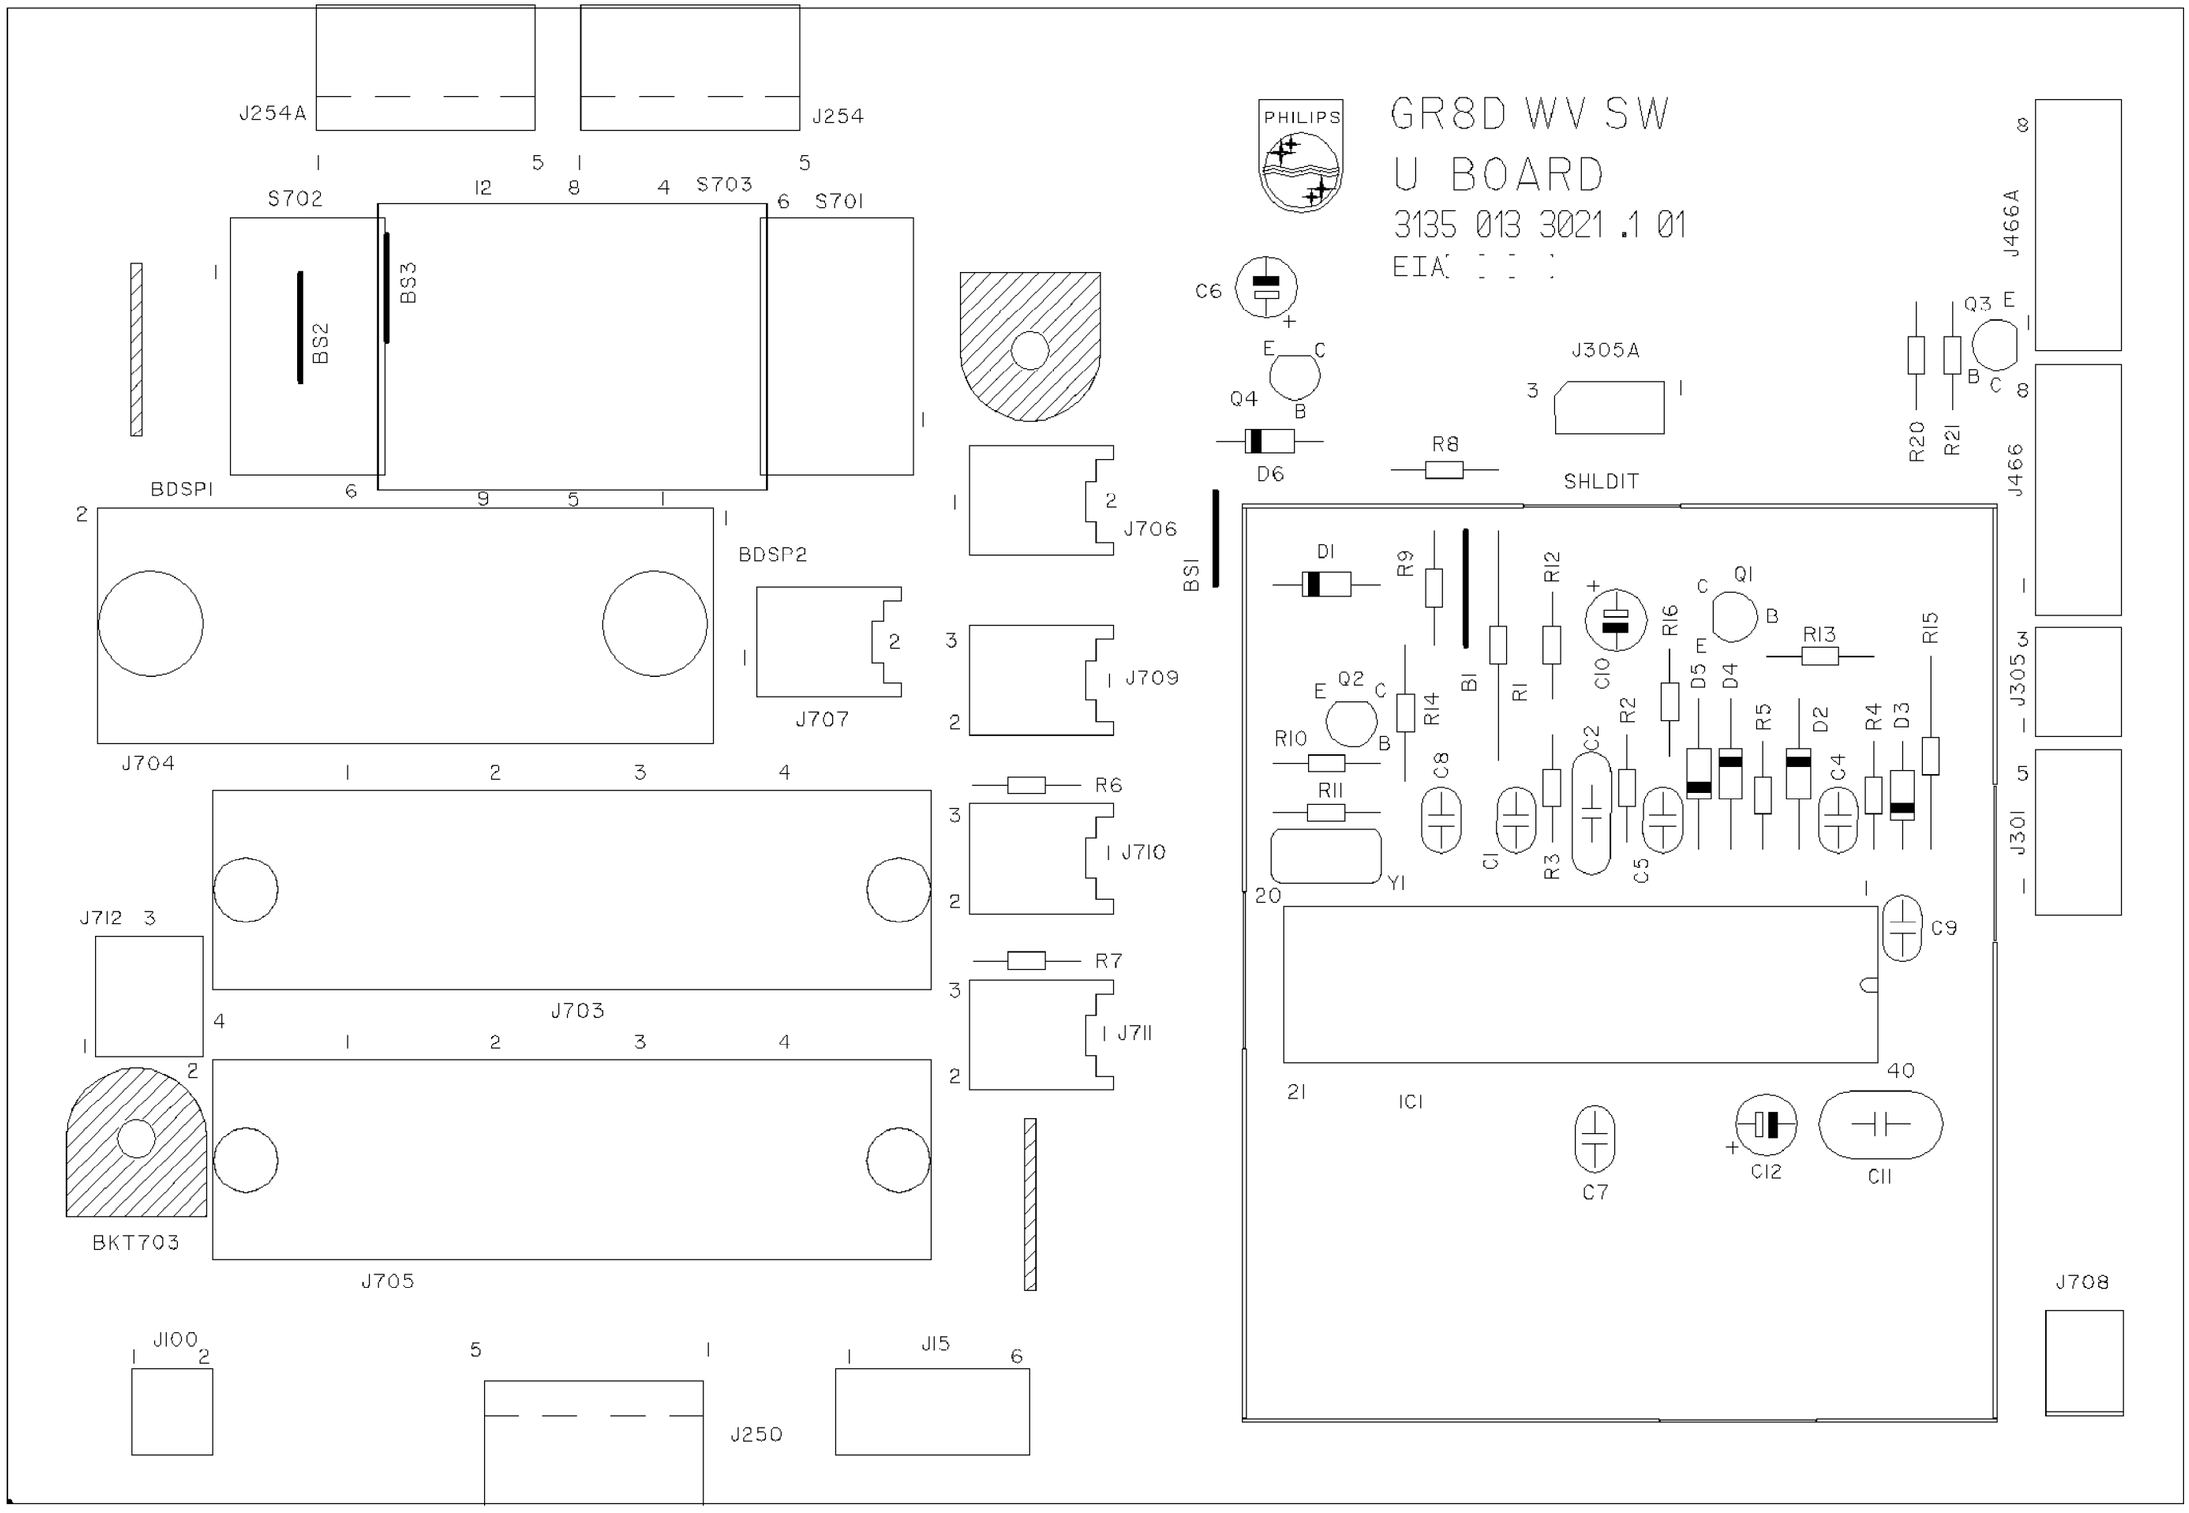


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - WALLVISION SWITCH PANEL CBA (BOTTOM VIEW)

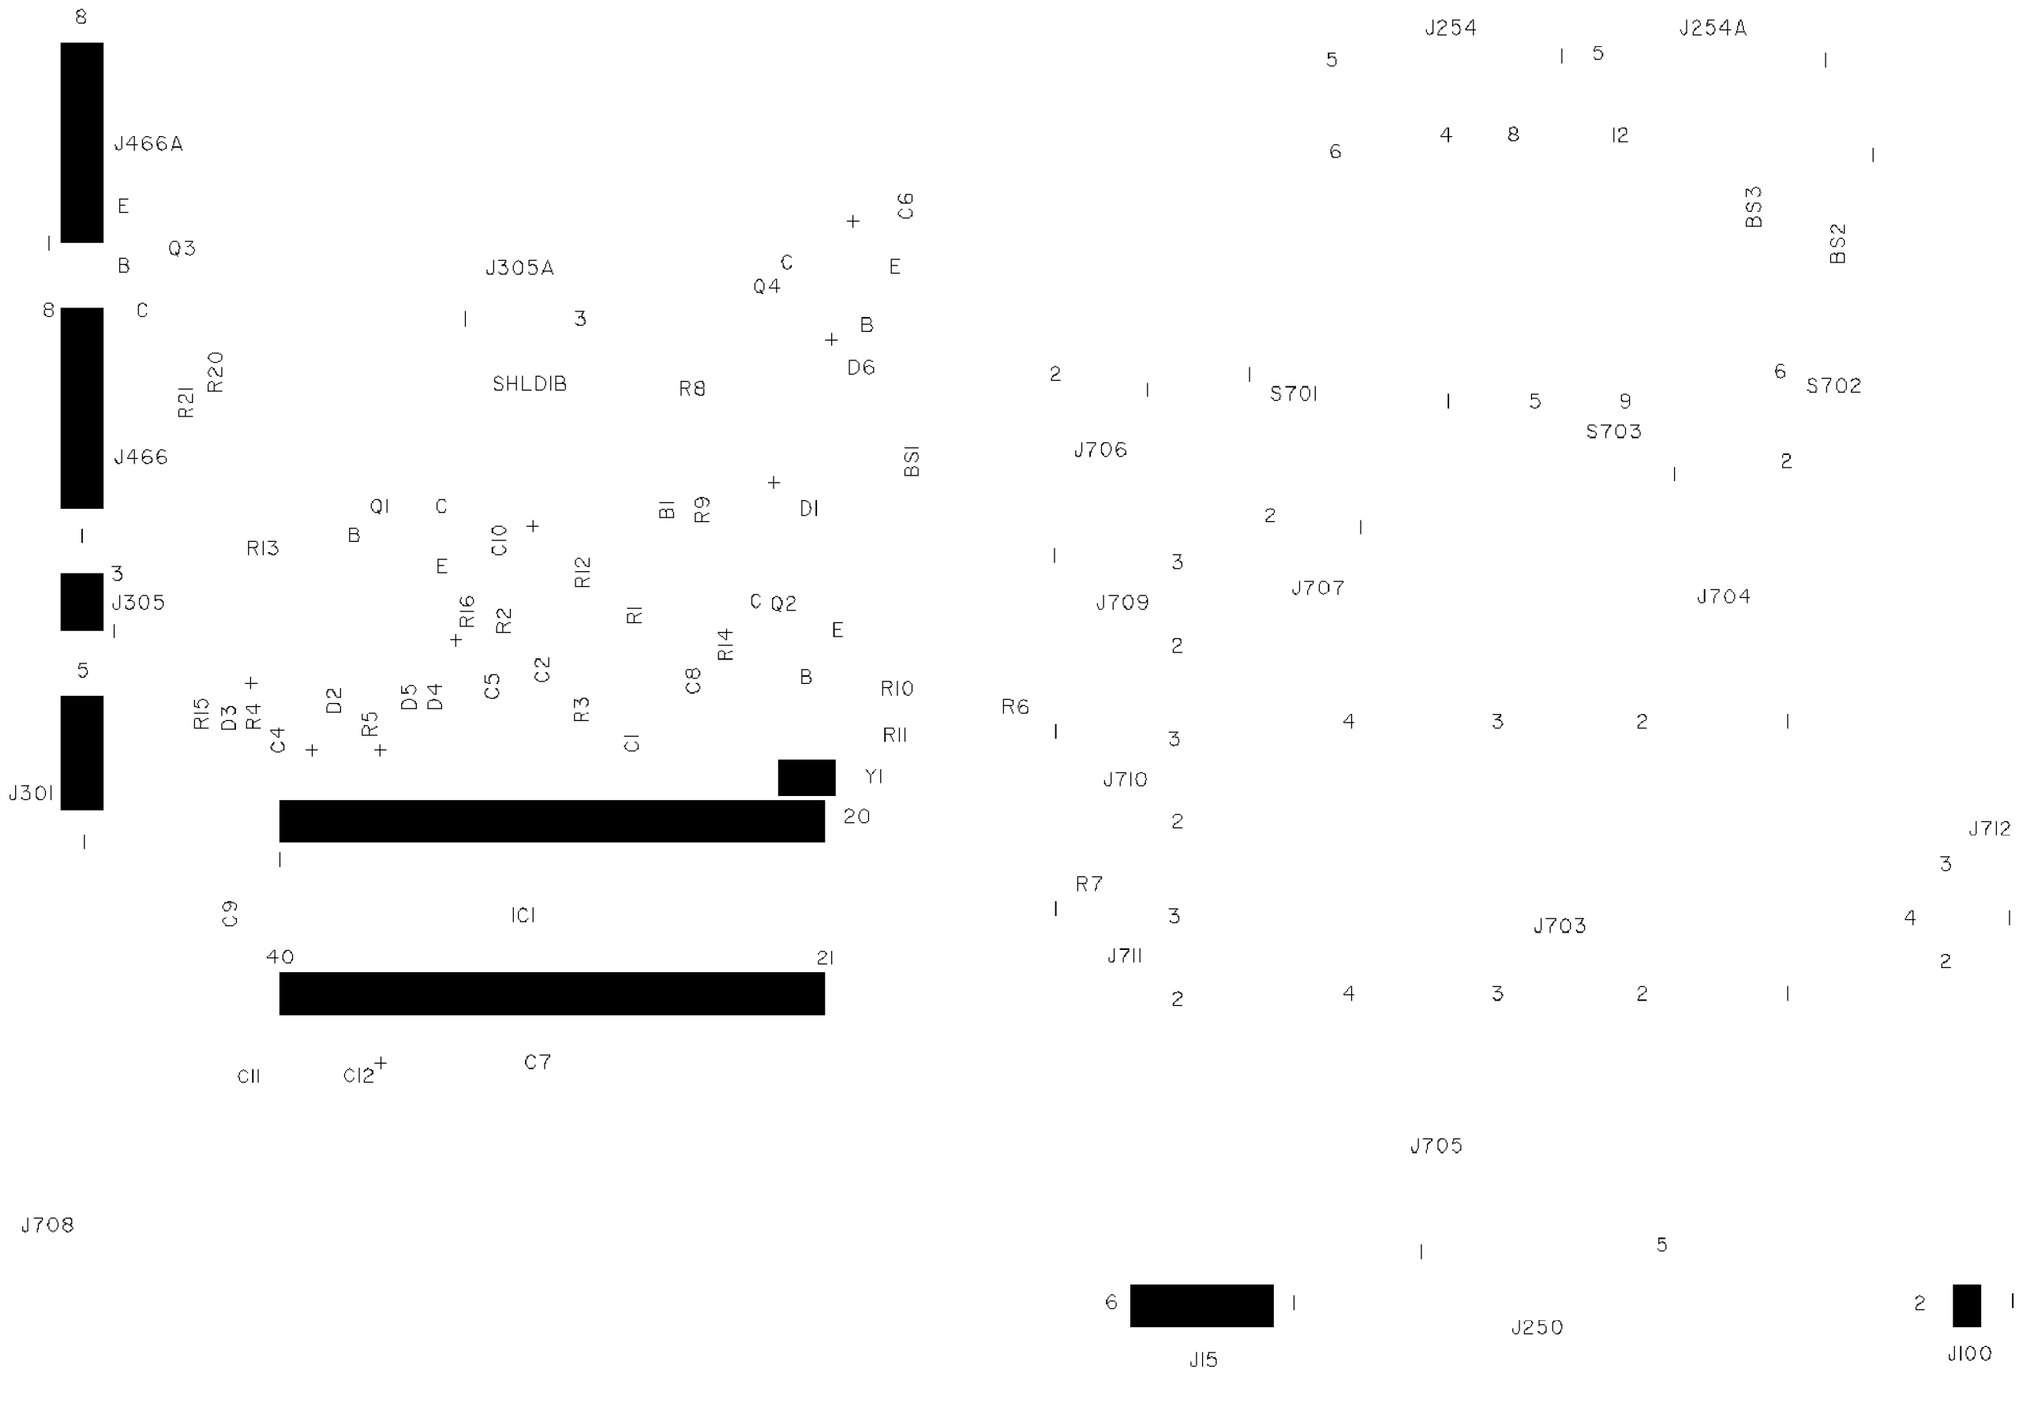


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C, PV5470, PV6070, XV5270 (7573) - SVM CBA (TOP VIEW)

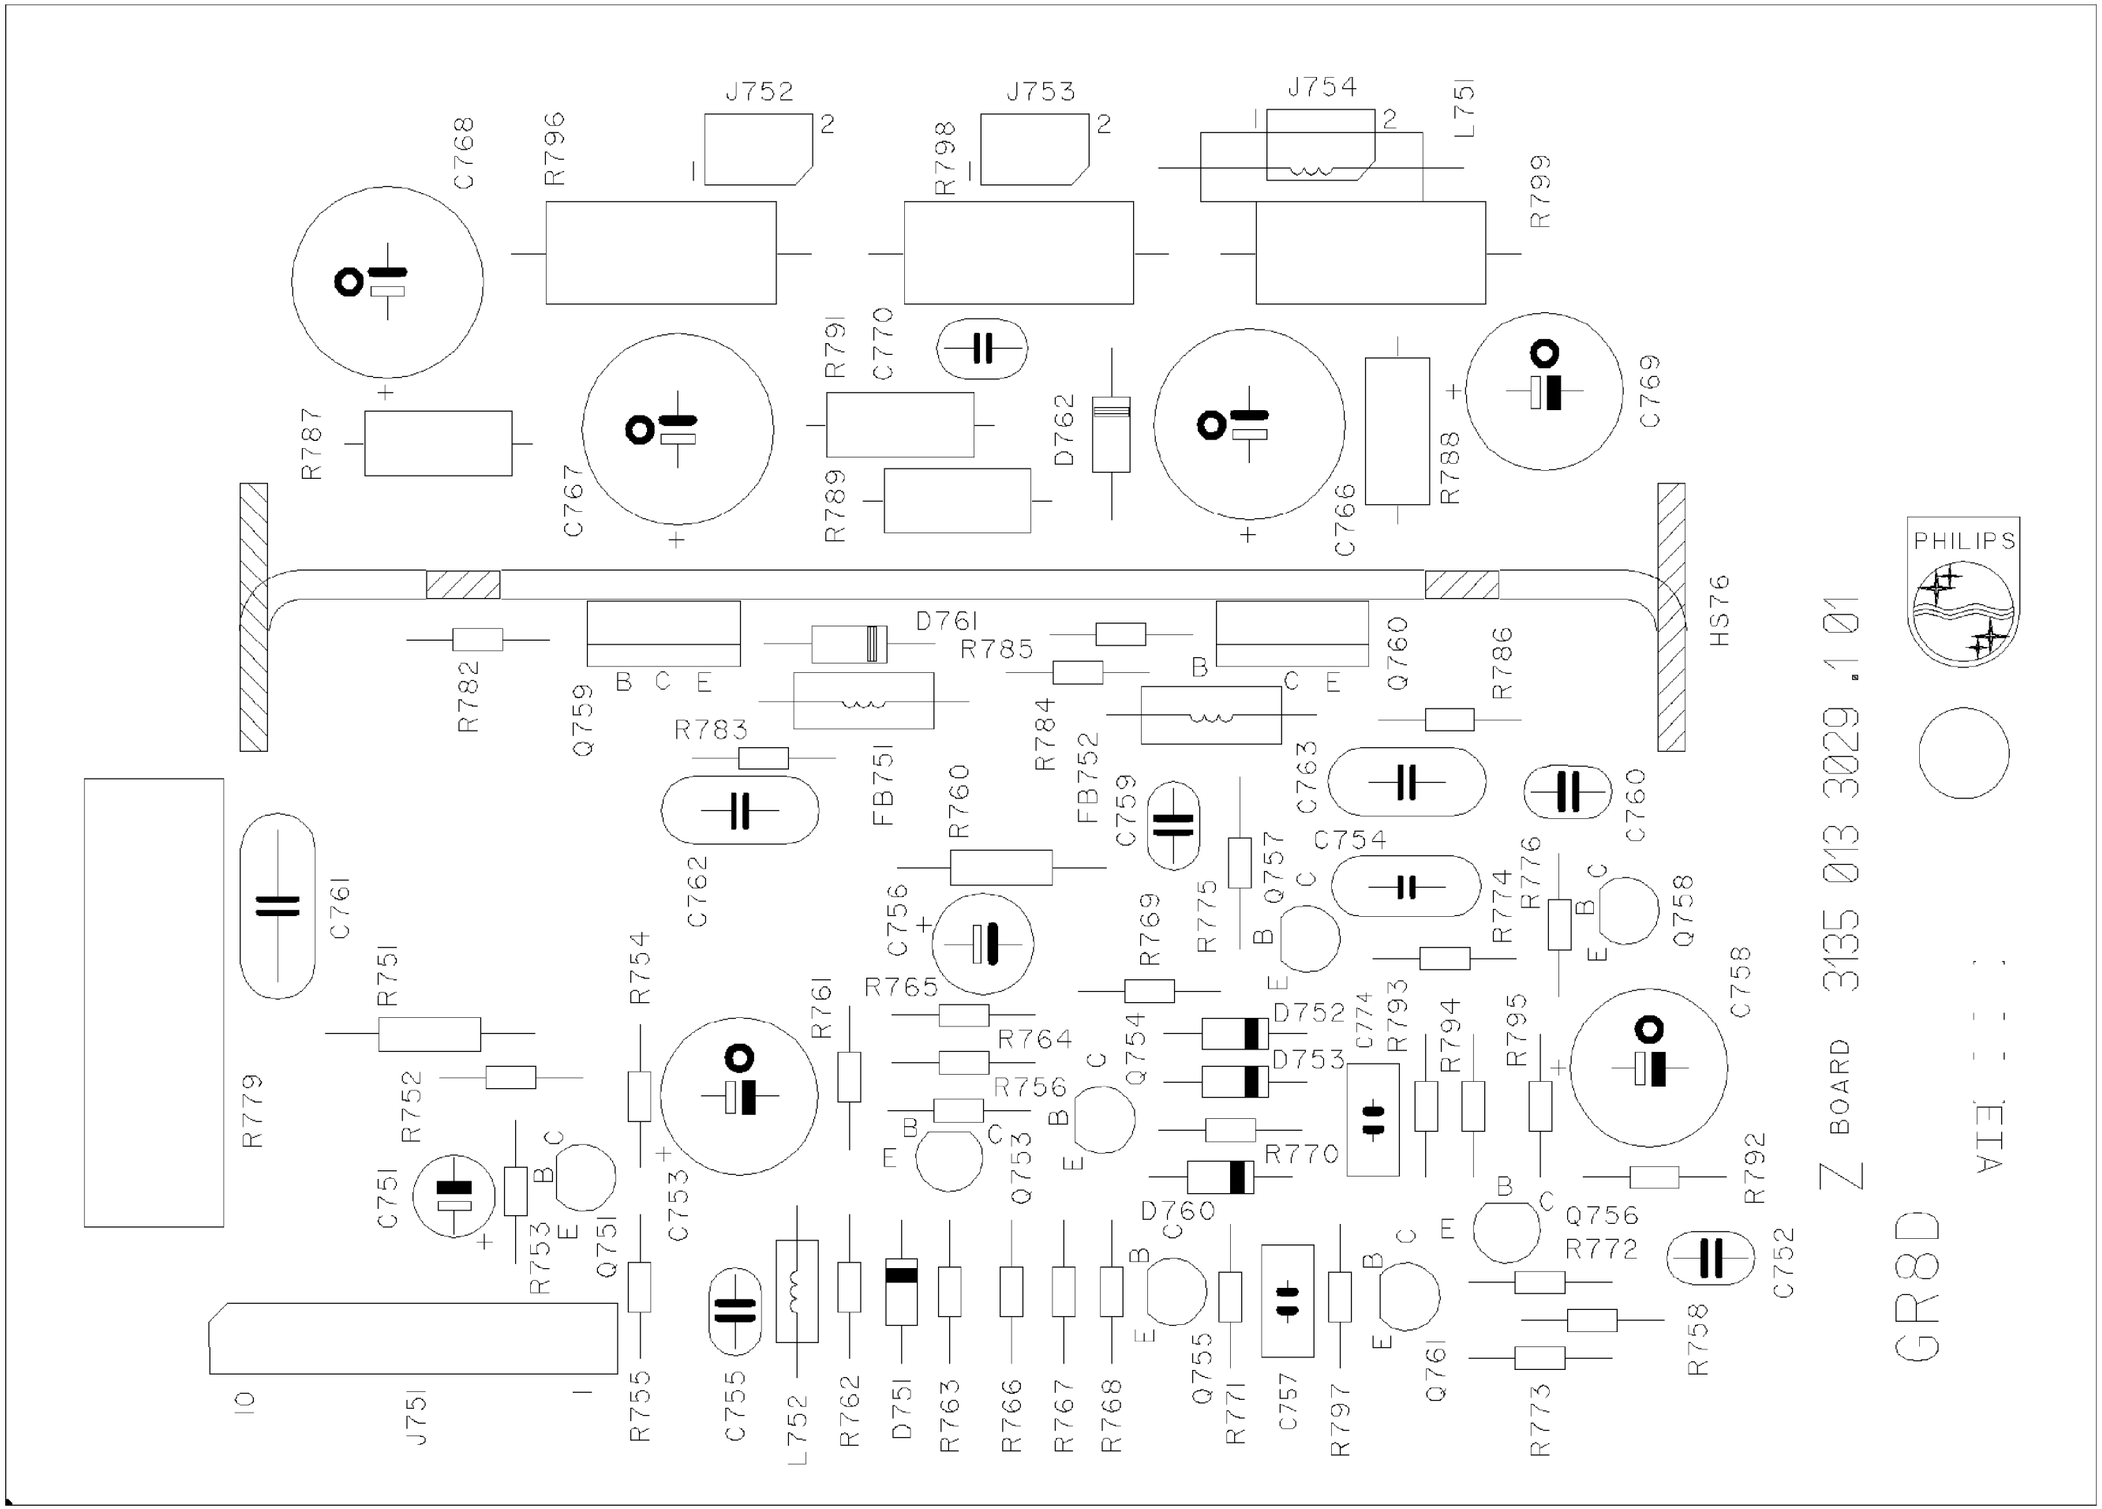


NOT USED IN MODELS: , 1152980001, 8P4831C, 8P4834C, 8P5431C, 8P5434C, 8P6031C, 8P6034C, PV5470, PV6070, XV5270 (7573) - SVM CBA (BOTTOM VIEW)

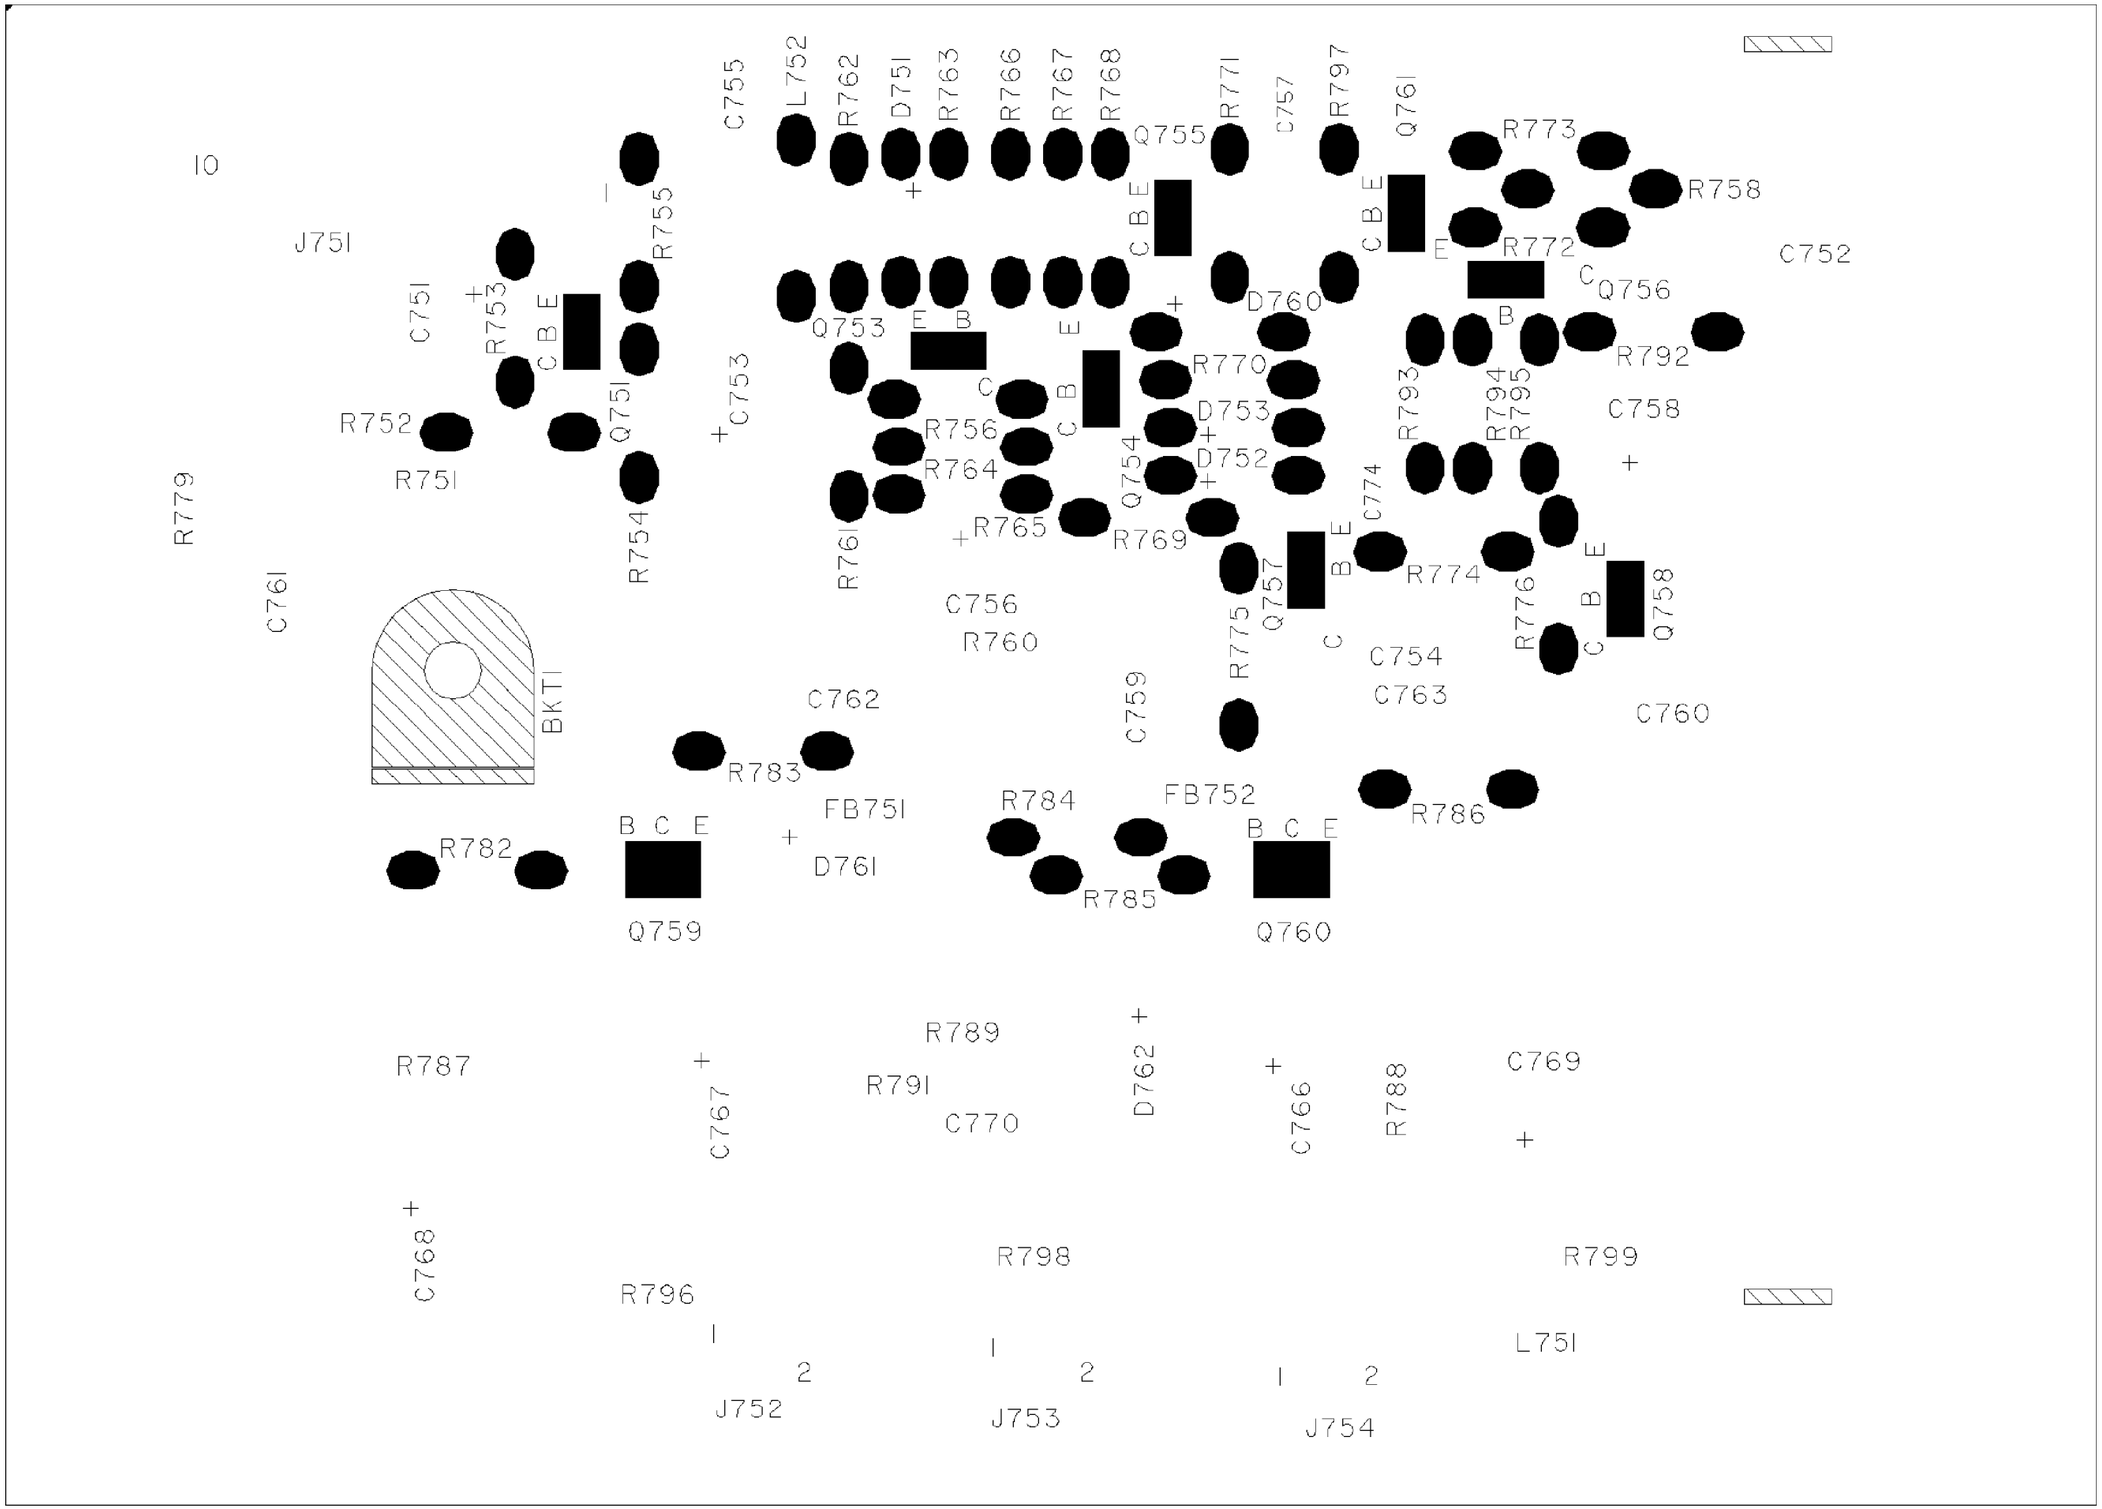


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - STEREO SPREAD MODULE CBA (TOP VIEW)

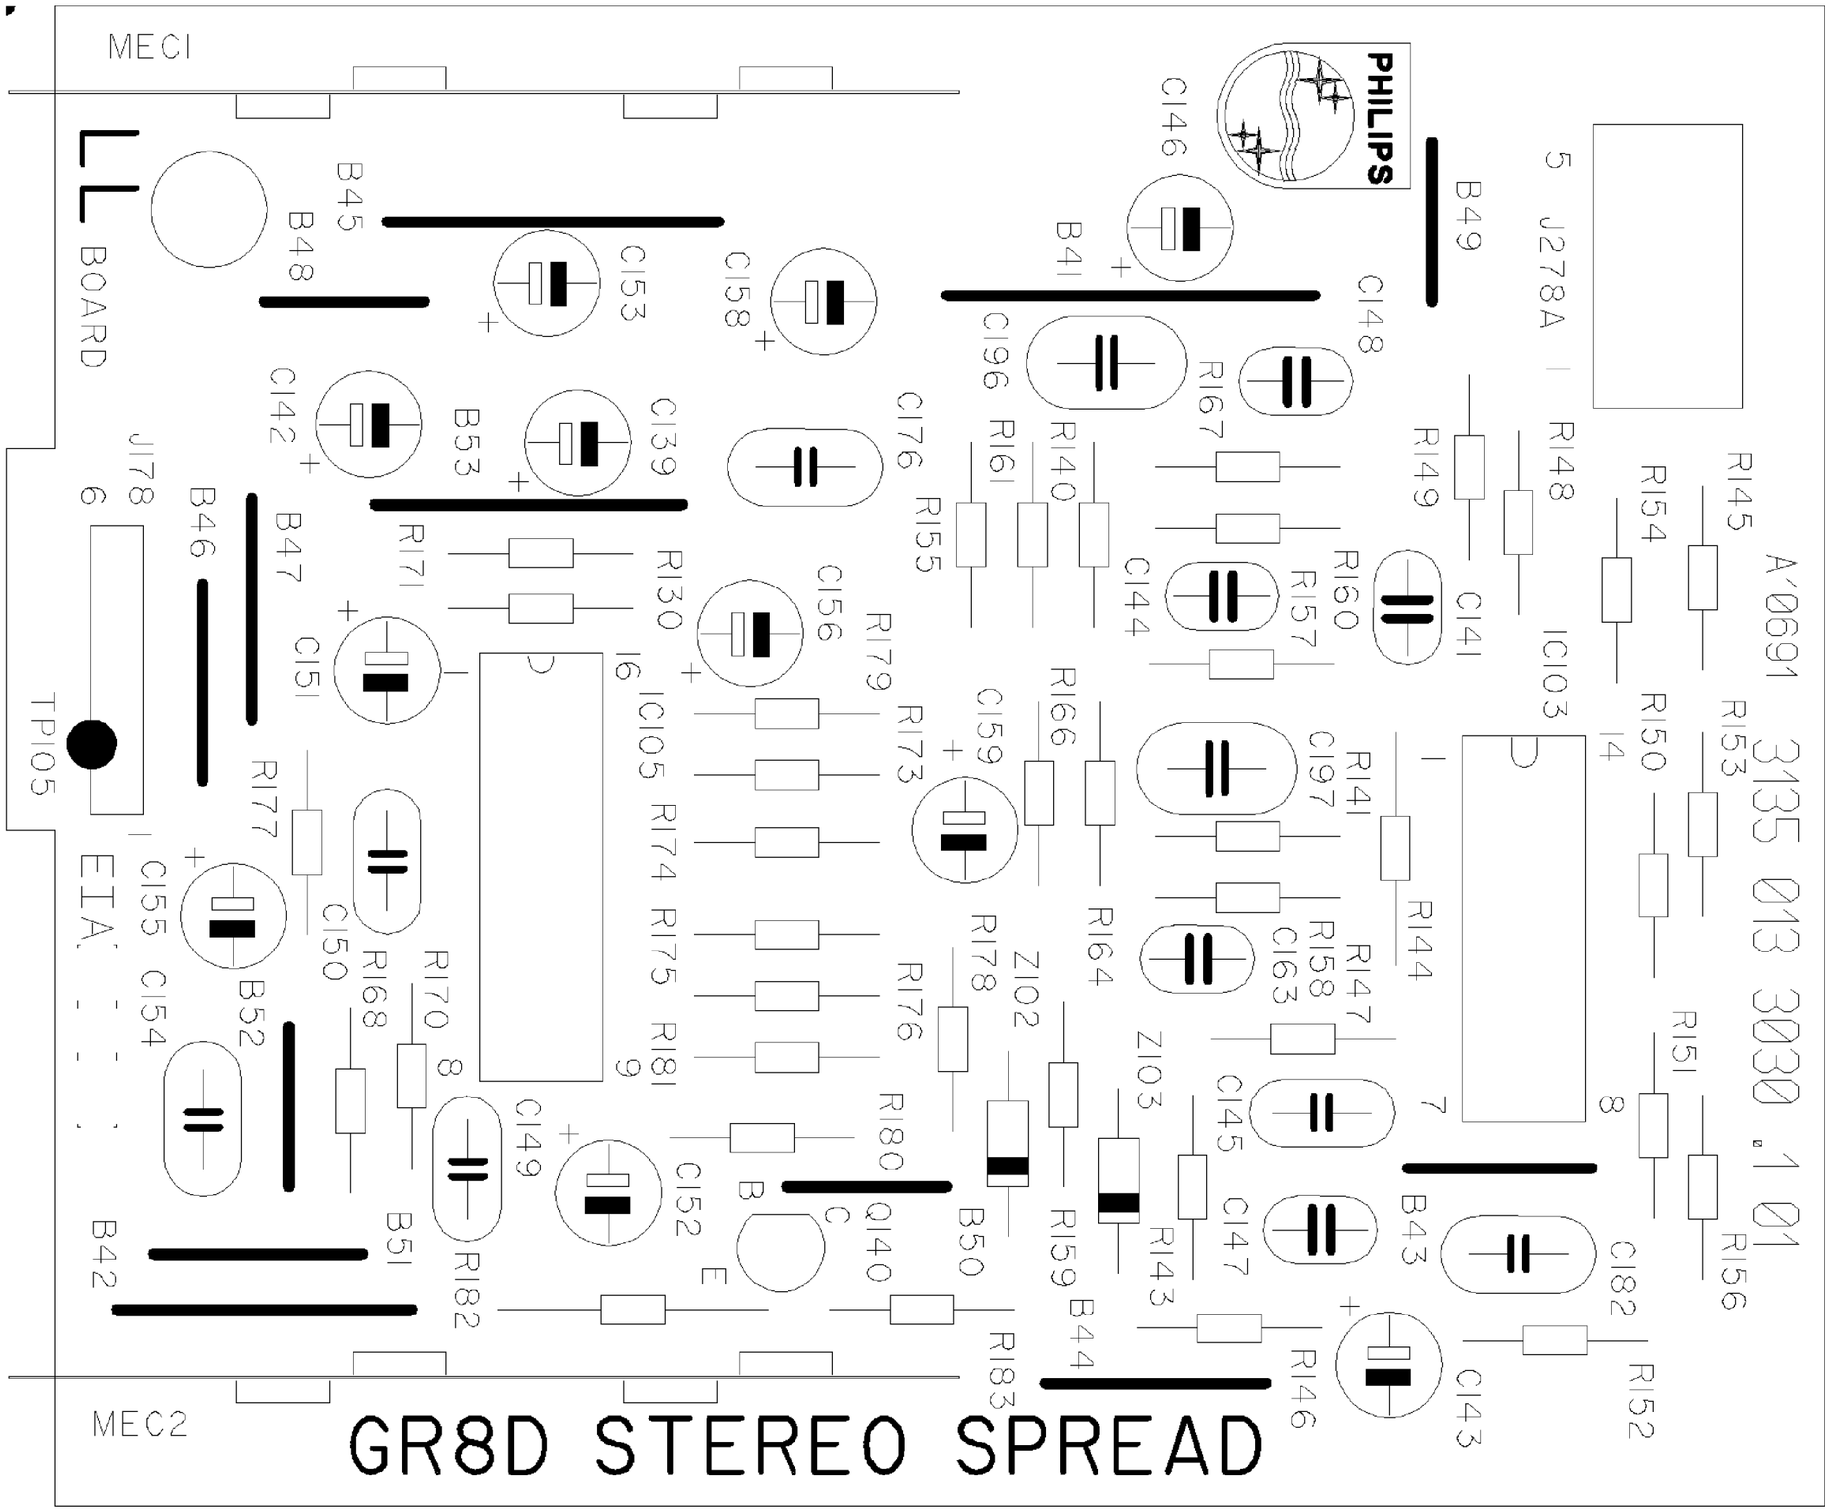


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - STEREO SPREAD MODULE CBA (BOTTOM VIEW)

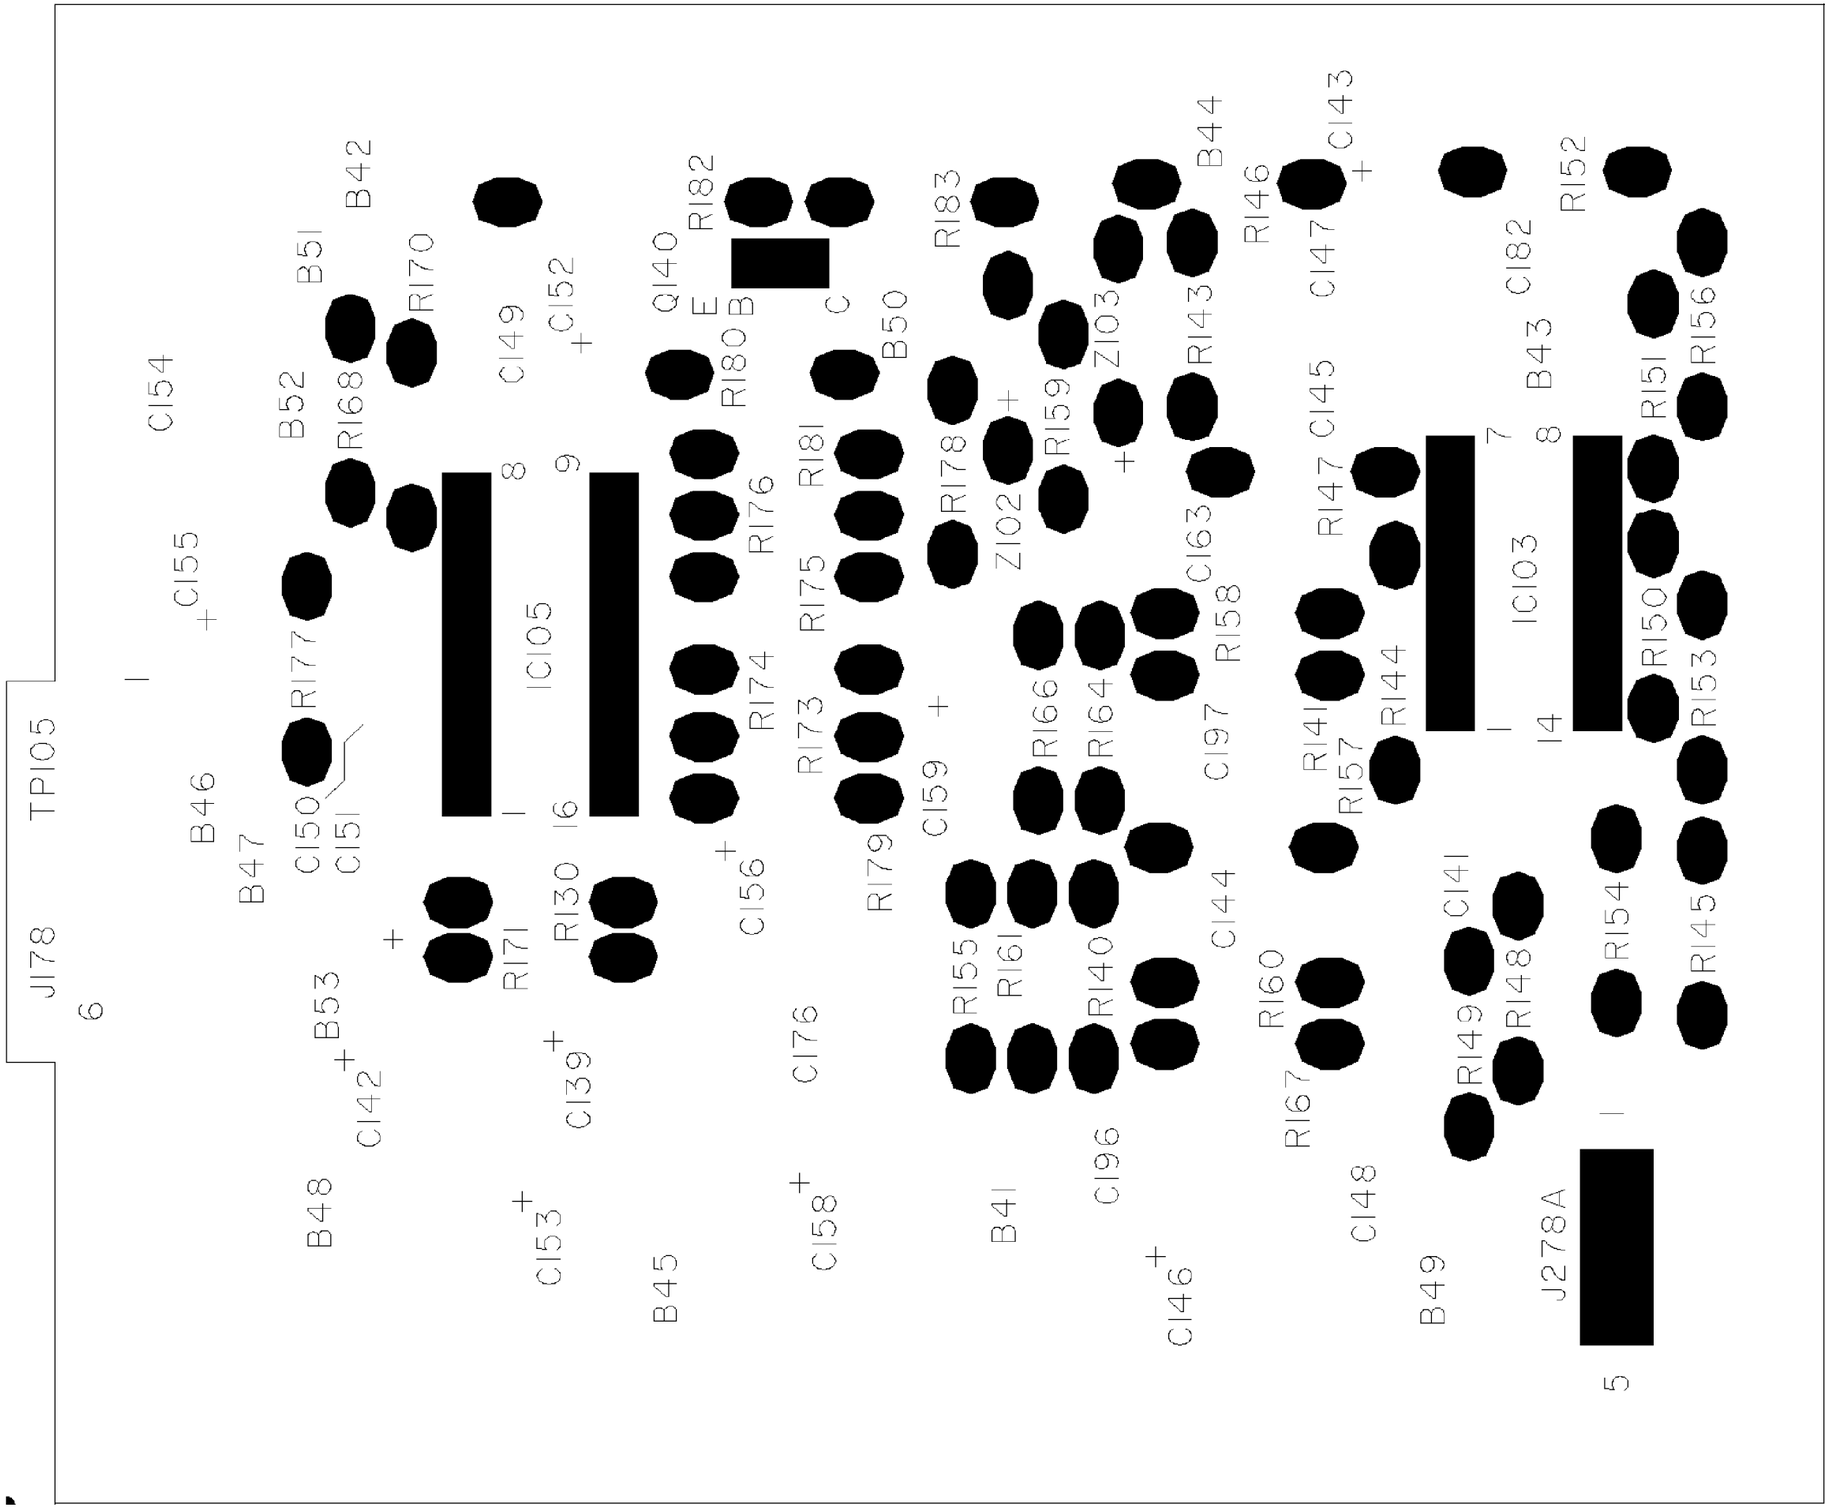


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - GUIDE PLUS CBA (TOP VIEW)

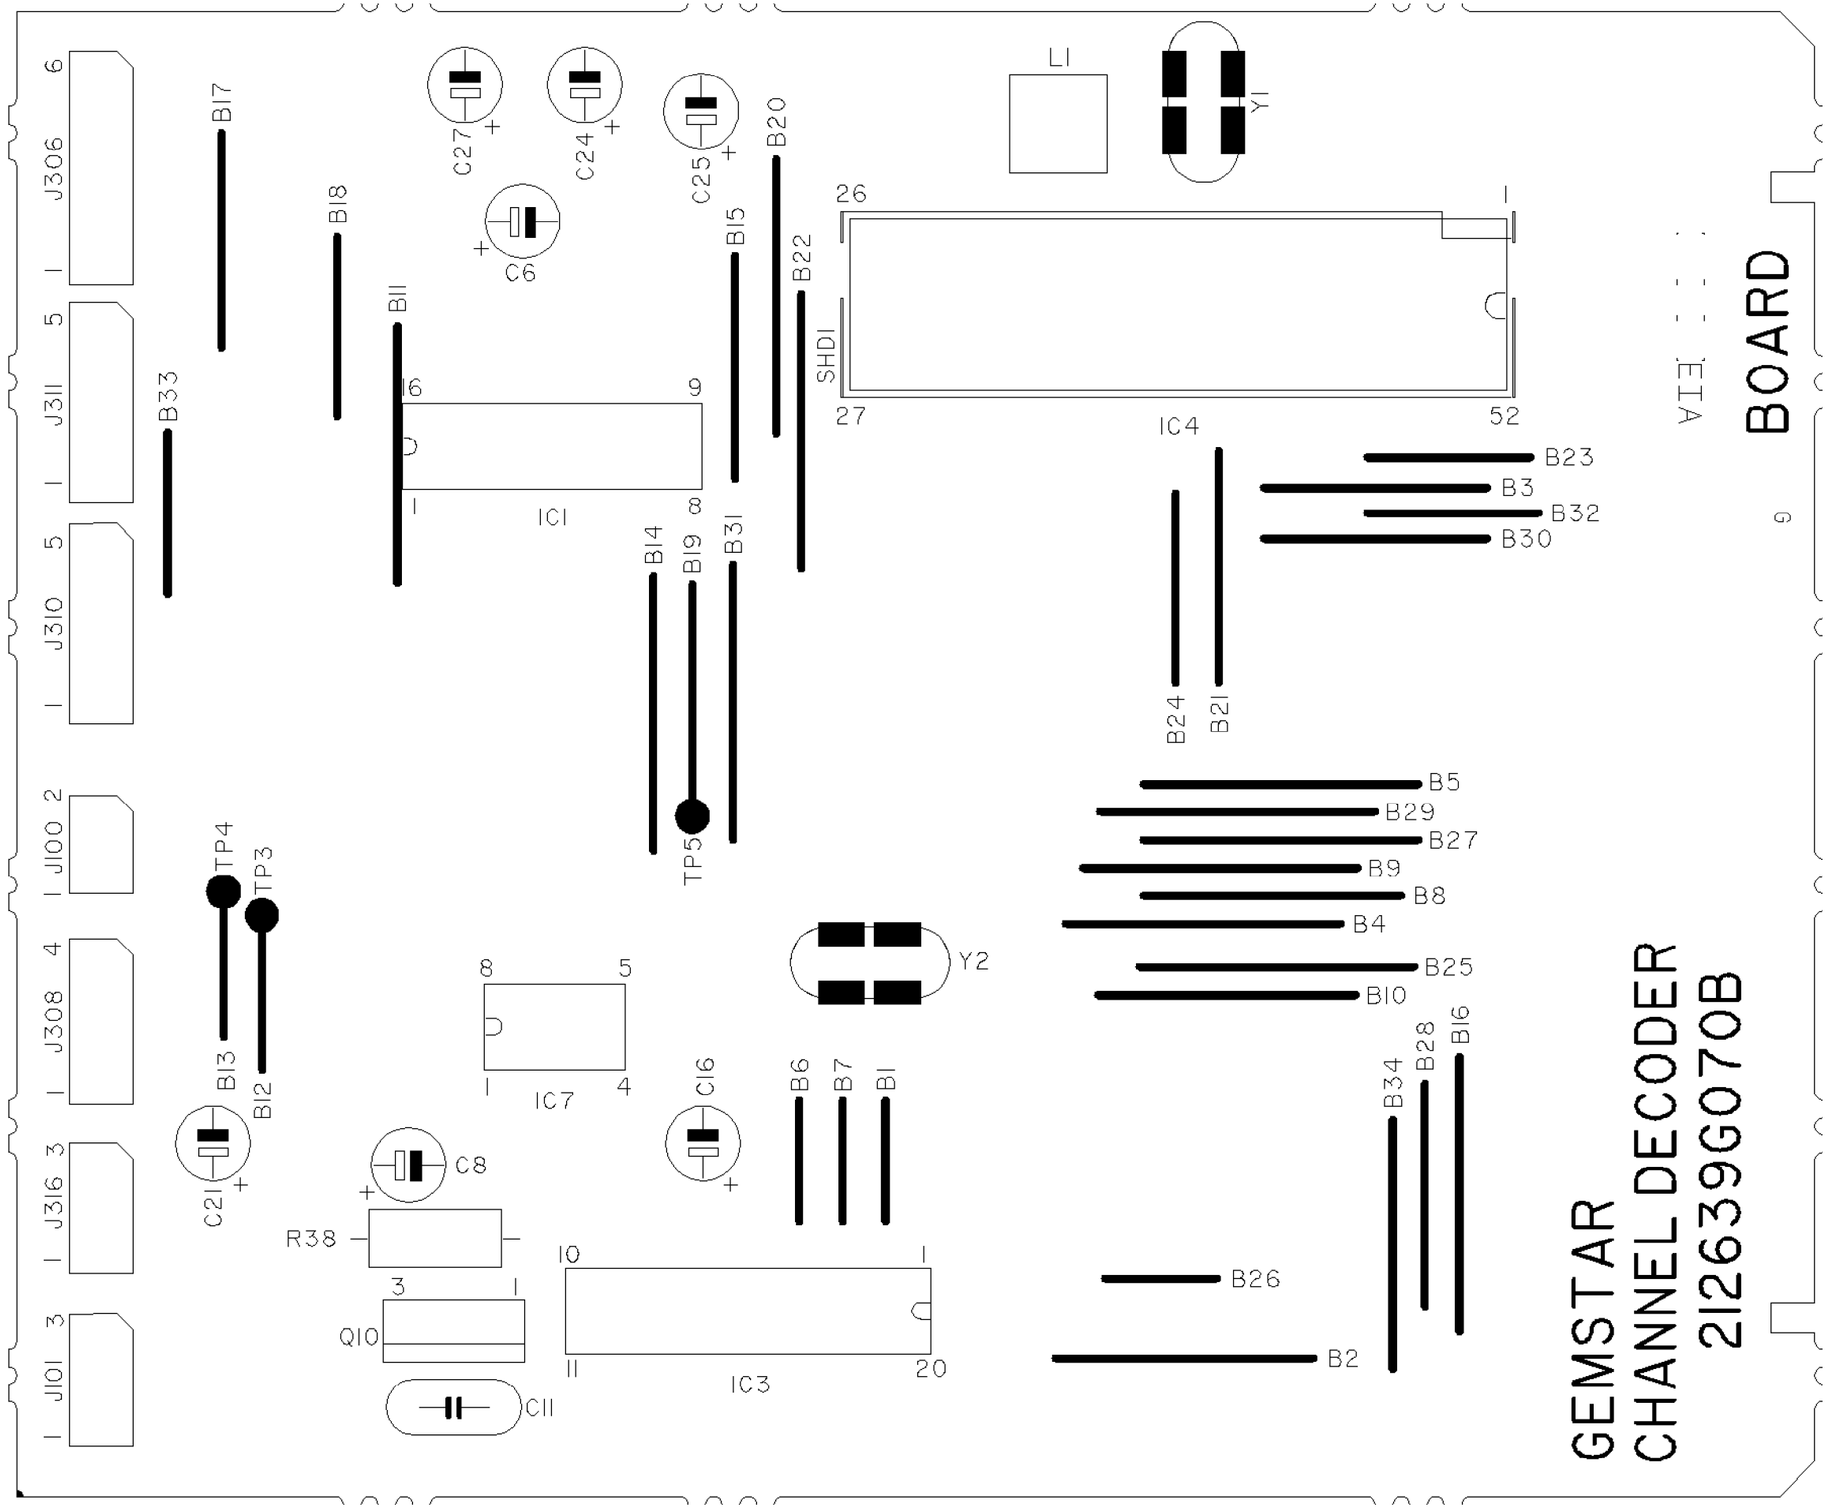


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, XV5270, PV5470, PV6070 (7573) - GUIDE PLUS CBA (BOTTOM VIEW)

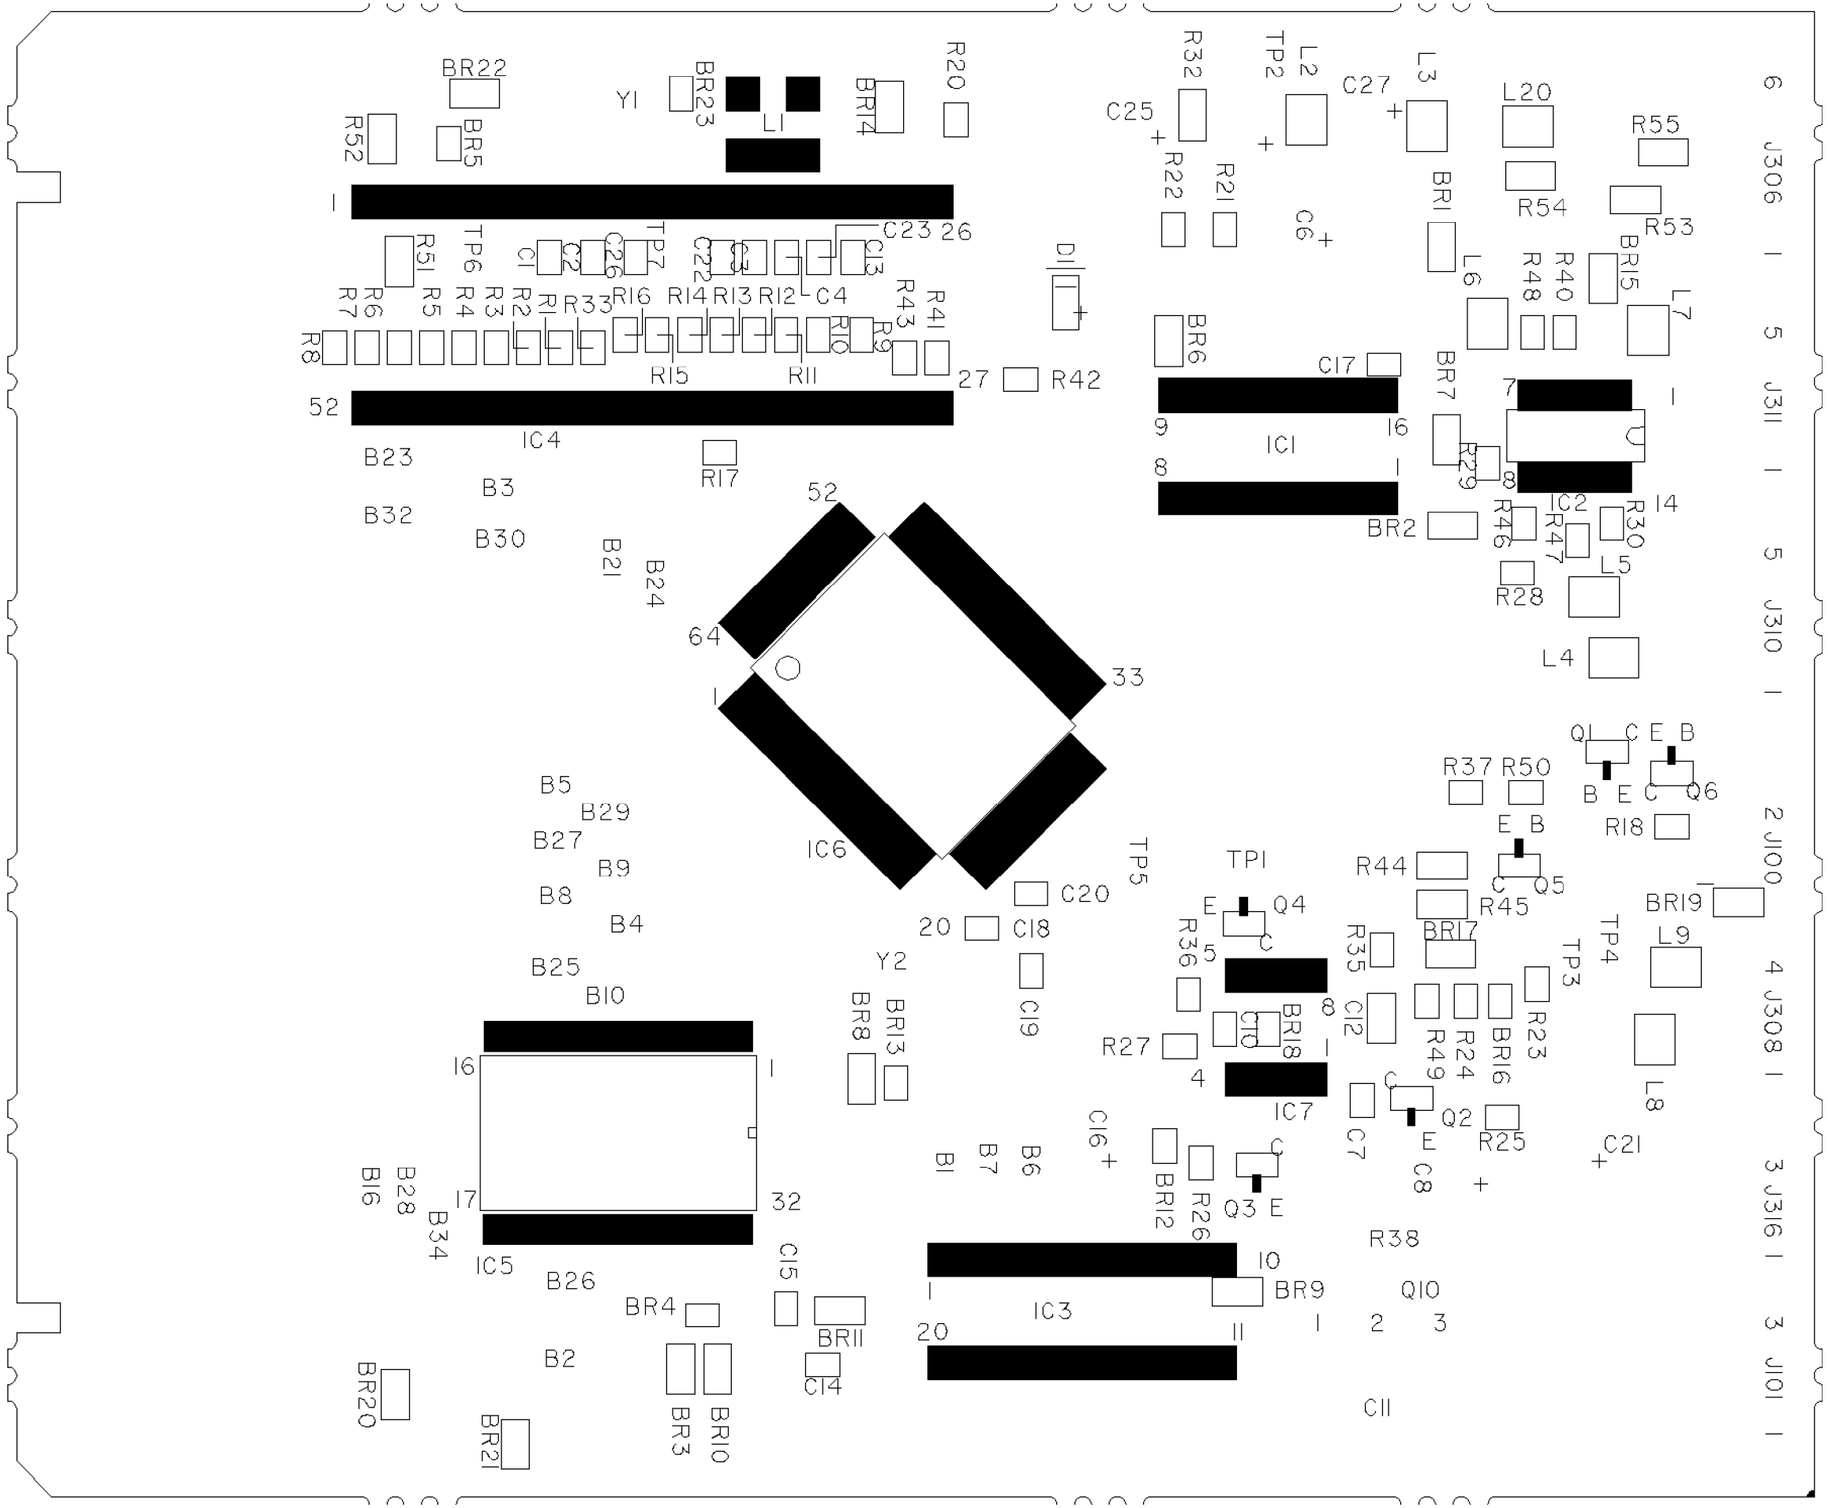


TOP VIEW

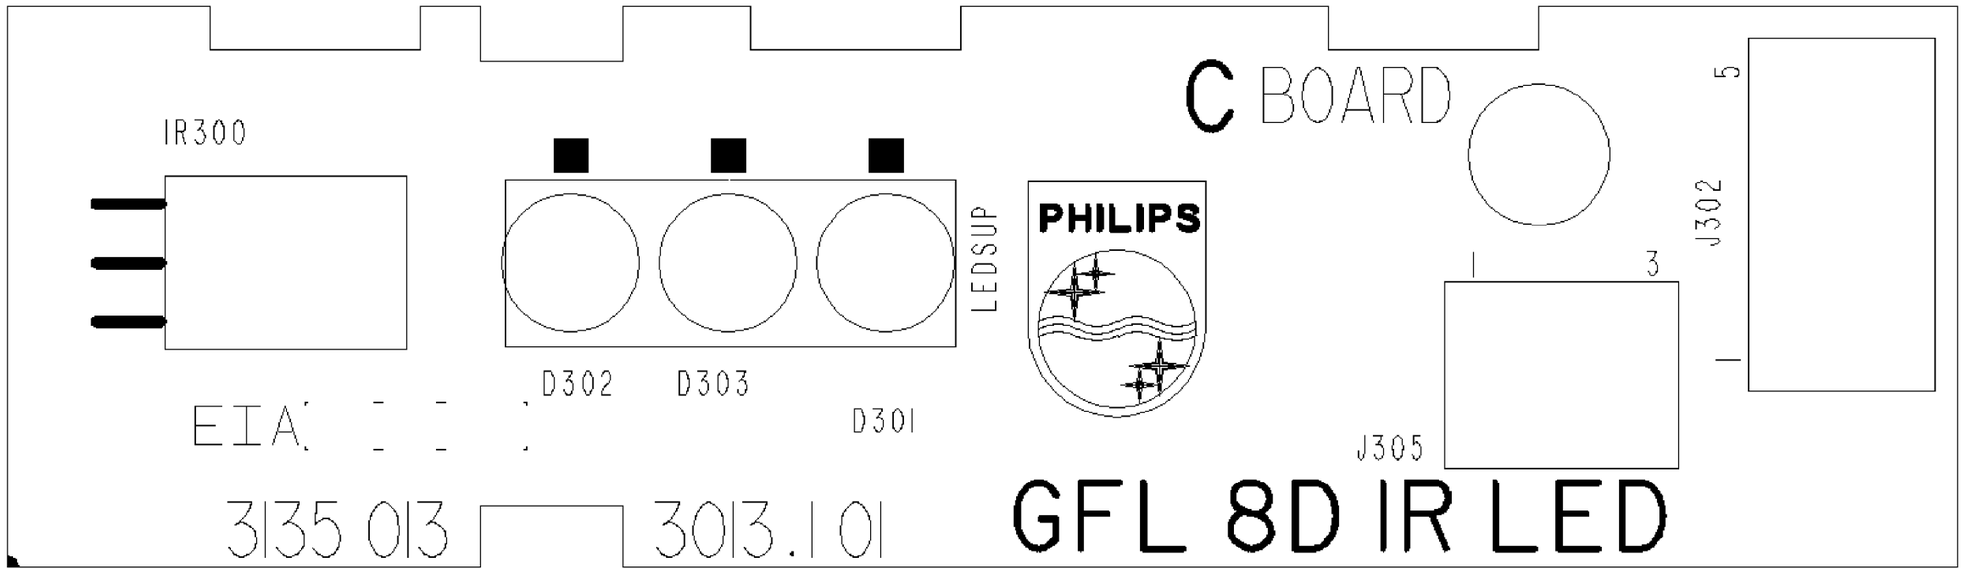


BOTTOM VIEW

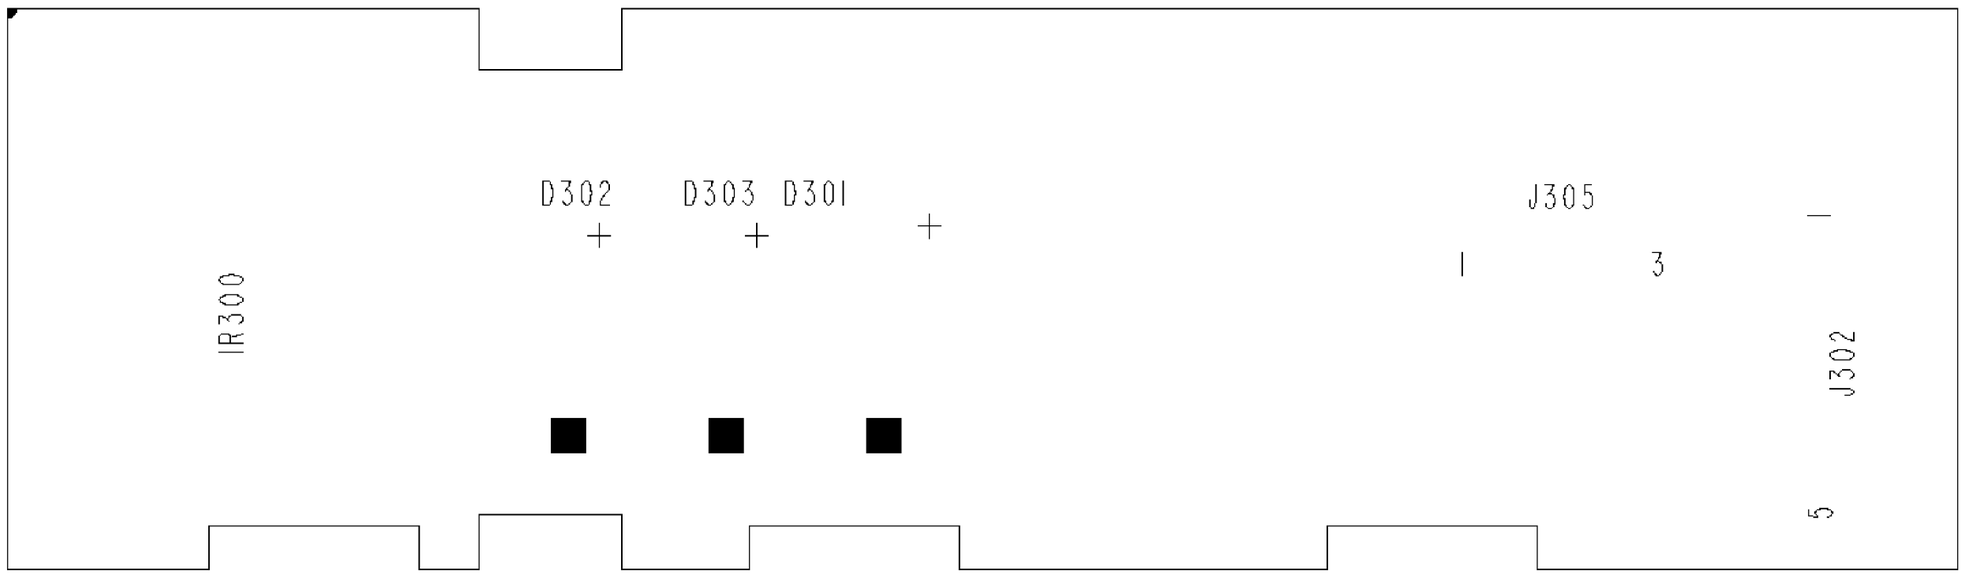

TOP VIEW

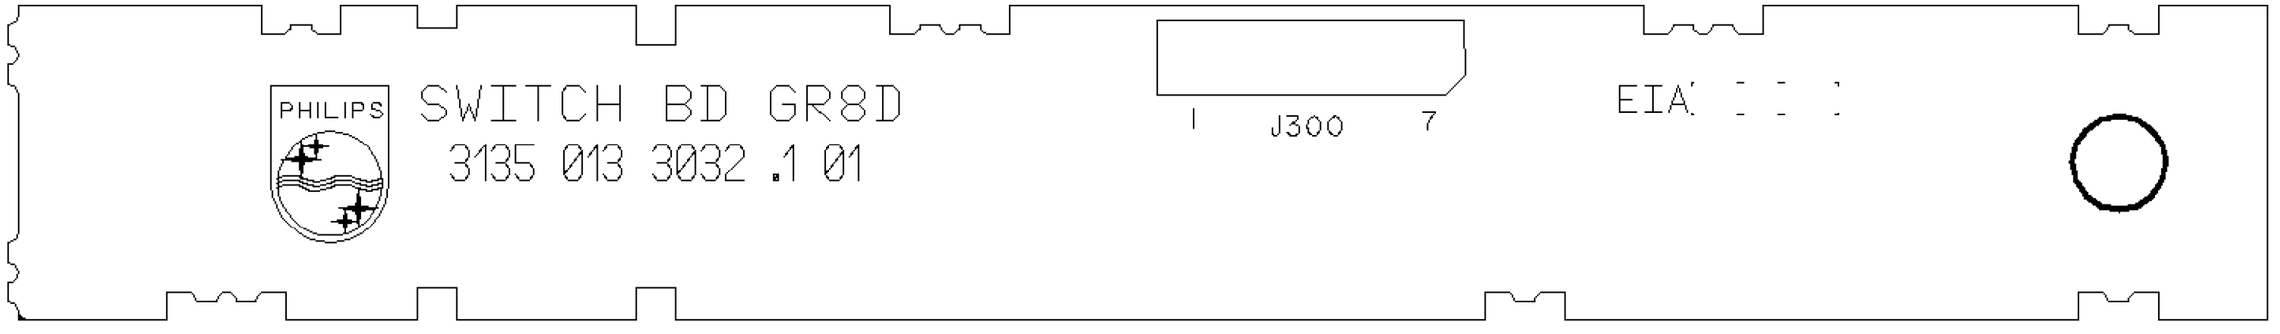


BOTTOM VIEW

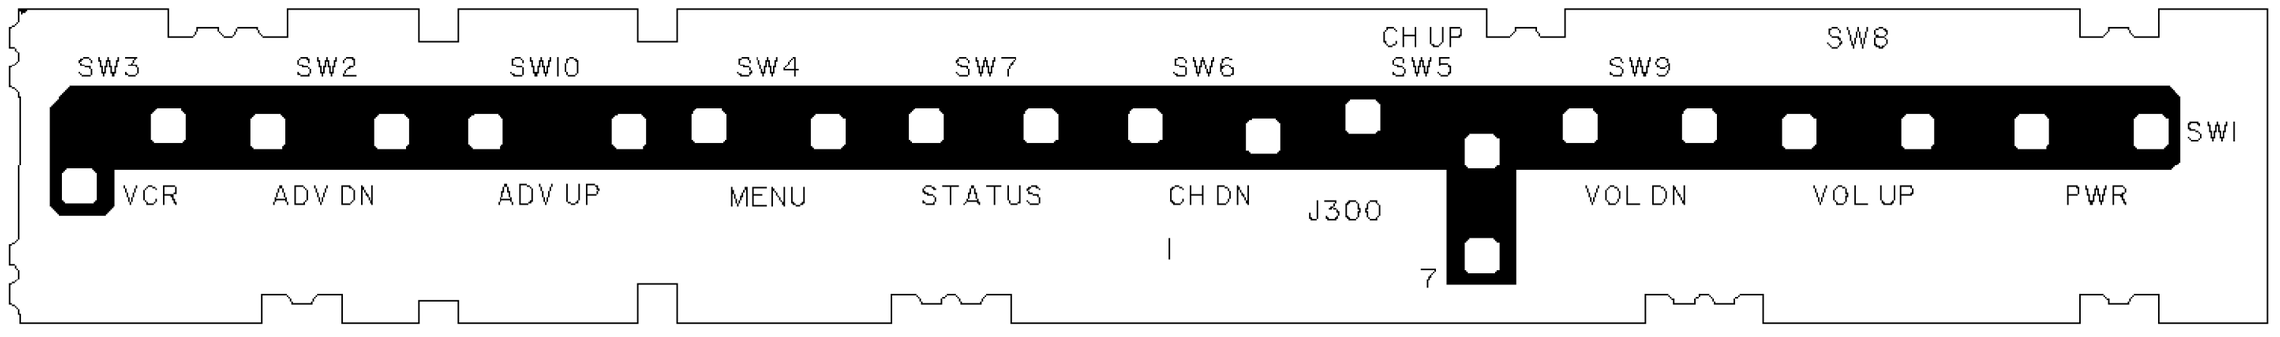


USED ONLY IN MODELS: MX5472C, MX6072C, MX6472C, PV5470, PV6070 (7573) - REMOTE LOCATOR CBA

TOP VIEW

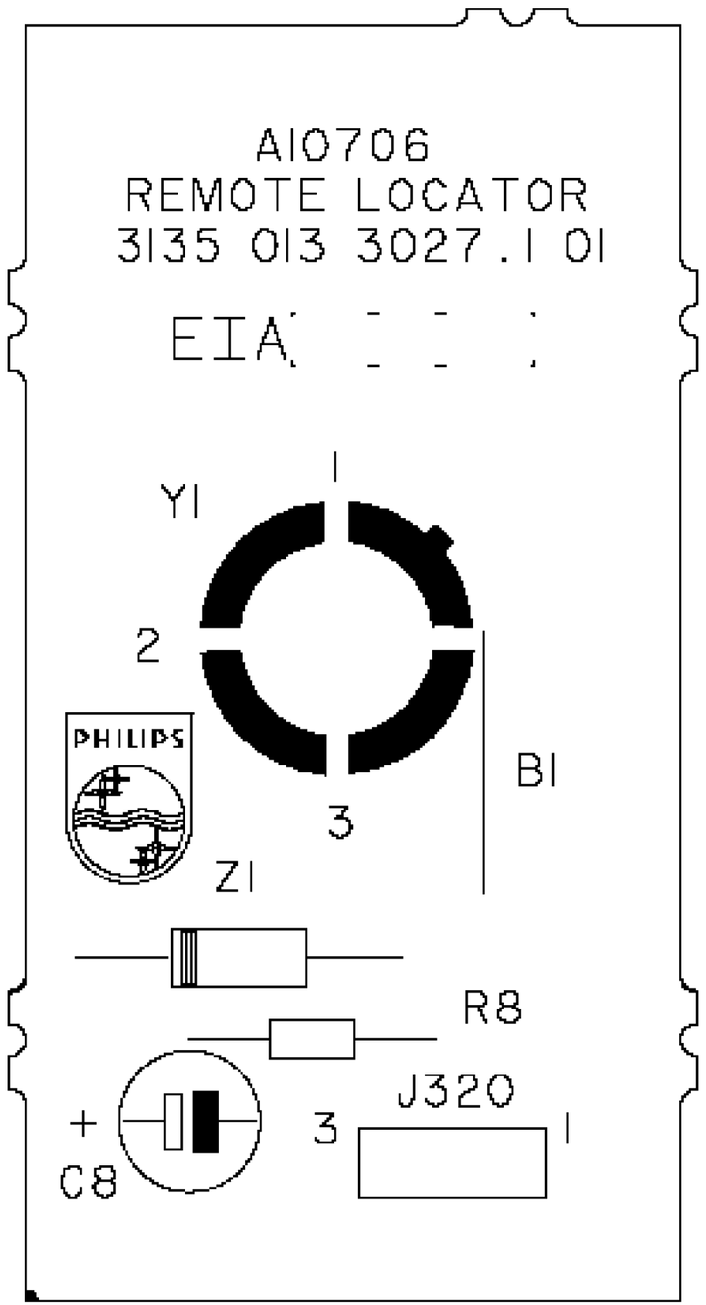


BOTTOM VIEW

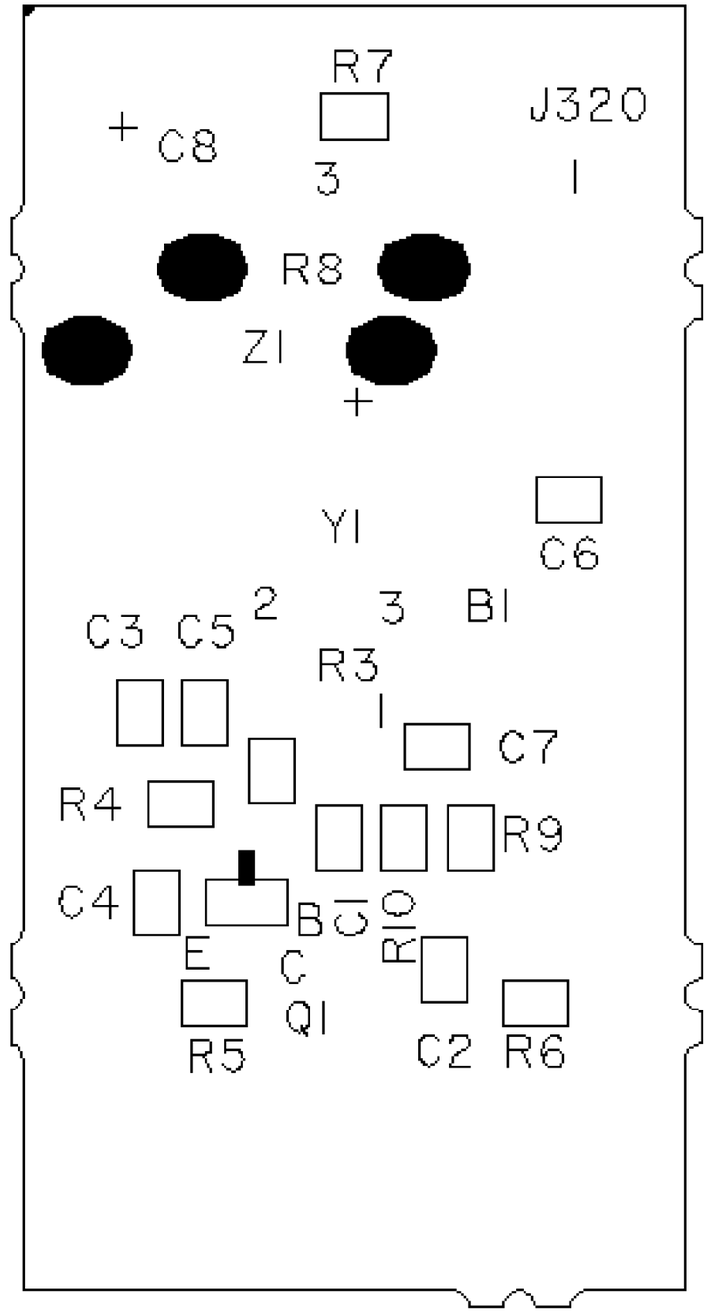


USED ONLY IN MODELS: 48PP72A, 48XP43C, 48XP44, 54PP72, 54XP43, 54XP44, 60XP43, MX5472C, MX6072C, MX6472C, PV5470, PV6070 (7573) - FRONT JACK PANEL CBA


TOP VIEW

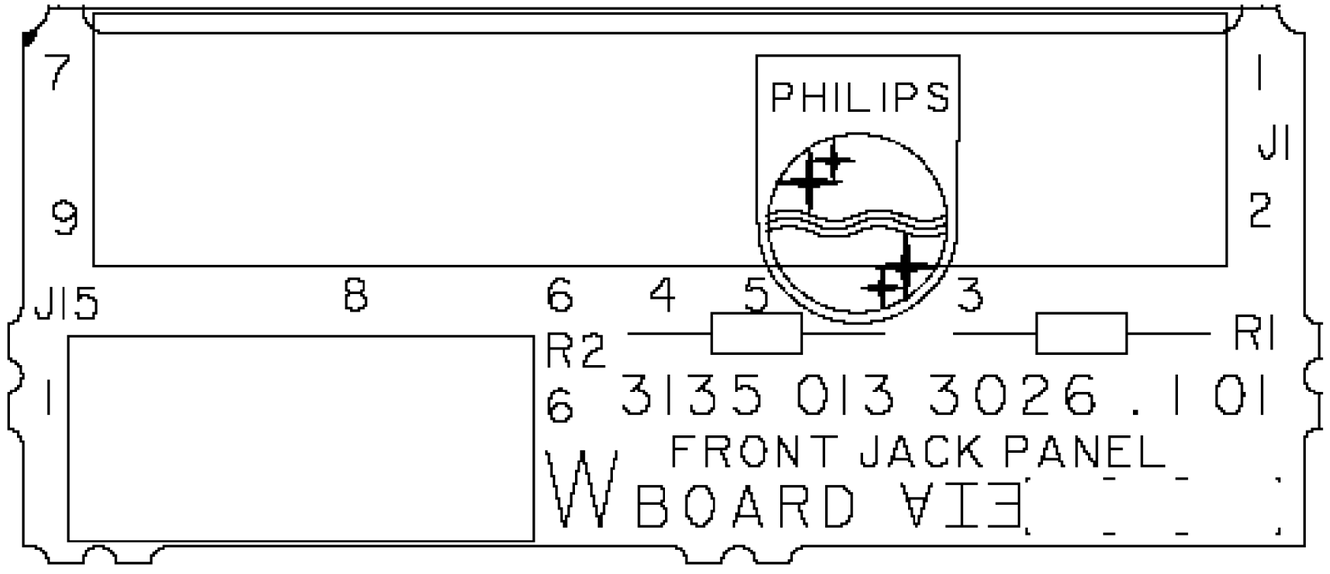


BOTTOM VIEW

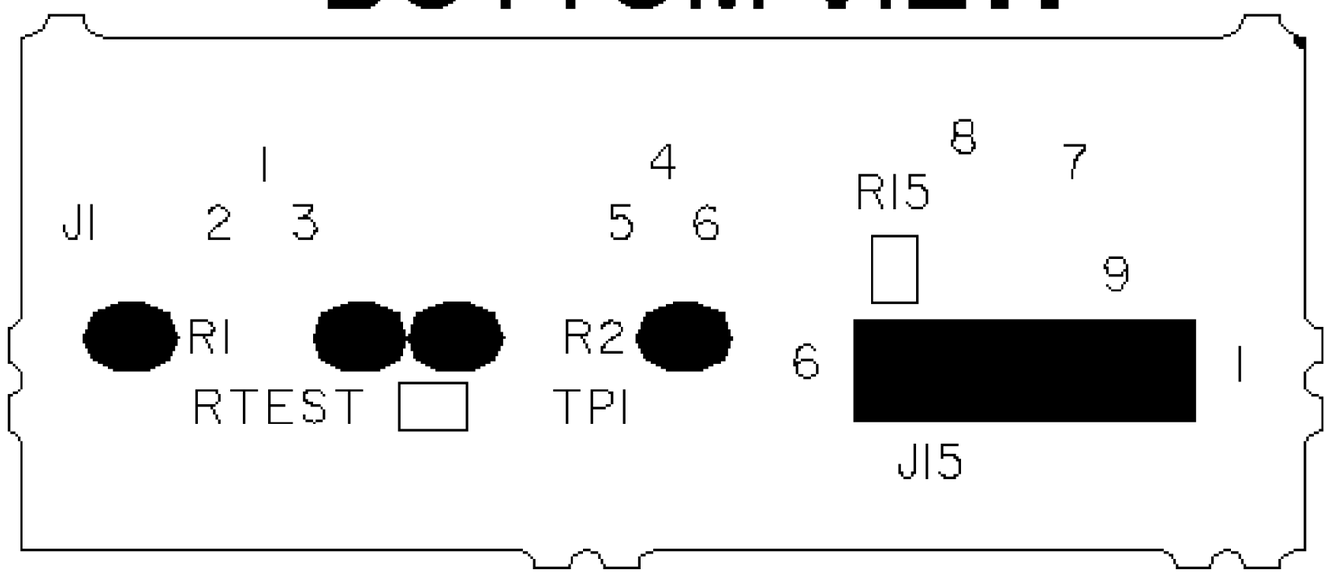

CABINET EXPLODED VIEW

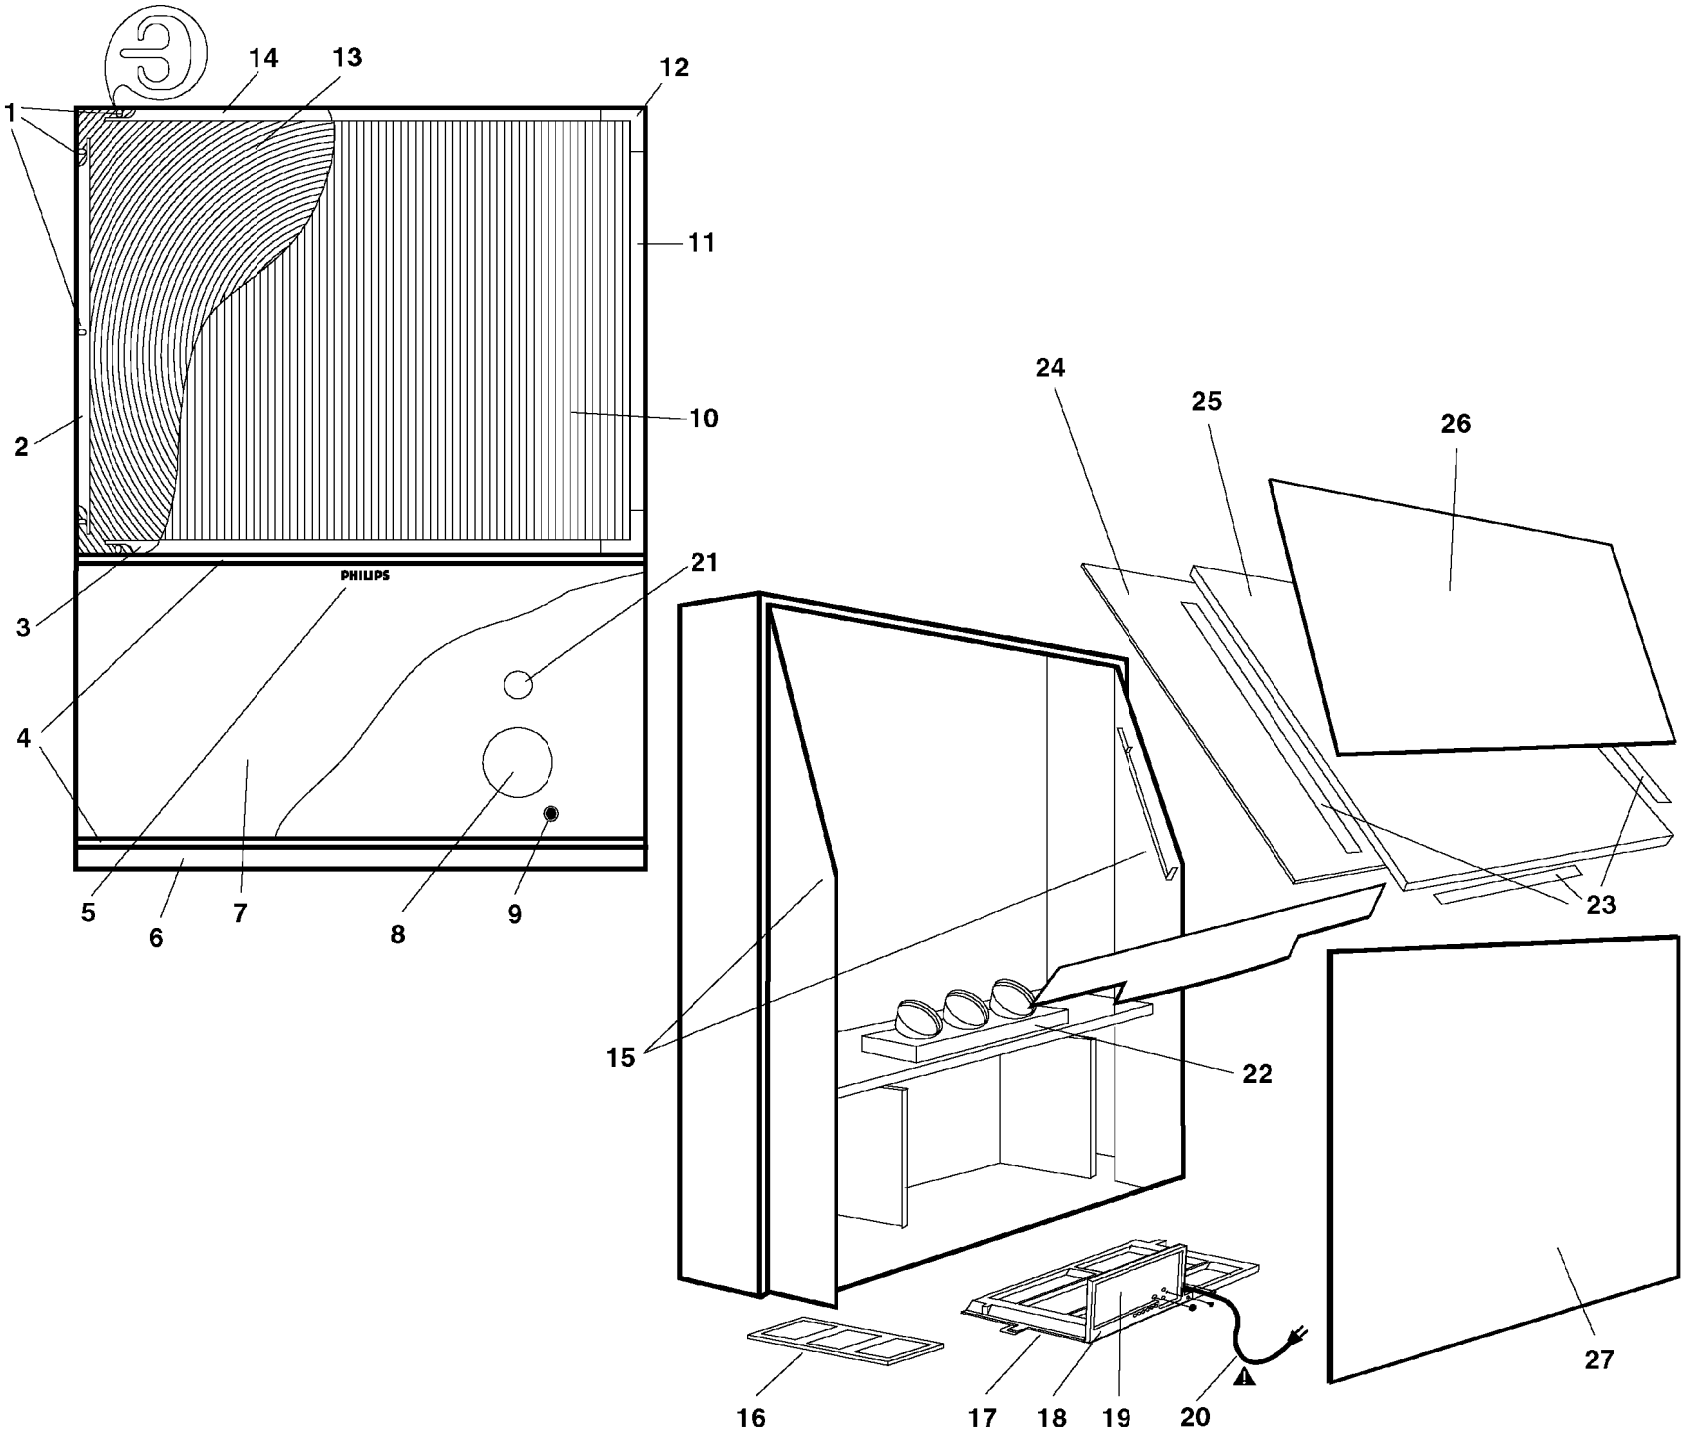

CRT LENS ASSEMBLY EXPLODED VIEW

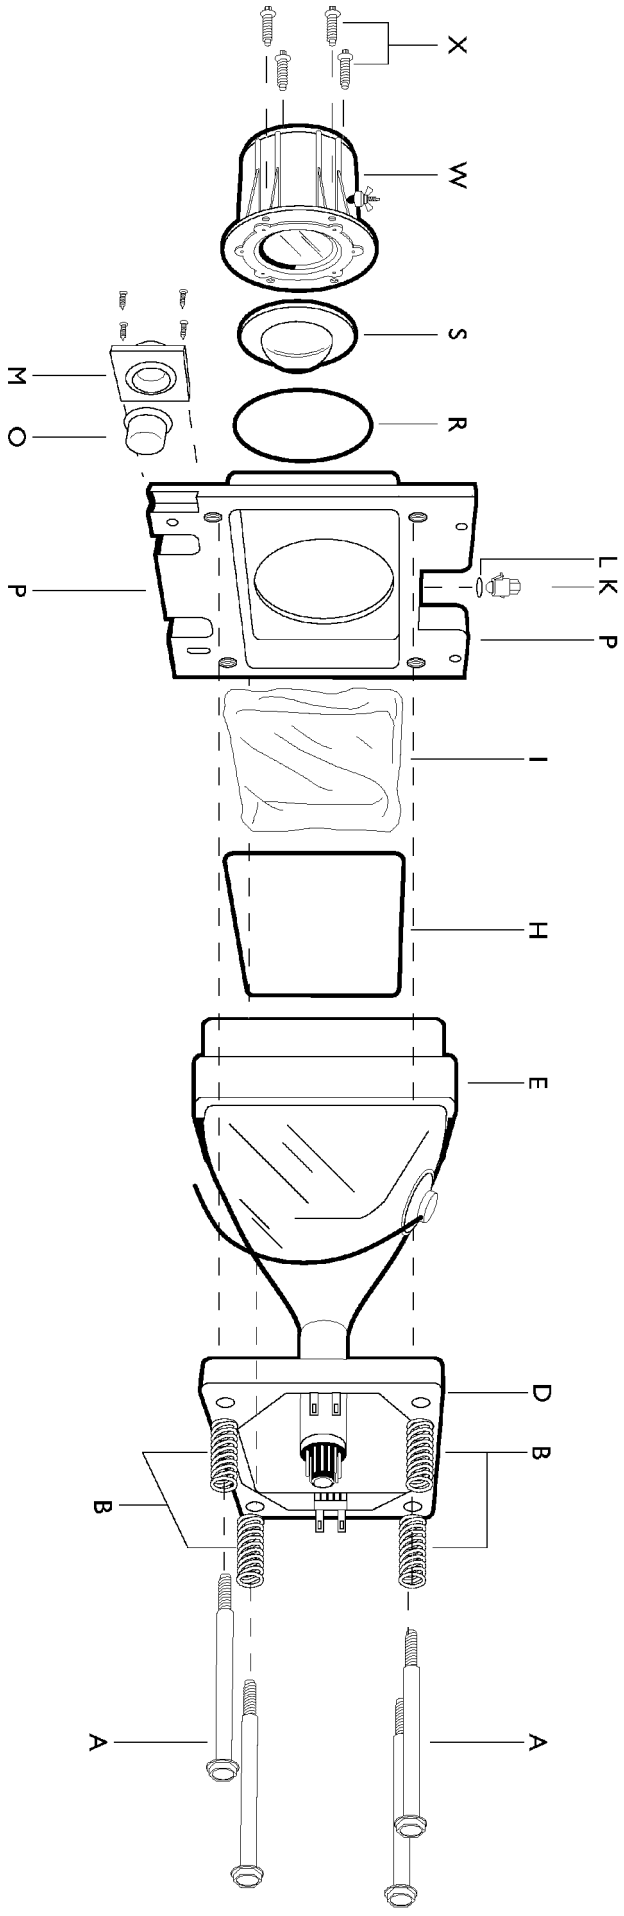

1152980001 - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77751
CBA	Small Signal Panel	4835 219 77755
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Remote Transmitter (1152980001). . . .	4835 219 17716
CBA	Remote Transmitter (5545380002). . . .	4835 219 17659

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

S = Safety Part Be sure to use exact replacement part.

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

1152980001 (continued)

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 1152980001

	MODEL 1152980001	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01850
27	Back Cover (Lower)	3135 013 01440
26	Back Cover (Upper)	3135 013 01010
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery AAA 2Pk.	4835 138 17001
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02930
14	Extr., Screen Edge Top	3135 014 03020
2	Extr., Screen Edge, Side (x2).	3135 014 03030
4	Foot Base Rail (x2).	3135 014 03131
16	Frame f/Digital Convergence.	4835 432 17846
6	Front Base Rail.	3135 013 02381
9	Hole Insert (x12).	3135 014 02741
	Instruction Book	3135 015 07350
18	Jack Panel Frame	3135 014 06650
19	Jack Panel Overlay	3135 015 04420
13	Lens, Fresnel.	3135 013 01110
10	Lens, Lenticular	3135 013 01100
22	Light Barrier.	4835 432 17847
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting.	3135 013 00780
24	Mirror Trapezoid, 2nd.	3135 013 01200
	Quick Use Guide.	3135 015 07340
	Remote Transmitter UR614	4835 219 17716
1	Retainer Treelock (x12).	3135 014 02620
11	Screen Frame 52" (x2).	3135 014 06550
8	Speaker Full 4x6" 8 Ohm (x2)	4835 240 47011
7	Speaker Grille Cover	3135 014 06410

SMALL SIGNAL PANEL (1 TUNER)

	SMALL SIGNAL PANEL (1 TUNER)	
C1	100uF., 16V, Electrolytic.	3198 025 21010
C4	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C5	100uF., 16V, Electrolytic.	3198 025 21010
C7	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C8	220uF., 16V, Electrolytic.	3198 025 22210
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	1uF., 20%, 50V, Electrolytic	3198 025 51080
C14	1uF., 20%, 50V, Electrolytic	3198 025 51080
C19	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C30	10uF., 20%, 16V, Electrolytic.	2020 012 92805
C37	100uF., 16V, Electrolytic.	3198 025 21010
C39	220uF., 16V, Electrolytic.	3198 025 22210
C45	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C46	1000uF., 16V, Electrolytic	4835 124 47571
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C100	5600pF., 10%, 50V, Ceramic	4835 122 87043
C101	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C102	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C103	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V, Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V, Electrolytic.	4835 124 97175
C112	1uF., 35V, Electrolytic.	4835 124 97175
C113	0.047uF., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 25V, Ceramic	3198 017 21040
C115	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 100V, Metalized Polyester	4835 121 47364
C119	0.22uF., 100V, Metalized Polyester	4835 121 47038
C120	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C121	0.22uF., 100V, Metalized Polyester	4835 121 47038
C122	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V,Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V,Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V,Ceramic.	4835 122 87527
C130	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C131	5600pF., 10%, 50V, Ceramic	4835 122 87043
C132	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C133	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C135	1000uF., 35V, Electrolytic	4835 124 47498
C136	1000uF., 35V, Electrolytic	4835 124 47498
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.1uF., 25V,Ceramic.	3198 017 21040
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C157	47uF., 20%, 25V,Electrolytic	3198 025 34790
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C160	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C161	100pF., 5%, 50V, Ceramic	3198 016 01010
C162	100uF., 50V, Electrolytic.	3198 025 51010
C164	100pF., 5%, 50V, Ceramic	3198 016 01010
C165	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C166	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C167	10uF., 50V, Electrolytic	4835 124 47525
C168	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C169	1000uF., 25V, Electrolytic	4835 124 47583
C171	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C172	0.1uF., 10%, 50V,Ceramic	4835 122 87061
C173	100uF., 16V, Electrolytic.	3198 025 21010
C174	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C175	1000uF., 25V, Electrolytic	4835 124 47583
C177	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C178	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C179	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C180	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C181	0.1uF., 25V, Ceramic	3198 017 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C190	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C199	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C200	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C201	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C216	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C217	470pF., 10%, 50V, Ceramic.	2020 552 93057
C218	1uF., 35V, Electrolytic.	4835 124 97175

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

C220	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C223	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C229	0.1uF., 25V, Ceramic	3198 017 21040
C230	220pF., 5%, 50V, Ceramic	3198 016 02210
C300	0.1uF., 25V, Ceramic	3198 017 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 10V, Electrolytic.	4835 124 97183
C304	1000pF., 10%, 50V, Ceramic	3198 017 01020
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	1000pF., 10%, 50V, Ceramic	3198 017 01020
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 10V, Electrolytic.	4835 124 97183
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	4835 122 87041
C322	1uF., 35V, Electrolytic.	4835 124 97175
C323	1uF., 35V, Electrolytic.	4835 124 97175
C341	Trimmer Capacitor, 3pF.-40pF., 250V. .	2222 808 11409
C342	0.47uF., 35V, Electrolytic	4835 124 97182
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C376	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 25V, Electrolytic.	4835 124 97179
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 25V, Ceramic	3198 017 21040
C396	0.1uF., 25V, Ceramic	3198 017 21040
C400	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C405	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 25V, Ceramic	3198 017 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 25V, Ceramic	3198 017 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 35V, Electrolytic	4835 124 97037
C606	0.1uF., 25V, Ceramic	3198 017 21040
C607	0.1uF., 25V, Ceramic	3198 017 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 25V, Ceramic	3198 017 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 100V, Metalized Polyester . .	4835 121 47222
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 35V, Electrolytic.	4835 124 97175
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	4835 122 87593
C628	0.22uF., 50V, Ceramic.	4835 122 87087
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 25V, Ceramic	3198 017 21040
C639	0.33uF., 35V, Electrolytic	4835 124 97037
C640	0.012uF., 10%, 50V, Ceramic.	4835 122 87501
C641	0.1uF., 25V, Ceramic	3198 017 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C643	200pF., 5%, 50V, Ceramic	4835 122 87092
C645	620pF., 5%, 50V, Ceramic	4835 122 87089
C647	1000pF., 10%, 50V, Ceramic	4835 122 87041
C648	120pF., 5%, 50V, Ceramic	4835 122 87046
C649	51pF., 5%, 50V, Ceramic.	4835 122 87054
C650	180pF., 5%, 50V, Ceramic	4835 122 87028
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 25V, Ceramic	3198 017 21040
C655	220uF., 16V, Electrolytic.	3198 025 22210
C656	100uF., 16V, Electrolytic.	3198 025 21010
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 25V, Ceramic	3198 017 21040
C664	0.1uF., 25V, Ceramic	3198 017 21040
C665	0.1uF., 25V, Ceramic	3198 017 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 25V, Ceramic	3198 017 21040
C676	82pF., 5%, 50V, Ceramic.	4835 122 87038
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	43pF., 5%, 50V, Ceramic.	2020 552 94276
C680	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C681	56P 5%, 50V, Ceramic	4835 122 87096
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 25V, Ceramic	3198 017 21040
C699	1uF., 35V, Electrolytic.	4835 124 97175
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C1050	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1052	1uF., 35V, Electrolytic.	4835 124 97175
BRSXXX	0 ohm, "Chip" Jumper	4835 111 27056
BRXXX	0 ohm, Jumper.	3198 021 90010
BRXXX	0 ohm, "Chip" Jumper	4835 111 27056
S R3	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R4	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R11	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R13	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R14	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R34	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
S R35	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R55	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R56	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R63	10 ohm, 5%, 1/4W, Carbon Film.	3198 011 01090
R64	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
R66	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R67	150 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51510
R71	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R74	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
S R76	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R91	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R115	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R116	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R117	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R118	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R119	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R120	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R121	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R122	470 ohm, 5%, 1/4W, Carbon Film	3198 011 14710
R123	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
R124	47k, 5%, 1/10W, Metal Film	4835 111 37445
R186	12k, 5%, 1/4W, Carbon Film	3198 011 01230
R187	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R189	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R190	12k, 5%, 1/4W, Carbon Film	3198 011 01230
R191	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
R192	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
R193	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R194	1k, 5%, 1/2W, Metal Film	4835 116 57685
R195	100k, 5%, 1/2W, Metal Film	4835 116 57687
R196	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R197	270k, 5%, 1/4W, Carbon Film.	3198 011 02740
R198	110k, 5%, 1/2W, Metal Film	2322 187 53114

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

R199	100k, 5%, 1/2W, Metal Film	4835 116 57687
R200	24k, 5%, 1/2W, Carbon Film	4835 110 47199
R201	22k, 5%, 1/8W, Carbon Film	4835 111 37558
R202	Control Adjust, 4.7k	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R206	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R228	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R229	3.6k, 5%, 1/4W, Carbon Film.	2322 711 61362
R230	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R231	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R232	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R233	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R234	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R235	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R236	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R238	2.7k, 5%, 1/4W, Carbon Film.	4835 111 37083
R240	0 ohm, Carbon Film	4835 111 27056
R241	0 ohm, Carbon Film	4835 111 27056
R242	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R243	4.3k, 5%, 0.24W, Carbon Film	2322 711 61432
R244	Control Adjust, 1k,.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R246	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R247	1.1k, 5%, 1/4W, Carbon Film.	2322 711 61112
R248	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R255	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R300	1/4W, 5%, 100 ohm, Carbon Composition.	4835 110 57066
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R318	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R319	16k, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R335	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R336	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R337	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R346	1k, 5%, 1/2W, Metal Film	4835 116 57685
R347	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R354	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R355	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R358	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R359	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R365	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R369	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R370	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R375	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R376	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R377	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R390	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R397	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R398	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R399	100k, 5%, 1/10W, Carbon Film	4835 111 37434
S R402	10 ohm, 5%, 3W, Metal Oxide.	2120 105 92585
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R603	3.3k, 5%, 1/4W, Carbon Film.	4835 111 37035
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm 5%, 1/10W, Carbon Film	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	0 ohm, 1/8W, Carbon Film	4835 110 67173
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R624	430 ohm, 5%, 1/4W, Carbon Film	3198 011 04310
R625	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R626	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/4W, Carbon Film	3198 011 03910
R634	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R635	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R636	0 ohm, Carbon Film	4835 111 27056
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/4W, Carbon Film	4835 111 37121
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R644	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R649	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R650	330 ohm, 5%, 1/2W, Metal Film.	4835 116 57713
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R662	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R663	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R664	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R665	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R666	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R671	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R672	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R673	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

	R674	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R675	2k, 5%, 1/10W, Carbon Film	4835 111 27091
	R676	620 ohm, 5%, 1/10W, Carbon Film.	3198 021 56210
	R677	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R678	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R679	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R681	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R682	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
	R683	8.2k, 5%, 1/4W, Carbon Film.	4835 111 37043
	R684	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R685	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
	R686	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R687	620 ohm, 5%, 1/10W, Carbon Film.	3198 021 56210
	R688	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R689	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
	R690	1 Meg ohm, 5%, 1/4W, Carbon Film	2322 711 61105
	R691	10 ohm, 5%, 1/4W, Carbon Film.	4835 111 37132
	R692	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R694	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
	R695	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
	R696	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R697	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R698	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
	R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
	R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R778	2k, 5%, 1/10W, Carbon Film	4835 111 27091
	R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
	R786	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
	R787	3k, 5%, 1/10W, Carbon Film	4835 111 37554
	R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R791	6.8k, 5%, 1/4W, Carbon Film.	3198 011 06820
	R794	200 ohm, 5%, 1/10W, Carbon Film.	3198 021 52010
	R795	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R796	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
	R797	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
	R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R806	1k, 2% 1/8W, Carbon Film	4835 110 67216
	R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R814	4.7 Meg ohm, 5%, 1/10W, Carbon Film.	3198 021 54750
	R821	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
	R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
S	R1016	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R1017	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R1018	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
	R1023	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R1050	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R1051	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R1052	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R1053	750 ohm, 5%, 1/4W, Carbon Film	3198 011 07510
	D100	Diode BAS216	4835 130 37905
	D150	Diode 1N4148	4835 130 37048
	D151	Diode 1N4148	4835 130 37048
	D300	Diode 1N4148	4835 130 37048
	D301	Diode BAS216	4835 130 37905
	D302	Diode 1N4148	4835 130 37048
	D303	Diode BAS216	4835 130 37905
	D305	Diode BAS216	4835 130 37905
	D306	Diode BAS216	4835 130 37905
	D310	Diode BAS216	4835 130 37905
	D311	Diode BAS216	4835 130 37905
	D312	Diode BAS216	4835 130 37905
	D313	Diode BAS216	4835 130 37905
	D320	Diode 1N4148	4835 130 37048
	D321	Diode BAS216	4835 130 37905
	D322	Diode BAS216	4835 130 37905
	D323	Diode BAS216	4835 130 37905
	D324	Diode BAS216	4835 130 37905
	D325	Diode BAS216	4835 130 37905
	D401	Diode 1N4148	4835 130 37048
	D600	Diode BAS216	4835 130 37905
	D601	Diode BAS216	4835 130 37905
	D602	Diode BAS216	4835 130 37905
	D603	Diode BAS216	4835 130 37905
	D605	Diode BAS216	4835 130 37905
	D607	Diode BAS216	4835 130 37905
	D608	Diode 1N4148	4835 130 37048
	D609	Diode 1N4148	4835 130 37048
	D610	Diode 1N4148	4835 130 37048
	D611	Diode BAS216	4835 130 37905
	D612	Diode BAS216	4835 130 37905
	D613	Diode 1N4148	4835 130 37048
	D614	Diode 1N4148	4835 130 37048
	D615	Diode BAS216	4835 130 37905
	D617	Diode 1N4148	4835 130 37048
	D618	Diode 1N4148	4835 130 37048
	D630	Diode BAS216	4835 130 37905
	IC1	IC, A/V Switch	4835 209 87952
	IC106	IC, 10/25W Hi-Fi Power Audio Amp	4835 209 87082
	IC120A	IC, Stereo Decoder & Audio Processor	4835 209 88493
	IC200	IC, IF Signal Processor.	4835 209 87757
	IC300	IC LC864265A, Tuning Microprocessor.	3135 010 02991
	IC304	IC ST24C02B1, EEPROM	4835 209 88326
	IC400	IC MC7812CT, 12V Regulator	9334 006 10682
	IC401	IC MC7805CT, 5V Regulator.	9334 536 00682
	IC600	IC, Y/C/S Processor.	4835 209 88331
	IC606	IC, 9V Regulator	4835 209 88009
	Q4	Transistor, Buffer	4822 130 60511
	Q5	Transistor, Buffer	4822 130 60511
	Q7	Transistor, NPN BC847B	4822 130 60511
	Q8	Transistor, NPN BC847B	4822 130 60511
	Q9	P-Channel JFET, Mono/Stereo Switch	9340 053 20126
	Q12	Transistor, Mono/Stereo Inverter	4822 130 60511
	Q152	P-Channel JFET, Mute	4835 130 47083
	Q153	P-Channel JFET, Mute	4835 130 47083
	Q154	P-Channel JFET, Mute	4835 130 47083
	Q155	P-Channel JFET, Mute	4835 130 47083
	Q156	Transistor, Mute Inverter.	4835 130 47055
	Q200	Transistor, Video Amp.	5322 130 60508
	Q201	Transistor, Coincidence Detector	5322 130 60508
	Q202	Transistor, Coincidence Detector	4822 130 60511
	Q203	Transistor, Coincidence Detector	5322 130 60508
	Q204	Transistor, Video Buffer	4822 130 60511
	Q300	Transistor, Standby LED Switch	4822 130 60511
	Q301	Transistor, SDA Amp.	4822 130 60511
	Q302	Transistor, SCC Amp.	4822 130 60511
	Q303	Transistor, Power LED Switch	4822 130 60511
	Q304	Transistor, Fast Blanking Buffer	4822 130 60511
	Q305	Transistor, OSD Intensity Buffer	4822 130 60511
	Q306	Transistor, Horizontal Amp	4822 130 60511
	Q308	Transistor, Vertical Amp	4822 130 60511
	Q309	Transistor, PNP Switch	5322 130 60508
	Q313	Transistor, SCC Amp.	4822 130 60511
	Q314	Transistor, SDA Amp.	4822 130 60511
	Q315	Transistor, Reset (Inverted)	5322 130 60508
	Q600	Transistor, Chroma Switch.	4822 130 60511
	Q601	Transistor, Chroma Delay	5322 130 60508
	Q602	Transistor, Chroma Buffer.	5322 130 60508
	Q603	Transistor, OSD Intensity Modulator.	5322 130 60508
	Q604	Transistor, Red Driver	4822 130 60511
	Q605	Transistor, Green Driver	4822 130 60511
	Q606	Transistor, Blue Driver.	4822 130 60511
	Q607	Transistor, Blue Linearity	5322 130 60508
	Q608	Transistor, Blue Linearity	4822 130 60511
	Q609	Transistor, 2.2V Regulator	4822 130 60511
	Q611	Transistor, Sync Buffer.	5322 130 60508
	Q612	Transistor, ABL Buffer	5322 130 60508
	Q613	Transistor, ABL Clamp.	5322 130 60508
	Q614	Transistor, Vertical Buffer.	4822 130 60511
	Q616	Transistor, Green Buffer	5322 130 60508
	Q617	Transistor, Green Clipper.	5322 130 60508
	Q618	Transistor, Red Buffer	5322 130 60508
	Q619	Transistor, Red Clipper.	5322 130 60508
	Q620	Transistor, Blue Buffer.	5322 130 60508
	Q621	Transistor, Blue Clipper	5322 130 60508
	Q623	Transistor, Common Base Allpass.	4822 130 60511
	Q624	Transistor, Chroma Buffer.	4822 130 60511
	Q625	Transistor, Chroma Buffer.	4822 130 60511
	Q626	Transistor, Common Base Allpass.	4822 130 60511
	Q627	Transistor, Common EmitterAllpass.	5322 130 60508
	Q632	Transistor, Blue Linearity	5322 130 60508
	Q635	Transistor, Horizontal Killer.	4822 130 60511
	Q1010	Transistor, NPN BC847B	4822 130 60511
	Q1020	Transistor, PNP BC85	5322 130 60508
	Z100	Zener Diode, 8.2V.	4835 130 37503
	Z101	Zener Diode, 8.2V.	4835 130 37503
	Z200	Zener Diode, MMSZ5257B	4835 130 37823
	Z300	Zener Diode, MMSZ5231B	4835 220 17061
	L116	Peaking Coil, 10uH..	4835 157 58198
	L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
	L201	Adjustable Coil, 4.5MHz.	4835 157 57113
	L202	Adjustable Coil, 45.75MHz.	4835 157 57594
	L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
	L204	Adjustable Coil, 4.75MHz	4835 157 57485
	L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
	L206	Peaking Coil, 8.2uH. ,5%	4835 150 57056
	L208	Peaking Coil, 12uH, 5%	4835 150 57058
	L209	Peaking Coil, 1000uH., 10%	4835 157 57828
	L210	Peaking Coil, 47uH., 5%.	4835 150 57055
	L211	Peaking Coil, 12uH., 5%.	4835 150 57058
	L212	Peaking Coil, 12uH., 10%	4835 157 67075
	L300	Peaking Coil, 5.6uH., 5%	2422 535 94322
	L301	Peaking Coil, 12uH., 5%.	4835 150 57058

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L313	Peaking Coil, 4.7uH., 10%.	4835 157 67057
L373	Peaking Coil, 0.68uH., 20%	4835 157 57596
L374	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L375	Peaking Coil, 0.68uH., 20%	4835 157 57596
L379	Peaking Coil, 0.68uH., 20%	4835 157 57596
L405	Ferrite Bead, 100MHz	4835 157 57995
L600	Peaking Coil, 33uH,. 5%.	4835 157 58113
L601	Peaking Coil, 10uH., 10%	4835 157 67074
L602	Peaking Coil, 10uH., 5%	4835 150 57008
L604	Peaking Coil, 12uH., 5%	4835 157 57831
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Peaking Coil, 3.3uH., 5%.	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L608	Peaking Coil, 12uH., 5%.	4835 157 57831
L609	Peaking Coil, 22uH., 5%.	4835 157 67018
L610	Peaking Coil, 15uH., 5%.	4835 157 57057
L611	Peaking Coil, 5.6uH., 5%	4835 157 57833
L612	Peaking Coil, 27uH., 5%.	4835 157 67019
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Jack Panel Bracket	3135 011 01900
CLP106	Spring Clip for IC 106	3135 011 02270
MEC4	IF Shield.	3135 011 02360
F100	Fuse, 5 Amp.	4835 253 37021
HS106A	Heatsink for IC 106.	3135 011 02260
HS400	Heatsink for IC 400.	3135 011 02510
HS401	Heatsink for IC 401.	3135 011 03291
J2	Phono Jack Assembly.	4835 265 97386
J3	Jack Assembly.	4835 265 97386
J5	4 Pin Push Terminal.	4835 265 97448
J250	5 Pin Board Connector.	2422 025 15832
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Board Connector.	2422 025 15193
J403	7 Pin Board Connector.	2422 025 14674
J467	7 Pin Board Connector.	2422 025 15024
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector	2422 025 15196
SHD3T	Shield for Small Signal Board.	3135 011 02251
TUNEXT	Connector for Tuner.	4835 265 97076
UV1236	Tuner, UV1236.	4835 210 47081
Y100	Ceramic Resonator.	4835 122 97102
Y200	Saw Filter	4835 153 97024
Y202	Ceramic Filter, 4.5MHz	4835 154 97168
Y203	Ceramic Filter, 4.5MHz	4835 153 57004
Y301	Peizoelectric Crystal.	4835 242 77283
Y600	Crystal Resonator 3.579MHz	2422 543 00862
Y601	Ceramic Resonator.	4835 153 97004
Y603	Comb Filter.	2422 549 43197

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C431	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C432	1500uF., 35V, Electrolytic	4835 124 47581
C433	0.1uF., 10%, 100V, Polyester	4822 121 41608
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R411	10 ohm, 5%, 1/2W, Metal Film	4835 116 67131
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R442	33k, 1/10W, Metal Film	4835 111 37248
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R472	1.2k, 5%, 2W, Metal Film	4835 116 57357
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R478	47k, 5%, 1/2W, Metal Film.	4835 111 67001
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D416	Diode, Silicon	4835 130 37663
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L413	Suppression Coil, 10uH..	4835 152 27002
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L467	Line Choke	4835 157 57077
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS416	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467	7 Pin Connector.	2422 025 15024
	J468	9 Pin Connector, Green	0018 223 80009
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470

S = Safety Part Be sure to use exact replacement part.

1152980001 (continued)

	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706115 0001 OPTICAL ASSEMBLY

00706115 0001 OPTICAL ASSEMBLY

S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler Red & Blue (52")	3135 011 02290
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Main, Blue	4835 381 47017
	W	Lens, Main, Red & Green.	4835 381 47022

48PP72A - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77753
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	Customer Control Assembly (48PP72A001 & 54PP72A001).	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	25W Audio Amp.	4835 219 77763
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR614	4835 219 17727

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1 159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

	RED CRT APNEL	
C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

	GREEN CRT PANEL	
C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

	00AVJ218 & 00AVJ221 FRONT JACK PANEL	
R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 0048PP72A001

	MODEL 0048PP72A001	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01370

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

27	Back Cover (Lower)	3135 013 01290
26	Back Cover (Upper)	3135 013 01320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Caster (x4)	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
3	Extr., Screen Bottom	3135 014 02940
2	Extr., Screen Edge, Side (x2).	3135 014 03050
14	Extr., Screen Edge, Top.	3135 014 03040
	Filter	4835 380 57009
4	Foot Base Rail (x2).	3135 014 03131
9	Hole Insert (x14).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00960
10	Lens, Lenticular	3135 013 00930
22	Light Barrier.	4835 432 17945
25	Mirror Board	3135 013 01351
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
24	Mirror Trapz 2nd Surface	3135 013 01150
	Panel, Front Jack.	3135 014 02980
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	00H1 47M EAA01
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 48" (x2).	3135 014 06300
7	Speaker Grille	4835 432 67252
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 5.25" (x2).	4835 240 57011

SMALL SIGNAL PANEL (2 TUNER)

SMALL SIGNAL PANEL (2 TUNER)

C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film.	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film.	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust).	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust).	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R269	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R277	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R282	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510
	R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
	R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
	R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R296	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
	R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
	R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	680pF., 10%, 1kV, Ceramic.	4835 122 47461
S C403	2700pF., 10% 250Vac Metal Film	4835 121 47414
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	2200pF., 5%, 1kV, Polypropylene.	4835 121 47635
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 400V, Electrolytic	4835 124 47717
S C424	470uF., 400V, Electrolytic	4835 124 47717
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	470pF., 10%, 1kV, Ceramic.	4835 122 47459
S C430	400V, 22uF., Electrolytic.	4835 124 47725
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R400	0.1 ohm, 5%, 2W, Metal Oxide	4835 116 67262
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	22 ohm, 5%, 20W, Wire Wound.	4835 112 47013
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
S	R432	3 ohm, 15%, Variable Resistor.	4835 116 47016
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37114
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
	Q401	Transistor APT6035BN	4835 130 48122
	Q402	Transistor, MTD1N80E1.	9322 113 01687
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002

S = Safety Part Be sure to use exact replacement part.

L550	Suppression Coil, 10uH..	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer.	4835 148 87368
S T402	Transformer.	4835 148 87367
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, T 5A IEC	2422 093 00035
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67162

SVM MODULE

SVM MODULE

C751	1uF., 50V, Electrolytic.	4835 121 47406
C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
C753	470uF., 25V, Electrolytic.	4835 121 47405
C754	0.1uF., 100V, Polyester.	2222 365 85104
C755	0.047uF., 50V, Ceramic	4835 122 47608
C756	47uF., 50V, Electrolytic	4835 124 47668
C757	0.01uF., 100V, Polyester	4822 121 41815
C758	470uF., 25V, Electrolytic.	4835 121 47405
C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
C761	0.1uF., 250V, Polyester.	4835 121 47278
C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S C766	47uF., 160V, Electrolytic.	4835 124 47713
S C767	47uF., 160V, Electrolytic.	4835 124 47713
S C768	47uF., 160V, Electrolytic.	4835 124 47713
S C769	22uF., 160V, Electrolytic.	4835 124 47726
S C770	560pF., 10%, 500V, Ceramic	4835 122 47647
C774	0.01uF., 100V, Polyester	4822 121 41815
S R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R753	4.7k, 1/2W, Metal Film	4835 116 57724
R754	1k, 1/2W, Metal Film	4835 116 57685
R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R765	1.8k, 1/2W, Metal Film	4835 116 57702
R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
R767	3.3k, 1/2W, Metal Film	4835 116 57714
R768	4.7k, 1/2W, Metal Film	4835 116 57724
R769	33k, 1/2W, Metal Film.	4835 116 57715
R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
R771	33k, 1/2W, Metal Film.	4835 116 57715
R772	1k, 1/2W, Metal Film	4835 116 57685
R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
R774	22 ohm, 1/2W, Metal Film	4835 116 57708
R775	22 ohm, 1/2W, Metal Film	4835 116 57708
R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
R783	68k, 1/2W, Metal Film.	4835 116 57737
R784	10k, 1/2W, Metal Film.	4835 116 57686
R785	68k, 1/2W, Metal Film.	4835 116 57737
R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
S R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
R793	22k, 1/2W, Metal Film.	4835 116 57706
R794	22 ohm, 1/2W, Metal Film	4835 116 57708
R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
R797	4.7k, 1/2W, Metal Film	4835 116 57724
S R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
D751	Diode 1N4148	4835 130 37048
D752	Diode 1N4148	4835 130 37048
D753	Diode 1N4148	4835 130 37048
D760	Diode 1N4148	4835 130 37048
D761	Diode, Silicon	4835 220 17059
D762	Diode, Silicon	4835 220 17059
Q751	Transistor BC548B.	4835 130 47055
Q753	Transistor BC558B.	4835 130 47162
Q754	Transistor BC548B.	4835 130 47055
Q755	Transistor BC548B.	4835 130 47055
Q756	Transistor BC548B.	4835 130 47055
Q757	Transistor BC337-25.	4835 130 48113
Q758	Transistor BC327-25.	4835 130 48112
Q759	Transistor 2SB940A	4835 130 48119
Q760	Transistor 2SD1264AP	4835 130 48121
Q761	Transistor BC548B.	4835 130 47055
L752	Inductor Coil LAL03 10UK	2422 535 96711
FB751	Ferrite Bead	4835 526 17003
FB752	Ferrite Bead	4835 526 17003
HS76	Solder Lug f/IC400	0020 100 70001
HS76	Heatsink	0073 515 10003
HS76	Spring Clip.	4835 290 47008
J751	10 Pin Connector	0018 223 80010
J752	2 Pin Board Connector.	2422 025 14668
J753	2 Pin Board Connector.	2422 025 14668
J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706109 0001, 0002 OPTICAL ASSEMBLY

	00706109 0001, 0002 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT 180DLB22 (Blue).	4835 310 57408
S E	CRT 180DLB22 (Green)	4835 310 57411
S E	CRT 180DLB22 (Red) (HU).	4835 310 57409
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Red & Blue (0001).	4835 290 87153
P	Coupler Red & Blue 54" (0002).	4835 290 87155

S = Safety Part Be sure to use exact replacement part.

48PP72A (continued)

P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Main, Blue	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

48XP43C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77753
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	Customer Control Assembly (48PP72A001 & 54PP72A001).	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	25W Audio Amp.	4835 219 77763
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR614	4835 219 17727

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1 159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic. . . .	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 0048XP43C101

MODEL 0048XP43C101

S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01370

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

27	Back Cover (Lower)	4835 432 97717
26	Back Cover (Upper)	3135 013 01320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
3	Extr., Screen Bottom	3135 014 02940
2	Extr., Screen Edge, Side (x2).	3135 014 03050
14	Extr., Screen Edge, Top.	3135 014 03040
	Filter	4835 380 57009
4	Foot Base Rail (x2).	3135 014 03131
	Front Jack Panel	4835 219 77787
9	Hole Insert (x14).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00960
10	Lens, Lenticular	3135 013 00930
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting Board.	3135 013 01350
24	Mirror Trapz 2nd Surface	3135 013 01150
	Owners Manual.	3135 015 07510
	Owners Manual English.	3135 015 08400
	Owners Manual Spanish.	3135 015 07510
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 07500
	Quick Use Guide.	3135 015 08390
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	00H1 47M EAA01
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 48" (x2).	3135 014 06300
7	Speaker Grille	4835 432 67252
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 5.25" (x2).	4835 240 57011

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap.	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester.	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

		LARGE SIGNAL PANEL	
S	C402	680pF., 10%, 1kV, Ceramic.	4835 122 47461
S	C403	2700pF., 10% 250Vac Metal Film	4835 121 47414
S	C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S	C407	2200pF., 5%, 1kV, Polypropylene.	4835 121 47635
	C408	330pF., 10%, 500V, Ceramic	4835 122 47648
	C409	3300uF., 35V, Electrolytic	4835 124 47559
	C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C411	0.1uF., 400V, Polyester.	0025 968 41049
	C412	330pF., 10%, 500V, Ceramic	4835 122 47648
	C413	330pF., 10%, 500V, Ceramic	4835 122 47648
	C414	330uF., 25V, Electrolytic.	4835 124 47632
	C415	100pF., 5%, 50V, Ceramic	4835 122 87025
	C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
	C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C418	1000pF., 50V, Ceramic.	4835 122 47004
	C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
	C420	100pF., 5%, 50V, Ceramic	4835 122 87025
	C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C423	470uF., 400V, Electrolytic	4835 124 47717
S	C424	470uF., 400V, Electrolytic	4835 124 47717
	C425	0.1uF., 400V, Polyester.	0025 968 41049
	C426	330pF., 10%, 500V, Ceramic	4835 122 47648
	C427	3300uF., 25V, Electrolytic	4835 124 47672
	C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C429	470pF., 10%, 1kV, Ceramic.	4835 122 47459
S	C430	400V, 22uF., Electrolytic.	4835 124 47725
	C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C435	3300uF., 25V, Electrolytic	4835 124 47575
	C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C437	100pF., 5%, 50V, Ceramic	4835 122 87025
	C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573
	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R400	0.1 ohm, 5%, 2W, Metal Oxide	4835 116 67262
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	22 ohm, 5%, 20W, Wire Wound.	4835 112 47013
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
S	R432	3 ohm, 15%, Variable Resistor.	4835 116 47016
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

S R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
R901	10k, Control Adjust.	4835 100 17036
R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
R908	1.5k, 1/10W, Metal Film.	4835 111 37437
R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R913	4.7k, 1/2W, Metal Film	4835 116 57724
R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R923	15k, 1/2W, Metal Film.	4835 116 57698
R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R932	5.6k, 1/10W, Metal Film.	4835 111 37376
R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S R937	33k, 1W, Metal Oxide	4835 116 67253
S R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
R943	2.2k, Control Adjust	4835 100 17047
S R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
R951	10k, 1/2W, Metal Film.	4835 116 57686
R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
R970	10k, 1/10W, Metal Film	4835 111 37216
R971	100k, 1/10W, Metal Film.	4835 111 37434
R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S R2839	300k, 5%, 3W, Metal Film	2322 195 73304
D402	Diode BYV95C	4835 130 37052
D403	Diode, Silicon MUR120.	4835 130 37674
D404	Diode BYV95C	4835 130 37052
D405	Diode BAX18.	4835 130 37933
D406	Diode GBU6J.	4835 130 37931
D407	Diode, Silicon MUR120.	4835 130 37674
D409	Diode BAS216	4835 130 37905
D417	Diode MUR460	4835 130 37932
D418	Diode, Silicon MUR460.	4835 130 37488
D419	Diode, Silicon	4835 130 37114
D420	Diode BAX18.	4835 130 37933
D431	Diode BAX18.	4835 130 37933
D432	Diode 1N4150	4835 130 37934
D433	Diode, Silicon	4835 130 37663
D434	Diode, Silicon	4835 130 37663
D501	Diode BAS216	4835 130 37905
D502	Diode BAS216	4835 130 37905
D503	Diode BAS216	4835 130 37905
D504	Diode, Silicon BYD77D.	4835 130 37497
D505	Diode BAS216	4835 130 37905
D550	Diode BYV95C	4835 130 37052
D551	Diode BAS216	4835 130 37905
D571	Diode BAS216	4835 130 37905
D801	Diode BYD33J	4835 130 37094
D802	Diode BYV95C	4835 130 37052
D806	Diode BY228.	4835 130 37166
D808	Diode BYW95C	4835 130 37059
D900	Diode BAS216	4835 130 37905
D901	Diode 1N4148	4835 130 37048
D902	Diode BY328.	4835 130 37938
D904	Diode BAX18.	4835 130 37933
D905	Diode BYD33J	4835 130 37094
D906	Diode, Silicon MUR140.	4835 130 37102
D907	Diode, Silicon MUR140.	4835 130 37102
D908	Diode BYV95C	4835 130 37052
D909	Diode BAV103	4835 130 37937
D910	Diode BYW95C	4835 130 37059
D911	Diode BAS216	4835 130 37905
D2830	Diode BYD33M	4835 130 37012
S IC400	IC LM393N, Dual Comparator	4835 209 87081
IC401	IC, 6126640002	4835 209 87834
IC402	IC, 6127710001	4835 209 87712
S IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S IC405	OPT CP CNW136.300.	4835 209 88561
S IC406	OPT CP CNX83A.	4835 209 88555
IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
IC550	IC TDA3654Q/N3	4835 209 17162
IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
IC552	IC MC7812CT, 12V Regulator	4835 209 88554
IC900	IC MC1391P, Horiz. Processor	9332 898 70682
IC901	IC, 6126729002	4835 209 88011
IC902	IC, 6128270001	4835 209 87838
Q2830	Transistor, NPN.	4835 130 47893
C914	Transistor, BU2508DF	4835 532 47018
Q401	Transistor APT6035BN	4835 130 48122
Q402	Transistor, MTD1N80E1.	9322 113 01687
Q404	Transistor, BC85	5322 130 60508
Q442	Transistor, BU2508DF	4835 532 47018
Q500	Transistor, BC85	5322 130 60508
Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
Q502	Transistor, BC847B	4822 130 60511
Q503	Transistor, BC847B	4822 130 60511
Q550	Transistor, PNP.	4835 130 47084
Q551	Transistor, BC847B	4822 130 60511
Q800	Transistor, BC847B	4822 130 60511
Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
Q802	Transistor, 2SD2539.	4835 130 48074
Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
Q901	Transistor, BC85	5322 130 60508
Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
Q904	Transistor, BC85, Soft Start	5322 130 60508
Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
Z400	Zener Diode, BZX79B10.	4835 130 37935
Z500	Zener Diode, 10V	4835 130 37739
Z501	Diode BZX79-B18.	4835 130 37936
Z503	Zener Diode, P6KE62A	4835 130 37547
Z901	Zener Diode, 6.2V.	4835 130 37751
L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
L407	Ferrite Bead	4835 526 17001
L408	Suppression Coil, 10uH..	4835 152 27002
S L409	Peaking Coil, 2.2uH.	4835 150 57054
L410	Suppression Coil, 18uH..	4835 150 57051
L412	Ferrite Bead	4835 526 17001
L415	Suppression Coil, 1.8uH.	4835 152 27029
L416	Ferrite Bead	4835 526 17001
L420	Ferrite Bead	4835 526 17001
S L421	Line Input Choke	4835 152 27028
L422	Suppression Coil, 10uH..	4835 152 27002
L423	Suppression Coil, 10uH..	4835 152 27002
L424	Suppression Coil, 10uH..	4835 152 27002
L425	Suppression Coil, 10uH..	4835 152 27002
L426	Suppression Coil, 42uH..	4835 157 57063

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH	4835 152 27002
	L435	Suppression Coil, 10uH	4835 152 27002
	L440	Suppression Coil, 10uH	4835 152 27002
	L550	Suppression Coil, 10uH	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer.	4835 148 87368
S	T402	Transformer.	4835 148 87367
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, T 5A IEC	2422 093 00035
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert.	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67162

SVM MODULE

		SVM MODULE	
	C751	1uF., 50V, Electrolytic.	4835 121 47406
	C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
	C753	470uF., 25V, Electrolytic.	4835 121 47405
	C754	0.1uF., 100V, Polyester.	2222 365 85104
	C755	0.047uF., 50V, Ceramic	4835 122 47608
	C756	47uF., 50V, Electrolytic	4835 124 47668
	C757	0.01uF., 100V, Polyester	4822 121 41815
	C758	470uF., 25V, Electrolytic.	4835 121 47405
	C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C761	0.1uF., 250V, Polyester.	4835 121 47278
	C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
	C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S	C766	47uF., 160V, Electrolytic.	4835 124 47713
S	C767	47uF., 160V, Electrolytic.	4835 124 47713
S	C768	47uF., 160V, Electrolytic.	4835 124 47713
S	C769	22uF., 160V, Electrolytic.	4835 124 47726
S	C770	560pF., 10%, 500V, Ceramic	4835 122 47647
	C774	0.01uF., 100V, Polyester	4822 121 41815
S	R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
	R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
	R753	4.7k, 1/2W, Metal Film	4835 116 57724
	R754	1k, 1/2W, Metal Film	4835 116 57685
	R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
	R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
	R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R765	1.8k, 1/2W, Metal Film	4835 116 57702
	R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
	R767	3.3k, 1/2W, Metal Film	4835 116 57714
	R768	4.7k, 1/2W, Metal Film	4835 116 57724
	R769	33k, 1/2W, Metal Film.	4835 116 57715
	R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R771	33k, 1/2W, Metal Film.	4835 116 57715
	R772	1k, 1/2W, Metal Film	4835 116 57685
	R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
	R774	22 ohm, 1/2W, Metal Film	4835 116 57708
	R775	22 ohm, 1/2W, Metal Film	4835 116 57708
	R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
	R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
	R783	68k, 1/2W, Metal Film.	4835 116 57737
	R784	10k, 1/2W, Metal Film.	4835 116 57686
	R785	68k, 1/2W, Metal Film.	4835 116 57737
	R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R789	3.3 ohm, 5%, 1W Metal Ox.	2120 106 90293
S	R791	3.3 ohm, 5%, 1W Metal Ox.	2120 106 90293
	R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R793	22k, 1/2W, Metal Film.	4835 116 57706
	R794	22 ohm, 1/2W, Metal Film	4835 116 57708
	R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S	R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	R797	4.7k, 1/2W, Metal Film	4835 116 57724
S	R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	D751	Diode 1N4148	4835 130 37048
	D752	Diode 1N4148	4835 130 37048
	D753	Diode 1N4148	4835 130 37048
	D760	Diode 1N4148	4835 130 37048
	D761	Diode, Silicon	4835 220 17059
	D762	Diode, Silicon	4835 220 17059
	Q751	Transistor BC548B.	4835 130 47055
	Q753	Transistor BC558B.	4835 130 47162
	Q754	Transistor BC548B.	4835 130 47055
	Q755	Transistor BC548B.	4835 130 47055
	Q756	Transistor BC548B.	4835 130 47055
	Q757	Transistor BC337-25.	4835 130 48113
	Q758	Transistor BC327-25.	4835 130 48112
	Q759	Transistor 2SB940A	4835 130 48119
	Q760	Transistor 2SD1264AP	4835 130 48121
	Q761	Transistor BC548B.	4835 130 47055
	L752	Inductor Coil LAL03 10UK	2422 535 96711
	FB751	Ferrite Bead	4835 526 17003
	FB752	Ferrite Bead	4835 526 17003
	HS76	Solder Lug f/IC400	0020 100 70001
	HS76	Heatsink	0073 515 10003
	HS76	Spring Clip.	4835 290 47008
	J751	10 Pin Connector	0018 223 80010
	J752	2 Pin Board Connector.	2422 025 14668
	J753	2 Pin Board Connector.	2422 025 14668
	J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

		STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ATC669 CUSTOMER CONTROL ASSEMBLY	
		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706089 0001, 0002 OPTICAL ASSEMBLY

		00706089 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control.	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321

S = Safety Part Be sure to use exact replacement part.

48XP43C (continued)

I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Green.	4835 290 87152
P	Coupler, Red & Blue (0001)	4835 290 87153
P	Coupler, Red & Blue 54" (0002)	4835 290 87155
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens C-Element, Green.	4835 381 47019
S	Lens C-Element, (Blue & Red) D77 . . .	4835 381 47016
W	Lens Main Blue	4835 381 47017
W	Lens, Main, Red & Green D78.	4835 381 47022

00706116 0001 OPTICAL ASSEMBLY

	00706116 0001 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT 180DLB22 (Blue).	4835 310 57408
S E	CRT 180DLB22 (Green)	4835 310 57411
S E	CRT 180DLB22 (Red) (HU).	4835 310 57409
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	4835 310 57233
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Red & Blue (54")	4835 290 87155
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Main, Blue	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

48XP44 - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77753
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	Customer Control Assembly (48PP72A001 & 54PP72A001).	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	25W Audio Amp.	4835 219 77763
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR614	4835 219 17727

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1 159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic. . . .	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 0048XP44C101

MODEL 0048XP44C101

S 20	AC Cord, Filtered.	3135 010 03060
	Back Barrier	3135 013 01370

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

27	Back Cover (Lower)	4835 432 97717
26	Back Cover (Upper)	3135 013 01320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA 3Pk.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
3	Extr., Screen Bottom	3135 014 02940
2	Extr., Screen Edge, Side (x2).	3135 014 03050
14	Extr., Screen Edge, Top.	3135 014 03040
	Filter	4835 380 57009
4	Foot Base Rail (x2).	3135 014 03131
	Front Jack Panel	4835 219 77787
9	Hole Insert (x14).	3135 014 02741
	Instruction Book	3135 015 08820
13	Lens, Fresnel.	3135 013 00960
10	Lens, Lenticular	3135 013 00930
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting Board.	3135 013 01350
24	Mirror Trapz 2nd Surface	3135 013 01150
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 08810
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	00H1 47M EAA01
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 48" (x2).	3135 014 06300
7	Speaker Grille	4835 432 67252
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 5.25" (x2).	4835 240 57011

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
S R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R60	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R64	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042	
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R69	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R70	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R74	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R76	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R82	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097	
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018	
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R96	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774	
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448	
R104	160 ohm, 5%, 1/10W, Carbon Film.	3198 021 51610	
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366	
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R120	680 ohm, 5%, 1/10W, Carbon Film.	4835 111 37271	
R121	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R157	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R158	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736	
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R202	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R220	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R222	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R225	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R255	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R256	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R269	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R277	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R282	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120	
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620	
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231	
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R296	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443	
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214	
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R307	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698	
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066	
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630	
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685	

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	680pF., 10%, 1kV, Ceramic.	4835 122 47461
S C403	2700pF., 10% 250Vac Metal Film	4835 121 47414
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	2200pF., 5%, 1kV, Polypropylene.	4835 121 47635
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 400V, Electrolytic	4835 124 47717
S C424	470uF., 400V, Electrolytic	4835 124 47717
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	470pF., 10%, 1kV, Ceramic.	4835 122 47459
S C430	400V, 22uF., Electrolytic.	4835 124 47725
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R400	0.1 ohm, 5%, 2W, Metal Oxide	4835 116 67262
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	22 ohm, 5%, 20W, Wire Wound.	4835 112 47013
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
S	R432	3 ohm, 15%, Variable Resistor.	4835 116 47016
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37114
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
	Q401	Transistor APT6035BN	4835 130 48122
	Q402	Transistor, MTD1N80E1.	9322 113 01687
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001

S = Safety Part Be sure to use exact replacement part.

	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer.	4835 148 87368
S	T402	Transformer.	4835 148 87367
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, T 5A IEC	2422 093 00035
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67162

SVM MODULE

		SVM MODULE	
	C751	1uF., 50V, Electrolytic.	4835 121 47406
	C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
	C753	470uF., 25V, Electrolytic.	4835 121 47405
	C754	0.1uF., 100V, Polyester.	2222 365 85104
	C755	0.047uF., 50V, Ceramic	4835 122 47608
	C756	47uF., 50V, Electrolytic	4835 124 47668
	C757	0.01uF., 100V, Polyester	4822 121 41815
	C758	470uF., 25V, Electrolytic.	4835 121 47405
	C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C761	0.1uF., 250V, Polyester.	4835 121 47278
	C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
	C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S	C766	47uF., 160V, Electrolytic.	4835 124 47713
S	C767	47uF., 160V, Electrolytic.	4835 124 47713
S	C768	47uF., 160V, Electrolytic.	4835 124 47713
S	C769	22uF., 160V, Electrolytic.	4835 124 47726
S	C770	560pF., 10%, 500V, Ceramic	4835 122 47647
	C774	0.01uF., 100V, Polyester	4822 121 41815
S	R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
	R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
	R753	4.7k, 1/2W, Metal Film	4835 116 57724
	R754	1k, 1/2W, Metal Film	4835 116 57685
	R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
	R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
	R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R765	1.8k, 1/2W, Metal Film	4835 116 57702
	R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
	R767	3.3k, 1/2W, Metal Film	4835 116 57714
	R768	4.7k, 1/2W, Metal Film	4835 116 57724
	R769	33k, 1/2W, Metal Film.	4835 116 57715
	R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R771	33k, 1/2W, Metal Film.	4835 116 57715
	R772	1k, 1/2W, Metal Film	4835 116 57685
	R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
	R774	22 ohm, 1/2W, Metal Film	4835 116 57708
	R775	22 ohm, 1/2W, Metal Film	4835 116 57708
	R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
	R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
	R783	68k, 1/2W, Metal Film.	4835 116 57737
	R784	10k, 1/2W, Metal Film.	4835 116 57686
	R785	68k, 1/2W, Metal Film.	4835 116 57737
	R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
S	R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
	R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R793	22k, 1/2W, Metal Film.	4835 116 57706
	R794	22 ohm, 1/2W, Metal Film	4835 116 57708
	R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S	R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	R797	4.7k, 1/2W, Metal Film	4835 116 57724
S	R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	D751	Diode 1N4148	4835 130 37048
	D752	Diode 1N4148	4835 130 37048
	D753	Diode 1N4148	4835 130 37048
	D760	Diode 1N4148	4835 130 37048
	D761	Diode, Silicon	4835 220 17059
	D762	Diode, Silicon	4835 220 17059
	Q751	Transistor BC548B.	4835 130 47055
	Q753	Transistor BC558B.	4835 130 47162
	Q754	Transistor BC548B.	4835 130 47055
	Q755	Transistor BC548B.	4835 130 47055
	Q756	Transistor BC548B.	4835 130 47055
	Q757	Transistor BC337-25.	4835 130 48113
	Q758	Transistor BC327-25.	4835 130 48112
	Q759	Transistor 2SB940A	4835 130 48119
	Q760	Transistor 2SD1264AP	4835 130 48121
	Q761	Transistor BC548B.	4835 130 47055
	L752	Inductor Coil LAL03 10UK	2422 535 96711
	FB751	Ferrite Bead	4835 526 17003
	FB752	Ferrite Bead	4835 526 17003
	HS76	Solder Lug f/IC400	0020 100 70001
	HS76	Heatsink	0073 515 10003
	HS76	Spring Clip.	4835 290 47008
	J751	10 Pin Connector	0018 223 80010
	J752	2 Pin Board Connector.	2422 025 14668
	J753	2 Pin Board Connector.	2422 025 14668
	J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

		STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ATC669 CUSTOMER CONTROL ASSEMBLY	
		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706089 0001, 0002 OPTICAL ASSEMBLY

		00706089 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736

S = Safety Part Be sure to use exact replacement part.

48XP44 (continued)

O	Expansion Diaphragm.	3135 013 01060
P	Coupler Green.	4835 290 87152
P	Coupler, Red & Blue (0001)	4835 290 87153
P	Coupler, Red & Blue 54" (0002)	4835 290 87155
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens C-Element, Green.	4835 381 47019
S	Lens C-Element, (Blue & Red) D77 . . .	4835 381 47016
W	Lens Main Blue	4835 381 47017
W	Lens, Main, Red & Green D78.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

54PP72 - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77753
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	Customer Control Assembly (48PP72A001 & 54PP72A001).	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	25W Audio Amp.	4835 219 77763
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR614	4835 219 17727

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1 159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic. . . .	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 0054PP72A001

MODEL 0054PP72A001

S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01381

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

27	Back Cover (Lower)	3135 013 01300
26	Back Cover (Upper)	3135 013 01331
	Baffle Mount Receptacle (x6)	4835 265 97154
	Caster (x4)	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
3	Extr., Screen Bottom	3135 014 02950
2	Extr., Screen Edge, Side (x2).	3135 014 03070
14	Extr., Screen Edge, Top.	3135 014 03060
	Filter	4835 380 57011
4	Foot Base Rail (x2).	3135 014 03131
11	Frame, Screen 54" (x2)	3135 014 06350
9	Hole Insert (x17).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier.	4835 432 17945
25	Mirror Board	3135 013 01410
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
24	Mirror Trapz 2nd Surface	3135 013 01140
	Panel, Front Jack.	3135 014 02980
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	00H1 47M EAA01
1	Retainer Treelock (x15).	3135 014 02620
7	Speaker Grille	4835 459 47112
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 5.25" (x2).	4835 240 57011

SMALL SIGNAL PANEL (2 TUNER)

SMALL SIGNAL PANEL (2 TUNER)

C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film.	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film.	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust).	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust).	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R269	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R277	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R282	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510
	R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
	R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
	R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R296	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
	R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
	R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	680pF., 10%, 1kV, Ceramic.	4835 122 47461
S C403	2700pF., 10% 250Vac Metal Film	4835 121 47414
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	2200pF., 5%, 1kV, Polypropylene.	4835 121 47635
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 400V, Electrolytic	4835 124 47717
S C424	470uF., 400V, Electrolytic	4835 124 47717
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	470pF., 10%, 1kV, Ceramic.	4835 122 47459
S C430	400V, 22uF., Electrolytic.	4835 124 47725
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R400	0.1 ohm, 5%, 2W, Metal Oxide	4835 116 67262
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	22 ohm, 5%, 20W, Wire Wound.	4835 112 47013
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
S	R432	3 ohm, 15%, Variable Resistor.	4835 116 47016
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37114
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
	Q401	Transistor APT6035BN	4835 130 48122
	Q402	Transistor, MTD1N80E1.	9322 113 01687
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002

S = Safety Part Be sure to use exact replacement part.

L550	Suppression Coil, 10uH..	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer.	4835 148 87368
S T402	Transformer.	4835 148 87367
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, T 5A IEC	2422 093 00035
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67162

SVM MODULE

	SVM MODULE	
C751	1uF., 50V, Electrolytic.	4835 121 47406
C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
C753	470uF., 25V, Electrolytic.	4835 121 47405
C754	0.1uF., 100V, Polyester.	2222 365 85104
C755	0.047uF., 50V, Ceramic	4835 122 47608
C756	47uF., 50V, Electrolytic	4835 124 47668
C757	0.01uF., 100V, Polyester	4822 121 41815
C758	470uF., 25V, Electrolytic.	4835 121 47405
C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
C761	0.1uF., 250V, Polyester.	4835 121 47278
C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S C766	47uF., 160V, Electrolytic.	4835 124 47713
S C767	47uF., 160V, Electrolytic.	4835 124 47713
S C768	47uF., 160V, Electrolytic.	4835 124 47713
S C769	22uF., 160V, Electrolytic.	4835 124 47726
S C770	560pF., 10%, 500V, Ceramic	4835 122 47647
C774	0.01uF., 100V, Polyester	4822 121 41815
S R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R753	4.7k, 1/2W, Metal Film	4835 116 57724
R754	1k, 1/2W, Metal Film	4835 116 57685
R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R765	1.8k, 1/2W, Metal Film	4835 116 57702
R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
R767	3.3k, 1/2W, Metal Film	4835 116 57714
R768	4.7k, 1/2W, Metal Film	4835 116 57724
R769	33k, 1/2W, Metal Film.	4835 116 57715
R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
R771	33k, 1/2W, Metal Film.	4835 116 57715
R772	1k, 1/2W, Metal Film	4835 116 57685
R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
R774	22 ohm, 1/2W, Metal Film	4835 116 57708
R775	22 ohm, 1/2W, Metal Film	4835 116 57708
R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
R783	68k, 1/2W, Metal Film.	4835 116 57737
R784	10k, 1/2W, Metal Film.	4835 116 57686
R785	68k, 1/2W, Metal Film.	4835 116 57737
R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
S R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
R793	22k, 1/2W, Metal Film.	4835 116 57706
R794	22 ohm, 1/2W, Metal Film	4835 116 57708
R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
R797	4.7k, 1/2W, Metal Film	4835 116 57724
S R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
D751	Diode 1N4148	4835 130 37048
D752	Diode 1N4148	4835 130 37048
D753	Diode 1N4148	4835 130 37048
D760	Diode 1N4148	4835 130 37048
D761	Diode, Silicon	4835 220 17059
D762	Diode, Silicon	4835 220 17059
Q751	Transistor BC548B.	4835 130 47055
Q753	Transistor BC558B.	4835 130 47162
Q754	Transistor BC548B.	4835 130 47055
Q755	Transistor BC548B.	4835 130 47055
Q756	Transistor BC548B.	4835 130 47055
Q757	Transistor BC337-25.	4835 130 48113
Q758	Transistor BC327-25.	4835 130 48112
Q759	Transistor 2SB940A	4835 130 48119
Q760	Transistor 2SD1264AP	4835 130 48121
Q761	Transistor BC548B.	4835 130 47055
L752	Inductor Coil LAL03 10UK	2422 535 96711
FB751	Ferrite Bead	4835 526 17003
FB752	Ferrite Bead	4835 526 17003
HS76	Solder Lug f/IC400	0020 100 70001
HS76	Heatsink	0073 515 10003
HS76	Spring Clip.	4835 290 47008
J751	10 Pin Connector	0018 223 80010
J752	2 Pin Board Connector.	2422 025 14668
J753	2 Pin Board Connector.	2422 025 14668
J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706109 0001, 0002 OPTICAL ASSEMBLY

	00706109 0001, 0002 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT 180DLB22 (Blue).	4835 310 57408
S E	CRT 180DLB22 (Green)	4835 310 57411
S E	CRT 180DLB22 (Red) (HU).	4835 310 57409
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Red & Blue (0001).	4835 290 87153
P	Coupler Red & Blue 54" (0002).	4835 290 87155

S = Safety Part Be sure to use exact replacement part.

54PP72 (continued)

P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Main, Blue	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

54XP43 - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77753
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	Customer Control Assembly (48PP72A001 & 54PP72A001).	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	25W Audio Amp.	4835 219 77763
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR614	4835 219 17727

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1 159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 0054XP43C101

MODEL 0054XP43C101

S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 00800

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

	Back Cover CRT	3135 013 02360
	Back Cover End	3135 013 00730
26	Back Cover Vac FM, (Upper)	3135 014 03320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
3	Extr., Screen Bottom	3135 014 02950
2	Extr., Screen Edge, Side (x2).	3135 014 03070
14	Extr., Screen Edge, Top.	3135 014 03060
	Filter	4835 380 57011
4	Foot Base Rail (x2).	3135 014 03131
6	Front Base Rail.	3135 013 02381
	Front Jack Panel	4835 219 77787
9	Hole Insert (x17).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier.	4835 432 17847
15	Mirror Board Mtng Brkt. (x2)	3135 011 02021
24	Mirror Trapz	4835 310 77052
	Owners Manual.	3135 015 07510
	Owners Manual English.	3135 015 08400
	Owners Manual Spanish.	3135 015 07510
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 07500
	Quick Use Guide.	3135 015 08390
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	00H1 47M EAA01
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 54" (x2).	3135 014 06350
7	Speaker Grille	3135 014 06570
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 5.25" (x2).	4835 240 57011

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
S R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R60	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R64	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042	
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R69	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R70	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R74	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R76	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R82	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097	
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018	
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R96	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774	
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448	
R104	160 ohm, 5%, 1/10W, Carbon Film.	3198 021 51610	
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366	
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R120	680 ohm, 5%, 1/10W, Carbon Film.	4835 111 37271	
R121	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R157	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R158	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736	
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	

R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R202	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R220	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R222	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R225	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R255	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R256	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R269	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R277	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R282	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120	
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620	
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231	
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R296	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443	
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214	
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R307	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698	
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066	
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630	
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp.	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp.	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp.	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp.	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp.	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film.	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film.	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film.	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film.	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film.	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film.	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

		LARGE SIGNAL PANEL	
S	C402	680pF., 10%, 1kV, Ceramic.	4835 122 47461
S	C403	2700pF., 10% 250Vac Metal Film	4835 121 47414
S	C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S	C407	2200pF., 5%, 1kV, Polypropylene.	4835 121 47635
	C408	330pF., 10%, 500V, Ceramic	4835 122 47648
	C409	3300uF., 35V, Electrolytic	4835 124 47559
	C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C411	0.1uF., 400V, Polyester.	0025 968 41049
	C412	330pF., 10%, 500V, Ceramic	4835 122 47648
	C413	330pF., 10%, 500V, Ceramic	4835 122 47648
	C414	330uF., 25V, Electrolytic.	4835 124 47632
	C415	100pF., 5%, 50V, Ceramic	4835 122 87025
	C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
	C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C418	1000pF., 50V, Ceramic.	4835 122 47004
	C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
	C420	100pF., 5%, 50V, Ceramic	4835 122 87025
	C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C423	470uF., 400V, Electrolytic	4835 124 47717
S	C424	470uF., 400V, Electrolytic	4835 124 47717
	C425	0.1uF., 400V, Polyester.	0025 968 41049
	C426	330pF., 10%, 500V, Ceramic	4835 122 47648
	C427	3300uF., 25V, Electrolytic	4835 124 47672
	C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C429	470pF., 10%, 1kV, Ceramic.	4835 122 47459
S	C430	400V, 22uF., Electrolytic.	4835 124 47725
	C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C435	3300uF., 25V, Electrolytic	4835 124 47575
	C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C437	100pF., 5%, 50V, Ceramic	4835 122 87025
	C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573
	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R400	0.1 ohm, 5%, 2W, Metal Oxide	4835 116 67262
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	22 ohm, 5%, 20W, Wire Wound.	4835 112 47013
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
S	R432	3 ohm, 15%, Variable Resistor.	4835 116 47016
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37114
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
	Q401	Transistor APT6035BN	4835 130 48122
	Q402	Transistor, MTD1N80E1.	9322 113 01687
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer.	4835 148 87368
S	T402	Transformer.	4835 148 87367
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, T 5A IEC	2422 093 00035
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67162

SVM MODULE

		SVM MODULE	
	C751	1uF., 50V, Electrolytic.	4835 121 47406
	C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
	C753	470uF., 25V, Electrolytic.	4835 121 47405
	C754	0.1uF., 100V, Polyester.	2222 365 85104
	C755	0.047uF., 50V, Ceramic	4835 122 47608
	C756	47uF., 50V, Electrolytic	4835 124 47668
	C757	0.01uF., 100V, Polyester	4822 121 41815
	C758	470uF., 25V, Electrolytic.	4835 121 47405
	C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C761	0.1uF., 250V, Polyester.	4835 121 47278
	C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
	C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S	C766	47uF., 160V, Electrolytic.	4835 124 47713
S	C767	47uF., 160V, Electrolytic.	4835 124 47713
S	C768	47uF., 160V, Electrolytic.	4835 124 47713
S	C769	22uF., 160V, Electrolytic.	4835 124 47726
S	C770	560pF., 10%, 500V, Ceramic	4835 122 47647
	C774	0.01uF., 100V, Polyester	4822 121 41815
S	R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
	R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
	R753	4.7k, 1/2W, Metal Film	4835 116 57724
	R754	1k, 1/2W, Metal Film	4835 116 57685
	R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
	R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
	R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R765	1.8k, 1/2W, Metal Film	4835 116 57702
	R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
	R767	3.3k, 1/2W, Metal Film	4835 116 57714
	R768	4.7k, 1/2W, Metal Film	4835 116 57724
	R769	33k, 1/2W, Metal Film.	4835 116 57715
	R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R771	33k, 1/2W, Metal Film.	4835 116 57715
	R772	1k, 1/2W, Metal Film	4835 116 57685
	R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
	R774	22 ohm, 1/2W, Metal Film	4835 116 57708
	R775	22 ohm, 1/2W, Metal Film	4835 116 57708
	R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
	R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
	R783	68k, 1/2W, Metal Film.	4835 116 57737
	R784	10k, 1/2W, Metal Film.	4835 116 57686
	R785	68k, 1/2W, Metal Film.	4835 116 57737
	R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
S	R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
	R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R793	22k, 1/2W, Metal Film.	4835 116 57706
	R794	22 ohm, 1/2W, Metal Film	4835 116 57708
	R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S	R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	R797	4.7k, 1/2W, Metal Film	4835 116 57724
S	R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	D751	Diode 1N4148	4835 130 37048
	D752	Diode 1N4148	4835 130 37048
	D753	Diode 1N4148	4835 130 37048
	D760	Diode 1N4148	4835 130 37048
	D761	Diode, Silicon	4835 220 17059
	D762	Diode, Silicon	4835 220 17059
	Q751	Transistor BC548B.	4835 130 47055
	Q753	Transistor BC558B.	4835 130 47162
	Q754	Transistor BC548B.	4835 130 47055
	Q755	Transistor BC548B.	4835 130 47055
	Q756	Transistor BC548B.	4835 130 47055
	Q757	Transistor BC337-25.	4835 130 48113
	Q758	Transistor BC327-25.	4835 130 48112
	Q759	Transistor 2SB940A	4835 130 48119
	Q760	Transistor 2SD1264AP	4835 130 48121
	Q761	Transistor BC548B.	4835 130 47055
	L752	Inductor Coil LAL03 10UK	2422 535 96711
	FB751	Ferrite Bead	4835 526 17003
	FB752	Ferrite Bead	4835 526 17003
	HS76	Solder Lug f/IC400	0020 100 70001
	HS76	Heatsink	0073 515 10003
	HS76	Spring Clip.	4835 290 47008
	J751	10 Pin Connector	0018 223 80010
	J752	2 Pin Board Connector.	2422 025 14668
	J753	2 Pin Board Connector.	2422 025 14668
	J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706116 0001 OPTICAL ASSEMBLY

		00706116 0001 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409

S = Safety Part Be sure to use exact replacement part.

54XP43 (continued)

H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	4835 310 57233
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Red & Blue (54")	4835 290 87155
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Main, Blue	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

54XP44 - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77753
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	Customer Control Assembly (48PP72A001 & 54PP72A001).	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	25W Audio Amp.	4835 219 77763
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR614	4835 219 17727

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1 159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic. . . .	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 0054XP44C101

MODEL 0054XP44C101

S 20	AC Cord, Filtered.	3135 010 03060
27	Back Cover (Lower)	3135 013 01300

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

26	Back Cover (Upper)	4835 432 97693
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA 3Pk.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
3	Extr., Screen Bottom	3135 014 02950
2	Extr., Screen Edge, Side (x2).	3135 014 03070
14	Extr., Screen Edge, Top.	3135 014 03060
	Filter	4835 380 57011
4	Foot Base Rail (x2).	3135 014 03131
	Front Jack Panel	4835 219 77787
9	Hole Insert (x17).	3135 014 02741
	Instruction Book	3135 015 08820
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting.	3135 013 01410
24	Mirror Trapz 2nd Surface	3135 013 01140
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 08810
	Rear Barrier	4835 432 97694
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	00H1 47M EAA01
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 54" (x2).	3135 014 06350
7	Speaker Grille	4835 459 47112
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 5.25" (x2).	4835 240 57011

SMALL SIGNAL PANEL (2 TUNER)

SMALL SIGNAL PANEL (2 TUNER)

C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
	R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
	R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
	R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
	R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

LARGE SIGNAL PANEL

S	C402	680pF., 10%, 1kV, Ceramic.	4835 122 47461
S	C403	2700pF., 10% 250Vac Metal Film	4835 121 47414
S	C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S	C407	2200pF., 5%, 1kV, Polypropylene.	4835 121 47635
	C408	330pF., 10%, 500V, Ceramic	4835 122 47648
	C409	3300uF., 35V, Electrolytic	4835 124 47559
	C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C411	0.1uF., 400V, Polyester.	0025 968 41049
	C412	330pF., 10%, 500V, Ceramic	4835 122 47648
	C413	330pF., 10%, 500V, Ceramic	4835 122 47648
	C414	330uF., 25V, Electrolytic.	4835 124 47632
	C415	100pF., 5%, 50V, Ceramic	4835 122 87025
	C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
	C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C418	1000pF., 50V, Ceramic.	4835 122 47004
	C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
	C420	100pF., 5%, 50V, Ceramic	4835 122 87025
	C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C423	470uF., 400V, Electrolytic	4835 124 47717
S	C424	470uF., 400V, Electrolytic	4835 124 47717
	C425	0.1uF., 400V, Polyester.	0025 968 41049
	C426	330pF., 10%, 500V, Ceramic	4835 122 47648
	C427	3300uF., 25V, Electrolytic	4835 124 47672
	C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C429	470pF., 10%, 1kV, Ceramic.	4835 122 47459
S	C430	400V, 22uF., Electrolytic.	4835 124 47725
	C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C435	3300uF., 25V, Electrolytic	4835 124 47575
	C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C437	100pF., 5%, 50V, Ceramic	4835 122 87025
	C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573
	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic	4835 122 47058
	C814	47uF., 315V, Electrolytic	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene	4835 121 47638
	C820	4.7uF., 100V, Polyester	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic	4835 124 47563
	C900	220uF., 16V, Electrolytic	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester	4835 121 47278
	C918	2.2uF., 50V, Electrolytic	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic	4835 124 47506
	C921	100uF., 25V, Electrolytic	4835 124 47501
	C922	470uF., 25V, Electrolytic	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic	4835 122 57004
	C927	1uF., 50V, Electrolytic	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R400	0.1 ohm, 5%, 2W, Metal Oxide	4835 116 67262
S	R401	100k, 5%, 2W, Metal Oxide	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	22 ohm, 5%, 20W, Wire Wound	4835 112 47013
	R412	510 ohm, 5%, 1/4W, Carbon	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
S	R432	3 ohm, 15%, Variable Resistor	4835 116 47016
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film	4835 116 57686
	R442	3.3k, 1/10W, Metal Film	4835 111 37247
	R443	100k, 1/10W, Metal Film	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film	4835 111 27086
	R446	10k, 1/2W, Metal Film	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film	4835 111 27061
	R455	470 ohm, Control Adjust	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37114
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
	Q401	Transistor APT6035BN	4835 130 48122
	Q402	Transistor, MTD1N80E1.	9322 113 01687
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer.	4835 148 87368
S	T402	Transformer.	4835 148 87367
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, T 5A IEC	2422 093 00035
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67162

SVM MODULE

		SVM MODULE	
	C751	1uF., 50V, Electrolytic.	4835 121 47406
	C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
	C753	470uF., 25V, Electrolytic.	4835 121 47405
	C754	0.1uF., 100V, Polyester.	2222 365 85104
	C755	0.047uF., 50V, Ceramic	4835 122 47608
	C756	47uF., 50V, Electrolytic	4835 124 47668
	C757	0.01uF., 100V, Polyester	4822 121 41815
	C758	470uF., 25V, Electrolytic.	4835 121 47405
	C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C761	0.1uF., 250V, Polyester.	4835 121 47278
	C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
	C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S	C766	47uF., 160V, Electrolytic.	4835 124 47713
S	C767	47uF., 160V, Electrolytic.	4835 124 47713
S	C768	47uF., 160V, Electrolytic.	4835 124 47713
S	C769	22uF., 160V, Electrolytic.	4835 124 47726
S	C770	560pF., 10%, 500V, Ceramic	4835 122 47647
	C774	0.01uF., 100V, Polyester	4822 121 41815
S	R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
	R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
	R753	4.7k, 1/2W, Metal Film	4835 116 57724
	R754	1k, 1/2W, Metal Film	4835 116 57685
	R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
	R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
	R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R765	1.8k, 1/2W, Metal Film	4835 116 57702
	R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
	R767	3.3k, 1/2W, Metal Film	4835 116 57714
	R768	4.7k, 1/2W, Metal Film	4835 116 57724
	R769	33k, 1/2W, Metal Film.	4835 116 57715
	R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R771	33k, 1/2W, Metal Film.	4835 116 57715
	R772	1k, 1/2W, Metal Film	4835 116 57685
	R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
	R774	22 ohm, 1/2W, Metal Film	4835 116 57708
	R775	22 ohm, 1/2W, Metal Film	4835 116 57708
	R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
	R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
	R783	68k, 1/2W, Metal Film.	4835 116 57737
	R784	10k, 1/2W, Metal Film.	4835 116 57686
	R785	68k, 1/2W, Metal Film.	4835 116 57737
	R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
S	R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
	R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R793	22k, 1/2W, Metal Film.	4835 116 57706
	R794	22 ohm, 1/2W, Metal Film	4835 116 57708
	R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S	R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	R797	4.7k, 1/2W, Metal Film	4835 116 57724
S	R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	D751	Diode 1N4148	4835 130 37048
	D752	Diode 1N4148	4835 130 37048
	D753	Diode 1N4148	4835 130 37048
	D760	Diode 1N4148	4835 130 37048
	D761	Diode, Silicon	4835 220 17059
	D762	Diode, Silicon	4835 220 17059
	Q751	Transistor BC548B.	4835 130 47055
	Q753	Transistor BC558B.	4835 130 47162
	Q754	Transistor BC548B.	4835 130 47055
	Q755	Transistor BC548B.	4835 130 47055
	Q756	Transistor BC548B.	4835 130 47055
	Q757	Transistor BC337-25.	4835 130 48113
	Q758	Transistor BC327-25.	4835 130 48112
	Q759	Transistor 2SB940A	4835 130 48119
	Q760	Transistor 2SD1264AP	4835 130 48121
	Q761	Transistor BC548B.	4835 130 47055
	L752	Inductor Coil LAL03 10UK	2422 535 96711
	FB751	Ferrite Bead	4835 526 17003
	FB752	Ferrite Bead	4835 526 17003
	HS76	Solder Lug f/IC400	0020 100 70001
	HS76	Heatsink	0073 515 10003
	HS76	Spring Clip.	4835 290 47008
	J751	10 Pin Connector	0018 223 80010
	J752	2 Pin Board Connector.	2422 025 14668
	J753	2 Pin Board Connector.	2422 025 14668
	J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

		STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ATC669 CUSTOMER CONTROL ASSEMBLY	
		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706089 0001, 0002 OPTICAL ASSEMBLY

		00706089 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147

S = Safety Part Be sure to use exact replacement part.

54XP44 (continued)

M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Green.	4835 290 87152
P	Coupler, Red & Blue (0001)	4835 290 87153
P	Coupler, Red & Blue 54" (0002)	4835 290 87155
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens C-Element, Green.	4835 381 47019
S	Lens C-Element, (Blue & Red) D77 . . .	4835 381 47016
W	Lens Main Blue	4835 381 47017
W	Lens, Main, Red & Green D78.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

60XP43 - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77753
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	Customer Control Assembly (48PP72A001 & 54PP72A001).	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	25W Audio Amp.	4835 219 77763
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR614	4835 219 17727

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1 159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 0060XP43C101

MODEL 0060XP43C101

S 20	AC Cord, Filtered.	3135 010 03060
	Back Barrier	3135 013 01390

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

27	Back Cover (Lower)	3135 013 02350
26	Back Cover (Upper)	3135 013 01340
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly	4835 240 77063
3	Extr., Screen Bottom	3135 014 02960
2	Extr., Screen Edge, Side (x2).	3135 014 03090
14	Extr., Screen Edge, Top.	3135 014 03080
	Filter	3135 014 02780
	Frame, Screen 60, Side (x2).	3135 014 03430
	Frame, Screen Top 60	3135 014 03410
	Front Jack Panel	4835 219 77787
	Front Panel Cover.	3135 013 01480
9	Hole Insert (x18).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier.	4835 432 17847
25	Mirror Board	3135 013 01420
15	Mirror Board Mtng Bracket Lt	3135 011 03011
15	Mirror Board Mtng Bracket Rt	3135 011 03021
24	Mirror Trapz, 2nd.	3135 013 01130
	Owners Manual.	00IB 789 4E001
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	00EL 623 9E001
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	00H1 47M EAA01
1	Retainer Treelock (x17).	3135 014 02620
7	Speaker Grille	3135 014 06320
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 5.25" (x2).	4835 240 57011

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
S R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R60	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R64	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042	
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R69	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R70	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R74	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R76	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R82	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097	
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018	
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R96	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774	
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448	
R104	160 ohm, 5%, 1/10W, Carbon Film.	3198 021 51610	
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366	
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R120	680 ohm, 5%, 1/10W, Carbon Film.	4835 111 37271	
R121	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R157	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R158	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736	
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R202	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R220	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R222	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R225	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R255	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R256	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R269	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R277	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R282	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120	
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620	
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231	
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R296	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443	
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214	
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R307	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698	
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066	
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630	
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685	

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724	
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724	
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R338	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724	
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715	
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248	
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R352	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045	
R355	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R357	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714	
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318	
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318	
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318	
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318	
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318	
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R386	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R388	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R389	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248	
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528	
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706	
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R605	180 ohm, 5%, 1/10W, Carbon Film.	4835 111 37229	
R606	180 ohm, 5%, 1/10W, Carbon Film.	4835 111 37229	
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420	
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630	
R610	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R612	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054	
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479	
R614	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443	
R615	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R616	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054	
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363	
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479	
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361	
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621	
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361	
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202	
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911	
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057	
R630	430 ohm, 5%, 1/10W, Carbon Film.	3198 021 54310	
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140	
R632	270 ohm, 5%, 1/10W, Carbon Film.	4835 111 37424	
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719	
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R636	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697	
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698	
R640	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443	
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751	
R642	430 ohm, 5%, 1/10W, Carbon Film.	3198 021 54310	
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R650	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443	
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620	
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R659	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104	
R662	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104	
R664	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104	
R666	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340	
R690	1 Meg ohm, 5%, 1/10W Carb. Film.	4835 111 37217	
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363	
R696	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R697	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053	
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741	
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R706	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R707	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059	
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630	
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320	
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320	
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320	
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R718	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054	
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R722	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054	
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048	
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R742	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R744	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R745	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R748	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R753	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054	
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R755	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458	
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448	
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R762	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	680pF., 10%, 1kV, Ceramic.	4835 122 47461
S C403	2700pF., 10% 250Vac Metal Film	4835 121 47414
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	2200pF., 5%, 1kV, Polypropylene.	4835 121 47635
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 400V, Electrolytic	4835 124 47717
S C424	470uF., 400V, Electrolytic	4835 124 47717
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	470pF., 10%, 1kV, Ceramic.	4835 122 47459
S C430	400V, 22uF., Electrolytic.	4835 124 47725
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R400	0.1 ohm, 5%, 2W, Metal Oxide	4835 116 67262
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	22 ohm, 5%, 20W, Wire Wound.	4835 112 47013
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
S	R432	3 ohm, 15%, Variable Resistor.	4835 116 47016
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37114
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
	Q401	Transistor APT6035BN	4835 130 48122
	Q402	Transistor, MTD1N80E1.	9322 113 01687
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001

S = Safety Part Be sure to use exact replacement part.

L428	Suppression Coil, 42uH..	4835 157 57063
L429	Ferrite Bead	4835 526 17001
L430	Ferrite Bead	4835 526 17001
L432	Suppression Coil, 10uH..	4835 152 27002
L435	Suppression Coil, 10uH..	4835 152 27002
L440	Suppression Coil, 10uH..	4835 152 27002
L550	Suppression Coil, 10uH..	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer.	4835 148 87368
S T402	Transformer.	4835 148 87367
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, T 5A IEC	2422 093 00035
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink .	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67162

SVM MODULE

	SVM MODULE	
C751	1uF., 50V, Electrolytic.	4835 121 47406
C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
C753	470uF., 25V, Electrolytic.	4835 121 47405
C754	0.1uF., 100V, Polyester.	2222 365 85104
C755	0.047uF., 50V, Ceramic	4835 122 47608
C756	47uF., 50V, Electrolytic	4835 124 47668
C757	0.01uF., 100V, Polyester	4822 121 41815
C758	470uF., 25V, Electrolytic.	4835 121 47405
C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
C761	0.1uF., 250V, Polyester.	4835 121 47278
C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S C766	47uF., 160V, Electrolytic.	4835 124 47713
S C767	47uF., 160V, Electrolytic.	4835 124 47713
S C768	47uF., 160V, Electrolytic.	4835 124 47713
S C769	22uF., 160V, Electrolytic.	4835 124 47726
S C770	560pF., 10%, 500V, Ceramic	4835 122 47647
C774	0.01uF., 100V, Polyester	4822 121 41815
S R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R753	4.7k, 1/2W, Metal Film	4835 116 57724
R754	1k, 1/2W, Metal Film	4835 116 57685
R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R765	1.8k, 1/2W, Metal Film	4835 116 57702
R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
R767	3.3k, 1/2W, Metal Film	4835 116 57714
R768	4.7k, 1/2W, Metal Film	4835 116 57724
R769	33k, 1/2W, Metal Film.	4835 116 57715
R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
R771	33k, 1/2W, Metal Film.	4835 116 57715
R772	1k, 1/2W, Metal Film	4835 116 57685
R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
R774	22 ohm, 1/2W, Metal Film	4835 116 57708
R775	22 ohm, 1/2W, Metal Film	4835 116 57708
R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
R783	68k, 1/2W, Metal Film.	4835 116 57737
R784	10k, 1/2W, Metal Film.	4835 116 57686
R785	68k, 1/2W, Metal Film.	4835 116 57737
R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
S R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
R793	22k, 1/2W, Metal Film.	4835 116 57706
R794	22 ohm, 1/2W, Metal Film	4835 116 57708
R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
R797	4.7k, 1/2W, Metal Film	4835 116 57724
S R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
D751	Diode 1N4148	4835 130 37048
D752	Diode 1N4148	4835 130 37048
D753	Diode 1N4148	4835 130 37048
D760	Diode 1N4148	4835 130 37048
D761	Diode, Silicon	4835 220 17059
D762	Diode, Silicon	4835 220 17059
Q751	Transistor BC548B.	4835 130 47055
Q753	Transistor BC558B.	4835 130 47162
Q754	Transistor BC548B.	4835 130 47055
Q755	Transistor BC548B.	4835 130 47055
Q756	Transistor BC548B.	4835 130 47055
Q757	Transistor BC337-25.	4835 130 48113
Q758	Transistor BC327-25.	4835 130 48112
Q759	Transistor 2SB940A	4835 130 48119
Q760	Transistor 2SD1264AP	4835 130 48121
Q761	Transistor BC548B.	4835 130 47055
L752	Inductor Coil LAL03 10UK	2422 535 96711
FB751	Ferrite Bead	4835 526 17003
FB752	Ferrite Bead	4835 526 17003
HS76	Solder Lug f/IC400	0020 100 70001
HS76	Heatsink	0073 515 10003
HS76	Spring Clip.	4835 290 47008
J751	10 Pin Connector	0018 223 80010
J752	2 Pin Board Connector.	2422 025 14668
J753	2 Pin Board Connector.	2422 025 14668
J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706120 0001 OPTICAL ASSEMBLY

	00706120 0001 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43802
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT 180DLB22 (Blue).	4835 310 57408
S E	CRT 180DLB22 (Green)	4835 310 57411
S E	CRT 180DLB22 (Red) (HU).	4835 310 57409
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040

S = Safety Part Be sure to use exact replacement part.

60XP43 (continued)

K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler 60" (Red).	3135 011 01940
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Delta 79	4835 381 47021
W	Lens, Main, Red & Green.	4835 381 47022

8P4831C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77751
CBA	Small Signal Panel	4835 219 77756
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Remote Transmitter UR714	4835 219 17699

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P4831C101

	MODEL 008P4831C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01370
27	Back Cover (Lower)	4835 432 97706
26	Back Cover (Upper)	3135 013 01320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02940
2	Extr., Screen Edge, Side (x2).	3135 014 03050
14	Extr., Screen Edge, Top.	3135 014 03040
4	Foot Base Rail (x2).	3135 014 03131
16	Frame f/Digital Convergence.	4835 432 17846
9	Hole Insert (x14).	3135 014 02741
18	Jack Panel Frame	3135 014 06650
13	Lens, Fresnel.	3135 013 00960
10	Lens, Lenticular	3135 013 00930
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting Board.	3135 013 01350
24	Mirror Trapz 2nd Surface	3135 013 01150
	Owners Manual.	3135 015 07370
	Quick Use Guide.	3135 015 07360
19	Rear Jack Panel Overlay.	4835 459 17556
	RemoteTransmit. UR714SB.	4835 219 17699
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 48" (x2).	3135 014 06300
8	Speaker Full 4x6" 8 Ohm (x2)	4835 240 47011
7	Speaker Grille	3135 014 06270

SMALL SIGNAL PANEL (1 TUNER)

	SMALL SIGNAL PANEL (1 TUNER)	
C1	100uF., 16V, Electrolytic.	3198 025 21010
C2	15pF., 5%, 50V, Ceramic.	3198 016 01590
C4	470uF., 50V, Electrolytic.	3198 025 54770
C5	100uF., 16V, Electrolytic.	3198 025 21010
C7	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C8	220uF., 16V, Electrolytic.	3198 025 22210
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	1uF., 20%, 50V, Electrolytic	3198 025 51080
C14	1uF., 20%, 50V, Electrolytic	3198 025 51080
C19	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C25	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C30	10uF., 20%, 16V, Electrolytic.	2020 012 92805
C37	100uF., 16V, Electrolytic.	3198 025 21010
C39	220uF., 16V, Electrolytic.	3198 025 22210
C45	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C46	1000uF., 16V, Electrolytic	4835 124 47571
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C100	5600pF., 10%, 50V, Ceramic	4835 122 87043
C101	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C102	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C103	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V, Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V, Electrolytic.	4835 124 97175
C112	1uF., 35V, Electrolytic.	4835 124 97175
C113	0.047uF., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 25V, Ceramic	3198 017 21040
C115	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 100V, Metalized Polyester	4835 121 47364
C119	0.22uF., 100V, Metalized Polyester	4835 121 47038
C120	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C121	0.22uF., 100V, Metalized Polyester	4835 121 47038
C122	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V,Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V,Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V,Ceramic.	4835 122 87527
C130	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C131	5600pF., 10%, 50V, Ceramic	4835 122 87043
C132	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C133	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C135	1000uF., 35V, Electrolytic	4835 124 47498
C136	1000uF., 35V, Electrolytic	4835 124 47498
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.1uF., 25V,Ceramic.	3198 017 21040
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C154	0.1uF., 25V, Ceramic	3198 017 21040
C155	100uF., 16V, Electrolytic.	3198 025 21010
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C157	47uF., 20%, 25V,Electrolytic	3198 025 34790
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C160	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C161	100pF., 5%, 50V, Ceramic	3198 016 01010
C162	100uF., 50V, Electrolytic.	3198 025 51010
C164	100pF., 5%, 50V, Ceramic	3198 016 01010
C165	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C166	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C167	10uF., 50V, Electrolytic	4835 124 47525
C168	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C169	1000uF., 25V, Electrolytic	4835 124 47583
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C171	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C172	0.1uF., 10%, 50V,Ceramic	4835 122 87061
C173	100uF., 16V, Electrolytic.	3198 025 21010
C174	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C175	1000uF., 25V, Electrolytic	4835 124 47583
C176	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C177	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C178	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C179	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C180	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C181	0.1uF., 25V, Ceramic	3198 017 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C190	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C199	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C200	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C201	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C216	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C217	470pF., 10%, 50V, Ceramic.	2020 552 93057
C218	1uF., 35V, Electrolytic.	4835 124 97175
C220	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C223	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C229	0.1uF., 25V, Ceramic	3198 017 21040
C230	220pF., 5%, 50V, Ceramic	3198 016 02210
C300	0.1uF., 25V, Ceramic	3198 017 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 10V, Electrolytic.	4835 124 97183
C304	1000pF., 10%, 50V, Ceramic	3198 017 01020
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	1000pF., 10%, 50V, Ceramic	3198 017 01020
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 10V, Electrolytic.	4835 124 97183
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	4835 122 87041
C322	1uF., 35V, Electrolytic.	4835 124 97175
C323	1uF., 35V, Electrolytic.	4835 124 97175
C341	Trimmer Capacitor, 3pF.-40pF., 250V. .	2222 808 11409
C342	0.47uF., 35V, Electrolytic	4835 124 97182
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C376	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 25V, Electrolytic.	4835 124 97179
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 25V, Ceramic	3198 017 21040
C396	0.1uF., 25V, Ceramic	3198 017 21040
C400	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C405	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 25V, Ceramic	3198 017 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 25V, Ceramic	3198 017 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 35V, Electrolytic	4835 124 97037
C606	0.1uF., 25V, Ceramic	3198 017 21040
C607	0.1uF., 25V, Ceramic	3198 017 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 25V, Ceramic	3198 017 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 100V, Metalized Polyester . .	4835 121 47222
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 35V, Electrolytic.	4835 124 97175
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	4835 122 87593
C628	0.22uF., 50V, Ceramic.	4835 122 87087
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 25V, Ceramic	3198 017 21040
C639	0.33uF., 35V, Electrolytic	4835 124 97037
C640	0.012uF., 10%, 50V, Ceramic.	4835 122 87501
C641	0.1uF., 25V, Ceramic	3198 017 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C643	200pF., 5%, 50V, Ceramic	4835 122 87092
C645	620pF., 5%, 50V, Ceramic	4835 122 87089
C647	1000pF., 10%, 50V, Ceramic	4835 122 87041
C648	120pF., 5%, 50V, Ceramic	4835 122 87046
C649	51pF., 5%, 50V, Ceramic.	4835 122 87054
C650	180pF., 5%, 50V, Ceramic	4835 122 87028
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 25V, Ceramic	3198 017 21040
C655	220uF., 16V, Electrolytic.	3198 025 22210
C656	100uF., 16V, Electrolytic.	3198 025 21010
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 25V, Ceramic	3198 017 21040
C664	0.1uF., 25V, Ceramic	3198 017 21040
C665	0.1uF., 25V, Ceramic	3198 017 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 25V, Ceramic	3198 017 21040
C676	82pF., 5%, 50V, Ceramic.	4835 122 87038
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	43pF., 5%, 50V, Ceramic.	2020 552 94276
C680	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C681	56P 5%, 50V, Ceramic	4835 122 87096
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 25V, Ceramic	3198 017 21040
C699	1uF., 35V, Electrolytic.	4835 124 97175
C719	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C720	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C721	0.1uF., 25V, Ceramic	3198 017 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C724	0.1uF., 25V, Ceramic	3198 017 21040
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C731	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C738	10pF., 5%, 50V, Ceramic.	3198 016 01090
C749	10pF., 5%, 50V, Ceramic.	3198 016 01090
C750	100uF., 25V, Electrolytic.	3198 025 31010
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C1000	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1001	0.22uF., 50V, Ceramic.	4835 122 87087
C1002	0.1uF., 25V, Ceramic	3198 017 21040
C1003	0.22uF., 50V, Ceramic.	4835 122 87087
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1011	220pF., 5%, 50V, Ceramic	3198 016 02210
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V,Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1016	220uF., 25V, Electrolytic.	3198 025 32210
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1026	560pF., 5%, 50V,Ceramic.	4835 122 87055
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 25V, Ceramic	3198 017 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1046	10uF., 10V, Electrolytic	4835 124 97178
C1050	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1051	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1052	1uF., 35V, Electrolytic.	4835 124 97175
BRSXXX	0 ohm, "Chip" Jumper	4835 111 27056
BRXXX	0 ohm, Jumper.	3198 021 90010
BRXXX	0 ohm, "Chip" Jumper	4835 111 27056
S R3	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

R4	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R5	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R6	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R11	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R13	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R14	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R34	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
S R35	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R44	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R45	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R46	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R47	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R48	820 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37466
R49	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R55	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R56	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R63	10 ohm, 5%, 1/4W, Carbon Film.	3198 011 01090
R64	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
R65	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
R66	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R67	150 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51510
R71	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R74	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
S R76	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R91	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R115	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R116	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R117	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R118	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R119	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R120	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R121	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R122	470 ohm, 5%, 1/4W, Carbon Film	3198 011 14710
R123	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
R124	47k, 5%, 1/10W, Metal Film	4835 111 37445
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R186	12k, 5%, 1/4W, Carbon Film	3198 011 01230
R187	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R189	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R190	12k, 5%, 1/4W, Carbon Film	3198 011 01230
R191	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
R192	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
R193	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R194	1k, 5%, 1/2W, Metal Film	4835 116 57685
R195	100k, 5%, 1/2W, Metal Film	4835 116 57687
R196	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R197	270k, 5%, 1/4W, Carbon Film.	3198 011 02740
R198	110k, 5%, 1/2W, Metal Film	2322 187 53114
R199	100k, 5%, 1/2W, Metal Film	4835 116 57687
R200	24k, 5%, 1/2W, Carbon Film	4835 110 47199
R201	22k, 5%, 1/8W, Carbon Film	4835 111 37558
R202	Control Adjust, 4.7k	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R206	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R228	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R229	3.6k, 5%, 1/4W, Carbon Film.	2322 711 61362
R230	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R231	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R232	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R233	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R234	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R235	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R236	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R238	2.7k, 5%, 1/4W, Carbon Film.	4835 111 37083
R240	0 ohm, Carbon Film	4835 111 27056
R241	0 ohm, Carbon Film	4835 111 27056
R242	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R243	4.3k, 5%, 0.24W, Carbon Film	2322 711 61432
R244	Control Adjust, 1k,.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R246	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R247	1.1k, 5%, 1/4W, Carbon Film.	2322 711 61112
R248	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R255	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R300	1/4W, 5%, 100 ohm, Carbon Composition.	4835 110 57066
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R318	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R319	16k, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R335	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R336	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R337	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R346	1k, 5%, 1/2W, Metal Film	4835 116 57685
R347	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

R353	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R354	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R355	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R357	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R358	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R359	47k, 5%, 1/4W, Carbon Film	3198 011 04730	
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R364	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R365	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R369	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318	
R370	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318	
R371	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318	
R372	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318	
R373	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318	
R374	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318	
R375	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R376	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R377	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R380	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R390	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R397	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R398	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R399	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
S R402	10 ohm, 5%, 3W, Metal Oxide.	2120 105 92585	
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R602	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R603	3.3k, 5%, 1/4W, Carbon Film.	4835 111 37035	
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R605	180 ohm 5%, 1/10W, Carbon Film	4835 111 37229	
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229	
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R608	0 ohm, 1/8W, Carbon Film	4835 110 67173	
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630	
R610	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479	
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443	
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253	
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363	
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479	
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361	
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621	
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361	
R623	2k, 5%, 1/4W, Carbon Film.	2322 711 61202	
R624	430 ohm, 5%, 1/4W, Carbon Film	3198 011 04310	
R625	2k, 5%, 1/10W, Carbon Film	4835 111 27091	
R626	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021	
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911	
R628	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190	
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057	
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310	
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140	
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424	
R633	390 ohm, 5%, 1/4W, Carbon Film	3198 011 03910	
R634	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190	
R635	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420	
R636	0 ohm, Carbon Film	4835 111 27056	
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697	
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698	
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443	
R641	750 ohm, 5%, 1/4W, Carbon Film	4835 111 37121	
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310	
R644	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R649	2k, 5%, 1/4W, Carbon Film.	2322 711 61202	
R650	330 ohm, 5%, 1/2W, Metal Film.	4835 116 57713	
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620	
R656	2k, 5%, 1/10W, Carbon Film	4835 111 27091	
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R659	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R661	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101	
R662	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021	
R663	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101	
R664	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021	
R665	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101	
R666	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021	
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340	
R671	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104	
R672	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104	
R673	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R674	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R675	2k, 5%, 1/10W, Carbon Film	4835 111 27091	
R676	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210	
R677	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R678	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R679	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R681	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R682	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479	
R683	8.2k, 5%, 1/4W, Carbon Film.	4835 111 37043	
R684	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253	
R685	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065	
R686	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R687	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210	
R688	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R689	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R690	1 Meg ohm, 5%, 1/4W, Carbon Film . . .	2322 711 61105	
R691	10 ohm, 5%, 1/4W, Carbon Film.	4835 111 37132	
R692	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R694	13k, 5%, 1/10W, Carbon Film.	4835 111 27059	
R695	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021	
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253	
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253	
R698	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190	
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R724	12k, 5%, 1/4W, Carbon Film	2322 711 61123	
R725	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R726	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R727	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R728	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R729	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R730	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R731	12k, 5%, 1/10W, Carbon Film.	3198 021 51230	
R732	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021	
R733	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559	
R734	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R735	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R736	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R737	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R738	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R739	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
S R740	18 ohm, 5%, 1/4W, Carbon Film.	2322 711 61189	
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512	
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R778	2k, 5%, 1/10W, Carbon Film	4835 111 27091	
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222	
R786	15k, 5%, 1/10W, Carbon Film.	4835 111 37458	
R787	3k, 5%, 1/10W, Carbon Film	4835 111 37554	
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231	
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R791	6.8k, 5%, 1/4W, Carbon Film.	3198 011 06820	
R794	200 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 52010	
R795	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R796	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221	
R797	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221	
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R806	1k, 2% 1/8W, Carbon Film	4835 110 67216	
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253	
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620	
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R814	4.7 Meg ohm, 5%, 1/10W, Carbon Film. .	3198 021 54750	
R821	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021	
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706	
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R1004	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890	
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407	
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230	
R1015	330 ohm, 5%, 1/4W, Carbon Film	4835 111 37034	
S R1016	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R1017	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R1018	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054	
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706	
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706	
R1023	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1032	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1050	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1051	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1052	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1053	750 ohm, 5%, 1/4W, Carbon Film	3198 011 07510
D100	Diode BAS216	4835 130 37905
D150	Diode 1N4148	4835 130 37048
D151	Diode 1N4148	4835 130 37048
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D302	Diode 1N4148	4835 130 37048
D303	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode BAS216	4835 130 37905
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode BAS216	4835 130 37905
D612	Diode BAS216	4835 130 37905
D613	Diode 1N4148	4835 130 37048
D614	Diode 1N4148	4835 130 37048
D615	Diode BAS216	4835 130 37905
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode BAS216	4835 130 37905
D700	Diode BAS216	4835 130 37905
IC1	IC, A/V Switch	4835 209 87952
IC106	IC, 10/25W Hi-Fi Power Audio Amp . . .	4835 209 87082
IC107	IC 2-Channel Multi/Demultiplexer . . .	4835 209 17033
IC120	IC, Stereo Decoder & Audio Processor .	4835 209 88337
IC200	IC, IF Signal Processor.	4835 209 87757
IC300	IC LC864265A, Tuning Microprocessor. .	3135 010 02991
IC304	IC ST24C02B1, EEPROM	4835 209 88326
IC400	IC MC7812CT, 12V Regulator	9334 006 10682
IC401	IC MC7805CT, 5V Regulator.	9334 536 00682
IC600	IC, Y/C/S Processor.	4835 209 88331
IC606	IC, 9V Regulator	4835 209 88009
IC701	IC, Chroma/Luma Switch	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor, NPN BC847B	4822 130 60511
Q4	Transistor, Buffer	4822 130 60511
Q5	Transistor, Buffer	4822 130 60511
Q7	Transistor, NPN BC847B	4822 130 60511
Q8	Transistor, NPN BC847B	4822 130 60511
Q9	P-Channel JFET, Mono/Stereo Switch . .	9340 053 20126
Q12	Transistor, Mono/Stereo Inverter . . .	4822 130 60511
Q14	Transistor, NPN BC847B	4822 130 60511
Q16	Transistor, NPN BC847B	4822 130 60511
Q17	Transistor, NPN BC847B	4822 130 60511
Q141	Transistor, Variable Audio Out Switch.	4822 130 60511
Q152	P-Channel JFET, Mute	4835 130 47083
Q153	P-Channel JFET, Mute	4835 130 47083
Q154	P-Channel JFET, Mute	4835 130 47083
Q155	P-Channel JFET, Mute	4835 130 47083
Q156	Transistor, Mute Inverter.	4835 130 47055
Q200	Transistor, Video Amp.	5322 130 60508
Q201	Transistor, Coincidence Detector . . .	5322 130 60508
Q202	Transistor, Coincidence Detector . . .	4822 130 60511
Q203	Transistor, Coincidence Detector . . .	5322 130 60508
Q204	Transistor, Video Buffer	4822 130 60511
Q300	Transistor, Standby LED Switch	4822 130 60511
Q301	Transistor, SDA Amp.	4822 130 60511
Q302	Transistor, SCC Amp.	4822 130 60511
Q303	Transistor, Power LED Switch	4822 130 60511
Q304	Transistor, Fast Blanking Buffer . . .	4822 130 60511
Q305	Transistor, OSD Intensity Buffer . . .	4822 130 60511
Q306	Transistor, Horizontal Amp	4822 130 60511
Q308	Transistor, Vertical Amp	4822 130 60511
Q309	Transistor, PNP Switch	5322 130 60508
Q313	Transistor, SCC Amp.	4822 130 60511
Q314	Transistor, SDA Amp.	4822 130 60511
Q315	Transistor, Reset (Inverted)	5322 130 60508
Q600	Transistor, Chroma Switch.	4822 130 60511
Q601	Transistor, Chroma Delay	5322 130 60508
Q602	Transistor, Chroma Buffer.	5322 130 60508
Q603	Transistor, OSD Intensity Modulator. .	5322 130 60508
Q604	Transistor, Red Driver	4822 130 60511
Q605	Transistor, Green Driver	4822 130 60511
Q606	Transistor, Blue Driver.	4822 130 60511
Q607	Transistor, Blue Linearity	5322 130 60508
Q608	Transistor, Blue Linearity	4822 130 60511
Q609	Transistor, 2.2V Regulator	4822 130 60511
Q611	Transistor, Sync Buffer.	5322 130 60508
Q612	Transistor, ABL Buffer	5322 130 60508
Q613	Transistor, ABL Clamp.	5322 130 60508
Q614	Transistor, Vertical Buffer.	4822 130 60511
Q616	Transistor, Green Buffer	5322 130 60508
Q617	Transistor, Green Clipper.	5322 130 60508
Q618	Transistor, Red Buffer	5322 130 60508
Q619	Transistor, Red Clipper.	5322 130 60508
Q620	Transistor, Blue Buffer.	5322 130 60508
Q621	Transistor, Blue Clipper	5322 130 60508
Q623	Transistor, Common Base Allpass. . . .	4822 130 60511
Q624	Transistor, Chroma Buffer.	4822 130 60511
Q625	Transistor, Chroma Buffer.	4822 130 60511
Q626	Transistor, Common Base Allpass. . . .	4822 130 60511
Q627	Transistor, Common EmitterAllpass. . .	5322 130 60508
Q632	Transistor, Blue Linearity	5322 130 60508
Q635	Transistor, Horizontal Killer.	4822 130 60511
Q703	Transistor, SVHSC Amp.	4822 130 60511
Q704	Transistor, SVHSC Amp.	5322 130 60508
Q705	Transistor, SVHSL Amp.	4822 130 60511
Q715	Transistor, NPN BC847B	4822 130 60511
Q720	Transistor, SVHSL Amp.	5322 130 60508
Q1000	Transistor, PNP T2907.	4835 130 47065
Q1010	Transistor, NPN BC847B	4822 130 60511
Q1020	Transistor, PNP BC85	5322 130 60508
Z100	Zener Diode, 8.2V.	4835 130 37503
Z101	Zener Diode, 8.2V.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, MMSZ5231B	4835 220 17061
L116	Peaking Coil, 10uH..	4835 157 58198
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable Coil, 4.5MHz.	4835 157 57113
L202	Adjustable Coil, 45.75MHz.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable Coil, 4.75MHz	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH. ,5%	4835 150 57056
L208	Peaking Coil, 12uH, 5%	4835 150 57058
L209	Peaking Coil, 1000uH., 10%	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH., 10%	4835 157 67075
L300	Peaking Coil, 5.6uH., 5%	2422 535 94322
L301	Peaking Coil, 12uH., 5%.	4835 150 57058
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L313	Peaking Coil, 4.7uH., 10%.	4835 157 67057
L373	Peaking Coil, 0.68uH., 20%	4835 157 57596
L374	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L375	Peaking Coil, 0.68uH., 20%	4835 157 57596
L379	Peaking Coil, 0.68uH., 20%	4835 157 57596
L405	Ferrite Bead, 100MHz	4835 157 57995
L600	Peaking Coil, 33uH,. 5%.	4835 157 58113
L601	Peaking Coil, 10uH., 10%	4835 157 67074
L602	Peaking Coil, 10uH., 5%	4835 150 57008
L604	Peaking Coil, 12uH., 5%	4835 157 57831
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Peaking Coil, 3.3uH., 5%.	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L608	Peaking Coil, 12uH., 5%.	4835 157 57831
L609	Peaking Coil, 22uH., 5%.	4835 157 67018
L610	Peaking Coil, 15uH., 5%.	4835 157 57057
L611	Peaking Coil, 5.6uH., 5%	4835 157 57833
L612	Peaking Coil, 27uH., 5%.	4835 157 67019
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L700	Peaking Coil, 10uH., 10%	4835 157 67074
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L1000	Peaking Coil, 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8 uH., 5%.	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Jack Panel Bracket	3135 011 01900
CLP106	Spring Clip for IC 106	3135 011 02270
MEC4	IF Shield.	3135 011 02360
F100	Fuse, 5 Amp.	4835 253 37021
HS106A	Heatsink for IC 106.	3135 011 02260
HS400	Heatsink for IC 400.	3135 011 02510
HS401	Heatsink for IC 401.	3135 011 03291
HS703	Heatsink for IC 703.	3135 011 02510
J2	Phono Jack Assembly.	4835 265 97388
J3	Jack Assembly.	4835 265 97386

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

J5	4 Pin Push Terminal.	4835 265 97448
J250	5 Pin Board Connector.	2422 025 15832
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Board Connector.	2422 025 15193
J403	7 Pin Board Connector.	2422 025 14674
J467	7 Pin Board Connector.	2422 025 15024
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector	2422 025 15196
SHD1T	Shield for Small Signal Board.	3135 011 02251
SHD3T	Shield for Small Signal Board.	3135 011 02251
TUNEXT	Connector for Tuner.	4835 265 97076
UV1236	Tuner, UV1236.	4835 210 47081
Y100	Ceramic Resonator.	4835 122 97102
Y1000	Crystal Resonator, 14.318MHz	4835 242 77059
Y1001	Crystal Resonator, 14.318MHz	4835 242 77059
Y200	Saw Filter	4835 153 97024
Y202	Ceramic Filter, 4.5MHz	4835 154 97168
Y203	Ceramic Filter, 4.5MHz	4835 153 57004
Y301	Peizoelectric Crystal.	4835 242 77283
Y600	Crystal Resonator 3.579MHz	2422 543 00862
Y601	Ceramic Resonator.	4835 153 97004
Y603	Comb Filter.	2422 549 43197

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film. . . .	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene. . . .	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene. . .	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C431	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C432	1500uF., 35V, Electrolytic	4835 124 47581
C433	0.1uF., 10%, 100V, Polyester	4822 121 41608
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S C916	6800pF., 10%, 50V, Polyester	2020 300 90571
C917	0.1uF., 250V, Polyester.	4835 121 47278
C918	2.2uF., 50V, Electrolytic.	4835 124 47502
C919	0.12uF., 100V, Polyester	4835 121 47425
C920	4.7uF., 50V, Electrolytic.	4835 124 47506
C921	100uF., 25V, Electrolytic.	4835 124 47501
C922	470uF., 25V, Electrolytic.	4835 121 47405
C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
C927	1uF., 50V, Electrolytic.	4835 121 47406
C928	0.33uF., 50V, Electrolytic	4835 124 47525
C929	330pF., 10%, 500V, Ceramic	4835 122 47648
C930	1uF., 100V, Electrolytic	4835 124 47485
C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C933	330pF., 10%, 500V, Ceramic	4835 122 47033
C2804	100uF., 50V, Electrolytic.	4835 124 47563
C2805	10uF., 50V, Electrolytic	4835 124 47499
C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2837	10uF., 50V, Electrolytic	4835 124 47499
C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

S R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
R411	10 ohm, 5%, 1/2W, Metal Film	4835 116 67131
R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
R426	100k, 1/2W, Metal Film	4835 116 57687
R427	27k, 1/10W, Metal Film	4835 111 37442
R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
R429	68k, 1/10W, Metal Film	4835 111 37273
S R430	1k, 5%, 3W, Metal Film	4835 116 57242
R431	10k, 1/2W, Metal Film.	4835 116 57686
R433	4.7k, 1/2W, Metal Film	4835 116 57724
R438	33k, 1/10W, Metal Film	4835 111 37248
R439	10k, 1/10W, Metal Film	4835 111 37216
R440	10k, 1/10W, Metal Film	4835 111 37216
R442	33k, 1/10W, Metal Film	4835 111 37248
R443	100k, 1/10W, Metal Film.	4835 111 37434
S R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
R446	10k, 1/2W, Metal Film.	4835 116 57686
S R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S R449	10 ohm, 1/2W, Metal Film	4835 116 57097
R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
R455	470 ohm, Control Adjust.	4835 100 17039
R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S R472	1.2k, 5%, 2W, Metal Film	4835 116 57357
S R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
R478	47k, 5%, 1/2W, Metal Film.	4835 111 67001
R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S R484	2k, 5%, 1W, Metal Film	4835 116 67154
S R485	2k, 5%, 1W, Metal Film	4835 116 67154
R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
R510	470k, 1/10W, Metal Film.	4835 111 37407
R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S R560	220 ohm, 1W, Metal Oxide	4835 116 57603
R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
R571	1k, 1/2W, Metal Film	4835 116 57685
S R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
R586	10k, 1/10W, Metal Film	4835 111 37216
R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R806	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
R901	10k, Control Adjust.	4835 100 17036
R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
R908	1.5k, 1/10W, Metal Film.	4835 111 37437
R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R913	4.7k, 1/2W, Metal Film	4835 116 57724
R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R923	15k, 1/2W, Metal Film.	4835 116 57698
R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R932	5.6k, 1/10W, Metal Film.	4835 111 37376
R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S R937	33k, 1W, Metal Oxide	4835 116 67253
S R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
R943	2.2k, Control Adjust	4835 100 17047
S R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
R951	10k, 1/2W, Metal Film.	4835 116 57686
R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
R959	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
R970	10k, 1/10W, Metal Film	4835 111 37216
R971	100k, 1/10W, Metal Film.	4835 111 37434
R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D416	Diode, Silicon	4835 130 37663
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L413	Suppression Coil, 10uH..	4835 152 27002
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L467	Line Choke	4835 157 57077
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS416	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467	7 Pin Connector.	2422 025 15024
	J468	9 Pin Connector, Green	0018 223 80009
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

S = Safety Part Be sure to use exact replacement part.

8P4831C (continued)

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY		
J300	7 Pin Board Connector.	2422	025 14674
	Keypad	3135	013 02470

00706087 0001, 0002 OPTICAL ASSEMBLY

	00706087 0001, 0002 OPTICAL ASSEMBLY		
S	Deflection Yoke.	2422	549 43801
	Focus Lead	3135	010 00730
S	Focus/Screen Control..	2322	460 90514
S	HV Anode Lead (3 used)	4835	321 27397
B	Compression Spring (4 used).	3135	011 00610
S E	CRT 180DLB22 (Blue).	4835	310 57408
S E	CRT 180DLB22 (Green)	4835	310 57411
S E	CRT 180DLB22 (Red) (HU).	4835	310 57409
H	Seal, CRT.	3135	013 02321
I	Coolant (Enough to do 3 CRTs).	3135	010 02040
K	Fill Plug.	4835	432 17791
L	Fill Plug Seal	4835	290 87147
M	Diaphragm Cover.	4835	432 17736
O	Expansion Diaphragm.	3135	013 01060
P	Coupler Red & Blue 46" (0001).	4835	290 87153
P	Coupler Red & Blue 54" (0002).	4835	290 87155
P	Coupler, Green	4835	290 87152
R	O-Ring Seal (Lens to Coupler).	4835	290 87141
S	Lens, C-Element, Blue & Red.	4835	381 47016
S	Lens, C-Element, Green	4835	381 47019
W	Lens, Main, Blue	4835	381 47017
W	Lens, Main, Red & Green.	4835	381 47022

8P4834C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77751
CBA	Small Signal Panel	4835 219 77756
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Remote Transmitter UR714	4835 219 17699

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P4834C101

	MODEL 008P4834C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01370
27	Back Cover (Lower)	4835 432 97706
26	Back Cover (Upper)	3135 013 01320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA ZC 1.5V.	4835 138 17047
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02940
2	Extr., Screen Edge, Side (x2).	3135 014 03050
14	Extr., Screen Edge, Top.	3135 014 03040
	Filter	4835 380 57009
4	Foot Base Rail (x2).	3135 014 03131
16	Frame f/Digital Convergence.	4835 432 17846
9	Hole Insert (x14).	3135 014 02741
18	Jack Panel Frame	3135 014 06650
13	Lens, Fresnel.	3135 013 00960
10	Lens, Lenticular	3135 013 00930
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting Board.	3135 013 01350
24	Mirror Trapz 2nd Surface	3135 013 01150
	Owners Manual.	3135 015 07370
	Quick Use Guide.	3135 015 07360
19	Rear Jack Panel Overlay.	4835 459 17556
	RemoteTransmit. UR714SB.	4835 219 17699
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 48" (x2).	3135 014 06300
8	Speaker Full 4x6 8 Ohm (x2).	4835 240 47011
7	Speaker Grille	3135 014 06270

SMALL SIGNAL PANEL (1 TUNER)

	SMALL SIGNAL PANEL (1 TUNER)	
C1	100uF., 16V, Electrolytic.	3198 025 21010
C2	15pF., 5%, 50V, Ceramic.	3198 016 01590
C4	470uF., 50V, Electrolytic.	3198 025 54770
C5	100uF., 16V, Electrolytic.	3198 025 21010
C7	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C8	220uF., 16V, Electrolytic.	3198 025 22210
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	1uF., 20%, 50V, Electrolytic	3198 025 51080
C14	1uF., 20%, 50V, Electrolytic	3198 025 51080
C19	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C25	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C30	10uF., 20%, 16V, Electrolytic.	2020 012 92805
C37	100uF., 16V, Electrolytic.	3198 025 21010
C39	220uF., 16V, Electrolytic.	3198 025 22210
C45	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C46	1000uF., 16V, Electrolytic	4835 124 47571
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C100	5600pF., 10%, 50V, Ceramic	4835 122 87043
C101	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C102	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C103	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V, Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V, Electrolytic.	4835 124 97175
C112	1uF., 35V, Electrolytic.	4835 124 97175
C113	0.047uF., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 25V, Ceramic	3198 017 21040
C115	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 100V, Metalized Polyester	4835 121 47364
C119	0.22uF., 100V, Metalized Polyester	4835 121 47038
C120	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C121	0.22uF., 100V, Metalized Polyester	4835 121 47038
C122	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V,Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V,Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V,Ceramic.	4835 122 87527
C130	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C131	5600pF., 10%, 50V, Ceramic	4835 122 87043
C132	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C133	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C135	1000uF., 35V, Electrolytic	4835 124 47498
C136	1000uF., 35V, Electrolytic	4835 124 47498
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.1uF., 25V,Ceramic.	3198 017 21040
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C154	0.1uF., 25V, Ceramic	3198 017 21040
C155	100uF., 16V, Electrolytic.	3198 025 21010
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C157	47uF., 20%, 25V,Electrolytic	3198 025 34790
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C160	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C161	100pF., 5%, 50V, Ceramic	3198 016 01010
C162	100uF., 50V, Electrolytic.	3198 025 51010
C164	100pF., 5%, 50V, Ceramic	3198 016 01010
C165	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C166	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C167	10uF., 50V, Electrolytic	4835 124 47525
C168	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C169	1000uF., 25V, Electrolytic	4835 124 47583
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C171	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C172	0.1uF., 10%, 50V,Ceramic	4835 122 87061
C173	100uF., 16V, Electrolytic.	3198 025 21010
C174	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C175	1000uF., 25V, Electrolytic	4835 124 47583
C176	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C177	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C178	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C179	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C180	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C181	0.1uF., 25V, Ceramic	3198 017 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C190	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C199	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C200	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C201	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C216	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C217	470pF., 10%, 50V, Ceramic.	2020 552 93057
C218	1uF., 35V, Electrolytic.	4835 124 97175
C220	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C221	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C222	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C223	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C229	0.1uF., 25V, Ceramic	3198 017 21040
C230	220pF., 5%, 50V, Ceramic	3198 016 02210
C300	0.1uF., 25V, Ceramic	3198 017 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 10V, Electrolytic.	4835 124 97183
C304	1000pF., 10%, 50V, Ceramic	3198 017 01020
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	1000pF., 10%, 50V, Ceramic	3198 017 01020
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 10V, Electrolytic.	4835 124 97183
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	4835 122 87041
C322	1uF., 35V, Electrolytic.	4835 124 97175
C323	1uF., 35V, Electrolytic.	4835 124 97175
C341	Trimmer Capacitor, 3pF.-40pF., 250V. .	2222 808 11409
C342	0.47uF., 35V, Electrolytic	4835 124 97182
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C376	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 25V, Electrolytic.	4835 124 97179
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 25V, Ceramic	3198 017 21040
C396	0.1uF., 25V, Ceramic	3198 017 21040
C400	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C401	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C402	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C405	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C406	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C408	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 25V, Ceramic	3198 017 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 25V, Ceramic	3198 017 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 35V, Electrolytic	4835 124 97037
C606	0.1uF., 25V, Ceramic	3198 017 21040
C607	0.1uF., 25V, Ceramic	3198 017 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 25V, Ceramic	3198 017 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 100V, Metalized Polyester . .	4835 121 47222
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 35V, Electrolytic.	4835 124 97175
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	4835 122 87593
C628	0.22uF., 50V, Ceramic.	4835 122 87087
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 25V, Ceramic	3198 017 21040
C639	0.33uF., 35V, Electrolytic	4835 124 97037
C640	0.012uF., 10%, 50V, Ceramic.	4835 122 87501
C641	0.1uF., 25V, Ceramic	3198 017 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C643	200pF., 5%, 50V, Ceramic	4835 122 87092
C645	620pF., 5%, 50V, Ceramic	4835 122 87089
C647	1000pF., 10%, 50V, Ceramic	4835 122 87041
C648	120pF., 5%, 50V, Ceramic	4835 122 87046
C649	51pF., 5%, 50V, Ceramic.	4835 122 87054
C650	180pF., 5%, 50V, Ceramic	4835 122 87028
C651	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C654	0.1uF., 25V, Ceramic	3198 017 21040
C655	220uF., 16V, Electrolytic.	3198 025 22210
C656	100uF., 16V, Electrolytic.	3198 025 21010
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 25V, Ceramic	3198 017 21040
C664	0.1uF., 25V, Ceramic	3198 017 21040
C665	0.1uF., 25V, Ceramic	3198 017 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 25V, Ceramic	3198 017 21040
C676	82pF., 5%, 50V, Ceramic.	4835 122 87038
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	43pF., 5%, 50V, Ceramic.	2020 552 94276
C680	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C681	56P 5%, 50V, Ceramic	4835 122 87096
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 25V, Ceramic	3198 017 21040
C699	1uF., 35V, Electrolytic.	4835 124 97175
C719	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C720	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C721	0.1uF., 25V, Ceramic	3198 017 21040
C722	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C724	0.1uF., 25V, Ceramic	3198 017 21040
C729	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C731	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C732	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C738	10pF., 5%, 50V, Ceramic.	3198 016 01090
C749	10pF., 5%, 50V, Ceramic.	3198 016 01090
C750	100uF., 25V, Electrolytic.	3198 025 31010
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C1000	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1001	0.22uF., 50V, Ceramic.	4835 122 87087
C1002	0.1uF., 25V, Ceramic	3198 017 21040
C1003	0.22uF., 50V, Ceramic.	4835 122 87087
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1011	220pF., 5%, 50V, Ceramic	3198 016 02210
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V,Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1016	220uF., 25V, Electrolytic.	3198 025 32210
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1026	560pF., 5%, 50V,Ceramic.	4835 122 87055
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 25V, Ceramic	3198 017 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1046	10uF., 10V, Electrolytic	4835 124 97178
C1050	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1051	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1052	1uF., 35V, Electrolytic.	4835 124 97175
BRSXXX	0 ohm, "Chip" Jumper	4835 111 27056
BRXXX	0 ohm, Jumper.	3198 021 90010

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

	BRXXX	0 ohm, "Chip" Jumper	4835 111 27056
S	R3	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
	R4	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R5	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R6	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R11	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R13	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R14	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R34	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
S	R35	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R44	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
	R45	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R46	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R47	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R48	820 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37466
	R49	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R55	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
	R56	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R63	10 ohm, 5%, 1/4W, Carbon Film.	3198 011 01090
	R64	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R65	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R66	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
	R67	150 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51510
	R71	100k, 5%, 1/2W, Metal Film	4835 116 57687
S	R74	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
S	R76	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R91	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R115	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R116	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R117	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R118	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R119	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R120	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R121	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R122	470 ohm, 5%, 1/4W, Carbon Film	3198 011 14710
	R123	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
	R124	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R186	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R187	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R189	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R190	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R191	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
	R192	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
	R193	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R194	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R195	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R196	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R197	270k, 5%, 1/4W, Carbon Film.	3198 011 02740
	R198	110k, 5%, 1/2W, Metal Film	2322 187 53114
	R199	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R200	24k, 5%, 1/2W, Carbon Film	4835 110 47199
	R201	22k, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	Control Adjust, 4.7k	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R206	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R228	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R229	3.6k, 5%, 1/4W, Carbon Film.	2322 711 61362
	R230	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R231	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R232	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R233	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R234	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R235	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
	R236	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
	R238	2.7k, 5%, 1/4W, Carbon Film.	4835 111 37083
	R240	0 ohm, Carbon Film	4835 111 27056
	R241	0 ohm, Carbon Film	4835 111 27056
	R242	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R243	4.3k, 5%, 0.24W, Carbon Film	2322 711 61432
	R244	Control Adjust, 1k,.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R246	150k, 5%, 1/10W, Carbon Film	4835 111 27045
	R247	1.1k, 5%, 1/4W, Carbon Film.	2322 711 61112
	R248	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R255	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
	R300	1/4W, 5%, 100 ohm, Carbon Composition.	4835 110 57066
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R317	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R318	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R319	16k, 5%, 1/10W, Carbon Film.	3198 021 51630
	R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R328	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
	R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R331	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R334	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
	R335	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R336	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R337	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R344	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R346	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R347	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R350	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R354	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R355	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R358	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R359	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R365	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R369	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R370	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R375	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R376	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R377	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R390	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R397	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R398	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R399	100k, 5%, 1/10W, Carbon Film	4835 111 37434
S R402	10 ohm, 5%, 3W, Metal Oxide.	2120 105 92585
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R603	3.3k, 5%, 1/4W, Carbon Film.	4835 111 37035
R604	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R605	180 ohm 5%, 1/10W, Carbon Film	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	0 ohm, 1/8W, Carbon Film	4835 110 67173
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R624	430 ohm, 5%, 1/4W, Carbon Film	3198 011 04310
R625	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R626	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/4W, Carbon Film	3198 011 03910
R634	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R635	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R636	0 ohm, Carbon Film	4835 111 27056
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/4W, Carbon Film	4835 111 37121
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R644	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R649	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R650	330 ohm, 5%, 1/2W, Metal Film.	4835 116 57713
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R662	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R663	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R664	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R665	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R666	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R671	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R672	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R673	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R674	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R675	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R676	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R677	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R678	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R679	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R681	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R682	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R683	8.2k, 5%, 1/4W, Carbon Film.	4835 111 37043
R684	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R685	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R686	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R687	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R688	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R689	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R690	1 Meg ohm, 5%, 1/4W, Carbon Film . . .	2322 711 61105
R691	10 ohm, 5%, 1/4W, Carbon Film.	4835 111 37132
R692	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R694	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R695	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R724	12k, 5%, 1/4W, Carbon Film	2322 711 61123
R725	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R726	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R727	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R728	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R729	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R730	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R731	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R732	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R733	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R734	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R735	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R736	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R737	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R739	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
S R740	18 ohm, 5%, 1/4W, Carbon Film.	2322 711 61189
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R772	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57723
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R787	3k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/4W, Carbon Film.	3198 011 06820
R794	200 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 52010
R795	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R796	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R797	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2% 1/8W, Carbon Film	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon Film. .	3198 021 54750
R821	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	330 ohm, 5%, 1/4W, Carbon Film	4835 111 37034
S R1016	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1017	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R1018	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

R1023	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1032	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1050	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1051	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1052	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1053	750 ohm, 5%, 1/4W, Carbon Film	3198 011 07510
D100	Diode BAS216	4835 130 37905
D150	Diode 1N4148	4835 130 37048
D151	Diode 1N4148	4835 130 37048
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D302	Diode 1N4148	4835 130 37048
D303	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode BAS216	4835 130 37905
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode BAS216	4835 130 37905
D612	Diode BAS216	4835 130 37905
D613	Diode 1N4148	4835 130 37048
D614	Diode 1N4148	4835 130 37048
D615	Diode BAS216	4835 130 37905
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode BAS216	4835 130 37905
D700	Diode BAS216	4835 130 37905
IC1	IC, A/V Switch	4835 209 87952
IC106	IC, 10/25W Hi-Fi Power Audio Amp . . .	4835 209 87082
IC107	IC 2-Channel Multi/Demultiplexer . . .	4835 209 17033
IC120	IC, Stereo Decoder & Audio Processor .	4835 209 88337
IC200	IC, IF Signal Processor.	4835 209 87757
IC300	IC LC864265A, Tuning Microprocessor. .	3135 010 02991
IC304	IC ST24C02B1, EEPROM	4835 209 88326
IC400	IC MC7812CT, 12V Regulator	9334 006 10682
IC401	IC MC7805CT, 5V Regulator.	9334 536 00682
IC600	IC, Y/C/S Processor.	4835 209 88331
IC606	IC, 9V Regulator	4835 209 88009
IC701	IC, Chroma/Luma Switch	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor, NPN BC847B	4822 130 60511
Q4	Transistor, Buffer	4822 130 60511
Q5	Transistor, Buffer	4822 130 60511
Q7	Transistor, NPN BC847B	4822 130 60511
Q8	Transistor, NPN BC847B	4822 130 60511
Q9	P-Channel JFET, Mono/Stereo Switch . .	9340 053 20126
Q12	Transistor, Mono/Stereo Inverter . . .	4822 130 60511
Q14	Transistor, NPN BC847B	4822 130 60511
Q16	Transistor, NPN BC847B	4822 130 60511
Q17	Transistor, NPN BC847B	4822 130 60511
Q141	Transistor, Variable Audio Out Switch.	4822 130 60511
Q152	P-Channel JFET, Mute	4835 130 47083
Q153	P-Channel JFET, Mute	4835 130 47083
Q154	P-Channel JFET, Mute	4835 130 47083
Q155	P-Channel JFET, Mute	4835 130 47083
Q156	Transistor, Mute Inverter.	4835 130 47055
Q200	Transistor, Video Amp.	5322 130 60508
Q201	Transistor, Coincidence Detector . . .	5322 130 60508
Q202	Transistor, Coincidence Detector . . .	4822 130 60511
Q203	Transistor, Coincidence Detector . . .	5322 130 60508
Q204	Transistor, Video Buffer	4822 130 60511
Q300	Transistor, Standby LED Switch	4822 130 60511
Q301	Transistor, SDA Amp.	4822 130 60511
Q302	Transistor, SCC Amp.	4822 130 60511
Q303	Transistor, Power LED Switch	4822 130 60511
Q304	Transistor, Fast Blanking Buffer . . .	4822 130 60511
Q305	Transistor, OSD Intensity Buffer . . .	4822 130 60511
Q306	Transistor, Horizontal Amp	4822 130 60511
Q308	Transistor, Vertical Amp	4822 130 60511
Q309	Transistor, PNP Switch	5322 130 60508
Q313	Transistor, SCC Amp.	4822 130 60511
Q314	Transistor, SDA Amp.	4822 130 60511
Q315	Transistor, Reset (Inverted)	5322 130 60508
Q600	Transistor, Chroma Switch.	4822 130 60511
Q601	Transistor, Chroma Delay	5322 130 60508
Q602	Transistor, Chroma Buffer.	5322 130 60508
Q603	Transistor, OSD Intensity Modulator. .	5322 130 60508
Q604	Transistor, Red Driver	4822 130 60511
Q605	Transistor, Green Driver	4822 130 60511
Q606	Transistor, Blue Driver.	4822 130 60511
Q607	Transistor, Blue Linearity	5322 130 60508
Q608	Transistor, Blue Linearity	4822 130 60511
Q609	Transistor, 2.2V Regulator	4822 130 60511
Q611	Transistor, Sync Buffer.	5322 130 60508
Q612	Transistor, ABL Buffer	5322 130 60508
Q613	Transistor, ABL Clamp.	5322 130 60508
Q614	Transistor, Vertical Buffer.	4822 130 60511
Q616	Transistor, Green Buffer	5322 130 60508
Q617	Transistor, Green Clipper.	5322 130 60508
Q618	Transistor, Red Buffer	5322 130 60508
Q619	Transistor, Red Clipper.	5322 130 60508
Q620	Transistor, Blue Buffer.	5322 130 60508
Q621	Transistor, Blue Clipper	5322 130 60508
Q623	Transistor, Common Base Allpass. . . .	4822 130 60511
Q624	Transistor, Chroma Buffer.	4822 130 60511
Q625	Transistor, Chroma Buffer.	4822 130 60511
Q626	Transistor, Common Base Allpass. . . .	4822 130 60511
Q627	Transistor, Common EmitterAllpass. . .	5322 130 60508
Q632	Transistor, Blue Linearity	5322 130 60508
Q635	Transistor, Horizontal Killer.	4822 130 60511
Q703	Transistor, SVHSC Amp.	4822 130 60511
Q704	Transistor, SVHSC Amp.	5322 130 60508
Q705	Transistor, SVHSL Amp.	4822 130 60511
Q715	Transistor, NPN BC847B	4822 130 60511
Q720	Transistor, SVHSL Amp.	5322 130 60508
Q1000	Transistor, PNP T2907.	4835 130 47065
Q1010	Transistor, NPN BC847B	4822 130 60511
Q1020	Transistor, PNP BC85	5322 130 60508
Z100	Zener Diode, 8.2V.	4835 130 37503
Z101	Zener Diode, 8.2V.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, MMSZ5231B	4835 220 17061
L116	Peaking Coil, 10uH..	4835 157 58198
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable Coil, 4.5MHz.	4835 157 57113
L202	Adjustable Coil, 45.75MHz.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable Coil, 4.75MHz	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH. ,5%	4835 150 57056
L208	Peaking Coil, 12uH, 5%	4835 150 57058
L209	Peaking Coil, 1000uH., 10%	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH., 10%	4835 157 67075
L300	Peaking Coil, 5.6uH., 5%	2422 535 94322
L301	Peaking Coil, 12uH., 5%.	4835 150 57058
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L313	Peaking Coil, 4.7uH., 10%.	4835 157 67057
L373	Peaking Coil, 0.68uH., 20%	4835 157 57596
L374	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L375	Peaking Coil, 0.68uH., 20%	4835 157 57596
L379	Peaking Coil, 0.68uH., 20%	4835 157 57596
L405	Ferrite Bead, 100MHz	4835 157 57995
L600	Peaking Coil, 33uH,. 5%.	4835 157 58113
L601	Peaking Coil, 10uH., 10%	4835 157 67074
L602	Peaking Coil, 10uH., 5%	4835 150 57008
L604	Peaking Coil, 12uH., 5%	4835 157 57831
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Peaking Coil, 3.3uH., 5%.	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L608	Peaking Coil, 12uH., 5%.	4835 157 57831
L609	Peaking Coil, 22uH., 5%.	4835 157 67018
L610	Peaking Coil, 15uH., 5%.	4835 157 57057
L611	Peaking Coil, 5.6uH., 5%	4835 157 57833
L612	Peaking Coil, 27uH., 5%.	4835 157 67019
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L700	Peaking Coil, 10uH., 10%	4835 157 67074
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L1000	Peaking Coil, 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8 uH., 5%.	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Jack Panel Bracket	3135 011 01900
CLP106	Spring Clip for IC 106	3135 011 02270
MEC4	IF Shield.	3135 011 02360
F100	Fuse, 5 Amp.	4835 253 37021
HS106A	Heatsink for IC 106.	3135 011 02260
HS400	Heatsink for IC 400.	3135 011 02510
HS401	Heatsink for IC 401.	3135 011 03291
HS703	Heatsink for IC 703.	3135 011 02510

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

J2	Phono Jack Assembly.	4835 265 97388
J3	Jack Assembly.	4835 265 97386
J5	4 Pin Push Terminal.	4835 265 97448
J250	5 Pin Board Connector.	2422 025 15832
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Board Connector.	2422 025 15193
J403	7 Pin Board Connector.	2422 025 14674
J467	7 Pin Board Connector.	2422 025 15024
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector	2422 025 15196
SHD1T	Shield for Small Signal Board.	3135 011 02251
SHD3T	Shield for Small Signal Board.	3135 011 02251
TUNEXT	Connector for Tuner.	4835 265 97076
UV1236	Tuner, UV1236.	4835 210 47081
Y100	Ceramic Resonator.	4835 122 97102
Y1000	Crystal Resonator, 14.318MHz	4835 242 77059
Y1001	Crystal Resonator, 14.318MHz	4835 242 77059
Y200	Saw Filter	4835 153 97024
Y202	Ceramic Filter, 4.5MHz	4835 154 97168
Y203	Ceramic Filter, 4.5MHz	4835 153 57004
Y301	Peizoelectric Crystal.	4835 242 77283
Y600	Crystal Resonator 3.579MHz	2422 543 00862
Y601	Ceramic Resonator.	4835 153 97004
Y603	Comb Filter.	2422 549 43197

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C431	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C432	1500uF., 35V, Electrolytic	4835 124 47581
C433	0.1uF., 10%, 100V, Polyester	4822 121 41608
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S C916	6800pF., 10%, 50V, Polyester	2020 300 90571
C917	0.1uF., 250V, Polyester.	4835 121 47278
C918	2.2uF., 50V, Electrolytic.	4835 124 47502
C919	0.12uF., 100V, Polyester	4835 121 47425
C920	4.7uF., 50V, Electrolytic.	4835 124 47506
C921	100uF., 25V, Electrolytic.	4835 124 47501
C922	470uF., 25V, Electrolytic.	4835 121 47405
C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
C927	1uF., 50V, Electrolytic.	4835 121 47406
C928	0.33uF., 50V, Electrolytic	4835 124 47525
C929	330pF., 10%, 500V, Ceramic	4835 122 47648
C930	1uF., 100V, Electrolytic	4835 124 47485
C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C933	330pF., 10%, 500V, Ceramic	4835 122 47033
C2804	100uF., 50V, Electrolytic.	4835 124 47563
C2805	10uF., 50V, Electrolytic	4835 124 47499
C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2837	10uF., 50V, Electrolytic	4835 124 47499
C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
R411	10 ohm, 5%, 1/2W, Metal Film	4835 116 67131
R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
R426	100k, 1/2W, Metal Film	4835 116 57687
R427	27k, 1/10W, Metal Film	4835 111 37442
R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
R429	68k, 1/10W, Metal Film	4835 111 37273
S R430	1k, 5%, 3W, Metal Film	4835 116 57242
R431	10k, 1/2W, Metal Film.	4835 116 57686
R433	4.7k, 1/2W, Metal Film	4835 116 57724
R438	33k, 1/10W, Metal Film	4835 111 37248
R439	10k, 1/10W, Metal Film	4835 111 37216
R440	10k, 1/10W, Metal Film	4835 111 37216
R442	33k, 1/10W, Metal Film	4835 111 37248
R443	100k, 1/10W, Metal Film.	4835 111 37434
S R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
R446	10k, 1/2W, Metal Film.	4835 116 57686
S R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S R449	10 ohm, 1/2W, Metal Film	4835 116 57097
R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
R455	470 ohm, Control Adjust.	4835 100 17039
R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S R472	1.2k, 5%, 2W, Metal Film	4835 116 57357
S R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
R478	47k, 5%, 1/2W, Metal Film.	4835 111 67001
R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S R484	2k, 5%, 1W, Metal Film	4835 116 67154
S R485	2k, 5%, 1W, Metal Film	4835 116 67154
R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
R510	470k, 1/10W, Metal Film.	4835 111 37407
R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S R560	220 ohm, 1W, Metal Oxide	4835 116 57603
R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
R571	1k, 1/2W, Metal Film	4835 116 57685
S R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
R586	10k, 1/10W, Metal Film	4835 111 37216
R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
R901	10k, Control Adjust.	4835 100 17036
R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
R908	1.5k, 1/10W, Metal Film.	4835 111 37437
R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R913	4.7k, 1/2W, Metal Film	4835 116 57724
R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R923	15k, 1/2W, Metal Film.	4835 116 57698
R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R932	5.6k, 1/10W, Metal Film.	4835 111 37376
R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S R937	33k, 1W, Metal Oxide	4835 116 67253
S R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
R943	2.2k, Control Adjust	4835 100 17047
S R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
R951	10k, 1/2W, Metal Film.	4835 116 57686
R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
R970	10k, 1/10W, Metal Film	4835 111 37216
R971	100k, 1/10W, Metal Film.	4835 111 37434
R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D416	Diode, Silicon	4835 130 37663
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH.	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH.	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L413	Suppression Coil, 10uH.	4835 152 27002
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH.	4835 152 27002
	L423	Suppression Coil, 10uH.	4835 152 27002
	L424	Suppression Coil, 10uH.	4835 152 27002
	L425	Suppression Coil, 10uH.	4835 152 27002
	L426	Suppression Coil, 42uH.	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH.	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH.	4835 152 27002
	L435	Suppression Coil, 10uH.	4835 152 27002
	L440	Suppression Coil, 10uH.	4835 152 27002
	L467	Line Choke	4835 157 57077
	L550	Suppression Coil, 10uH.	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert.	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS416	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467	7 Pin Connector.	2422 025 15024
	J468	9 Pin Connector, Green	0018 223 80009
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061

S = Safety Part Be sure to use exact replacement part.

8P4834C (continued)

	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706087 0001, 0002 OPTICAL ASSEMBLY

		00706087 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler Red & Blue 46" (0001).	4835 290 87153
	P	Coupler Red & Blue 54" (0002).	4835 290 87155
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Main, Blue	4835 381 47017
	W	Lens, Main, Red & Green.	4835 381 47022

8P4841C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	2 Tube Scan Velocity Module.	4835 219 77774
CBA	Remote Transmitter	4835 219 17724
CBA	25W Audio Amp.	4835 219 77762

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop..	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH..	4835 157 67084
L402	Coil 100uH..	4835 157 67084
L403	Coil 100uH..	4835 157 67084
L404	Suppression Coil, 10uH..	4835 152 27002
L405	Coil 100uH..	4835 157 67084
L407	Coil 100uH..	4835 157 67084
L409	Coil 100uH..	4835 157 67084
L410	Coil 100uH..	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P4841C101

MODEL 008P4841C101

S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01370
27	Back Cover (Lower)	3135 013 01260
26	Back Cover (Upper)	3135 013 01320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02940
2	Extr., Screen Edge, Side (x2).	3135 014 03050
14	Extr., Screen Edge, Top.	3135 014 03040
4	Foot Base Rail (x2).	3135 014 03131

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

	Front Jack Panel	4835 219 77787
9	Hole Insert (x14)	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel	3135 013 00960
10	Lens, Lenticular	3135 013 00930
22	Light Barrier	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting Board	3135 013 01350
24	Mirror Trapz 2nd Surface	3135 013 01150
	Owners Manual	3135 015 07400
	Panel, Front Jack	3135 014 02980
	Quick Use Guide	3135 015 07390
19	Rear Jack Panel Overlay	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer Treelock (x15)	3135 014 02620
11	Screen Frame 48" (x2)	3135 014 06300
8	Speaker 8 Ohm Full (x2)	2422 264 00301
7	Speaker Grille	4835 459 47107

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic	3198 025 51090
C8	220uF., 16V, Electrolytic	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic	3198 025 51090
C39	220uF., 16V, Electrolytic	2020 012 92633
C40	220uF., 16V, Electrolytic	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic	4835 124 97179
C82	2.2uF., 25V, Electrolytic	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic	4835 124 97179
C105	8200pF., 10%, 50V Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic	4835 124 97179
C108	2.2uF., 25V, Electrolytic	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C124	2.2uF., 25V, Electrolytic	4835 124 97179
C125	2.2uF., 25V, Electrolytic	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic	4835 122 87063
C128	2.2uF., 25V, Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V Ceramic	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic	3198 025 51090
C143	2.2uF., 25V, Electrolytic	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic	4835 124 97179
C208	330pF., 10%, 50V, Ceramic	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C235	100uF., 25V, Electrolytic	3198 025 31010
C236	2.2uF., 25V, Electrolytic	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C241	330pF., 10%, 50V, Ceramic	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic	3198 016 03390
C302	33pF., 5%, 50V, Ceramic	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap.	2222 808 11409
C342	470uF., 50V, Electrolytic	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester.	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH.	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH.	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH.	4835 152 27002
	L423	Suppression Coil, 10uH.	4835 152 27002
	L424	Suppression Coil, 10uH.	4835 152 27002
	L425	Suppression Coil, 10uH.	4835 152 27002
	L426	Suppression Coil, 42uH.	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH.	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH.	4835 152 27002
	L435	Suppression Coil, 10uH.	4835 152 27002
	L440	Suppression Coil, 10uH.	4835 152 27002
	L550	Suppression Coil, 10uH.	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003

S = Safety Part Be sure to use exact replacement part.

8P4841C (continued)

	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

S	R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S	R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ATC669 CUSTOMER CONTROL ASSEMBLY	
		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706101 0001, 0002 OPTICAL ASSEMBLY

		00706101 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler Red & Blue 46" (0001).	4835 290 87153
	P	Coupler Red & Blue 54" (0002).	4835 290 87155
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Main, Blue	4835 381 47017
	W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

8P4844C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	2 Tube Scan Velocity Module.	4835 219 77774
CBA	Remote Transmitter	4835 219 17724
CBA	25W Audio Amp.	4835 219 77762

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop..	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH..	4835 157 67084
L402	Coil 100uH..	4835 157 67084
L403	Coil 100uH..	4835 157 67084
L404	Suppression Coil, 10uH..	4835 152 27002
L405	Coil 100uH..	4835 157 67084
L407	Coil 100uH..	4835 157 67084
L409	Coil 100uH..	4835 157 67084
L410	Coil 100uH..	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P4844C101

MODEL 008P4844C101

S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01370
27	Back Cover (Lower)	3135 013 01260
26	Back Cover (Upper)	3135 013 01320
	Baffle Mount Receptacle (x6)	4835 265 97154
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02940
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
2	Extr., Screen Edge, Side (x2).	3135 014 03050
14	Extr., Screen Edge, Top.	3135 014 03040
	Filter	4835 380 57009

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

4	Foot Base Rail (x2).	3135 014 03131
	Front Jack Panel	4835 219 77787
9	Hole Insert (x14).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00960
10	Lens, Lenticular	3135 013 00930
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting Board.	3135 013 01350
24	Mirror Trapz 2nd Surface	3135 013 01150
	Owners Manual.	3135 015 07400
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 07390
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer Treelock (x15).	3135 014 02620
11	Screen Frame 48" (x2).	3135 014 06300
8	Speaker 8 Ohm Full (x2).	2422 264 00301
7	Speaker Grille	4835 459 47107

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R60	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253	
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R64	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042	
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R69	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R70	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110	
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R74	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R76	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R82	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097	
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018	
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R96	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774	
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448	
R104	160 ohm, 5%, 1/10W, Carbon Film.	3198 021 51610	
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366	
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R120	680 ohm, 5%, 1/10W, Carbon Film.	4835 111 37271	
R121	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R157	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R158	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736	
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R202	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R220	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R222	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259	
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R225	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R255	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R256	4.7k Trim Pot. CControl Adjust).	2020 363 90236	
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R269	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R277	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R282	750 ohm, 5%, 1/10W, Carbon Film.	3198 021 57510	
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120	
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620	
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231	
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R296	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443	
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214	
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R307	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432	
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698	
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066	
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630	
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724	
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724	

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026

S = Safety Part Be sure to use exact replacement part.

8P4844C (continued)

L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer, Switch Mode	4835 148 87339
S T402	Transformer, Power	4835 148 87345
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

S R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706101 0001, 0002 OPTICAL ASSEMBLY

	00706101 0001, 0002 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT 180DLB22 (Blue).	4835 310 57408
S E	CRT 180DLB22 (Green)	4835 310 57411
S E	CRT 180DLB22 (Red) (HU).	4835 310 57409
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Red & Blue 46" (0001).	4835 290 87153
P	Coupler Red & Blue 54" (0002).	4835 290 87155
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Main, Blue	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

8P5431C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77751
CBA	Small Signal Panel	4835 219 77756
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Remote Transmitter UR714	4835 219 17699

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P5431C101

	MODEL 008P5431C101	
S 20	AC Cord, Filtered.	4835 321 17128
27	Back Cover (Lower)	4835 432 97707
26	Back Cover (Upper)	4835 432 97693
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA ZC 1.5V.	4835 138 17047
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02950
2	Extr., Screen Edge, Side (x2).	3135 014 03070
14	Extr., Screen Edge, Top.	3135 014 03060
4	Foot Base Rail (x2).	3135 014 03131
16	Frame f/Digital Convergence.	4835 432 17846
11	Frame, Screen 54" (x2)	3135 014 06350
9	Hole Insert (x17).	3135 014 02741
18	Jack Panel Frame	3135 014 06650
13	Lens, Fresnel.	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting.	3135 013 01410
24	Mirror Trapz 2nd Surface	3135 013 01140
	Owners Manual.	3135 015 07370
	Quick Use Guide.	3135 015 07360
	Rear Barrier	4835 432 97694
19	Rear Jack Panel Overlay.	4835 459 17556
	Remote Transmit. UR714SB	4835 219 17699
1	Retainer Treelock (x15).	3135 014 02620
8	Speaker Full 4x6" 8 Ohm (x2)	4835 240 47011
7	Speaker Grille	4835 459 47113

SMALL SIGNAL PANEL (1 TUNER)

	SMALL SIGNAL PANEL (1 TUNER)	
C1	100uF., 16V, Electrolytic.	3198 025 21010
C2	15pF., 5%, 50V, Ceramic.	3198 016 01590
C4	470uF., 50V, Electrolytic.	3198 025 54770
C5	100uF., 16V, Electrolytic.	3198 025 21010
C7	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C8	220uF., 16V, Electrolytic.	3198 025 22210
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	1uF., 20%, 50V, Electrolytic	3198 025 51080
C14	1uF., 20%, 50V, Electrolytic	3198 025 51080
C19	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C25	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C30	10uF., 20%, 16V, Electrolytic.	2020 012 92805
C37	100uF., 16V, Electrolytic.	3198 025 21010
C39	220uF., 16V, Electrolytic.	3198 025 22210
C45	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C46	1000uF., 16V, Electrolytic	4835 124 47571
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C100	5600pF., 10%, 50V, Ceramic	4835 122 87043
C101	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C102	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C103	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V, Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V, Electrolytic.	4835 124 97175
C112	1uF., 35V, Electrolytic.	4835 124 97175
C113	0.047uF., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 25V, Ceramic	3198 017 21040
C115	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 100V, Metalized Polyester	4835 121 47364
C119	0.22uF., 100V, Metalized Polyester	4835 121 47038
C120	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C121	0.22uF., 100V, Metalized Polyester	4835 121 47038
C122	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V,Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V,Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V,Ceramic.	4835 122 87527
C130	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C131	5600pF., 10%, 50V, Ceramic	4835 122 87043
C132	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C133	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C135	1000uF., 35V, Electrolytic	4835 124 47498
C136	1000uF., 35V, Electrolytic	4835 124 47498
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.1uF., 25V,Ceramic.	3198 017 21040
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C154	0.1uF., 25V, Ceramic	3198 017 21040
C155	100uF., 16V, Electrolytic.	3198 025 21010
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C157	47uF., 20%, 25V,Electrolytic	3198 025 34790
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C160	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C161	100pF., 5%, 50V, Ceramic	3198 016 01010
C162	100uF., 50V, Electrolytic.	3198 025 51010
C164	100pF., 5%, 50V, Ceramic	3198 016 01010
C165	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C166	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C167	10uF., 50V, Electrolytic	4835 124 47525
C168	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C169	1000uF., 25V, Electrolytic	4835 124 47583
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C171	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C172	0.1uF., 10%, 50V,Ceramic	4835 122 87061
C173	100uF., 16V, Electrolytic.	3198 025 21010
C174	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C175	1000uF., 25V, Electrolytic	4835 124 47583
C176	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C177	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C178	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C179	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C180	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C181	0.1uF., 25V, Ceramic	3198 017 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C190	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C199	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C200	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C201	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C216	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C217	470pF., 10%, 50V, Ceramic.	2020 552 93057
C218	1uF., 35V, Electrolytic.	4835 124 97175
C220	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C223	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C229	0.1uF., 25V, Ceramic	3198 017 21040
C230	220pF., 5%, 50V, Ceramic	3198 016 02210
C300	0.1uF., 25V, Ceramic	3198 017 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 10V, Electrolytic.	4835 124 97183
C304	1000pF., 10%, 50V, Ceramic	3198 017 01020
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	1000pF., 10%, 50V, Ceramic	3198 017 01020
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 10V, Electrolytic.	4835 124 97183
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	4835 122 87041
C322	1uF., 35V, Electrolytic.	4835 124 97175
C323	1uF., 35V, Electrolytic.	4835 124 97175
C341	Trimmer Capacitor, 3pF.-40pF., 250V. .	2222 808 11409
C342	0.47uF., 35V, Electrolytic	4835 124 97182
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C376	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 25V, Electrolytic.	4835 124 97179
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 25V, Ceramic	3198 017 21040
C396	0.1uF., 25V, Ceramic	3198 017 21040
C400	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C405	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 25V, Ceramic	3198 017 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 25V, Ceramic	3198 017 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 35V, Electrolytic	4835 124 97037
C606	0.1uF., 25V, Ceramic	3198 017 21040
C607	0.1uF., 25V, Ceramic	3198 017 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 25V, Ceramic	3198 017 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 100V, Metalized Polyester . .	4835 121 47222
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 35V, Electrolytic.	4835 124 97175
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	4835 122 87593
C628	0.22uF., 50V, Ceramic.	4835 122 87087
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 25V, Ceramic	3198 017 21040
C639	0.33uF., 35V, Electrolytic	4835 124 97037
C640	0.012uF., 10%, 50V, Ceramic.	4835 122 87501
C641	0.1uF., 25V, Ceramic	3198 017 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C643	200pF., 5%, 50V, Ceramic	4835 122 87092
C645	620pF., 5%, 50V, Ceramic	4835 122 87089
C647	1000pF., 10%, 50V, Ceramic	4835 122 87041
C648	120pF., 5%, 50V, Ceramic	4835 122 87046
C649	51pF., 5%, 50V, Ceramic.	4835 122 87054
C650	180pF., 5%, 50V, Ceramic	4835 122 87028
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 25V, Ceramic	3198 017 21040
C655	220uF., 16V, Electrolytic.	3198 025 22210
C656	100uF., 16V, Electrolytic.	3198 025 21010
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 25V, Ceramic	3198 017 21040
C664	0.1uF., 25V, Ceramic	3198 017 21040
C665	0.1uF., 25V, Ceramic	3198 017 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 25V, Ceramic	3198 017 21040
C676	82pF., 5%, 50V, Ceramic.	4835 122 87038
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	43pF., 5%, 50V, Ceramic.	2020 552 94276
C680	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C681	56P 5%, 50V, Ceramic	4835 122 87096
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 25V, Ceramic	3198 017 21040
C699	1uF., 35V, Electrolytic.	4835 124 97175
C719	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C720	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C721	0.1uF., 25V, Ceramic	3198 017 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C724	0.1uF., 25V, Ceramic	3198 017 21040
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C731	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C738	10pF., 5%, 50V, Ceramic.	3198 016 01090
C749	10pF., 5%, 50V, Ceramic.	3198 016 01090
C750	100uF., 25V, Electrolytic.	3198 025 31010
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C1000	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1001	0.22uF., 50V, Ceramic.	4835 122 87087
C1002	0.1uF., 25V, Ceramic	3198 017 21040
C1003	0.22uF., 50V, Ceramic.	4835 122 87087
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1011	220pF., 5%, 50V, Ceramic	3198 016 02210
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V,Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1016	220uF., 25V, Electrolytic.	3198 025 32210
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1026	560pF., 5%, 50V,Ceramic.	4835 122 87055
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 25V, Ceramic	3198 017 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1046	10uF., 10V, Electrolytic	4835 124 97178
C1050	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1051	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1052	1uF., 35V, Electrolytic.	4835 124 97175
BRSXXX	0 ohm, "Chip" Jumper	4835 111 27056
BRXXX	0 ohm, Jumper.	3198 021 90010
BRXXX	0 ohm, "Chip" Jumper	4835 111 27056

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

S R3	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R4	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R5	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R6	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R11	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R13	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R14	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W, Carbon Film.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon Film.	4835 111 27047
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R34	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
S R35	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R44	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R45	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R46	510 ohm, 5%, 1/10W, Carbon Film.	3198 021 55110
R47	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R48	820 ohm, 5%, 1/10W, Carbon Film.	4835 111 37466
R49	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R55	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R56	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R63	10 ohm, 5%, 1/4W, Carbon Film.	3198 011 01090
R64	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
R65	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
R66	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R67	150 ohm, 5%, 1/10W, Carbon Film.	3198 021 51510
R71	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R74	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
S R76	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R91	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film.	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R115	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R116	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R117	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R118	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R119	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R120	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R121	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R122	470 ohm, 5%, 1/4W, Carbon Film	3198 011 14710
R123	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
R124	47k, 5%, 1/10W, Metal Film	4835 111 37445
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R186	12k, 5%, 1/4W, Carbon Film	3198 011 01230
R187	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R189	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R190	12k, 5%, 1/4W, Carbon Film	3198 011 01230
R191	4.7 ohm, 5%, 1/10W, Carbon Film.	3198 021 54780
R192	4.7 ohm, 5%, 1/10W, Carbon Film.	3198 021 54780
R193	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R194	1k, 5%, 1/2W, Metal Film	4835 116 57685
R195	100k, 5%, 1/2W, Metal Film	4835 116 57687
R196	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R197	270k, 5%, 1/4W, Carbon Film.	3198 011 02740
R198	110k, 5%, 1/2W, Metal Film	2322 187 53114
R199	100k, 5%, 1/2W, Metal Film	4835 116 57687
R200	24k, 5%, 1/2W, Carbon Film	4835 110 47199
R201	22k, 5%, 1/8W, Carbon Film	4835 111 37558
R202	Control Adjust, 4.7k	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R206	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R228	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R229	3.6k, 5%, 1/4W, Carbon Film.	2322 711 61362
R230	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R231	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R232	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R233	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R234	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R235	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R236	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
R238	2.7k, 5%, 1/4W, Carbon Film.	4835 111 37083
R240	0 ohm, Carbon Film	4835 111 27056
R241	0 ohm, Carbon Film	4835 111 27056
R242	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R243	4.3k, 5%, 0.24W, Carbon Film	2322 711 61432
R244	Control Adjust, 1k,.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R246	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R247	1.1k, 5%, 1/4W, Carbon Film.	2322 711 61112
R248	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R255	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R300	1/4W, 5%, 100 ohm, Carbon Composition.	4835 110 57066
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R318	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R319	16k, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R335	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R336	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R337	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R338	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R346	1k, 5%, 1/2W, Metal Film	4835 116 57685
R347	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R354	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R355	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R358	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R359	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R365	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R369	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R370	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R375	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R376	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R377	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R390	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R397	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R398	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R399	100k, 5%, 1/10W, Carbon Film	4835 111 37434
S R402	10 ohm, 5%, 3W, Metal Oxide.	2120 105 92585
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R603	3.3k, 5%, 1/4W, Carbon Film.	4835 111 37035
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm 5%, 1/10W, Carbon Film	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	0 ohm, 1/8W, Carbon Film	4835 110 67173
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R624	430 ohm, 5%, 1/4W, Carbon Film	3198 011 04310
R625	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R626	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/4W, Carbon Film	3198 011 03910
R634	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R635	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R636	0 ohm, Carbon Film	4835 111 27056
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/4W, Carbon Film	4835 111 37121
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R644	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R649	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R650	330 ohm, 5%, 1/2W, Metal Film.	4835 116 57713
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R662	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R663	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R664	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R665	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R666	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R671	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R672	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R673	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R674	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R675	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R676	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R677	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R678	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R679	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R681	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R682	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R683	8.2k, 5%, 1/4W, Carbon Film.	4835 111 37043
R684	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R685	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R686	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R687	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R688	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R689	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R690	1 Meg ohm, 5%, 1/4W, Carbon Film . . .	2322 711 61105
R691	10 ohm, 5%, 1/4W, Carbon Film.	4835 111 37132
R692	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R694	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R695	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R724	12k, 5%, 1/4W, Carbon Film	2322 711 61123
R725	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R726	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R727	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R728	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R729	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R730	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R731	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R732	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R733	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R734	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R735	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R736	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R737	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R739	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
S R740	18 ohm, 5%, 1/4W, Carbon Film.	2322 711 61189
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R787	3k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/4W, Carbon Film.	3198 011 06820
R794	200 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 52010
R795	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R796	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R797	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2% 1/8W, Carbon Film	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon Film. .	3198 021 54750
R821	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	330 ohm, 5%, 1/4W, Carbon Film	4835 111 37034
S R1016	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1017	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R1018	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1032	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1050	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1051	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1052	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1053	750 ohm, 5%, 1/4W, Carbon Film	3198 011 07510
D100	Diode BAS216	4835 130 37905
D150	Diode 1N4148	4835 130 37048
D151	Diode 1N4148	4835 130 37048
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D302	Diode 1N4148	4835 130 37048
D303	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode BAS216	4835 130 37905
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode BAS216	4835 130 37905
D612	Diode BAS216	4835 130 37905
D613	Diode 1N4148	4835 130 37048
D614	Diode 1N4148	4835 130 37048
D615	Diode BAS216	4835 130 37905
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode BAS216	4835 130 37905
D700	Diode BAS216	4835 130 37905
IC1	IC, A/V Switch	4835 209 87952
IC106	IC, 10/25W Hi-Fi Power Audio Amp . . .	4835 209 87082
IC107	IC 2-Channel Multi/Demultiplexer . . .	4835 209 17033
IC120	IC, Stereo Decoder & Audio Processor .	4835 209 88337
IC200	IC, IF Signal Processor.	4835 209 87757
IC300	IC LC864265A, Tuning Microprocessor. .	3135 010 02991
IC304	IC ST24C02B1, EEPROM	4835 209 88326
IC400	IC MC7812CT, 12V Regulator	9334 006 10682
IC401	IC MC7805CT, 5V Regulator.	9334 536 00682
IC600	IC, Y/C/S Processor.	4835 209 88331
IC606	IC, 9V Regulator	4835 209 88009
IC701	IC, Chroma/Luma Switch	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor, NPN BC847B	4822 130 60511
Q4	Transistor, Buffer	4822 130 60511
Q5	Transistor, Buffer	4822 130 60511
Q7	Transistor, NPN BC847B	4822 130 60511
Q8	Transistor, NPN BC847B	4822 130 60511
Q9	P-Channel JFET, Mono/Stereo Switch . .	9340 053 20126
Q12	Transistor, Mono/Stereo Inverter . . .	4822 130 60511
Q14	Transistor, NPN BC847B	4822 130 60511
Q16	Transistor, NPN BC847B	4822 130 60511
Q17	Transistor, NPN BC847B	4822 130 60511
Q141	Transistor, Variable Audio Out Switch.	4822 130 60511
Q152	P-Channel JFET, Mute	4835 130 47083
Q153	P-Channel JFET, Mute	4835 130 47083
Q154	P-Channel JFET, Mute	4835 130 47083
Q155	P-Channel JFET, Mute	4835 130 47083
Q156	Transistor, Mute Inverter.	4835 130 47055
Q200	Transistor, Video Amp.	5322 130 60508
Q201	Transistor, Coincidence Detector . . .	5322 130 60508
Q202	Transistor, Coincidence Detector . . .	4822 130 60511
Q203	Transistor, Coincidence Detector . . .	5322 130 60508
Q204	Transistor, Video Buffer	4822 130 60511
Q300	Transistor, Standby LED Switch	4822 130 60511
Q301	Transistor, SDA Amp.	4822 130 60511
Q302	Transistor, SCC Amp.	4822 130 60511
Q303	Transistor, Power LED Switch	4822 130 60511
Q304	Transistor, Fast Blanking Buffer . . .	4822 130 60511
Q305	Transistor, OSD Intensity Buffer . . .	4822 130 60511
Q306	Transistor, Horizontal Amp	4822 130 60511
Q308	Transistor, Vertical Amp	4822 130 60511
Q309	Transistor, PNP Switch	5322 130 60508
Q313	Transistor, SCC Amp.	4822 130 60511
Q314	Transistor, SDA Amp.	4822 130 60511
Q315	Transistor, Reset (Inverted)	5322 130 60508
Q600	Transistor, Chroma Switch.	4822 130 60511
Q601	Transistor, Chroma Delay	5322 130 60508
Q602	Transistor, Chroma Buffer.	5322 130 60508
Q603	Transistor, OSD Intensity Modulator. .	5322 130 60508
Q604	Transistor, Red Driver	4822 130 60511
Q605	Transistor, Green Driver	4822 130 60511
Q606	Transistor, Blue Driver.	4822 130 60511
Q607	Transistor, Blue Linearity	5322 130 60508
Q608	Transistor, Blue Linearity	4822 130 60511
Q609	Transistor, 2.2V Regulator	4822 130 60511
Q611	Transistor, Sync Buffer.	5322 130 60508
Q612	Transistor, ABL Buffer	5322 130 60508
Q613	Transistor, ABL Clamp.	5322 130 60508
Q614	Transistor, Vertical Buffer.	4822 130 60511
Q616	Transistor, Green Buffer	5322 130 60508
Q617	Transistor, Green Clipper.	5322 130 60508
Q618	Transistor, Red Buffer	5322 130 60508
Q619	Transistor, Red Clipper.	5322 130 60508
Q620	Transistor, Blue Buffer.	5322 130 60508
Q621	Transistor, Blue Clipper	5322 130 60508
Q623	Transistor, Common Base Allpass. . . .	4822 130 60511
Q624	Transistor, Chroma Buffer.	4822 130 60511
Q625	Transistor, Chroma Buffer.	4822 130 60511
Q626	Transistor, Common Base Allpass. . . .	4822 130 60511
Q627	Transistor, Common EmitterAllpass. . .	5322 130 60508
Q632	Transistor, Blue Linearity	5322 130 60508
Q635	Transistor, Horizontal Killer.	4822 130 60511
Q703	Transistor, SVHSC Amp.	4822 130 60511
Q704	Transistor, SVHSC Amp.	5322 130 60508
Q705	Transistor, SVHSL Amp.	4822 130 60511
Q715	Transistor, NPN BC847B	4822 130 60511
Q720	Transistor, SVHSL Amp.	5322 130 60508
Q1000	Transistor, PNP T2907.	4835 130 47065
Q1010	Transistor, NPN BC847B	4822 130 60511
Q1020	Transistor, PNP BC85	5322 130 60508
Z100	Zener Diode, 8.2V.	4835 130 37503
Z101	Zener Diode, 8.2V.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, MMSZ5231B	4835 220 17061
L116	Peaking Coil, 10uH..	4835 157 58198
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable Coil, 4.5MHz.	4835 157 57113
L202	Adjustable Coil, 45.75MHz.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable Coil, 4.75MHz	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH. ,5%	4835 150 57056
L208	Peaking Coil, 12uH, 5%	4835 150 57058
L209	Peaking Coil, 1000uH., 10%	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH., 10%	4835 157 67075
L300	Peaking Coil, 5.6uH., 5%	2422 535 94322
L301	Peaking Coil, 12uH., 5%.	4835 150 57058
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L313	Peaking Coil, 4.7uH., 10%.	4835 157 67057
L373	Peaking Coil, 0.68uH., 20%	4835 157 57596
L374	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L375	Peaking Coil, 0.68uH., 20%	4835 157 57596
L379	Peaking Coil, 0.68uH., 20%	4835 157 57596
L405	Ferrite Bead, 100MHz	4835 157 57995
L600	Peaking Coil, 33uH,. 5%.	4835 157 58113
L601	Peaking Coil, 10uH., 10%	4835 157 67074
L602	Peaking Coil, 10uH., 5%	4835 150 57008
L604	Peaking Coil, 12uH., 5%	4835 157 57831
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Peaking Coil, 3.3uH., 5%.	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L608	Peaking Coil, 12uH., 5%.	4835 157 57831
L609	Peaking Coil, 22uH., 5%.	4835 157 67018
L610	Peaking Coil, 15uH., 5%.	4835 157 57057
L611	Peaking Coil, 5.6uH., 5%	4835 157 57833
L612	Peaking Coil, 27uH., 5%.	4835 157 67019
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L700	Peaking Coil, 10uH., 10%	4835 157 67074
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L1000	Peaking Coil, 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8 uH., 5%.	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Jack Panel Bracket	3135 011 01900
CLP106	Spring Clip for IC 106	3135 011 02270
MEC4	IF Shield.	3135 011 02360
F100	Fuse, 5 Amp.	4835 253 37021
HS106A	Heatsink for IC 106.	3135 011 02260
HS400	Heatsink for IC 400.	3135 011 02510
HS401	Heatsink for IC 401.	3135 011 03291
HS703	Heatsink for IC 703.	3135 011 02510
J2	Phono Jack Assembly.	4835 265 97388

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

J3	Jack Assembly.	4835 265 97386
J5	4 Pin Push Terminal.	4835 265 97448
J250	5 Pin Board Connector.	2422 025 15832
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Board Connector.	2422 025 15193
J403	7 Pin Board Connector.	2422 025 14674
J467	7 Pin Board Connector.	2422 025 15024
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector	2422 025 15196
SHD1T	Shield for Small Signal Board.	3135 011 02251
SHD3T	Shield for Small Signal Board.	3135 011 02251
TUNEXT	Connector for Tuner.	4835 265 97076
UV1236	Tuner, UV1236.	4835 210 47081
Y100	Ceramic Resonator.	4835 122 97102
Y1000	Crystal Resonator, 14.318MHz	4835 242 77059
Y1001	Crystal Resonator, 14.318MHz	4835 242 77059
Y200	Saw Filter	4835 153 97024
Y202	Ceramic Filter, 4.5MHz	4835 154 97168
Y203	Ceramic Filter, 4.5MHz	4835 153 57004
Y301	Peizoelectric Crystal.	4835 242 77283
Y600	Crystal Resonator 3.579MHz	2422 543 00862
Y601	Ceramic Resonator.	4835 153 97004
Y603	Comb Filter.	2422 549 43197

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film. . . .	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene. . . .	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene. . .	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C431	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C432	1500uF., 35V, Electrolytic	4835 124 47581
C433	0.1uF., 10%, 100V, Polyester	4822 121 41608
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S C916	6800pF., 10%, 50V, Polyester	2020 300 90571
C917	0.1uF., 250V, Polyester.	4835 121 47278
C918	2.2uF., 50V, Electrolytic.	4835 124 47502
C919	0.12uF., 100V, Polyester	4835 121 47425
C920	4.7uF., 50V, Electrolytic.	4835 124 47506
C921	100uF., 25V, Electrolytic.	4835 124 47501
C922	470uF., 25V, Electrolytic.	4835 121 47405
C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
C927	1uF., 50V, Electrolytic.	4835 121 47406
C928	0.33uF., 50V, Electrolytic	4835 124 47525
C929	330pF., 10%, 500V, Ceramic	4835 122 47648
C930	1uF., 100V, Electrolytic	4835 124 47485
C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C933	330pF., 10%, 500V, Ceramic	4835 122 47033
C2804	100uF., 50V, Electrolytic.	4835 124 47563
C2805	10uF., 50V, Electrolytic	4835 124 47499
C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2837	10uF., 50V, Electrolytic	4835 124 47499
C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R411	10 ohm, 5%, 1/2W, Metal Film	4835 116 67131
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R442	33k, 1/10W, Metal Film	4835 111 37248
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R472	1.2k, 5%, 2W, Metal Film	4835 116 57357
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R478	47k, 5%, 1/2W, Metal Film.	4835 111 67001
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S R2839	300k, 5%, 3W, Metal Film	2322 195 73304
D402	Diode BYV95C	4835 130 37052
D403	Diode, Silicon MUR120.	4835 130 37674
D404	Diode BYV95C	4835 130 37052
D405	Diode BAX18.	4835 130 37933
D406	Diode GBU6J.	4835 130 37931
D407	Diode, Silicon MUR120.	4835 130 37674
D409	Diode BAS216	4835 130 37905
D416	Diode, Silicon	4835 130 37663
D417	Diode MUR460	4835 130 37932
D418	Diode, Silicon MUR460.	4835 130 37488
D419	Diode, Silicon	4835 130 37491
D420	Diode BAX18.	4835 130 37933
D431	Diode BAX18.	4835 130 37933
D432	Diode 1N4150	4835 130 37934
D433	Diode, Silicon	4835 130 37663
D434	Diode, Silicon	4835 130 37663
D501	Diode BAS216	4835 130 37905
D502	Diode BAS216	4835 130 37905
D503	Diode BAS216	4835 130 37905
D504	Diode, Silicon BYD77D.	4835 130 37497
D505	Diode BAS216	4835 130 37905
D550	Diode BYV95C	4835 130 37052
D551	Diode BAS216	4835 130 37905
D571	Diode BAS216	4835 130 37905
D801	Diode BYD33J	4835 130 37094
D802	Diode BYV95C	4835 130 37052
D806	Diode BY228.	4835 130 37166
D808	Diode BYW95C	4835 130 37059
D900	Diode BAS216	4835 130 37905
D901	Diode 1N4148	4835 130 37048
D902	Diode BY328.	4835 130 37938
D904	Diode BAX18.	4835 130 37933
D905	Diode BYD33J	4835 130 37094
D906	Diode, Silicon MUR140.	4835 130 37102
D907	Diode, Silicon MUR140.	4835 130 37102
D908	Diode BYV95C	4835 130 37052
D909	Diode BAV103	4835 130 37937
D910	Diode BYW95C	4835 130 37059
D911	Diode BAS216	4835 130 37905
D2830	Diode BYD33M	4835 130 37012
S IC400	IC LM393N, Dual Comparator	4835 209 87081
IC401	IC, 6126640002	4835 209 87834
IC402	IC, 6127710001	4835 209 87712
S IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S IC405	OPT CP CNW136.300.	4835 209 88561
S IC406	OPT CP CNX83A.	4835 209 88555
IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
IC550	IC TDA3654Q/N3	4835 209 17162
IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
IC552	IC MC7812CT, 12V Regulator	4835 209 88554
IC900	IC MC1391P, Horiz. Processor	9332 898 70682
IC901	IC, 6126729002	4835 209 88011
IC902	IC, 6128270001	4835 209 87838
Q2830	Transistor, NPN.	4835 130 47893
C914	Transistor, BU2508DF	4835 532 47018
S Q400	Transistor, BC847B	4822 130 60511
Q401	N-Channel Power MOSFET	4835 130 47888
Q402	Transistor, Standby Regulator.	4835 130 47885
S Q403	Transistor, BC847B	4822 130 60511
Q404	Transistor, BC85	5322 130 60508
Q442	Transistor, BU2508DF	4835 532 47018
Q500	Transistor, BC85	5322 130 60508
Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
Q502	Transistor, BC847B	4822 130 60511
Q503	Transistor, BC847B	4822 130 60511
Q550	Transistor, PNP.	4835 130 47084
Q551	Transistor, BC847B	4822 130 60511
Q800	Transistor, BC847B	4822 130 60511
Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
Q802	Transistor, 2SD2539.	4835 130 48074
Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
Q901	Transistor, BC85	5322 130 60508
Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
Q904	Transistor, BC85, Soft Start	5322 130 60508
Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
Z400	Zener Diode, BZX79B10.	4835 130 37935
Z500	Zener Diode, 10V	4835 130 37739
Z501	Diode BZX79-B18.	4835 130 37936
Z503	Zener Diode, P6KE62A	4835 130 37547
Z901	Zener Diode, 6.2V.	4835 130 37751
L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
L407	Ferrite Bead	4835 526 17001
L408	Suppression Coil, 10uH.	4835 152 27002
S L409	Peaking Coil, 2.2uH.	4835 150 57054
L410	Suppression Coil, 18uH.	4835 150 57051
L412	Ferrite Bead	4835 526 17001
L413	Suppression Coil, 10uH.	4835 152 27002
L415	Suppression Coil, 1.8uH.	4835 152 27029
L416	Ferrite Bead	4835 526 17001
L420	Ferrite Bead	4835 526 17001
S L421	Line Input Choke	4835 152 27028
L422	Suppression Coil, 10uH.	4835 152 27002
L423	Suppression Coil, 10uH.	4835 152 27002
L424	Suppression Coil, 10uH.	4835 152 27002
L425	Suppression Coil, 10uH.	4835 152 27002
L426	Suppression Coil, 42uH.	4835 157 57063
L427	Ferrite Bead	4835 526 17001
L428	Suppression Coil, 42uH.	4835 157 57063
L429	Ferrite Bead	4835 526 17001
L430	Ferrite Bead	4835 526 17001
L432	Suppression Coil, 10uH.	4835 152 27002
L435	Suppression Coil, 10uH.	4835 152 27002
L440	Suppression Coil, 10uH.	4835 152 27002
L467	Line Choke	4835 157 57077
L550	Suppression Coil, 10uH.	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer, Switch Mode	4835 148 87339
S T402	Transformer, Power	4835 148 87345
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert.	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS416	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467	7 Pin Connector.	2422 025 15024
J468	9 Pin Connector, Green	0018 223 80009
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176

S = Safety Part Be sure to use exact replacement part.

8P5431C (continued)

	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706087 0001, 0002 OPTICAL ASSEMBLY

		00706087 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler Red & Blue 46" (0001).	4835 290 87153
	P	Coupler Red & Blue 54" (0002).	4835 290 87155
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Main, Blue	4835 381 47017
	W	Lens, Main, Red & Green.	4835 381 47022

8P5434C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77751
CBA	Small Signal Panel	4835 219 77756
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Remote Transmitter UR714	4835 219 17699

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P5434C101

	MODEL 008P5434C101	
S 20	AC Cord, Filtered.	4835 321 17128
27	Back Cover (Lower)	4835 432 97707
26	Back Cover (Upper)	4835 432 97693
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA ZC 1.5V.	4835 138 17047
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02950
2	Extr., Screen Edge, Side (x2).	3135 014 03070
14	Extr., Screen Edge, Top.	3135 014 03060
	Filter	4835 380 57011
4	Foot Base Rail (x2).	3135 014 03131
16	Frame f/Digital Convergence.	4835 432 17846
11	Frame, Screen 54" (x2)	3135 014 06350
9	Hole Insert (x17).	3135 014 02741
18	Jack Panel Frame	3135 014 06650
13	Lens, Fresnel.	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting.	3135 013 01410
24	Mirror Trapz 2nd Surface	3135 013 01140
	Owners Manual.	3135 015 07370
	Quick Use Guide.	3135 015 07360
	Rear Barrier	4835 432 97694
19	Rear Jack Panel Overlay.	4835 459 17556
	RemoteTransmit. UR714SB.	4835 219 17699
1	Retainer Treelock (x15).	3135 014 02620
8	Speaker Full 4x6" 8 Ohm (x2)	4835 240 47011
7	Speaker Grille	4835 459 47113

SMALL SIGNAL PANEL (1 TUNER)

	SMALL SIGNAL PANEL (1 TUNER)	
C1	100uF., 16V, Electrolytic.	3198 025 21010
C2	15pF., 5%, 50V, Ceramic.	3198 016 01590
C4	470uF., 50V, Electrolytic.	3198 025 54770
C5	100uF., 16V, Electrolytic.	3198 025 21010
C7	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C8	220uF., 16V, Electrolytic.	3198 025 22210
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	1uF., 20%, 50V, Electrolytic	3198 025 51080
C14	1uF., 20%, 50V, Electrolytic	3198 025 51080
C19	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C25	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C30	10uF., 20%, 16V, Electrolytic.	2020 012 92805
C37	100uF., 16V, Electrolytic.	3198 025 21010
C39	220uF., 16V, Electrolytic.	3198 025 22210
C45	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C46	1000uF., 16V, Electrolytic	4835 124 47571
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C100	5600pF., 10%, 50V, Ceramic	4835 122 87043
C101	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C102	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C103	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V, Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V, Electrolytic.	4835 124 97175
C112	1uF., 35V, Electrolytic.	4835 124 97175
C113	0.047uF., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 25V, Ceramic	3198 017 21040
C115	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 100V, Metalized Polyester	4835 121 47364
C119	0.22uF., 100V, Metalized Polyester	4835 121 47038
C120	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C121	0.22uF., 100V, Metalized Polyester	4835 121 47038
C122	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V,Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V,Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V,Ceramic.	4835 122 87527
C130	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C131	5600pF., 10%, 50V, Ceramic	4835 122 87043
C132	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C133	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C135	1000uF., 35V, Electrolytic	4835 124 47498
C136	1000uF., 35V, Electrolytic	4835 124 47498
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.1uF., 25V,Ceramic.	3198 017 21040
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C154	0.1uF., 25V, Ceramic	3198 017 21040
C155	100uF., 16V, Electrolytic.	3198 025 21010
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C157	47uF., 20%, 25V,Electrolytic	3198 025 34790
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C160	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C161	100pF., 5%, 50V, Ceramic	3198 016 01010
C162	100uF., 50V, Electrolytic.	3198 025 51010
C164	100pF., 5%, 50V, Ceramic	3198 016 01010
C165	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C166	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C167	10uF., 50V, Electrolytic	4835 124 47525
C168	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C169	1000uF., 25V, Electrolytic	4835 124 47583
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C171	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C172	0.1uF., 10%, 50V,Ceramic	4835 122 87061
C173	100uF., 16V, Electrolytic.	3198 025 21010
C174	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C175	1000uF., 25V, Electrolytic	4835 124 47583
C176	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C177	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C178	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C179	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C180	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C181	0.1uF., 25V, Ceramic	3198 017 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C190	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C199	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C200	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C201	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C216	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C217	470pF., 10%, 50V, Ceramic.	2020 552 93057
C218	1uF., 35V, Electrolytic.	4835 124 97175
C220	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C223	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C229	0.1uF., 25V, Ceramic	3198 017 21040
C230	220pF., 5%, 50V, Ceramic	3198 016 02210
C300	0.1uF., 25V, Ceramic	3198 017 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 10V, Electrolytic.	4835 124 97183
C304	1000pF., 10%, 50V, Ceramic	3198 017 01020
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	1000pF., 10%, 50V, Ceramic	3198 017 01020
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 10V, Electrolytic.	4835 124 97183
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	4835 122 87041
C322	1uF., 35V, Electrolytic.	4835 124 97175
C323	1uF., 35V, Electrolytic.	4835 124 97175
C341	Trimmer Capacitor, 3pF.-40pF., 250V. .	2222 808 11409
C342	0.47uF., 35V, Electrolytic	4835 124 97182
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C376	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 25V, Electrolytic.	4835 124 97179
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 25V, Ceramic	3198 017 21040
C396	0.1uF., 25V, Ceramic	3198 017 21040
C400	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C405	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 25V, Ceramic	3198 017 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 25V, Ceramic	3198 017 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 35V, Electrolytic	4835 124 97037
C606	0.1uF., 25V, Ceramic	3198 017 21040
C607	0.1uF., 25V, Ceramic	3198 017 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 25V, Ceramic	3198 017 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 100V, Metalized Polyester . .	4835 121 47222
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 35V, Electrolytic.	4835 124 97175
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	4835 122 87593
C628	0.22uF., 50V, Ceramic.	4835 122 87087
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 25V, Ceramic	3198 017 21040
C639	0.33uF., 35V, Electrolytic	4835 124 97037
C640	0.012uF., 10%, 50V, Ceramic.	4835 122 87501
C641	0.1uF., 25V, Ceramic	3198 017 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C643	200pF., 5%, 50V, Ceramic	4835 122 87092
C645	620pF., 5%, 50V, Ceramic	4835 122 87089
C647	1000pF., 10%, 50V, Ceramic	4835 122 87041
C648	120pF., 5%, 50V, Ceramic	4835 122 87046
C649	51pF., 5%, 50V, Ceramic.	4835 122 87054
C650	180pF., 5%, 50V, Ceramic	4835 122 87028
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 25V, Ceramic	3198 017 21040
C655	220uF., 16V, Electrolytic.	3198 025 22210
C656	100uF., 16V, Electrolytic.	3198 025 21010
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 25V, Ceramic	3198 017 21040
C664	0.1uF., 25V, Ceramic	3198 017 21040
C665	0.1uF., 25V, Ceramic	3198 017 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 25V, Ceramic	3198 017 21040
C676	82pF., 5%, 50V, Ceramic.	4835 122 87038
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	43pF., 5%, 50V, Ceramic.	2020 552 94276
C680	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C681	56P 5%, 50V, Ceramic	4835 122 87096
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 25V, Ceramic	3198 017 21040
C699	1uF., 35V, Electrolytic.	4835 124 97175
C719	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C720	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C721	0.1uF., 25V, Ceramic	3198 017 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C724	0.1uF., 25V, Ceramic	3198 017 21040
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C731	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C738	10pF., 5%, 50V, Ceramic.	3198 016 01090
C749	10pF., 5%, 50V, Ceramic.	3198 016 01090
C750	100uF., 25V, Electrolytic.	3198 025 31010
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C1000	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1001	0.22uF., 50V, Ceramic.	4835 122 87087
C1002	0.1uF., 25V, Ceramic	3198 017 21040
C1003	0.22uF., 50V, Ceramic.	4835 122 87087
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1011	220pF., 5%, 50V, Ceramic	3198 016 02210
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V,Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1016	220uF., 25V, Electrolytic.	3198 025 32210
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1026	560pF., 5%, 50V,Ceramic.	4835 122 87055
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 25V, Ceramic	3198 017 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1046	10uF., 10V, Electrolytic	4835 124 97178
C1050	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1051	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1052	1uF., 35V, Electrolytic.	4835 124 97175
BRSXXX	0 ohm, "Chip" Jumper	4835 111 27056
BRXXX	0 ohm, Jumper.	3198 021 90010

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

	BRXXX	0 ohm, "Chip" Jumper	4835 111 27056
S	R3	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
	R4	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R5	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R6	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R11	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R13	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R14	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R34	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
S	R35	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R44	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
	R45	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R46	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R47	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R48	820 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37466
	R49	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R55	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
	R56	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R63	10 ohm, 5%, 1/4W, Carbon Film.	3198 011 01090
	R64	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R65	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R66	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
	R67	150 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51510
	R71	100k, 5%, 1/2W, Metal Film	4835 116 57687
S	R74	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
S	R76	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R91	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R115	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R116	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R117	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R118	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R119	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R120	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R121	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R122	470 ohm, 5%, 1/4W, Carbon Film	3198 011 14710
	R123	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
	R124	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R186	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R187	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R189	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R190	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R191	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
	R192	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
	R193	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R194	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R195	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R196	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R197	270k, 5%, 1/4W, Carbon Film.	3198 011 02740
	R198	110k, 5%, 1/2W, Metal Film	2322 187 53114
	R199	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R200	24k, 5%, 1/2W, Carbon Film	4835 110 47199
	R201	22k, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	Control Adjust, 4.7k	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R206	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R228	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R229	3.6k, 5%, 1/4W, Carbon Film.	2322 711 61362
	R230	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R231	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R232	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R233	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R234	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R235	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
	R236	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
	R238	2.7k, 5%, 1/4W, Carbon Film.	4835 111 37083
	R240	0 ohm, Carbon Film	4835 111 27056
	R241	0 ohm, Carbon Film	4835 111 27056
	R242	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R243	4.3k, 5%, 0.24W, Carbon Film	2322 711 61432
	R244	Control Adjust, 1k,.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R246	150k, 5%, 1/10W, Carbon Film	4835 111 27045
	R247	1.1k, 5%, 1/4W, Carbon Film.	2322 711 61112
	R248	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R255	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
	R300	1/4W, 5%, 100 ohm, Carbon Composition.	4835 110 57066
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R317	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R318	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R319	16k, 5%, 1/10W, Carbon Film.	3198 021 51630
	R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R328	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
	R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R331	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R334	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
	R335	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R336	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R337	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R344	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R346	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R347	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R350	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R354	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R355	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R358	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R359	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R365	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R369	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R370	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R375	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R376	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R377	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R390	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R397	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R398	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R399	100k, 5%, 1/10W, Carbon Film	4835 111 37434
S R402	10 ohm, 5%, 3W, Metal Oxide.	2120 105 92585
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R603	3.3k, 5%, 1/4W, Carbon Film.	4835 111 37035
R604	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R605	180 ohm 5%, 1/10W, Carbon Film	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	0 ohm, 1/8W, Carbon Film	4835 110 67173
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R624	430 ohm, 5%, 1/4W, Carbon Film	3198 011 04310
R625	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R626	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/4W, Carbon Film	3198 011 03910
R634	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R635	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R636	0 ohm, Carbon Film	4835 111 27056
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/4W, Carbon Film	4835 111 37121
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R644	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R649	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R650	330 ohm, 5%, 1/2W, Metal Film.	4835 116 57713
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R662	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R663	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R664	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R665	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R666	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R671	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R672	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R673	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R674	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R675	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R676	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R677	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R678	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R679	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R681	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R682	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R683	8.2k, 5%, 1/4W, Carbon Film.	4835 111 37043
R684	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R685	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R686	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R687	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R688	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R689	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R690	1 Meg ohm, 5%, 1/4W, Carbon Film . . .	2322 711 61105
R691	10 ohm, 5%, 1/4W, Carbon Film.	4835 111 37132
R692	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R694	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R695	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R724	12k, 5%, 1/4W, Carbon Film	2322 711 61123
R725	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R726	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R727	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R728	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R729	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R730	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R731	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R732	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R733	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R734	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R735	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R736	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R737	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R739	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
S R740	18 ohm, 5%, 1/4W, Carbon Film.	2322 711 61189
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R772	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57723
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R787	3k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/4W, Carbon Film.	3198 011 06820
R794	200 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 52010
R795	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R796	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R797	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2% 1/8W, Carbon Film	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon Film. .	3198 021 54750
R821	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	330 ohm, 5%, 1/4W, Carbon Film	4835 111 37034
S R1016	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1017	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R1018	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

R1023	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1032	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1050	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1051	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1052	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1053	750 ohm, 5%, 1/4W, Carbon Film	3198 011 07510
D100	Diode BAS216	4835 130 37905
D150	Diode 1N4148	4835 130 37048
D151	Diode 1N4148	4835 130 37048
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D302	Diode 1N4148	4835 130 37048
D303	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode BAS216	4835 130 37905
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode BAS216	4835 130 37905
D612	Diode BAS216	4835 130 37905
D613	Diode 1N4148	4835 130 37048
D614	Diode 1N4148	4835 130 37048
D615	Diode BAS216	4835 130 37905
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode BAS216	4835 130 37905
D700	Diode BAS216	4835 130 37905
IC1	IC, A/V Switch	4835 209 87952
IC106	IC, 10/25W Hi-Fi Power Audio Amp . . .	4835 209 87082
IC107	IC 2-Channel Multi/Demultiplexer . . .	4835 209 17033
IC120	IC, Stereo Decoder & Audio Processor .	4835 209 88337
IC200	IC, IF Signal Processor.	4835 209 87757
IC300	IC LC864265A, Tuning Microprocessor. .	3135 010 02991
IC304	IC ST24C02B1, EEPROM	4835 209 88326
IC400	IC MC7812CT, 12V Regulator	9334 006 10682
IC401	IC MC7805CT, 5V Regulator.	9334 536 00682
IC600	IC, Y/C/S Processor.	4835 209 88331
IC606	IC, 9V Regulator	4835 209 88009
IC701	IC, Chroma/Luma Switch	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor, NPN BC847B	4822 130 60511
Q4	Transistor, Buffer	4822 130 60511
Q5	Transistor, Buffer	4822 130 60511
Q7	Transistor, NPN BC847B	4822 130 60511
Q8	Transistor, NPN BC847B	4822 130 60511
Q9	P-Channel JFET, Mono/Stereo Switch . .	9340 053 20126
Q12	Transistor, Mono/Stereo Inverter . . .	4822 130 60511
Q14	Transistor, NPN BC847B	4822 130 60511
Q16	Transistor, NPN BC847B	4822 130 60511
Q17	Transistor, NPN BC847B	4822 130 60511
Q141	Transistor, Variable Audio Out Switch.	4822 130 60511
Q152	P-Channel JFET, Mute	4835 130 47083
Q153	P-Channel JFET, Mute	4835 130 47083
Q154	P-Channel JFET, Mute	4835 130 47083
Q155	P-Channel JFET, Mute	4835 130 47083
Q156	Transistor, Mute Inverter.	4835 130 47055
Q200	Transistor, Video Amp.	5322 130 60508
Q201	Transistor, Coincidence Detector . . .	5322 130 60508
Q202	Transistor, Coincidence Detector . . .	4822 130 60511
Q203	Transistor, Coincidence Detector . . .	5322 130 60508
Q204	Transistor, Video Buffer	4822 130 60511
Q300	Transistor, Standby LED Switch	4822 130 60511
Q301	Transistor, SDA Amp.	4822 130 60511
Q302	Transistor, SCC Amp.	4822 130 60511
Q303	Transistor, Power LED Switch	4822 130 60511
Q304	Transistor, Fast Blanking Buffer . . .	4822 130 60511
Q305	Transistor, OSD Intensity Buffer . . .	4822 130 60511
Q306	Transistor, Horizontal Amp	4822 130 60511
Q308	Transistor, Vertical Amp	4822 130 60511
Q309	Transistor, PNP Switch	5322 130 60508
Q313	Transistor, SCC Amp.	4822 130 60511
Q314	Transistor, SDA Amp.	4822 130 60511
Q315	Transistor, Reset (Inverted)	5322 130 60508
Q600	Transistor, Chroma Switch.	4822 130 60511
Q601	Transistor, Chroma Delay	5322 130 60508
Q602	Transistor, Chroma Buffer.	5322 130 60508
Q603	Transistor, OSD Intensity Modulator. .	5322 130 60508
Q604	Transistor, Red Driver	4822 130 60511
Q605	Transistor, Green Driver	4822 130 60511
Q606	Transistor, Blue Driver.	4822 130 60511
Q607	Transistor, Blue Linearity	5322 130 60508
Q608	Transistor, Blue Linearity	4822 130 60511
Q609	Transistor, 2.2V Regulator	4822 130 60511
Q611	Transistor, Sync Buffer.	5322 130 60508
Q612	Transistor, ABL Buffer	5322 130 60508
Q613	Transistor, ABL Clamp.	5322 130 60508
Q614	Transistor, Vertical Buffer.	4822 130 60511
Q616	Transistor, Green Buffer	5322 130 60508
Q617	Transistor, Green Clipper.	5322 130 60508
Q618	Transistor, Red Buffer	5322 130 60508
Q619	Transistor, Red Clipper.	5322 130 60508
Q620	Transistor, Blue Buffer.	5322 130 60508
Q621	Transistor, Blue Clipper	5322 130 60508
Q623	Transistor, Common Base Allpass. . . .	4822 130 60511
Q624	Transistor, Chroma Buffer.	4822 130 60511
Q625	Transistor, Chroma Buffer.	4822 130 60511
Q626	Transistor, Common Base Allpass. . . .	4822 130 60511
Q627	Transistor, Common EmitterAllpass. . .	5322 130 60508
Q632	Transistor, Blue Linearity	5322 130 60508
Q635	Transistor, Horizontal Killer.	4822 130 60511
Q703	Transistor, SVHSC Amp.	4822 130 60511
Q704	Transistor, SVHSC Amp.	5322 130 60508
Q705	Transistor, SVHSL Amp.	4822 130 60511
Q715	Transistor, NPN BC847B	4822 130 60511
Q720	Transistor, SVHSL Amp.	5322 130 60508
Q1000	Transistor, PNP T2907.	4835 130 47065
Q1010	Transistor, NPN BC847B	4822 130 60511
Q1020	Transistor, PNP BC85	5322 130 60508
Z100	Zener Diode, 8.2V.	4835 130 37503
Z101	Zener Diode, 8.2V.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, MMSZ5231B	4835 220 17061
L116	Peaking Coil, 10uH..	4835 157 58198
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable Coil, 4.5MHz.	4835 157 57113
L202	Adjustable Coil, 45.75MHz.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable Coil, 4.75MHz	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH. ,5%	4835 150 57056
L208	Peaking Coil, 12uH, 5%	4835 150 57058
L209	Peaking Coil, 1000uH., 10%	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH., 10%	4835 157 67075
L300	Peaking Coil, 5.6uH., 5%	2422 535 94322
L301	Peaking Coil, 12uH., 5%.	4835 150 57058
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L313	Peaking Coil, 4.7uH., 10%.	4835 157 67057
L373	Peaking Coil, 0.68uH., 20%	4835 157 57596
L374	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L375	Peaking Coil, 0.68uH., 20%	4835 157 57596
L379	Peaking Coil, 0.68uH., 20%	4835 157 57596
L405	Ferrite Bead, 100MHz	4835 157 57995
L600	Peaking Coil, 33uH,. 5%.	4835 157 58113
L601	Peaking Coil, 10uH., 10%	4835 157 67074
L602	Peaking Coil, 10uH., 5%	4835 150 57008
L604	Peaking Coil, 12uH., 5%	4835 157 57831
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Peaking Coil, 3.3uH., 5%.	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L608	Peaking Coil, 12uH., 5%.	4835 157 57831
L609	Peaking Coil, 22uH., 5%.	4835 157 67018
L610	Peaking Coil, 15uH., 5%.	4835 157 57057
L611	Peaking Coil, 5.6uH., 5%	4835 157 57833
L612	Peaking Coil, 27uH., 5%.	4835 157 67019
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L700	Peaking Coil, 10uH., 10%	4835 157 67074
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L1000	Peaking Coil, 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8 uH., 5%.	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Jack Panel Bracket	3135 011 01900
CLP106	Spring Clip for IC 106	3135 011 02270
MEC4	IF Shield.	3135 011 02360
F100	Fuse, 5 Amp.	4835 253 37021
HS106A	Heatsink for IC 106.	3135 011 02260
HS400	Heatsink for IC 400.	3135 011 02510
HS401	Heatsink for IC 401.	3135 011 03291
HS703	Heatsink for IC 703.	3135 011 02510

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

J2	Phono Jack Assembly.	4835 265 97388
J3	Jack Assembly.	4835 265 97386
J5	4 Pin Push Terminal.	4835 265 97448
J250	5 Pin Board Connector.	2422 025 15832
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Board Connector.	2422 025 15193
J403	7 Pin Board Connector.	2422 025 14674
J467	7 Pin Board Connector.	2422 025 15024
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector	2422 025 15196
SHD1T	Shield for Small Signal Board.	3135 011 02251
SHD3T	Shield for Small Signal Board.	3135 011 02251
TUNEXT	Connector for Tuner.	4835 265 97076
UV1236	Tuner, UV1236.	4835 210 47081
Y100	Ceramic Resonator.	4835 122 97102
Y1000	Crystal Resonator, 14.318MHz	4835 242 77059
Y1001	Crystal Resonator, 14.318MHz	4835 242 77059
Y200	Saw Filter	4835 153 97024
Y202	Ceramic Filter, 4.5MHz	4835 154 97168
Y203	Ceramic Filter, 4.5MHz	4835 153 57004
Y301	Peizoelectric Crystal.	4835 242 77283
Y600	Crystal Resonator 3.579MHz	2422 543 00862
Y601	Ceramic Resonator.	4835 153 97004
Y603	Comb Filter.	2422 549 43197

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C431	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C432	1500uF., 35V, Electrolytic	4835 124 47581
C433	0.1uF., 10%, 100V, Polyester	4822 121 41608
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S C916	6800pF., 10%, 50V, Polyester	2020 300 90571
C917	0.1uF., 250V, Polyester.	4835 121 47278
C918	2.2uF., 50V, Electrolytic.	4835 124 47502
C919	0.12uF., 100V, Polyester	4835 121 47425
C920	4.7uF., 50V, Electrolytic.	4835 124 47506
C921	100uF., 25V, Electrolytic.	4835 124 47501
C922	470uF., 25V, Electrolytic.	4835 121 47405
C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
C927	1uF., 50V, Electrolytic.	4835 121 47406
C928	0.33uF., 50V, Electrolytic	4835 124 47525
C929	330pF., 10%, 500V, Ceramic	4835 122 47648
C930	1uF., 100V, Electrolytic	4835 124 47485
C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C933	330pF., 10%, 500V, Ceramic	4835 122 47033
C2804	100uF., 50V, Electrolytic.	4835 124 47563
C2805	10uF., 50V, Electrolytic	4835 124 47499
C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2837	10uF., 50V, Electrolytic	4835 124 47499
C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
R411	10 ohm, 5%, 1/2W, Metal Film	4835 116 67131
R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
R426	100k, 1/2W, Metal Film	4835 116 57687
R427	27k, 1/10W, Metal Film	4835 111 37442
R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
R429	68k, 1/10W, Metal Film	4835 111 37273
S R430	1k, 5%, 3W, Metal Film	4835 116 57242
R431	10k, 1/2W, Metal Film.	4835 116 57686
R433	4.7k, 1/2W, Metal Film	4835 116 57724
R438	33k, 1/10W, Metal Film	4835 111 37248
R439	10k, 1/10W, Metal Film	4835 111 37216
R440	10k, 1/10W, Metal Film	4835 111 37216
R442	33k, 1/10W, Metal Film	4835 111 37248
R443	100k, 1/10W, Metal Film.	4835 111 37434
S R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
R446	10k, 1/2W, Metal Film.	4835 116 57686
S R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S R449	10 ohm, 1/2W, Metal Film	4835 116 57097
R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
R455	470 ohm, Control Adjust.	4835 100 17039
R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S R472	1.2k, 5%, 2W, Metal Film	4835 116 57357
S R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
R478	47k, 5%, 1/2W, Metal Film.	4835 111 67001
R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S R484	2k, 5%, 1W, Metal Film	4835 116 67154
S R485	2k, 5%, 1W, Metal Film	4835 116 67154
R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
R510	470k, 1/10W, Metal Film.	4835 111 37407
R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S R560	220 ohm, 1W, Metal Oxide	4835 116 57603
R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
R571	1k, 1/2W, Metal Film	4835 116 57685
S R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
R586	10k, 1/10W, Metal Film	4835 111 37216
R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
R901	10k, Control Adjust.	4835 100 17036
R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
R908	1.5k, 1/10W, Metal Film.	4835 111 37437
R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R913	4.7k, 1/2W, Metal Film	4835 116 57724
R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R923	15k, 1/2W, Metal Film.	4835 116 57698
R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R932	5.6k, 1/10W, Metal Film.	4835 111 37376
R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S R937	33k, 1W, Metal Oxide	4835 116 67253
S R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
R943	2.2k, Control Adjust	4835 100 17047
S R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
R951	10k, 1/2W, Metal Film.	4835 116 57686
R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
R970	10k, 1/10W, Metal Film	4835 111 37216
R971	100k, 1/10W, Metal Film.	4835 111 37434
R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D416	Diode, Silicon	4835 130 37663
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH.	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH.	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L413	Suppression Coil, 10uH.	4835 152 27002
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH.	4835 152 27002
	L423	Suppression Coil, 10uH.	4835 152 27002
	L424	Suppression Coil, 10uH.	4835 152 27002
	L425	Suppression Coil, 10uH.	4835 152 27002
	L426	Suppression Coil, 42uH.	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH.	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH.	4835 152 27002
	L435	Suppression Coil, 10uH.	4835 152 27002
	L440	Suppression Coil, 10uH.	4835 152 27002
	L467	Line Choke	4835 157 57077
	L550	Suppression Coil, 10uH.	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert.	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS416	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467	7 Pin Connector.	2422 025 15024
	J468	9 Pin Connector, Green	0018 223 80009
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061

S = Safety Part Be sure to use exact replacement part.

8P5434C (continued)

	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706087 0001, 0002 OPTICAL ASSEMBLY

		00706087 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler Red & Blue 46" (0001).	4835 290 87153
	P	Coupler Red & Blue 54" (0002).	4835 290 87155
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Main, Blue	4835 381 47017
	W	Lens, Main, Red & Green.	4835 381 47022

8P5441C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	2 Tube Scan Velocity Module.	4835 219 77774
CBA	Remote Transmitter	4835 219 17724
CBA	25W Audio Amp.	4835 219 77762

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop..	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH..	4835 157 67084
L402	Coil 100uH..	4835 157 67084
L403	Coil 100uH..	4835 157 67084
L404	Suppression Coil, 10uH..	4835 152 27002
L405	Coil 100uH..	4835 157 67084
L407	Coil 100uH..	4835 157 67084
L409	Coil 100uH..	4835 157 67084
L410	Coil 100uH..	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P5441C101

MODEL 008P5441C101

S 20	AC Cord, Filtered.	4835 321 17128
27	Back Cover (Lower)	4835 432 97691
26	Back Cover (Upper)	4835 432 97693
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02950
2	Extr., Screen Edge, Side (x2).	3135 014 03070
14	Extr., Screen Edge, Top.	3135 014 03060
4	Foot, Base Rail (x2)	3135 014 03131
11	Frame, Screen 54" (x2)	3135 014 06350

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

	Front Jack Panel	4835 219 77787
9	Hole Insert (x17)	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting	3135 013 01410
24	Mirror Trapz 2nd Surface	3135 013 01140
	Owners Manual	3135 015 07400
	Panel, Front Jack	3135 014 02980
	Quick Use Guide	3135 015 07390
	Rear Barrier	4835 432 97694
19	Rear Jack Panel Overlay	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer, Treelock (x15)	3135 014 02620
8	Speaker 8 Ohm Full (x2)	2422 264 00301
7	Speaker Grille	4835 459 47108

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap.	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester.	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH.	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH.	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH.	4835 152 27002
	L423	Suppression Coil, 10uH.	4835 152 27002
	L424	Suppression Coil, 10uH.	4835 152 27002
	L425	Suppression Coil, 10uH.	4835 152 27002
	L426	Suppression Coil, 42uH.	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH.	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH.	4835 152 27002
	L435	Suppression Coil, 10uH.	4835 152 27002
	L440	Suppression Coil, 10uH.	4835 152 27002
	L550	Suppression Coil, 10uH.	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003

S = Safety Part Be sure to use exact replacement part.

8P5441C (continued)

	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

S	R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S	R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ATC669 CUSTOMER CONTROL ASSEMBLY	
		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706101 0001, 0002 OPTICAL ASSEMBLY

		00706101 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler Red & Blue 46" (0001).	4835 290 87153
	P	Coupler Red & Blue 54" (0002).	4835 290 87155
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Main, Blue	4835 381 47017
	W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

8P5444C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	2 Tube Scan Velocity Module.	4835 219 77774
CBA	Remote Transmitter	4835 219 17724

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

S = Safety part. RED CRT APNEL Be sure to use exact replacement part.

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

	GREEN CRT PANEL	
C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P5444C101

	MODEL 008P5444C101	
S 20	AC Cord, Filtered.	4835 321 17128
27	Back Cover (Lower)	4835 432 97691
26	Back Cover (Upper)	4835 432 97693
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02950
2	Extr., Screen Edge, Side (x2).	3135 014 03070
14	Extr., Screen Edge, Top.	3135 014 03060
	Filter	4835 380 57011
4	Foot Base Rail (x2).	3135 014 03131
11	Frame, Screen 54" (x2)	3135 014 06350
	Front Jack Panel	4835 219 77787
9	Hole Insert (x17).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier.	4835 432 17945
15	Mirror Board Mtng Brkt. (x2)	3135 011 02401
25	Mirror Mounting.	3135 013 01410
24	Mirror Trapz 2nd Surface	3135 013 01140
	Owners Manual.	3135 015 07400
	Quick Use Guide.	3135 015 07390
	Rear Barrier	4835 432 97694
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer Treelock (x15).	3135 014 02620
8	Speaker 8 Ohm Full (x2).	2422 264 00301
7	Speaker Grille	4835 459 47108

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

	C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
	C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
	C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
	C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
	C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
	C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
	C1013	1uF., 35V Electrolytic	4835 124 97175
	C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
	C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
	C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
	C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
	C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
	C1031	1uF., 35V Electrolytic	4835 124 97175
	C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
	C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1040	0.1uF., 50V, Ceramic	3198 023 21040
	C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
	C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
	C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
	C1051	0.1uF., 50V, Ceramic	3198 023 21040
	R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
	R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

		LARGE SIGNAL PANEL	
S	C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S	C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S	C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
	C408	330pF., 10%, 500V, Ceramic	4835 122 47648
	C409	3300uF., 35V, Electrolytic	4835 124 47559
	C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C411	0.1uF., 400V, Polyester.	0025 968 41049
	C412	330pF., 10%, 500V, Ceramic	4835 122 47648
	C413	330pF., 10%, 500V, Ceramic	4835 122 47648
	C414	330uF., 25V, Electrolytic.	4835 124 47632
	C415	100pF., 5%, 50V, Ceramic	4835 122 87025
	C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
	C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C418	1000pF., 50V, Ceramic.	4835 122 47004
	C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
	C420	100pF., 5%, 50V, Ceramic	4835 122 87025
	C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C423	470uF., 250V, Electrolytic	4835 124 47141

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S C916	6800pF., 10%, 50V, Polyester	2020 300 90571
C917	0.1uF., 250V, Polyester.	4835 121 47278
C918	2.2uF., 50V, Electrolytic.	4835 124 47502
C919	0.12uF., 100V, Polyester	4835 121 47425
C920	4.7uF., 50V, Electrolytic.	4835 124 47506
C921	100uF., 25V, Electrolytic.	4835 124 47501
C922	470uF., 25V, Electrolytic.	4835 121 47405
C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
C927	1uF., 50V, Electrolytic.	4835 121 47406
C928	0.33uF., 50V, Electrolytic	4835 124 47525
C929	330pF., 10%, 500V, Ceramic	4835 122 47648
C930	1uF., 100V, Electrolytic	4835 124 47485
C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C933	330pF., 10%, 500V, Ceramic	4835 122 47033
C2804	100uF., 50V, Electrolytic.	4835 124 47563
C2805	10uF., 50V, Electrolytic	4835 124 47499
C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2837	10uF., 50V, Electrolytic	4835 124 47499
C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
R426	100k, 1/2W, Metal Film	4835 116 57687
R427	27k, 1/10W, Metal Film	4835 111 37442
R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
R429	68k, 1/10W, Metal Film	4835 111 37273
S R430	1k, 5%, 3W, Metal Film	4835 116 57242
R431	10k, 1/2W, Metal Film.	4835 116 57686
R433	4.7k, 1/2W, Metal Film	4835 116 57724
R438	33k, 1/10W, Metal Film	4835 111 37248
R439	10k, 1/10W, Metal Film	4835 111 37216
R440	10k, 1/10W, Metal Film	4835 111 37216
R441	10k, 1/2W, Metal Film.	4835 116 57686
R442	3.3k, 1/10W, Metal Film.	4835 111 37247
R443	100k, 1/10W, Metal Film.	4835 111 37434
S R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
R446	10k, 1/2W, Metal Film.	4835 116 57686
S R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S R449	10 ohm, 1/2W, Metal Film	4835 116 57097
R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
R455	470 ohm, Control Adjust.	4835 100 17039
R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S R484	2k, 5%, 1W, Metal Film	4835 116 67154
S R485	2k, 5%, 1W, Metal Film	4835 116 67154

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection . . .	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor . . .	4835 209 88565

S = Safety Part Be sure to use exact replacement part.

8P5444C (continued)

	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH.	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH.	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH.	4835 152 27002
	L423	Suppression Coil, 10uH.	4835 152 27002
	L424	Suppression Coil, 10uH.	4835 152 27002
	L425	Suppression Coil, 10uH.	4835 152 27002
	L426	Suppression Coil, 42uH.	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH.	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH.	4835 152 27002
	L435	Suppression Coil, 10uH.	4835 152 27002
	L440	Suppression Coil, 10uH.	4835 152 27002
	L550	Suppression Coil, 10uH.	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert.	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

S	R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S	R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ATC669 CUSTOMER CONTROL ASSEMBLY	
		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706101 0001, 0002 OPTICAL ASSEMBLY

		00706101 0001, 0002 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43801
		Focus Lead	3135 010 00730
S		Focus/Screen Control.	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler Red & Blue 46" (0001).	4835 290 87153
	P	Coupler Red & Blue 54" (0002).	4835 290 87155
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Main, Blue	4835 381 47017
	W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

8P6031C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77751
CBA	Small Signal Panel	4835 219 77756
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Remote Transmitter UR714	4835 219 17699

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P6031C101

	MODEL 008P6031C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01390
27	Back Cover (Lower)	4835 432 97708
26	Back Cover (Upper)	3135 013 01340
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA ZC 1.5V.	4835 138 17047
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02960
2	Extr., Screen Edge, Side (x2).	3135 014 03090
14	Extr., Screen Edge, Top.	3135 014 03080
16	Frame f/Digital Convergence.	4835 432 17846
	Front Panel Cover.	3135 013 01480
9	Hole Insert (x18).	3135 014 02741
18	Jack Panel Frame	3135 014 06650
13	Lens, Fresnel.	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier.	4835 432 17847
25	Mirror Board	3135 013 01420
15	Mirror Board Mtng Bracket Lt	3135 011 03011
15	Mirror Board Mtng Bracket Rt	3135 011 03021
24	Mirror Trapz, 2nd.	3135 013 01130
	Owners Manual.	3135 015 07370
	Quick Use Guide.	3135 015 07360
19	Rear Jack Panel Overlay.	4835 459 17556
	Remote Transmit. UR714SB	4835 219 17699
1	Retainer Treelock (x17).	3135 014 02620
	Screen Frame Top (x2).	4835 432 17848
	Screen Frame, Side (x2).	4835 432 17851
8	Speaker Full 4x6" 8 Ohm (x2)	4835 240 47011
7	Speaker Grille	4835 459 47114

SMALL SIGNAL PANEL (1 TUNER)

	SMALL SIGNAL PANEL (1 TUNER)	
C1	100uF., 16V, Electrolytic.	3198 025 21010
C2	15pF., 5%, 50V, Ceramic.	3198 016 01590
C4	470uF., 50V, Electrolytic.	3198 025 54770
C5	100uF., 16V, Electrolytic.	3198 025 21010
C7	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C8	220uF., 16V, Electrolytic.	3198 025 22210
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	1uF., 20%, 50V, Electrolytic	3198 025 51080
C14	1uF., 20%, 50V, Electrolytic	3198 025 51080
C19	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C25	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C30	10uF., 20%, 16V, Electrolytic.	2020 012 92805
C37	100uF., 16V, Electrolytic.	3198 025 21010
C39	220uF., 16V, Electrolytic.	3198 025 22210
C45	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C46	1000uF., 16V, Electrolytic	4835 124 47571
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C100	5600pF., 10%, 50V, Ceramic	4835 122 87043
C101	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C102	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C103	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V, Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V, Electrolytic.	4835 124 97175
C112	1uF., 35V, Electrolytic.	4835 124 97175
C113	0.047uF., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 25V, Ceramic	3198 017 21040
C115	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 100V, Metalized Polyester	4835 121 47364
C119	0.22uF., 100V, Metalized Polyester	4835 121 47038
C120	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C121	0.22uF., 100V, Metalized Polyester	4835 121 47038
C122	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V,Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V,Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V,Ceramic.	4835 122 87527
C130	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C131	5600pF., 10%, 50V, Ceramic	4835 122 87043
C132	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C133	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C135	1000uF., 35V, Electrolytic	4835 124 47498
C136	1000uF., 35V, Electrolytic	4835 124 47498
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.1uF., 25V,Ceramic.	3198 017 21040
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C154	0.1uF., 25V, Ceramic	3198 017 21040
C155	100uF., 16V, Electrolytic.	3198 025 21010
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C157	47uF., 20%, 25V,Electrolytic	3198 025 34790
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C160	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C161	100pF., 5%, 50V, Ceramic	3198 016 01010
C162	100uF., 50V, Electrolytic.	3198 025 51010
C164	100pF., 5%, 50V, Ceramic	3198 016 01010
C165	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C166	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C167	10uF., 50V, Electrolytic	4835 124 47525
C168	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C169	1000uF., 25V, Electrolytic	4835 124 47583
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C171	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C172	0.1uF., 10%, 50V,Ceramic	4835 122 87061
C173	100uF., 16V, Electrolytic.	3198 025 21010
C174	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C175	1000uF., 25V, Electrolytic	4835 124 47583
C176	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C177	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C178	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C179	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C180	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C181	0.1uF., 25V, Ceramic	3198 017 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C190	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C199	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C200	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C201	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C216	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C217	470pF., 10%, 50V, Ceramic.	2020 552 93057
C218	1uF., 35V, Electrolytic.	4835 124 97175
C220	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C223	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C229	0.1uF., 25V, Ceramic	3198 017 21040
C230	220pF., 5%, 50V, Ceramic	3198 016 02210
C300	0.1uF., 25V, Ceramic	3198 017 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 10V, Electrolytic.	4835 124 97183
C304	1000pF., 10%, 50V, Ceramic	3198 017 01020
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	1000pF., 10%, 50V, Ceramic	3198 017 01020
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 10V, Electrolytic.	4835 124 97183
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	4835 122 87041
C322	1uF., 35V, Electrolytic.	4835 124 97175
C323	1uF., 35V, Electrolytic.	4835 124 97175
C341	Trimmer Capacitor, 3pF.-40pF., 250V. .	2222 808 11409
C342	0.47uF., 35V, Electrolytic	4835 124 97182
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C376	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 25V, Electrolytic.	4835 124 97179
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 25V, Ceramic	3198 017 21040
C396	0.1uF., 25V, Ceramic	3198 017 21040
C400	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C405	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 25V, Ceramic	3198 017 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 25V, Ceramic	3198 017 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 35V, Electrolytic	4835 124 97037
C606	0.1uF., 25V, Ceramic	3198 017 21040
C607	0.1uF., 25V, Ceramic	3198 017 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 25V, Ceramic	3198 017 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 100V, Metalized Polyester . .	4835 121 47222
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 35V, Electrolytic.	4835 124 97175
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	4835 122 87593
C628	0.22uF., 50V, Ceramic.	4835 122 87087
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 25V, Ceramic	3198 017 21040
C639	0.33uF., 35V, Electrolytic	4835 124 97037
C640	0.012uF., 10%, 50V, Ceramic.	4835 122 87501
C641	0.1uF., 25V, Ceramic	3198 017 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C643	200pF., 5%, 50V, Ceramic	4835 122 87092
C645	620pF., 5%, 50V, Ceramic	4835 122 87089
C647	1000pF., 10%, 50V, Ceramic	4835 122 87041
C648	120pF., 5%, 50V, Ceramic	4835 122 87046
C649	51pF., 5%, 50V, Ceramic.	4835 122 87054
C650	180pF., 5%, 50V, Ceramic	4835 122 87028
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 25V, Ceramic	3198 017 21040
C655	220uF., 16V, Electrolytic.	3198 025 22210
C656	100uF., 16V, Electrolytic.	3198 025 21010
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 25V, Ceramic	3198 017 21040
C664	0.1uF., 25V, Ceramic	3198 017 21040
C665	0.1uF., 25V, Ceramic	3198 017 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 25V, Ceramic	3198 017 21040
C676	82pF., 5%, 50V, Ceramic.	4835 122 87038
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	43pF., 5%, 50V, Ceramic.	2020 552 94276
C680	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C681	56P 5%, 50V, Ceramic	4835 122 87096
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 25V, Ceramic	3198 017 21040
C699	1uF., 35V, Electrolytic.	4835 124 97175
C719	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C720	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C721	0.1uF., 25V, Ceramic	3198 017 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C724	0.1uF., 25V, Ceramic	3198 017 21040
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C731	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C738	10pF., 5%, 50V, Ceramic.	3198 016 01090
C749	10pF., 5%, 50V, Ceramic.	3198 016 01090
C750	100uF., 25V, Electrolytic.	3198 025 31010
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C1000	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1001	0.22uF., 50V, Ceramic.	4835 122 87087
C1002	0.1uF., 25V, Ceramic	3198 017 21040
C1003	0.22uF., 50V, Ceramic.	4835 122 87087
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1011	220pF., 5%, 50V, Ceramic	3198 016 02210
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V,Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1016	220uF., 25V, Electrolytic.	3198 025 32210
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1026	560pF., 5%, 50V,Ceramic.	4835 122 87055
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 25V, Ceramic	3198 017 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1046	10uF., 10V, Electrolytic	4835 124 97178
C1050	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1051	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1052	1uF., 35V, Electrolytic.	4835 124 97175
BRSXXX	0 ohm, "Chip" Jumper	4835 111 27056

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

	BRXXX	0 ohm, Jumper.	3198 021 90010
	BRXXX	0 ohm, "Chip" Jumper	4835 111 27056
S	R3	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
	R4	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R5	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R6	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R11	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R13	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R14	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon Film. .	4835 111 27047
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R34	2.2k, 5%, 1/4W, Carbon Film.	3198 011 02220
S	R35	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R44	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
	R45	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R46	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R47	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R48	820 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37466
	R49	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R55	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
	R56	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R63	10 ohm, 5%, 1/4W, Carbon Film.	3198 011 01090
	R64	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R65	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R66	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
	R67	150 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51510
	R71	100k, 5%, 1/2W, Metal Film	4835 116 57687
S	R74	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
S	R76	51 ohm, 5%, 1/4W, Carbon Film.	4835 111 37138
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R91	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R115	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R116	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R117	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R118	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R119	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R120	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R121	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R122	470 ohm, 5%, 1/4W, Carbon Film	3198 011 14710
	R123	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
	R124	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R186	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R187	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R189	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R190	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R191	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
	R192	4.7 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54780
	R193	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R194	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R195	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R196	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R197	270k, 5%, 1/4W, Carbon Film.	3198 011 02740
	R198	110k, 5%, 1/2W, Metal Film	2322 187 53114
	R199	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R200	24k, 5%, 1/2W, Carbon Film	4835 110 47199
	R201	22k, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	Control Adjust, 4.7k	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R206	2.7k, 5%, 1/4W, Carbon Film.	3198 011 02720
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R228	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R229	3.6k, 5%, 1/4W, Carbon Film.	2322 711 61362
	R230	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R231	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R232	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R233	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R234	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R235	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
	R236	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
	R238	2.7k, 5%, 1/4W, Carbon Film.	4835 111 37083
	R240	0 ohm, Carbon Film	4835 111 27056
	R241	0 ohm, Carbon Film	4835 111 27056
	R242	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R243	4.3k, 5%, 0.24W, Carbon Film	2322 711 61432
	R244	Control Adjust, 1k,.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R246	150k, 5%, 1/10W, Carbon Film	4835 111 27045
	R247	1.1k, 5%, 1/4W, Carbon Film.	2322 711 61112
	R248	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R255	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
	R300	1/4W, 5%, 100 ohm, Carbon Composition.	4835 110 57066
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Composition.	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R317	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R318	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R319	16k, 5%, 1/10W, Carbon Film.	3198 021 51630
	R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R328	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
	R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R331	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R334	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
	R335	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R336	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R337	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R344	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R346	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R347	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

R350	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R353	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R354	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R355	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R358	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R359	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R365	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R369	1k, 20%, 1/4W, Carbon Composition.	4835 110 57318
R370	1k, 20%, 1/4W, Carbon Composition.	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Composition.	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Composition.	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Composition.	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Composition.	4835 110 57318
R375	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R376	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R377	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R390	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R397	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R398	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R399	100k, 5%, 1/10W, Carbon Film	4835 111 37434
S R402	10 ohm, 5%, 3W, Metal Oxide.	2120 105 92585
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R603	3.3k, 5%, 1/4W, Carbon Film.	4835 111 37035
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm 5%, 1/10W, Carbon Film	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film.	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	0 ohm, 1/8W, Carbon Film	4835 110 67173
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R624	430 ohm, 5%, 1/4W, Carbon Film	3198 011 04310
R625	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R626	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film.	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film.	4835 111 37424
R633	390 ohm, 5%, 1/4W, Carbon Film	3198 011 03910
R634	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R635	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R636	0 ohm, Carbon Film	4835 111 27056
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film.	4835 111 37443
R641	750 ohm, 5%, 1/4W, Carbon Film	4835 111 37121
R642	430 ohm, 5%, 1/10W, Carbon Film.	3198 021 54310
R644	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R649	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R650	330 ohm, 5%, 1/2W, Metal Film.	4835 116 57713
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R662	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R663	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R664	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R665	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R666	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R671	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R672	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R673	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R674	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R675	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R676	620 ohm, 5%, 1/10W, Carbon Film.	3198 021 56210
R677	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R678	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R679	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R681	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R682	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R683	8.2k, 5%, 1/4W, Carbon Film.	4835 111 37043
R684	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R685	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R686	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R687	620 ohm, 5%, 1/10W, Carbon Film.	3198 021 56210
R688	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R689	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R690	1 Meg ohm, 5%, 1/4W, Carbon Film	2322 711 61105
R691	10 ohm, 5%, 1/4W, Carbon Film.	4835 111 37132
R692	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
R694	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R695	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R696	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R698	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R724	12k, 5%, 1/4W, Carbon Film	2322 711 61123
R725	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R726	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R727	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R728	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R729	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R730	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R731	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R732	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R733	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R734	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R735	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R736	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R737	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R739	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
S R740	18 ohm, 5%, 1/4W, Carbon Film.	2322 711 61189
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R787	3k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/4W, Carbon Film.	3198 011 06820
R794	200 ohm, 5%, 1/10W, Carbon Film.	3198 021 52010
R795	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R796	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R797	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2% 1/8W, Carbon Film	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon Film.	3198 021 54750
R821	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	330 ohm, 5%, 1/4W, Carbon Film	4835 111 37034
S R1016	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1017	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R1018	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1032	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1050	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1051	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1052	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1053	750 ohm, 5%, 1/4W, Carbon Film	3198 011 07510
D100	Diode BAS216	4835 130 37905
D150	Diode 1N4148	4835 130 37048
D151	Diode 1N4148	4835 130 37048
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D302	Diode 1N4148	4835 130 37048
D303	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode BAS216	4835 130 37905
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode BAS216	4835 130 37905
D612	Diode BAS216	4835 130 37905
D613	Diode 1N4148	4835 130 37048
D614	Diode 1N4148	4835 130 37048
D615	Diode BAS216	4835 130 37905
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode BAS216	4835 130 37905
D700	Diode BAS216	4835 130 37905
IC1	IC, A/V Switch	4835 209 87952
IC106	IC, 10/25W Hi-Fi Power Audio Amp . . .	4835 209 87082
IC107	IC 2-Channel Multi/Demultiplexer . . .	4835 209 17033
IC120	IC, Stereo Decoder & Audio Processor .	4835 209 88337
IC200	IC, IF Signal Processor.	4835 209 87757
IC300	IC LC864265A, Tuning Microprocessor. .	3135 010 02991
IC304	IC ST24C02B1, EEPROM	4835 209 88326
IC400	IC MC7812CT, 12V Regulator	9334 006 10682
IC401	IC MC7805CT, 5V Regulator.	9334 536 00682
IC600	IC, Y/C/S Processor.	4835 209 88331
IC606	IC, 9V Regulator	4835 209 88009
IC701	IC, Chroma/Luma Switch	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor, NPN BC847B	4822 130 60511
Q4	Transistor, Buffer	4822 130 60511
Q5	Transistor, Buffer	4822 130 60511
Q7	Transistor, NPN BC847B	4822 130 60511
Q8	Transistor, NPN BC847B	4822 130 60511
Q9	P-Channel JFET, Mono/Stereo Switch . .	9340 053 20126
Q12	Transistor, Mono/Stereo Inverter . . .	4822 130 60511
Q14	Transistor, NPN BC847B	4822 130 60511
Q16	Transistor, NPN BC847B	4822 130 60511
Q17	Transistor, NPN BC847B	4822 130 60511
Q141	Transistor, Variable Audio Out Switch.	4822 130 60511
Q152	P-Channel JFET, Mute	4835 130 47083
Q153	P-Channel JFET, Mute	4835 130 47083
Q154	P-Channel JFET, Mute	4835 130 47083
Q155	P-Channel JFET, Mute	4835 130 47083
Q156	Transistor, Mute Inverter.	4835 130 47055
Q200	Transistor, Video Amp.	5322 130 60508
Q201	Transistor, Coincidence Detector . . .	5322 130 60508
Q202	Transistor, Coincidence Detector . . .	4822 130 60511
Q203	Transistor, Coincidence Detector . . .	5322 130 60508
Q204	Transistor, Video Buffer	4822 130 60511
Q300	Transistor, Standby LED Switch	4822 130 60511
Q301	Transistor, SDA Amp.	4822 130 60511
Q302	Transistor, SCC Amp.	4822 130 60511
Q303	Transistor, Power LED Switch	4822 130 60511
Q304	Transistor, Fast Blanking Buffer . . .	4822 130 60511
Q305	Transistor, OSD Intensity Buffer . . .	4822 130 60511
Q306	Transistor, Horizontal Amp	4822 130 60511
Q308	Transistor, Vertical Amp	4822 130 60511
Q309	Transistor, PNP Switch	5322 130 60508
Q313	Transistor, SCC Amp.	4822 130 60511
Q314	Transistor, SDA Amp.	4822 130 60511
Q315	Transistor, Reset (Inverted)	5322 130 60508
Q600	Transistor, Chroma Switch.	4822 130 60511
Q601	Transistor, Chroma Delay	5322 130 60508
Q602	Transistor, Chroma Buffer.	5322 130 60508
Q603	Transistor, OSD Intensity Modulator. .	5322 130 60508
Q604	Transistor, Red Driver	4822 130 60511
Q605	Transistor, Green Driver	4822 130 60511
Q606	Transistor, Blue Driver.	4822 130 60511
Q607	Transistor, Blue Linearity	5322 130 60508
Q608	Transistor, Blue Linearity	4822 130 60511
Q609	Transistor, 2.2V Regulator	4822 130 60511
Q611	Transistor, Sync Buffer.	5322 130 60508
Q612	Transistor, ABL Buffer	5322 130 60508
Q613	Transistor, ABL Clamp.	5322 130 60508
Q614	Transistor, Vertical Buffer.	4822 130 60511
Q616	Transistor, Green Buffer	5322 130 60508
Q617	Transistor, Green Clipper.	5322 130 60508
Q618	Transistor, Red Buffer	5322 130 60508
Q619	Transistor, Red Clipper.	5322 130 60508
Q620	Transistor, Blue Buffer.	5322 130 60508
Q621	Transistor, Blue Clipper	5322 130 60508
Q623	Transistor, Common Base Allpass. . . .	4822 130 60511
Q624	Transistor, Chroma Buffer.	4822 130 60511
Q625	Transistor, Chroma Buffer.	4822 130 60511
Q626	Transistor, Common Base Allpass. . . .	4822 130 60511
Q627	Transistor, Common EmitterAllpass. . .	5322 130 60508
Q632	Transistor, Blue Linearity	5322 130 60508
Q635	Transistor, Horizontal Killer.	4822 130 60511
Q703	Transistor, SVHSC Amp.	4822 130 60511
Q704	Transistor, SVHSC Amp.	5322 130 60508
Q705	Transistor, SVHSL Amp.	4822 130 60511
Q715	Transistor, NPN BC847B	4822 130 60511
Q720	Transistor, SVHSL Amp.	5322 130 60508
Q1000	Transistor, PNP T2907.	4835 130 47065
Q1010	Transistor, NPN BC847B	4822 130 60511
Q1020	Transistor, PNP BC85	5322 130 60508
Z100	Zener Diode, 8.2V.	4835 130 37503
Z101	Zener Diode, 8.2V.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, MMSZ5231B	4835 220 17061
L116	Peaking Coil, 10uH..	4835 157 58198
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable Coil, 4.5MHz.	4835 157 57113
L202	Adjustable Coil, 45.75MHz.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable Coil, 4.75MHz	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH. ,5%	4835 150 57056
L208	Peaking Coil, 12uH, 5%	4835 150 57058
L209	Peaking Coil, 1000uH., 10%	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH., 10%	4835 157 67075
L300	Peaking Coil, 5.6uH., 5%	2422 535 94322
L301	Peaking Coil, 12uH., 5%.	4835 150 57058
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L313	Peaking Coil, 4.7uH., 10%.	4835 157 67057
L373	Peaking Coil, 0.68uH., 20%	4835 157 57596
L374	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L375	Peaking Coil, 0.68uH., 20%	4835 157 57596
L379	Peaking Coil, 0.68uH., 20%	4835 157 57596
L405	Ferrite Bead, 100MHz	4835 157 57995
L600	Peaking Coil, 33uH,. 5%.	4835 157 58113
L601	Peaking Coil, 10uH., 10%	4835 157 67074
L602	Peaking Coil, 10uH., 5%	4835 150 57008
L604	Peaking Coil, 12uH., 5%	4835 157 57831
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Peaking Coil, 3.3uH., 5%.	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L608	Peaking Coil, 12uH., 5%.	4835 157 57831
L609	Peaking Coil, 22uH., 5%.	4835 157 67018
L610	Peaking Coil, 15uH., 5%.	4835 157 57057
L611	Peaking Coil, 5.6uH., 5%	4835 157 57833
L612	Peaking Coil, 27uH., 5%.	4835 157 67019
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L700	Peaking Coil, 10uH., 10%	4835 157 67074
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L1000	Peaking Coil, 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8 uH., 5%.	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Jack Panel Bracket	3135 011 01900
CLP106	Spring Clip for IC 106	3135 011 02270
MEC4	IF Shield.	3135 011 02360
F100	Fuse, 5 Amp.	4835 253 37021
HS106A	Heatsink for IC 106.	3135 011 02260
HS400	Heatsink for IC 400.	3135 011 02510
HS401	Heatsink for IC 401.	3135 011 03291

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

HS703	Heatsink for IC 703.	3135 011 02510
J2	Phono Jack Assembly.	4835 265 97388
J3	Jack Assembly.	4835 265 97386
J5	4 Pin Push Terminal.	4835 265 97448
J250	5 Pin Board Connector.	2422 025 15832
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Board Connector.	2422 025 15193
J403	7 Pin Board Connector.	2422 025 14674
J467	7 Pin Board Connector.	2422 025 15024
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector	2422 025 15196
SHD1T	Shield for Small Signal Board.	3135 011 02251
SHD3T	Shield for Small Signal Board.	3135 011 02251
TUNEXT	Connector for Tuner.	4835 265 97076
UV1236	Tuner, UV1236.	4835 210 47081
Y100	Ceramic Resonator.	4835 122 97102
Y1000	Crystal Resonator, 14.318MHz	4835 242 77059
Y1001	Crystal Resonator, 14.318MHz	4835 242 77059
Y200	Saw Filter	4835 153 97024
Y202	Ceramic Filter, 4.5MHz	4835 154 97168
Y203	Ceramic Filter, 4.5MHz	4835 153 57004
Y301	Peizoelectric Crystal.	4835 242 77283
Y600	Crystal Resonator 3.579MHz	2422 543 00862
Y601	Ceramic Resonator.	4835 153 97004
Y603	Comb Filter.	2422 549 43197

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C431	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C432	1500uF., 35V, Electrolytic	4835 124 47581
C433	0.1uF., 10%, 100V, Polyester	4822 121 41608
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S C916	6800pF., 10%, 50V, Polyester	2020 300 90571
C917	0.1uF., 250V, Polyester.	4835 121 47278
C918	2.2uF., 50V, Electrolytic.	4835 124 47502
C919	0.12uF., 100V, Polyester	4835 121 47425
C920	4.7uF., 50V, Electrolytic.	4835 124 47506
C921	100uF., 25V, Electrolytic.	4835 124 47501
C922	470uF., 25V, Electrolytic.	4835 121 47405
C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
C927	1uF., 50V, Electrolytic.	4835 121 47406
C928	0.33uF., 50V, Electrolytic	4835 124 47525
C929	330pF., 10%, 500V, Ceramic	4835 122 47648
C930	1uF., 100V, Electrolytic	4835 124 47485
C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C933	330pF., 10%, 500V, Ceramic	4835 122 47033
C2804	100uF., 50V, Electrolytic.	4835 124 47563
C2805	10uF., 50V, Electrolytic	4835 124 47499
C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2837	10uF., 50V, Electrolytic	4835 124 47499
C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

S R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
R411	10 ohm, 5%, 1/2W, Metal Film	4835 116 67131
R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
R426	100k, 1/2W, Metal Film	4835 116 57687
R427	27k, 1/10W, Metal Film	4835 111 37442
R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
R429	68k, 1/10W, Metal Film	4835 111 37273
S R430	1k, 5%, 3W, Metal Film	4835 116 57242
R431	10k, 1/2W, Metal Film.	4835 116 57686
R433	4.7k, 1/2W, Metal Film	4835 116 57724
R438	33k, 1/10W, Metal Film	4835 111 37248
R439	10k, 1/10W, Metal Film	4835 111 37216
R440	10k, 1/10W, Metal Film	4835 111 37216
R442	33k, 1/10W, Metal Film	4835 111 37248
R443	100k, 1/10W, Metal Film.	4835 111 37434
S R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
R446	10k, 1/2W, Metal Film.	4835 116 57686
S R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S R449	10 ohm, 1/2W, Metal Film	4835 116 57097
R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
R455	470 ohm, Control Adjust.	4835 100 17039
R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S R472	1.2k, 5%, 2W, Metal Film	4835 116 57357
S R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
R478	47k, 5%, 1/2W, Metal Film.	4835 111 67001
R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S R484	2k, 5%, 1W, Metal Film	4835 116 67154
S R485	2k, 5%, 1W, Metal Film	4835 116 67154
R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
R510	470k, 1/10W, Metal Film.	4835 111 37407
R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S R560	220 ohm, 1W, Metal Oxide	4835 116 57603
R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
R571	1k, 1/2W, Metal Film	4835 116 57685
S R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
R586	10k, 1/10W, Metal Film	4835 111 37216
R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
R901	10k, Control Adjust.	4835 100 17036
R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
R908	1.5k, 1/10W, Metal Film.	4835 111 37437
R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R913	4.7k, 1/2W, Metal Film	4835 116 57724
R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
R923	15k, 1/2W, Metal Film.	4835 116 57698
R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R932	5.6k, 1/10W, Metal Film.	4835 111 37376
R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S R937	33k, 1W, Metal Oxide	4835 116 67253
S R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
R943	2.2k, Control Adjust	4835 100 17047
S R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
R951	10k, 1/2W, Metal Film.	4835 116 57686
R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
R970	10k, 1/10W, Metal Film	4835 111 37216
R971	100k, 1/10W, Metal Film.	4835 111 37434
R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D416	Diode, Silicon	4835 130 37663
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH.	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH.	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L413	Suppression Coil, 10uH.	4835 152 27002
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH.	4835 152 27002
	L423	Suppression Coil, 10uH.	4835 152 27002
	L424	Suppression Coil, 10uH.	4835 152 27002
	L425	Suppression Coil, 10uH.	4835 152 27002
	L426	Suppression Coil, 42uH.	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH.	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH.	4835 152 27002
	L435	Suppression Coil, 10uH.	4835 152 27002
	L440	Suppression Coil, 10uH.	4835 152 27002
	L467	Line Choke	4835 157 57077
	L550	Suppression Coil, 10uH.	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert.	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS416	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467	7 Pin Connector.	2422 025 15024
	J468	9 Pin Connector, Green	0018 223 80009
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669	CUSTOMER CONTROL ASSEMBLY
	00ARR023	IR Receiver Panel	4835 219 77785
	00ASW129	Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096

S = Safety Part Be sure to use exact replacement part.

8P6031C (continued)

	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706088 0001 OPTICAL ASSEMBLY

		00706088 0001 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43802
		Focus Lead Assembly.	3135 010 00350
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler 60" (Red).	3135 011 01940
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Delta 79	4835 381 47021
	W	Lens, Main, Red & Green.	4835 381 47022

8P6034C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77751
CBA	Small Signal Panel	4835 219 77756
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Remote Transmitter UR714	4835 219 17699

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03.	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P6034C101

	MODEL 008P6034C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01390
27	Back Cover (Lower)	4835 432 97708
26	Back Cover (Upper)	3135 013 01340
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA ZC 1.5V.	4835 138 17047
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02960
2	Extr., Screen Edge, Side (x2).	3135 014 03090
14	Extr., Screen Edge, Top.	3135 014 03080
	Filter	3135 014 02780
16	Frame f/Digital Convergence.	4835 432 17846
	Front Panel Cover.	3135 013 01480
9	Hole Insert (x18).	3135 014 02741
18	Jack Panel Frame	3135 014 06650
13	Lens, Fresnel.	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier.	4835 432 17847
25	Mirror Board	3135 013 01420
15	Mirror Board Mtng Bracket Lt	3135 011 03011
15	Mirror Board Mtng Bracket Rt	3135 011 03021
24	Mirror Trapz, 2nd.	3135 013 01130
	Owners Manual.	3135 015 07370
	Quick Use Guide.	3135 015 07360
19	Rear Jack Panel Overlay.	4835 459 17556
	Remote Transmit. UR714SB	4835 219 17699
1	Retainer Treelock (x17).	3135 014 02620
	Screen Frame Top (x2).	4835 432 17848
	Screen Frame, Side (x2).	4835 432 17851
8	Speaker Full 4x6" 8 Ohm (x2)	4835 240 47011
7	Speaker Grille	4835 459 47114

SMALL SIGNAL PANEL (1 TUNER)

	SMALL SIGNAL PANEL (1 TUNER)	
C1	100uF., 16V, Electrolytic.	3198 025 21010
C2	15pF., 5%, 50V, Ceramic.	3198 016 01590
C4	470uF., 50V, Electrolytic.	3198 025 54770
C5	100uF., 16V, Electrolytic.	3198 025 21010
C7	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C8	220uF., 16V, Electrolytic.	3198 025 22210
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	1uF., 20%, 50V, Electrolytic	3198 025 51080
C14	1uF., 20%, 50V, Electrolytic	3198 025 51080
C19	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C25	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C30	10uF., 20%, 16V, Electrolytic.	2020 012 92805
C37	100uF., 16V, Electrolytic.	3198 025 21010
C39	220uF., 16V, Electrolytic.	3198 025 22210
C45	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C46	1000uF., 16V, Electrolytic	4835 124 47571
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C100	5600pF., 10%, 50V, Ceramic	4835 122 87043
C101	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C102	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C103	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V, Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V, Electrolytic.	4835 124 97175
C112	1uF., 35V, Electrolytic.	4835 124 97175
C113	0.047uF., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 25V, Ceramic	3198 017 21040
C115	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 100V, Metalized Polyester	4835 121 47364
C119	0.22uF., 100V, Metalized Polyester	4835 121 47038
C120	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C121	0.22uF., 100V, Metalized Polyester	4835 121 47038
C122	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V,Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V,Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V,Ceramic.	4835 122 87527
C130	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C131	5600pF., 10%, 50V, Ceramic	4835 122 87043
C132	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C133	0.15uF., 5%, 50V, Polyester.	2020 308 90118
C135	1000uF., 35V, Electrolytic	4835 124 47498
C136	1000uF., 35V, Electrolytic	4835 124 47498
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.1uF., 25V,Ceramic.	3198 017 21040
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C154	0.1uF., 25V, Ceramic	3198 017 21040
C155	100uF., 16V, Electrolytic.	3198 025 21010
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C157	47uF., 20%, 25V,Electrolytic	3198 025 34790
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C160	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C161	100pF., 5%, 50V, Ceramic	3198 016 01010
C162	100uF., 50V, Electrolytic.	3198 025 51010
C164	100pF., 5%, 50V, Ceramic	3198 016 01010
C165	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C166	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C167	10uF., 50V, Electrolytic	4835 124 47525
C168	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C169	1000uF., 25V, Electrolytic	4835 124 47583
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C171	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C172	0.1uF., 10%, 50V,Ceramic	4835 122 87061
C173	100uF., 16V, Electrolytic.	3198 025 21010
C174	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C175	1000uF., 25V, Electrolytic	4835 124 47583
C176	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C177	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C178	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C179	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C180	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C181	0.1uF., 25V, Ceramic	3198 017 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C190	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C199	47uF., 20%, 50V, Electrolytic.	3198 025 54790
C200	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C201	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C216	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C217	470pF., 10%, 50V, Ceramic.	2020 552 93057
C218	1uF., 35V, Electrolytic.	4835 124 97175
C220	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C221	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C222	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C223	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C229	0.1uF., 25V, Ceramic	3198 017 21040
C230	220pF., 5%, 50V, Ceramic	3198 016 02210
C300	0.1uF., 25V, Ceramic	3198 017 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 10V, Electrolytic.	4835 124 97183
C304	1000pF., 10%, 50V, Ceramic	3198 017 01020
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	1000pF., 10%, 50V, Ceramic	3198 017 01020
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 10V, Electrolytic.	4835 124 97183
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	4835 122 87041
C322	1uF., 35V, Electrolytic.	4835 124 97175
C323	1uF., 35V, Electrolytic.	4835 124 97175
C341	Trimmer Capacitor, 3pF.-40pF., 250V. .	2222 808 11409
C342	0.47uF., 35V, Electrolytic	4835 124 97182
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C376	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 25V, Electrolytic.	4835 124 97179
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 25V, Ceramic	3198 017 21040
C396	0.1uF., 25V, Ceramic	3198 017 21040
C400	4.7uF., 20%, 16V, Electrolytic	2020 004 90258
C401	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C402	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C405	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 25V, Ceramic	3198 017 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 25V, Ceramic	3198 017 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 35V, Electrolytic	4835 124 97037
C606	0.1uF., 25V, Ceramic	3198 017 21040
C607	0.1uF., 25V, Ceramic	3198 017 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 25V, Ceramic	3198 017 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 100V, Metalized Polyester . .	4835 121 47222
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 35V, Electrolytic.	4835 124 97175
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	4835 122 87593
C628	0.22uF., 50V, Ceramic.	4835 122 87087
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 25V, Ceramic	3198 017 21040
C639	0.33uF., 35V, Electrolytic	4835 124 97037
C640	0.012uF., 10%, 50V, Ceramic.	4835 122 87501
C641	0.1uF., 25V, Ceramic	3198 017 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C643	200pF., 5%, 50V, Ceramic	4835 122 87092
C645	620pF., 5%, 50V, Ceramic	4835 122 87089
C647	1000pF., 10%, 50V, Ceramic	4835 122 87041
C648	120pF., 5%, 50V, Ceramic	4835 122 87046
C649	51pF., 5%, 50V, Ceramic.	4835 122 87054
C650	180pF., 5%, 50V, Ceramic	4835 122 87028
C651	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C654	0.1uF., 25V, Ceramic	3198 017 21040
C655	220uF., 16V, Electrolytic.	3198 025 22210
C656	100uF., 16V, Electrolytic.	3198 025 21010
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 25V, Ceramic	3198 017 21040
C664	0.1uF., 25V, Ceramic	3198 017 21040
C665	0.1uF., 25V, Ceramic	3198 017 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 25V, Ceramic	3198 017 21040
C676	82pF., 5%, 50V, Ceramic.	4835 122 87038
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	43pF., 5%, 50V, Ceramic.	2020 552 94276
C680	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C681	56P 5%, 50V, Ceramic	4835 122 87096
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 25V, Ceramic	3198 017 21040
C699	1uF., 35V, Electrolytic.	4835 124 97175
C719	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C720	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C721	0.1uF., 25V, Ceramic	3198 017 21040
C722	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C724	0.1uF., 25V, Ceramic	3198 017 21040
C729	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C731	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C732	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C738	10pF., 5%, 50V, Ceramic.	3198 016 01090
C749	10pF., 5%, 50V, Ceramic.	3198 016 01090
C750	100uF., 25V, Electrolytic.	3198 025 31010
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C1000	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1001	0.22uF., 50V, Ceramic.	4835 122 87087
C1002	0.1uF., 25V, Ceramic	3198 017 21040
C1003	0.22uF., 50V, Ceramic.	4835 122 87087
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1011	220pF., 5%, 50V, Ceramic	3198 016 02210
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V,Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1016	220uF., 25V, Electrolytic.	3198 025 32210
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1026	560pF., 5%, 50V,Ceramic.	4835 122 87055
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 25V, Ceramic	3198 017 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1046	10uF., 10V, Electrolytic	4835 124 97178
C1050	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1051	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C1052	1uF., 35V, Electrolytic.	4835 124 97175

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

	BRSXXX	0 ohm, "Chip" Jumper	4835 111 27056
	BRXXX	0 ohm, Jumper	3198 021 90010
	BRXXX	0 ohm, "Chip" Jumper	4835 111 27056
S	R3	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
	R4	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R5	22k, 5%, 1/2W, Metal Film	4835 116 57706
	R6	1k, 5%, 1/4W, Carbon Film	4835 111 37022
	R11	22k, 5%, 1/10W, Carbon Film	4835 111 37441
	R12	10k, 5%, 1/2W, Metal Film	4835 116 57686
	R13	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R14	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W, Carbon Film	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon Film	4835 111 27047
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/4W, Carbon Film	3198 011 02220
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R34	2.2k, 5%, 1/4W, Carbon Film	3198 011 02220
S	R35	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R44	560 ohm, 5%, 1/10W, Carbon Film	4835 111 27054
	R45	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R46	510 ohm, 5%, 1/10W, Carbon Film	3198 021 55110
	R47	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R48	820 ohm, 5%, 1/10W, Carbon Film	4835 111 37466
	R49	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R55	33k, 5%, 1/10W, Carbon Film	4835 111 37248
	R56	33k, 5%, 1/10W, Carbon Film	4835 111 37248
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R63	10 ohm, 5%, 1/4W, Carbon Film	3198 011 01090
	R64	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R65	150 ohm, 5%, 1/4W, Carbon Film	3198 011 01510
	R66	68 ohm, 5%, 1/4W, Carbon Film	3198 011 06890
	R67	150 ohm, 5%, 1/10W, Carbon Film	3198 021 51510
	R71	100k, 5%, 1/2W, Metal Film	4835 116 57687
S	R74	51 ohm, 5%, 1/4W, Carbon Film	4835 111 37138
S	R76	51 ohm, 5%, 1/4W, Carbon Film	4835 111 37138
	R83	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R84	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R91	10k, 5%, 1/2W, Metal Film	4835 116 57686
	R100	10k, 5%, 1/10W, Carbon Film	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film	3198 021 52030
	R110	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R111	10k, 5%, 1/10W, Carbon Film	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film	4835 111 37441
	R115	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R116	22k, 5%, 1/10W, Carbon Film	4835 111 37441
	R117	22k, 5%, 1/2W, Metal Film	4835 116 57706
	R118	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R119	22k, 5%, 1/2W, Metal Film	4835 116 57706
	R120	22k, 5%, 1/10W, Carbon Film	4835 111 37441
	R121	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R122	470 ohm, 5%, 1/4W, Carbon Film	3198 011 14710
	R123	2.7k, 5%, 1/4W, Carbon Film	3198 011 02720
	R124	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film	4835 111 37216
	R133	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film	4835 111 37216
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R186	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R187	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R189	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R190	12k, 5%, 1/4W, Carbon Film	3198 011 01230
	R191	4.7 ohm, 5%, 1/10W, Carbon Film	3198 021 54780
	R192	4.7 ohm, 5%, 1/10W, Carbon Film	3198 021 54780
	R193	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R194	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R195	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R196	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R197	270k, 5%, 1/4W, Carbon Film	3198 011 02740
	R198	110k, 5%, 1/2W, Metal Film	2322 187 53114
	R199	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R200	24k, 5%, 1/2W, Carbon Film	4835 110 47199
	R201	22k, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	Control Adjust, 4.7k	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film	2322 711 61222
	R206	2.7k, 5%, 1/4W, Carbon Film	3198 011 02720
	R207	6.2k, 5%, 1/4W, Carbon Film	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/8W, Metal Film	4835 111 37556
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film	4835 111 37259
	R228	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R229	3.6k, 5%, 1/4W, Carbon Film	2322 711 61362
	R230	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R231	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R232	10k, 5%, 1/8W, Metal Film	4835 111 37556
	R233	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R234	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R235	1.8k, 5%, 1/4W, Carbon Film	4835 111 37065
	R236	330 ohm, 5%, 1/10W, Carbon Film	4835 111 37443
	R238	2.7k, 5%, 1/4W, Carbon Film	4835 111 37083
	R240	0 ohm, Carbon Film	4835 111 27056
	R241	0 ohm, Carbon Film	4835 111 27056
	R242	1k, 5%, 1/4W, Carbon Film	4835 111 37022
	R243	4.3k, 5%, 0.24W, Carbon Film	2322 711 61432
	R244	Control Adjust, 1k,	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R246	150k, 5%, 1/10W, Carbon Film	4835 111 27045
	R247	1.1k, 5%, 1/4W, Carbon Film	2322 711 61112
	R248	470 ohm, 5%, 1/10W, Carbon Film	4835 111 37259
	R255	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
	R300	1/4W, 5%, 100 ohm, Carbon Composition	4835 110 57066
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/4W, Carbon Composition	4835 110 57066
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Composition	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684
	R317	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R318	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R319	16k, 5%, 1/10W, Carbon Film	3198 021 51630
	R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R326	1k, 5%, 1/4W, Carbon Film	4835 111 37022
	R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R328	4.7k,, 5%, 1/8W, Metal Film	4835 111 37559
	R329	470 ohm, 5%, 1/2W, Metal Film	4835 116 57723
	R330	470 ohm, 5%, 1/2W, Metal Film	4835 116 57723
	R331	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R332	470 ohm, 5%, 1/2W, Metal Film	4835 116 57723
	R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R334	4.7k,, 5%, 1/8W, Metal Film	4835 111 37559
	R335	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R336	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R337	47k, 5%, 1/4W, Carbon Film	3198 011 04730
	R338	470 ohm, 5%, 1/10W, Carbon Film	4835 111 37259
	R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R344	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R346	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R347	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R354	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R355	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R358	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R359	47k, 5%, 1/4W, Carbon Film	3198 011 04730
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R365	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R369	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R370	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Composition. . .	4835 110 57318
R375	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R376	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R377	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R390	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R397	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R398	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R399	100k, 5%, 1/10W, Carbon Film	4835 111 37434
S R402	10 ohm, 5%, 3W, Metal Oxide.	2120 105 92585
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R603	3.3k, 5%, 1/4W, Carbon Film.	4835 111 37035
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm 5%, 1/10W, Carbon Film	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	0 ohm, 1/8W, Carbon Film	4835 110 67173
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R624	430 ohm, 5%, 1/4W, Carbon Film	3198 011 04310
R625	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R626	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/4W, Carbon Film	3198 011 03910
R634	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R635	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R636	0 ohm, Carbon Film	4835 111 27056
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/4W, Carbon Film	4835 111 37121
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R644	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R649	2k, 5%, 1/4W, Carbon Film.	2322 711 61202
R650	330 ohm, 5%, 1/2W, Metal Film.	4835 116 57713
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R662	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R663	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R664	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R665	430 ohm, 5%, 1/4W, Carbon Film	4835 111 37101
R666	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R671	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R672	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R673	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R674	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R675	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R676	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R677	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R678	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R679	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R681	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R682	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R683	8.2k, 5%, 1/4W, Carbon Film.	4835 111 37043
R684	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R685	1.8k, 5%, 1/4W, Carbon Film.	4835 111 37065
R686	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R687	620 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 56210
R688	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R689	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R690	1 Meg ohm, 5%, 1/4W, Carbon Film . . .	2322 711 61105
R691	10 ohm, 5%, 1/4W, Carbon Film.	4835 111 37132
R692	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R694	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R695	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	51 ohm, 5%, 1/4W, Carbon Film.	3198 011 05190
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R724	12k, 5%, 1/4W, Carbon Film	2322 711 61123
R725	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R726	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R727	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R728	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R729	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R730	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R731	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R732	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R733	4.7k,, 5%, 1/8W, Metal Film.	4835 111 37559
R734	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R735	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R736	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R737	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R739	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
S R740	18 ohm, 5%, 1/4W, Carbon Film.	2322 711 61189
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2k, 5%, 1/10W, Carbon Film	4835 111 27091
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R787	3k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/4W, Carbon Film.	3198 011 06820
R794	200 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 52010
R795	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R796	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R797	220 ohm, 5%, 1/4W, Carbon Film	2322 711 61221
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2% 1/8W, Carbon Film	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon Film. .	3198 021 54750
R821	100 ohm, 5%, 1/4W, Carbon Film	4835 111 37021
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	68 ohm, 5%, 1/4W, Carbon Film.	3198 011 06890
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	330 ohm, 5%, 1/4W, Carbon Film	4835 111 37034
S R1016	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1017	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R1018	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1032	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1050	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1051	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R1052	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1053	750 ohm, 5%, 1/4W, Carbon Film	3198 011 07510
D100	Diode BAS216	4835 130 37905
D150	Diode 1N4148	4835 130 37048
D151	Diode 1N4148	4835 130 37048
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D302	Diode 1N4148	4835 130 37048
D303	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode BAS216	4835 130 37905
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode BAS216	4835 130 37905
D612	Diode BAS216	4835 130 37905
D613	Diode 1N4148	4835 130 37048
D614	Diode 1N4148	4835 130 37048
D615	Diode BAS216	4835 130 37905
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode BAS216	4835 130 37905
D700	Diode BAS216	4835 130 37905
IC1	IC, A/V Switch	4835 209 87952
IC106	IC, 10/25W Hi-Fi Power Audio Amp	4835 209 87082
IC107	IC 2-Channel Multi/Demultiplexer	4835 209 17033
IC120	IC, Stereo Decoder & Audio Processor	4835 209 88337
IC200	IC, IF Signal Processor.	4835 209 87757
IC300	IC LC864265A, Tuning Microprocessor.	3135 010 02991
IC304	IC ST24C02B1, EEPROM	4835 209 88326
IC400	IC MC7812CT, 12V Regulator	9334 006 10682
IC401	IC MC7805CT, 5V Regulator.	9334 536 00682
IC600	IC, Y/C/S Processor.	4835 209 88331
IC606	IC, 9V Regulator	4835 209 88009
IC701	IC, Chroma/Luma Switch	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor, NPN BC847B	4822 130 60511
Q4	Transistor, Buffer	4822 130 60511
Q5	Transistor, Buffer	4822 130 60511
Q7	Transistor, NPN BC847B	4822 130 60511
Q8	Transistor, NPN BC847B	4822 130 60511
Q9	P-Channel JFET, Mono/Stereo Switch	9340 053 20126
Q12	Transistor, Mono/Stereo Inverter	4822 130 60511
Q14	Transistor, NPN BC847B	4822 130 60511
Q16	Transistor, NPN BC847B	4822 130 60511
Q17	Transistor, NPN BC847B	4822 130 60511
Q141	Transistor, Variable Audio Out Switch.	4822 130 60511
Q152	P-Channel JFET, Mute	4835 130 47083
Q153	P-Channel JFET, Mute	4835 130 47083
Q154	P-Channel JFET, Mute	4835 130 47083
Q155	P-Channel JFET, Mute	4835 130 47083
Q156	Transistor, Mute Inverter.	4835 130 47055
Q200	Transistor, Video Amp.	5322 130 60508
Q201	Transistor, Coincidence Detector	5322 130 60508
Q202	Transistor, Coincidence Detector	4822 130 60511
Q203	Transistor, Coincidence Detector	5322 130 60508
Q204	Transistor, Video Buffer	4822 130 60511
Q300	Transistor, Standby LED Switch	4822 130 60511
Q301	Transistor, SDA Amp.	4822 130 60511
Q302	Transistor, SCC Amp.	4822 130 60511
Q303	Transistor, Power LED Switch	4822 130 60511
Q304	Transistor, Fast Blanking Buffer	4822 130 60511
Q305	Transistor, OSD Intensity Buffer	4822 130 60511
Q306	Transistor, Horizontal Amp	4822 130 60511
Q308	Transistor, Vertical Amp	4822 130 60511
Q309	Transistor, PNP Switch	5322 130 60508
Q313	Transistor, SCC Amp.	4822 130 60511
Q314	Transistor, SDA Amp.	4822 130 60511
Q315	Transistor, Reset (Inverted)	5322 130 60508
Q600	Transistor, Chroma Switch.	4822 130 60511
Q601	Transistor, Chroma Delay	5322 130 60508
Q602	Transistor, Chroma Buffer.	5322 130 60508
Q603	Transistor, OSD Intensity Modulator.	5322 130 60508
Q604	Transistor, Red Driver	4822 130 60511
Q605	Transistor, Green Driver	4822 130 60511
Q606	Transistor, Blue Driver.	4822 130 60511
Q607	Transistor, Blue Linearity	5322 130 60508
Q608	Transistor, Blue Linearity	4822 130 60511
Q609	Transistor, 2.2V Regulator	4822 130 60511
Q611	Transistor, Sync Buffer.	5322 130 60508
Q612	Transistor, ABL Buffer	5322 130 60508
Q613	Transistor, ABL Clamp.	5322 130 60508
Q614	Transistor, Vertical Buffer.	4822 130 60511
Q616	Transistor, Green Buffer	5322 130 60508
Q617	Transistor, Green Clipper.	5322 130 60508
Q618	Transistor, Red Buffer	5322 130 60508
Q619	Transistor, Red Clipper.	5322 130 60508
Q620	Transistor, Blue Buffer.	5322 130 60508
Q621	Transistor, Blue Clipper	5322 130 60508
Q623	Transistor, Common Base Allpass.	4822 130 60511
Q624	Transistor, Chroma Buffer.	4822 130 60511
Q625	Transistor, Chroma Buffer.	4822 130 60511
Q626	Transistor, Common Base Allpass.	4822 130 60511
Q627	Transistor, Common EmitterAllpass.	5322 130 60508
Q632	Transistor, Blue Linearity	5322 130 60508
Q635	Transistor, Horizontal Killer.	4822 130 60511
Q703	Transistor, SVHSC Amp.	4822 130 60511
Q704	Transistor, SVHSC Amp.	5322 130 60508
Q705	Transistor, SVHSL Amp.	4822 130 60511
Q715	Transistor, NPN BC847B	4822 130 60511
Q720	Transistor, SVHSL Amp.	5322 130 60508
Q1000	Transistor, PNP T2907.	4835 130 47065
Q1010	Transistor, NPN BC847B	4822 130 60511
Q1020	Transistor, PNP BC85	5322 130 60508
Z100	Zener Diode, 8.2V.	4835 130 37503
Z101	Zener Diode, 8.2V.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, MMSZ5231B	4835 220 17061
L116	Peaking Coil, 10uH..	4835 157 58198
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable Coil, 4.5MHz.	4835 157 57113
L202	Adjustable Coil, 45.75MHz.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable Coil, 4.75MHz	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH. ,5%	4835 150 57056
L208	Peaking Coil, 12uH, 5%	4835 150 57058
L209	Peaking Coil, 1000uH., 10%	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH., 10%	4835 157 67075
L300	Peaking Coil, 5.6uH., 5%	2422 535 94322
L301	Peaking Coil, 12uH., 5%.	4835 150 57058
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L313	Peaking Coil, 4.7uH., 10%.	4835 157 67057
L373	Peaking Coil, 0.68uH., 20%	4835 157 57596
L374	Peaking Coil, 6.8uH., 10%.	2422 535 96708
L375	Peaking Coil, 0.68uH., 20%	4835 157 57596
L379	Peaking Coil, 0.68uH., 20%	4835 157 57596
L405	Ferrite Bead, 100MHz	4835 157 57995
L600	Peaking Coil, 33uH,. 5%.	4835 157 58113
L601	Peaking Coil, 10uH., 10%	4835 157 67074
L602	Peaking Coil, 10uH., 5%	4835 150 57008
L604	Peaking Coil, 12uH., 5%	4835 157 57831
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Peaking Coil, 3.3uH., 5%.	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L608	Peaking Coil, 12uH., 5%.	4835 157 57831
L609	Peaking Coil, 22uH., 5%.	4835 157 67018
L610	Peaking Coil, 15uH., 5%.	4835 157 57057
L611	Peaking Coil, 5.6uH., 5%	4835 157 57833
L612	Peaking Coil, 27uH., 5%.	4835 157 67019
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L700	Peaking Coil, 10uH., 10%	4835 157 67074
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L1000	Peaking Coil, 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8 uH., 5%.	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Jack Panel Bracket	3135 011 01900
CLP106	Spring Clip for IC 106	3135 011 02270
MEC4	IF Shield.	3135 011 02360
F100	Fuse, 5 Amp.	4835 253 37021
HS106A	Heatsink for IC 106.	3135 011 02260
HS400	Heatsink for IC 400.	3135 011 02510

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

HS401	Heatsink for IC 401.	3135 011 03291
HS703	Heatsink for IC 703.	3135 011 02510
J2	Phono Jack Assembly.	4835 265 97388
J3	Jack Assembly.	4835 265 97386
J5	4 Pin Push Terminal.	4835 265 97448
J250	5 Pin Board Connector.	2422 025 15832
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Board Connector.	2422 025 15193
J403	7 Pin Board Connector.	2422 025 14674
J467	7 Pin Board Connector.	2422 025 15024
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector	2422 025 15196
SHD1T	Shield for Small Signal Board.	3135 011 02251
SHD3T	Shield for Small Signal Board.	3135 011 02251
TUNEXT	Connector for Tuner.	4835 265 97076
UV1236	Tuner, UV1236.	4835 210 47081
Y100	Ceramic Resonator.	4835 122 97102
Y1000	Crystal Resonator, 14.318MHz	4835 242 77059
Y1001	Crystal Resonator, 14.318MHz	4835 242 77059
Y200	Saw Filter	4835 153 97024
Y202	Ceramic Filter, 4.5MHz	4835 154 97168
Y203	Ceramic Filter, 4.5MHz	4835 153 57004
Y301	Peizoelectric Crystal.	4835 242 77283
Y600	Crystal Resonator 3.579MHz	2422 543 00862
Y601	Ceramic Resonator.	4835 153 97004
Y603	Comb Filter.	2422 549 43197

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C431	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C432	1500uF., 35V, Electrolytic	4835 124 47581
C433	0.1uF., 10%, 100V, Polyester	4822 121 41608
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
C587	680pF., 5%, 50V, Ceramic	4835 122 87019
C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C800	1uF., 50V, Electrolytic.	4835 121 47406
C801	0.1uF., 50V, Ceramic	4835 122 87375
C805	0.1uF., 250V, Polyester.	4835 121 47629
C806	1000pF., 500V, Ceramic	4835 122 47384
C807	0.1uF., 50V, Ceramic	4835 122 87375
C808	680pF., 10%, 500V, Ceramic	4835 122 47035
C809	0.1uF., 250V, Polyester.	4835 121 47278
C810	470uF., 200V, Electrolytic	4835 124 47673
S C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
C814	47uF., 315V, Electrolytic.	4835 124 47482
C815	1000pF., 500V, Ceramic	4835 122 47384
C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
C818	560pF., 10%, 500V, Ceramic	4835 122 47212
C819	0.039uF., 630V, Polypropylene.	4835 121 47638
C820	4.7uF., 100V, Polyester.	4835 121 47633
C822	0.43uF., 250V, Polypropylene	4835 121 47607
C824	1000pF., 500V, Ceramic	4835 122 47384
C826	100uF., 50V, Electrolytic.	4835 124 47563
C900	220uF., 16V, Electrolytic.	4835 124 47494
C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
C902	680pF., 5%, 50V, Ceramic	3198 016 06810
C903	1uF., 50V, Electrolytic.	4835 121 47406
C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
C909	330pF., 10%, 500V, Ceramic	4835 122 47648
C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S C913	1000uF., 16V, Electrolytic	4835 124 47699
C914	470uF., 200V, Electrolytic	4835 124 47673
S C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S C916	6800pF., 10%, 50V, Polyester	2020 300 90571
C917	0.1uF., 250V, Polyester.	4835 121 47278
C918	2.2uF., 50V, Electrolytic.	4835 124 47502
C919	0.12uF., 100V, Polyester	4835 121 47425
C920	4.7uF., 50V, Electrolytic.	4835 124 47506
C921	100uF., 25V, Electrolytic.	4835 124 47501
C922	470uF., 25V, Electrolytic.	4835 121 47405
C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
C927	1uF., 50V, Electrolytic.	4835 121 47406
C928	0.33uF., 50V, Electrolytic	4835 124 47525
C929	330pF., 10%, 500V, Ceramic	4835 122 47648
C930	1uF., 100V, Electrolytic	4835 124 47485
C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C933	330pF., 10%, 500V, Ceramic	4835 122 47033
C2804	100uF., 50V, Electrolytic.	4835 124 47563
C2805	10uF., 50V, Electrolytic	4835 124 47499
C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2837	10uF., 50V, Electrolytic	4835 124 47499
C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R402	2k, 5%, 1/2W, Metal Film	4835 116 57703

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R411	10 ohm, 5%, 1/2W, Metal Film	4835 116 67131
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R442	33k, 1/10W, Metal Film	4835 111 37248
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R472	1.2k, 5%, 2W, Metal Film	4835 116 57357
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R478	47k, 5%, 1/2W, Metal Film.	4835 111 67001
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp.	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

S R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S R2839	300k, 5%, 3W, Metal Film	2322 195 73304
D402	Diode BYV95C	4835 130 37052
D403	Diode, Silicon MUR120.	4835 130 37674
D404	Diode BYV95C	4835 130 37052
D405	Diode BAX18.	4835 130 37933
D406	Diode GBU6J.	4835 130 37931
D407	Diode, Silicon MUR120.	4835 130 37674
D409	Diode BAS216	4835 130 37905
D416	Diode, Silicon	4835 130 37663
D417	Diode MUR460	4835 130 37932
D418	Diode, Silicon MUR460.	4835 130 37488
D419	Diode, Silicon	4835 130 37491
D420	Diode BAX18.	4835 130 37933
D431	Diode BAX18.	4835 130 37933
D432	Diode 1N4150	4835 130 37934
D433	Diode, Silicon	4835 130 37663
D434	Diode, Silicon	4835 130 37663
D501	Diode BAS216	4835 130 37905
D502	Diode BAS216	4835 130 37905
D503	Diode BAS216	4835 130 37905
D504	Diode, Silicon BYD77D.	4835 130 37497
D505	Diode BAS216	4835 130 37905
D550	Diode BYV95C	4835 130 37052
D551	Diode BAS216	4835 130 37905
D571	Diode BAS216	4835 130 37905
D801	Diode BYD33J	4835 130 37094
D802	Diode BYV95C	4835 130 37052
D806	Diode BY228.	4835 130 37166
D808	Diode BYW95C	4835 130 37059
D900	Diode BAS216	4835 130 37905
D901	Diode 1N4148	4835 130 37048
D902	Diode BY328.	4835 130 37938
D904	Diode BAX18.	4835 130 37933
D905	Diode BYD33J	4835 130 37094
D906	Diode, Silicon MUR140.	4835 130 37102
D907	Diode, Silicon MUR140.	4835 130 37102
D908	Diode BYV95C	4835 130 37052
D909	Diode BAV103	4835 130 37937
D910	Diode BYW95C	4835 130 37059
D911	Diode BAS216	4835 130 37905
D2830	Diode BYD33M	4835 130 37012
S IC400	IC LM393N, Dual Comparator	4835 209 87081
IC401	IC, 6126640002	4835 209 87834
IC402	IC, 6127710001	4835 209 87712
S IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S IC405	OPT CP CNW136.300.	4835 209 88561
S IC406	OPT CP CNX83A.	4835 209 88555
IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
IC550	IC TDA3654Q/N3	4835 209 17162
IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
IC552	IC MC7812CT, 12V Regulator	4835 209 88554
IC900	IC MC1391P, Horiz. Processor	9332 898 70682
IC901	IC, 6126729002	4835 209 88011
IC902	IC, 6128270001	4835 209 87838
Q2830	Transistor, NPN.	4835 130 47893
C914	Transistor, BU2508DF	4835 532 47018
S Q400	Transistor, BC847B	4822 130 60511
Q401	N-Channel Power MOSFET	4835 130 47888
Q402	Transistor, Standby Regulator.	4835 130 47885
S Q403	Transistor, BC847B	4822 130 60511
Q404	Transistor, BC85	5322 130 60508
Q442	Transistor, BU2508DF	4835 532 47018
Q500	Transistor, BC85	5322 130 60508
Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
Q502	Transistor, BC847B	4822 130 60511
Q503	Transistor, BC847B	4822 130 60511
Q550	Transistor, PNP.	4835 130 47084
Q551	Transistor, BC847B	4822 130 60511
Q800	Transistor, BC847B	4822 130 60511
Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
Q802	Transistor, 2SD2539.	4835 130 48074
Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
Q901	Transistor, BC85	5322 130 60508
Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
Q904	Transistor, BC85, Soft Start	5322 130 60508
Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
Z400	Zener Diode, BZX79B10.	4835 130 37935
Z500	Zener Diode, 10V	4835 130 37739
Z501	Diode BZX79-B18.	4835 130 37936
Z503	Zener Diode, P6KE62A	4835 130 37547
Z901	Zener Diode, 6.2V.	4835 130 37751
L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
L407	Ferrite Bead	4835 526 17001
L408	Suppression Coil, 10uH.	4835 152 27002
S L409	Peaking Coil, 2.2uH.	4835 150 57054
L410	Suppression Coil, 18uH.	4835 150 57051
L412	Ferrite Bead	4835 526 17001
L413	Suppression Coil, 10uH.	4835 152 27002
L415	Suppression Coil, 1.8uH.	4835 152 27029
L416	Ferrite Bead	4835 526 17001
L420	Ferrite Bead	4835 526 17001
S L421	Line Input Choke	4835 152 27028
L422	Suppression Coil, 10uH.	4835 152 27002
L423	Suppression Coil, 10uH.	4835 152 27002
L424	Suppression Coil, 10uH.	4835 152 27002
L425	Suppression Coil, 10uH.	4835 152 27002
L426	Suppression Coil, 42uH.	4835 157 57063
L427	Ferrite Bead	4835 526 17001
L428	Suppression Coil, 42uH.	4835 157 57063
L429	Ferrite Bead	4835 526 17001
L430	Ferrite Bead	4835 526 17001
L432	Suppression Coil, 10uH.	4835 152 27002
L435	Suppression Coil, 10uH.	4835 152 27002
L440	Suppression Coil, 10uH.	4835 152 27002
L467	Line Choke	4835 157 57077
L550	Suppression Coil, 10uH.	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer, Switch Mode	4835 148 87339
S T402	Transformer, Power	4835 148 87345
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert.	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS416	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467	7 Pin Connector.	2422 025 15024
J468	9 Pin Connector, Green	0018 223 80009
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

STEREO SPREAD MODULE
STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY
00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY
ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL
00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

D301	Green LED.	4835 130 97095

S = Safety Part Be sure to use exact replacement part.

8P6034C (continued)

	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706088 0001 OPTICAL ASSEMBLY

		00706088 0001 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43802
		Focus Lead Assembly.	3135 010 00350
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler 60" (Red).	3135 011 01940
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Delta 79	4835 381 47021
	W	Lens, Main, Red & Green.	4835 381 47022

8P6041C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	2 Tube Scan Velocity Module.	4835 219 77774
CBA	Remote Transmitter	4835 219 17724
CBA	25W Audio Amp.	4835 219 77762

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop..	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH..	4835 157 67084
L402	Coil 100uH..	4835 157 67084
L403	Coil 100uH..	4835 157 67084
L404	Suppression Coil, 10uH..	4835 152 27002
L405	Coil 100uH..	4835 157 67084
L407	Coil 100uH..	4835 157 67084
L409	Coil 100uH..	4835 157 67084
L410	Coil 100uH..	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

	RED CRT APNEL	
C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

	GREEN CRT PANEL	
C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 008P6041C101

	MODEL 008P6041C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01390
27	Back Cover (Lower)	3135 013 01280
26	Back Cover (Upper)	3135 013 01340
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
3	Extr., Screen Bottom	3135 014 02960
2	Extr., Screen Edge, Side (x2).	3135 014 03090
14	Extr., Screen Edge, Top.	3135 014 03080
	Frame, Screen 60, Side (x2).	3135 014 03430

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

	Frame, Screen Top 60 (x2).	3135 014 03410
	Front Jack Panel	4835 219 77787
	Front Panel Cover.	3135 013 01480
9	Hole Insert (x18).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier.	4835 432 17847
25	Mirror Board	3135 013 01420
15	Mirror Board Mtng Bracket Lt	3135 011 03011
15	Mirror Board Mtng Bracket Rt	3135 011 03021
24	Mirror Trapz, Screen	3135 013 01130
	Owners Manual.	3135 015 07400
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 07390
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer, Treelock (x17)	3135 014 02620
8	Speaker 8 Ohm Full (x2).	2422 264 00301
7	Speaker Grille	4835 459 47109

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH.	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH.	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH.	4835 152 27002
	L423	Suppression Coil, 10uH.	4835 152 27002
	L424	Suppression Coil, 10uH.	4835 152 27002
	L425	Suppression Coil, 10uH.	4835 152 27002
	L426	Suppression Coil, 42uH.	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH.	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH.	4835 152 27002
	L435	Suppression Coil, 10uH.	4835 152 27002
	L440	Suppression Coil, 10uH.	4835 152 27002
	L550	Suppression Coil, 10uH.	4835 152 27002
	L803	Coil, Choke.	3121 218 31110

S = Safety Part Be sure to use exact replacement part.

8P6041C (continued)

L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%. . . .	4835 152 27038
S T401	Transformer, Switch Mode	4835 148 87339
S T402	Transformer, Power	4835 148 87345
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

S R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278

STEREO SPREAD MODULE

STEREO SPREAD MODULE

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706102 0001 OPTICAL ASSEMBLY

	00706102 0001 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43802
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT 180DLB22 (Blue).	4835 310 57408
S E	CRT 180DLB22 (Green)	4835 310 57411
S E	CRT 180DLB22 (Red) (HU).	4835 310 57409
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler 60" (Red).	3135 011 01940
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Delta 79	4835 381 47021
W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

8P6044C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	2 Tube Scan Velocity Module.	4835 219 77774
CBA	Remote Transmitter	4835 219 17724
CBA	25W Audio Amp.	4835 219 77762

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop..	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH..	4835 157 67084
L402	Coil 100uH..	4835 157 67084
L403	Coil 100uH..	4835 157 67084
L404	Suppression Coil, 10uH..	4835 152 27002
L405	Coil 100uH..	4835 157 67084
L407	Coil 100uH..	4835 157 67084
L409	Coil 100uH..	4835 157 67084
L410	Coil 100uH..	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 008P6044C101

MODEL 008P6044C101

S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 01390
27	Back Cover (Lower)	3135 013 01280
26	Back Cover (Upper)	3135 013 01340

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA	2422 526 01262
	Caster (x4)	4835 528 77071
17	Chassis Frame	4835 432 17943
3	Extr., Screen Bottom	3135 014 02960
2	Extr., Screen Edge, Side (x2)	3135 014 03090
14	Extr., Screen Edge, Top	3135 014 03080
	Filter	3135 014 02780
4	Foot, Base Rail	3135 014 03131
	Frame, Screen 60, Side (x2)	3135 014 03430
	Frame, Screen Top 60 (x2)	3135 014 03410
	Front Jack Panel	4835 219 77787
	Front Panel Cover	3135 013 01480
9	Hole Insert (x18)	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier	4835 432 17847
25	Mirror Board	3135 013 01420
15	Mirror Board Mtng Bracket Lt	3135 011 03011
15	Mirror Board Mtng Bracket Rt	3135 011 03021
24	Mirror Trapz, 2nd	3135 013 01130
	Owners Manual	3135 015 07400
	Panel, Front Jack	3135 014 02980
	Quick Use Guide	3135 015 07390
19	Rear Jack Panel Overlay	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer Treelock (x17)	3135 014 02620
8	Speaker 8 Ohm Full (x2)	2422 264 00301
7	Speaker Grille	4835 459 47109

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic	3198 025 51090
C8	220uF., 16V, Electrolytic	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic	3198 025 51090
C39	220uF., 16V, Electrolytic	2020 012 92633
C40	220uF., 16V, Electrolytic	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic	4835 124 97179
C82	2.2uF., 25V, Electrolytic	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic	4835 124 97179
C105	8200pF., 10%, 50V Ceramic	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C107	2.2uF., 25V, Electrolytic	4835 124 97179
C108	2.2uF., 25V, Electrolytic	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C124	2.2uF., 25V, Electrolytic	4835 124 97179
C125	2.2uF., 25V, Electrolytic	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic	4835 122 87063
C128	2.2uF., 25V, Electrolytic	4835 124 97179
C129	8200pF., 10%, 50V Ceramic	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic	3198 025 51090
C143	2.2uF., 25V, Electrolytic	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic	4835 124 97179
C208	330pF., 10%, 50V, Ceramic	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C235	100uF., 25V, Electrolytic	3198 025 31010
C236	2.2uF., 25V, Electrolytic	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic	2238 581 16741
C241	330pF., 10%, 50V, Ceramic	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic	3198 016 03390
C302	33pF., 5%, 50V, Ceramic	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
S R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253	
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276	
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723	
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253	
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042	
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110	
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110	
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097	
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018	
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484	
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774	
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448	
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610	
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366	
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030	
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006	
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441	
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271	
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736	
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727	
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236	
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259	
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510	
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720	
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236	
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120	
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042	
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558	
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222	
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912	
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622	
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682	
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014	
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432	
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262	
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623	
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561	
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022	
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510	
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023	
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271	
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120	
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620	
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216	
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231	
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840	
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443	
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214	
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725	
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687	
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434	
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432	
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698	
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066	
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686	
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247	
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684	
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630	
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685	

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

		SVM MODULE	
	C751	1uF., 50V, Electrolytic.	4835 121 47406
	C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
	C753	470uF., 25V, Electrolytic.	4835 121 47405
	C754	0.1uF., 100V, Polyester.	2222 365 85104
	C755	0.047uF., 50V, Ceramic	4835 122 47608
	C756	47uF., 50V, Electrolytic	4835 124 47668
	C757	0.01uF., 100V, Polyester	4822 121 41815
	C758	470uF., 25V, Electrolytic.	4835 121 47405
	C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C761	0.1uF., 250V, Polyester.	4835 121 47278
	C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
	C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S	C766	47uF., 160V, Electrolytic.	4835 124 47713
S	C767	47uF., 160V, Electrolytic.	4835 124 47713
S	C768	47uF., 160V, Electrolytic.	4835 124 47713
S	C769	22uF., 160V, Electrolytic.	4835 124 47726
S	C770	560pF., 10%, 500V, Ceramic	4835 122 47647
	C774	0.01uF., 100V, Polyester	4822 121 41815
S	R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
	R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
	R753	4.7k, 1/2W, Metal Film	4835 116 57724
	R754	1k, 1/2W, Metal Film	4835 116 57685
	R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
	R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
	R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R765	1.8k, 1/2W, Metal Film	4835 116 57702
	R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
	R767	3.3k, 1/2W, Metal Film	4835 116 57714
	R768	4.7k, 1/2W, Metal Film	4835 116 57724
	R769	33k, 1/2W, Metal Film.	4835 116 57715
	R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R771	33k, 1/2W, Metal Film.	4835 116 57715
	R772	1k, 1/2W, Metal Film	4835 116 57685
	R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
	R774	22 ohm, 1/2W, Metal Film	4835 116 57708
	R775	22 ohm, 1/2W, Metal Film	4835 116 57708
	R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
	R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
	R783	68k, 1/2W, Metal Film.	4835 116 57737
	R784	10k, 1/2W, Metal Film.	4835 116 57686
	R785	68k, 1/2W, Metal Film.	4835 116 57737
	R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S	R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
	R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R793	22k, 1/2W, Metal Film.	4835 116 57706
	R794	22 ohm, 1/2W, Metal Film	4835 116 57708
	R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S	R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	R797	4.7k, 1/2W, Metal Film	4835 116 57724
S	R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	D751	Diode 1N4148	4835 130 37048
	D752	Diode 1N4148	4835 130 37048
	D753	Diode 1N4148	4835 130 37048
	D760	Diode 1N4148	4835 130 37048
	D761	Diode, Silicon	4835 220 17059
	D762	Diode, Silicon	4835 220 17059
	Q751	Transistor BC548B.	4835 130 47055
	Q753	Transistor BC558B.	4835 130 47162
	Q754	Transistor BC548B.	4835 130 47055
	Q755	Transistor BC548B.	4835 130 47055
	Q756	Transistor BC548B.	4835 130 47055
	Q757	Transistor BC337-25.	4835 130 48113
	Q758	Transistor BC327-25.	4835 130 48112
	Q759	Transistor 2SB940A	4835 130 48119
	Q760	Transistor 2SD1264AP	4835 130 48121
	Q761	Transistor BC548B.	4835 130 47055
	L752	Inductor Coil LAL03 10UK	2422 535 96711
	FB751	Ferrite Bead	4835 526 17003
	FB752	Ferrite Bead	4835 526 17003
	HS76	Solder Lug f/IC400	0020 100 70001
	HS76	Heatsink	0073 515 10003
	HS76	Spring Clip.	4835 290 47008
	J751	10 Pin Connector	0018 223 80010
	J752	2 Pin Board Connector.	2422 025 14668
	J753	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

		STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

		00ATC669 CUSTOMER CONTROL ASSEMBLY	
		00ARR023 IR Receiver Panel	4835 219 77785
		00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

		ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
		Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

		00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
	D301	Green LED.	4835 130 97095
	D302	Red LED.	4835 130 97096
	IR300	IR Receiver.	4835 219 67061
	J302	5 Pin Board Connector.	2422 038 00176
	J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

		00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
	J300	7 Pin Board Connector.	2422 025 14674
		Keypad	3135 013 02470

00706102 0001 OPTICAL ASSEMBLY

		00706102 0001 OPTICAL ASSEMBLY	
S		Deflection Yoke.	2422 549 43802
		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409

S = Safety Part Be sure to use exact replacement part.

8P6044C (continued)

H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler 60" (Red).	3135 011 01940
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Delta 79	4835 381 47021
W	Lens, Main, Red & Green.	4835 381 47022

8P6051C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77757
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77787
CBA	2 Tube Scan Velocity Module.	4835 219 77774
CBA	Remote Transmitter	4835 219 17724
CBA	25W Audio Amp.	4835 219 77762

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop..	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH..	4835 157 67084
L402	Coil 100uH..	4835 157 67084
L403	Coil 100uH..	4835 157 67084
L404	Suppression Coil, 10uH..	4835 152 27002
L405	Coil 100uH..	4835 157 67084
L407	Coil 100uH..	4835 157 67084
L409	Coil 100uH..	4835 157 67084
L410	Coil 100uH..	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 008P6051C101

MODEL 008P6051C101

S 20	AC Cord, Filtered.	4835 321 17128
	Accessory Shelf.	3135 013 02191
	Accessory Shelf.	3135 013 02201
	ATC Spacer	3135 014 05880

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

	Back Cover Ctr..	4835 432 97697
	Back Cover End	3135 013 00730
	Baffle Mount Receptacle (x8)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Cabinet Back, Vac.	4835 432 97626
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Door, Glass (x2)	3135 013 02181
3	Extr., Screen Bottom	3135 014 02960
2	Extr., Screen Edge, Side (x2).	3135 014 03090
14	Extr., Screen Edge, Top.	3135 014 03080
	Frame, Screen 60, Side (x2).	3135 014 03430
	Frame, Screen Top 60 (x2).	3135 014 03410
6	Front Base Rail.	3135 013 02211
	Front Jack Panel	4835 219 77787
	Hinge (Lower).	3135 010 02411
	Hinge (Upper).	3135 010 02401
9	Hole Insert (x16).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier.	4835 432 17847
	Magnetic Catch (x2).	3135 010 02381
15	Mirror Board Mtng Brkt. (x2)	3135 011 02021
25	Mirror Mounting.	3135 013 00760
24	Mirror Trapz, 2nd.	4835 380 37021
	Owners Manual.	3135 015 07430
	Panel, Front Jack.	3135 014 02980
	Pull, Door (x2).	3135 010 02391
	Quick Use Guide.	3135 015 07420
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer Treelock (x17).	3135 014 02620
	Shelf VCR Storage.	3135 011 03211
8	Speaker 8 Ohm Full (x2).	2422 264 00301
	Speaker Bfl.	4835 432 67244
	Tube VCR	3135 014 05870
	VCR Enclosure.	3135 014 07031

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
	R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
	R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
	R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
	R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
	R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
	R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
	R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
	R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

R318	1k, 5%, 1/2W, Metal Film	4835	116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198	021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R322	1k, 5%, 1/2W, Metal Film	4835	116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R325	1k, 5%, 1/2W, Metal Film	4835	116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835	111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835	116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835	116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835	116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835	116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835	111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835	116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835	116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835	116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835	111 37262
R341	1k, 5%, 1/2W, Metal Film	4835	116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835	111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835	111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835	116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835	116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835	111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R353	1k, 5%, 1/2W, Metal Film	4835	116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835	111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835	111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835	116 57725
R360	1k, 5%, 1/2W, Metal Film	4835	116 57685
R361	1k, 5%, 1/2W, Metal Film	4835	116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835	116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835	116 57714
R365	1k, 5%, 1/2W, Metal Film	4835	116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835	111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835	116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835	110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835	110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835	110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835	110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835	110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835	110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835	111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835	111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835	111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835	111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835	116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835	111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120	106 90528
R600	1k, 5%, 1/2W, Metal Film	4835	116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835	116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835	111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835	116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835	111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198	021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198	021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322	711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835	111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322	711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322	711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322	711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322	711 61361
R623	2k, 5%, 1/4W Carbon Film	2322	711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835	116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835	111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322	711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835	116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835	111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198	021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198	021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835	116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835	116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835	116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835	116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322	187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198	021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835	111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198	021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835	111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835	116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835	116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835	111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835	111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835	111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835	111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835	111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198	021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835	111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835	111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835	116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835	111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835	111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835	116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835	116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835	116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835	111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835	111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198	021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198	021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198	021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198	021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835	116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822	051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835	111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835	111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835	111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835	111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322	711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822	051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835	111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835	111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835	111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835	111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835	111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835	111 37437

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

		LARGE SIGNAL PANEL	
S	C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S	C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S	C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
	C408	330pF., 10%, 500V, Ceramic	4835 122 47648
	C409	3300uF., 35V, Electrolytic	4835 124 47559
	C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C411	0.1uF., 400V, Polyester.	0025 968 41049
	C412	330pF., 10%, 500V, Ceramic	4835 122 47648
	C413	330pF., 10%, 500V, Ceramic	4835 122 47648
	C414	330uF., 25V, Electrolytic.	4835 124 47632
	C415	100pF., 5%, 50V, Ceramic	4835 122 87025
	C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
	C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C418	1000pF., 50V, Ceramic.	4835 122 47004
	C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
	C420	100pF., 5%, 50V, Ceramic	4835 122 87025
	C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C423	470uF., 250V, Electrolytic	4835 124 47141
S	C424	470uF., 250V, Electrolytic	4835 124 47141
	C425	0.1uF., 400V, Polyester.	0025 968 41049
	C426	330pF., 10%, 500V, Ceramic	4835 122 47648
	C427	3300uF., 25V, Electrolytic	4835 124 47672
	C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S	C430A	22uF., 250V, Electrolytic.	4835 124 47021
	C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C435	3300uF., 25V, Electrolytic	4835 124 47575
	C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C437	100pF., 5%, 50V, Ceramic	4835 122 87025
	C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection . . .	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor . . .	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe . .	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver . .	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver . . .	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv. . .	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown. . . .	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.. . .	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.. . . .	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

		SVM MODULE	
	C751	1uF., 50V, Electrolytic.	4835 121 47406
	C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
	C753	470uF., 25V, Electrolytic.	4835 121 47405
	C754	0.1uF., 100V, Polyester.	2222 365 85104
	C755	0.047uF., 50V, Ceramic	4835 122 47608
	C756	47uF., 50V, Electrolytic	4835 124 47668
	C757	0.01uF., 100V, Polyester	4822 121 41815
	C758	470uF., 25V, Electrolytic.	4835 121 47405
	C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C761	0.1uF., 250V, Polyester.	4835 121 47278
	C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
	C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S	C766	47uF., 160V, Electrolytic.	4835 124 47713
S	C767	47uF., 160V, Electrolytic.	4835 124 47713
S	C768	47uF., 160V, Electrolytic.	4835 124 47713
S	C769	22uF., 160V, Electrolytic.	4835 124 47726
S	C770	560pF., 10%, 500V, Ceramic	4835 122 47647
	C774	0.01uF., 100V, Polyester	4822 121 41815
S	R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
	R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
	R753	4.7k, 1/2W, Metal Film	4835 116 57724
	R754	1k, 1/2W, Metal Film	4835 116 57685
	R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
	R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
	R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R765	1.8k, 1/2W, Metal Film	4835 116 57702
	R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
	R767	3.3k, 1/2W, Metal Film	4835 116 57714
	R768	4.7k, 1/2W, Metal Film	4835 116 57724
	R769	33k, 1/2W, Metal Film.	4835 116 57715
	R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R771	33k, 1/2W, Metal Film.	4835 116 57715
	R772	1k, 1/2W, Metal Film	4835 116 57685
	R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
	R774	22 ohm, 1/2W, Metal Film	4835 116 57708
	R775	22 ohm, 1/2W, Metal Film	4835 116 57708
	R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
	R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
	R783	68k, 1/2W, Metal Film.	4835 116 57737
	R784	10k, 1/2W, Metal Film.	4835 116 57686
	R785	68k, 1/2W, Metal Film.	4835 116 57737
	R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S	R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S	R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
	R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R793	22k, 1/2W, Metal Film.	4835 116 57706
	R794	22 ohm, 1/2W, Metal Film	4835 116 57708
	R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S	R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S	R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	R797	4.7k, 1/2W, Metal Film	4835 116 57724
S	R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
	D751	Diode 1N4148	4835 130 37048
	D752	Diode 1N4148	4835 130 37048
	D753	Diode 1N4148	4835 130 37048
	D760	Diode 1N4148	4835 130 37048
	D761	Diode, Silicon	4835 220 17059
	D762	Diode, Silicon	4835 220 17059
	Q751	Transistor BC548B.	4835 130 47055
	Q753	Transistor BC558B.	4835 130 47162
	Q754	Transistor BC548B.	4835 130 47055
	Q755	Transistor BC548B.	4835 130 47055
	Q756	Transistor BC548B.	4835 130 47055
	Q757	Transistor BC337-25.	4835 130 48113
	Q758	Transistor BC327-25.	4835 130 48112
	Q759	Transistor 2SB940A	4835 130 48119
	Q760	Transistor 2SD1264AP	4835 130 48121
	Q761	Transistor BC548B.	4835 130 47055
	L752	Inductor Coil LAL03 10UK	2422 535 96711
	FB751	Ferrite Bead	4835 526 17003
	FB752	Ferrite Bead	4835 526 17003
	HS76	Solder Lug f/IC400	0020 100 70001
	HS76	Heatsink	0073 515 10003
	HS76	Spring Clip.	4835 290 47008
	J751	10 Pin Connector	0018 223 80010
	J752	2 Pin Board Connector.	2422 025 14668
	J753	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706092 0001 OPTICAL ASSEMBLY

	00706092 0001 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801

S = Safety Part Be sure to use exact replacement part.

8P6051C (continued)

		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler 60" (Red).	3135 011 01940
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Delta 79	4835 381 47021
	W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

8P6054 - Manual no. 7573

CBA's

	CBA's		
CBA	Large Signal Panel	4835	219 77752
CBA	Small Signal Panel	4835	219 77757
CBA	Digital Convergence Panel.	4835	219 77788
CBA	Green CRT Panel.	4835	219 77782
CBA	Red CRT Panel.	4835	219 77783
CBA	Blue CRT Panel	4835	219 77784
CBA	Customer Control Assembly.	4835	219 77764
CBA	IR Receiver Panel.	0000	00A RR023
CBA	Switch Panel	4835	219 77786
CBA	Front Jack Panel	4835	219 77787
CBA	2 Tube Scan Velocity Module.	4835	219 77774
CBA	Remote Transmitter	4835	219 17724
CBA	25W Audio Amp.	4835	219 77762

25W AUDIO AMP

	25W AUDIO AMP		
C201	1uF., 50V, Electrolytic.	4835	121 47406
C202	0.01uF., 50V, Ceramic.	4835	122 47616
C203	0.01uF., 50V, Ceramic.	4835	122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835	124 47709
C301	100pF.,10%, 50V, Ceramic	4835	122 47644
C302	100pF.,10%, 50V, Ceramic	4835	122 47644
C303	0.1uF., 63V, Polyester	4835	121 47602
C304	0.1uF., 63V, Polyester	4835	121 47602
C305	100uF., 50V, Electrolytic.	4835	124 47563
C306	47uF., 25V, Electrolytic	4835	124 47708
C307	47uF., 25V, Electrolytic	4835	124 47708
C308	47uF., 25V, Electrolytic	4835	124 47708
C309	1000uF., 35V, Electrolytic	4835	124 47498
C310	1000uF., 35V, Electrolytic	4835	124 47498
C311	47uF., 25V, Electrolytic	4835	124 47708
C312	47uF., 25V, Electrolytic	4835	124 47708
C313	0.1uF., 63V, Polyester	4835	121 47602
C314	0.1uF., 63V, Polyester	4835	121 47602
C401	1000pF.,1kV Ceramic.	4835	122 47373
S C402	220uF., 250V, Electrolytic	4835	124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835	124 47711
C403	470pF., 1kV, Ceramic	4835	122 47459
C404	10uF., 50V, Electrolytic	4835	124 47499
C405	1000pF., 50V, Ceramic.	4835	122 47004
C406	0.01uF., 50V, Ceramic.	4835	122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835	121 47085
C408	1000pF., 50V, Ceramic.	4835	122 47004
C409	500V, 100pF., 10%, Ceramic	4835	122 47644
C410	100uF., 16V, Electrolytic.	4835	124 47706
C411	3300uF., 50V, , Electrolytic	4835	124 47582
C412	0.1uF., 63V, Polyester	4835	121 47602
S C413	1000pF., 1kV, Ceramic.	4835	122 47373
C414	680uF., 16V, Electrolytic.	4835	124 47578
C415	10uF., 50V, Electrolytic	4835	124 47499
C416	0.1uF., 63V, Polyester	4835	121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835	122 47373
C418	0.1uF., 63V, Polyester	4835	121 47602
C423	47uF., 25V, Electrolytic	4835	124 47708
C425	100pF.,10%, 50V, Ceramic	4835	122 47644
R201	47k, 1/2W, Metal Film.	4835	116 57725
R202	47k, 1/2W, Metal Film.	4835	116 57725
R203	22k, 1/2W, Metal Film.	4835	116 57706
R204	22k, 1/2W, Metal Film.	4835	116 57706
R205	220k, 1/2W, Metal Film	4835	116 57018
R208	47k, 1/2W, Metal Film.	4835	116 57725
R260	22k, 1/2W, Metal Film.	4835	116 57706
R261	22k, 1/2W, Metal Film.	4835	116 57706
R301	1k, 1/2W, Metal Film	4835	116 57685
R302	1k, 1/2W, Metal Film	4835	116 57685
R303	100k, 1/2W, Metal Film	4835	116 57687
R304	100k, 1/2W, Metal Film	4835	116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835	116 57684
R306	270k, 5%, 1/2W, Metal Film	4835	116 57756
R307	100k, 1/2W, Metal Film	4835	116 57687
R309	12k, 1/2W, Metal Film.	4835	116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835	116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120	105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835	116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835	116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835	116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835	116 57754
R406	220k, 1/2W, Metal Film	4835	116 57018
R407	10k, 1/2W, Metal Film.	4835	116 57686
R408	100k, 1/2W, Metal Film	4835	116 57687
R409	10k, 1/2W, Metal Film.	4835	116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835	116 57753
R411	100 ohm, 1/2W, Metal Film.	4835	116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835	116 67265
R413	2k, 1/2W, Metal Film	4835	116 57703
R414	470 ohm, 1/2W, Metal Film.	4835	116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835	116 57052
R416	390 ohm, 1/2W, Metal Film.	4835	116 57719
R418	470 ohm, 1/2W, Metal Film.	4835	116 57723
R419	2.7k, 1/2W, Metal Film	4835	116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835	116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835	110 47023
D202	Diode 1N4148	4835	130 37048
D203	Diode 1N4148	4835	130 37048
D401	Diode BAV21 (AMP030)	4822	130 30842
D401	Diode BAX18.	4835	130 37933
D402	Diode, Silicon (AMP030).	4835	130 37491
D402	Diode, Silicon	4835	130 37663
D404	Diode, Silicon	4835	130 37674
D405	Diode BYV95C	4835	130 37052
D406	Diode BYV95C	4835	130 37052
D407	Diode 1N4150	4835	130 37934
Q202	Transistor BC547B, Inverter.	4835	130 47055
Q203	Transistor J175, Mute.	4835	130 48123
Q204	Transistor J175.	4835	130 48123
Q207	Transistor J175, Mute.	4835	130 48123
Q208	Transistor J175, Mute.	4835	130 48123
Q401	Transistor BC547B, Inverter.	4835	130 47055
Q402	Transistor BC547B, Inverter.	4835	130 47055
Q403	N-Channel MOSFET, Regulator.	4835	130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835	220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835	209 87082
IC401	IC, 6127410001, Current Mode Controller	4835	209 17027
Z401	Zener Diode BZX79-C8.2V.	4835	130 37503
L401	Coil 100uH.	4835	157 67084
L402	Coil 100uH.	4835	157 67084
L403	Coil 100uH.	4835	157 67084
L404	Suppression Coil, 10uH.	4835	152 27002
L405	Coil 100uH.	4835	157 67084
L407	Coil 100uH.	4835	157 67084
L409	Coil 100uH.	4835	157 67084
L410	Coil 100uH.	4835	157 67084
S T401	Transformer W02242 B	4835	148 87369
BKS301	Stabilizer Bracket	0073	466 70001
BKT301	Bracket, 25W Amp	0073	514 10005
S F401	Fuse, 3A	4835	220 17012
HS402	Heatsink, Transistor	0073	166 50008
HS403	Heatsink, Vertical	0073	497 40004
J251A	4 Pin Board Connector.	2422	025 14671
J254A	5 Pin Connector.	0018	222 20405
J278	4 Pin Board Connector.	2422	025 14672
J469	4 Pin Connector.	0018	222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL		
C11	1000uF., 50V, Electrolytic	3198	026 51020
C13	470uF., 25V, Electrolytic.	4835	124 47576
C14	100uF., 25V, Electrolytic.	3198	025 31010
C16	100pF., 5%, 50V, Ceramic	3198	016 01010
C17	100pF., 5%, 50V, Ceramic	3198	016 01010
C19	0.1uF., 50V, Ceramic	3198	023 21040
C20	0.01uF.,10%, 100V, Polyester	4835	121 47232
C21	2700pF.,10%, 100V, Polyester	4835	122 47487
C22	220pF., 5%, 50V, Ceramic	3198	016 02210
C23	220pF., 5%, 50V, Ceramic	3198	016 02210
C24	10pF., 5%, 50V, Ceramic.	3198	016 01090
C25	0.1uF., 50V, Ceramic	3198	023 21040
C29	0.1uF., 50V, Ceramic	3198	023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238	581 16741
C31	27pF., 5%, 50V, Ceramic.	3198	016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198	019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198	025 52280
C34	0.1uF., 50V, Ceramic	3198	023 21040
C35	220uF., 25V, Electrolytic.	3198	025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198	025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238	581 16741
C38	1000uF., 25V, Electrolytic	3198	026 31020
C39	27pF., 5%, 50V, Ceramic.	3198	016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198	025 52280
C42	0.1uF., 50V, Ceramic	3198	023 21040
C50	0.1uF., 50V, Ceramic	3198	023 21040
C51	100pF., 5%, 50V, Ceramic	3198	016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238	581 16741
C71	100pF., 5%, 50V, Ceramic	3198	016 01010
C72	100pF., 5%, 50V, Ceramic	3198	016 01010
C73	100pF., 5%, 50V, Ceramic	4835	122 87025
C74	27pF., 5%, 50V, Ceramic.	3198	016 02790
C81	1000uF., 50V, Electrolytic	3198	026 51020
C83	470uF., 25V, Electrolytic.	4835	124 47576
C84	100uF., 25V, Electrolytic.	3198	025 31010
C85	0.1uF., 63V, Metalized Polyester	4835	121 47602
C86	0.1uF., 63V, Metalized Polyester	4835	121 47602
C87	1000uF., 16V, Electrolytic	3198	026 21020
C88	0.1uF., 50V, Ceramic	3198	023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835	122 47091
C101	39pF., 50V, Ceramic Disc	4835	122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198	025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198	025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198	025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198	025 52280
C110	0.1uF., 50V, Ceramic	3198	023 21040
C111	0.1uF., 50V, Ceramic	3198	023 21040

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SM BT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 008P6051C101

MODEL 008P6051C101

S 20	AC Cord, Filtered.	4835 321 17128
	Accessory Shelf.	3135 013 02191
	Accessory Shelf.	3135 013 02201
	ATC Spacer	3135 014 05880

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

	Back Cover Ctr..	4835 432 97697
	Back Cover End	3135 013 00730
	Baffle Mount Receptacle (x8)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Cabinet Back, Vac.	4835 432 97626
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Door, Glass (x2)	3135 013 02181
3	Extr., Screen Bottom	3135 014 02960
2	Extr., Screen Edge, Side (x2).	3135 014 03090
14	Extr., Screen Edge, Top.	3135 014 03080
	Frame, Screen 60, Side (x2).	3135 014 03430
	Frame, Screen Top 60 (x2).	3135 014 03410
6	Front Base Rail.	3135 013 02211
	Front Jack Panel	4835 219 77787
	Hinge (Lower).	3135 010 02411
	Hinge (Upper).	3135 010 02401
9	Hole Insert (x16).	3135 014 02741
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier.	4835 432 17847
	Magnetic Catch (x2).	3135 010 02381
15	Mirror Board Mtng Brkt. (x2)	3135 011 02021
25	Mirror Mounting.	3135 013 00760
24	Mirror Trapz, 2nd.	4835 380 37021
	Owners Manual.	3135 015 07430
	Panel, Front Jack.	3135 014 02980
	Pull, Door (x2).	3135 010 02391
	Quick Use Guide.	3135 015 07420
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter	4835 219 17724
1	Retainer Treelock (x17).	3135 014 02620
	Shelf VCR Storage.	3135 011 03211
8	Speaker 8 Ohm Full (x2).	2422 264 00301
	Speaker Bfl.	4835 432 67244
	Tube VCR	3135 014 05870
	VCR Enclosure.	3135 014 07031

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester	3198 014 01540
C102	0.15uF., 50V Metalized Polyester	3198 014 01540
C103	0.15uF., 50V Metalized Polyester	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester.	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester	3198 014 01540
C133	0.15uF., 50V Metalized Polyester	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRS300	Zero ohm, Carbon Film.	4835 111 27056
BRS301	Zero ohm, Carbon Film.	4835 111 27056
BRS302	Zero ohm, Carbon Film.	4835 111 27056
BRS303	Zero ohm, Carbon Film.	4835 111 27056
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

		LARGE SIGNAL PANEL	
S	C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S	C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S	C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
	C408	330pF., 10%, 500V, Ceramic	4835 122 47648
	C409	3300uF., 35V, Electrolytic	4835 124 47559
	C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C411	0.1uF., 400V, Polyester.	0025 968 41049
	C412	330pF., 10%, 500V, Ceramic	4835 122 47648
	C413	330pF., 10%, 500V, Ceramic	4835 122 47648
	C414	330uF., 25V, Electrolytic.	4835 124 47632
	C415	100pF., 5%, 50V, Ceramic	4835 122 87025
	C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
	C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C418	1000pF., 50V, Ceramic.	4835 122 47004
	C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
	C420	100pF., 5%, 50V, Ceramic	4835 122 87025
	C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C423	470uF., 250V, Electrolytic	4835 124 47141
S	C424	470uF., 250V, Electrolytic	4835 124 47141
	C425	0.1uF., 400V, Polyester.	0025 968 41049
	C426	330pF., 10%, 500V, Ceramic	4835 122 47648
	C427	3300uF., 25V, Electrolytic	4835 124 47672
	C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S	C430A	22uF., 250V, Electrolytic.	4835 124 47021
	C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C435	3300uF., 25V, Electrolytic	4835 124 47575
	C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C437	100pF., 5%, 50V, Ceramic	4835 122 87025
	C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection . . .	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor . . .	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe . .	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver . .	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver . . .	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv. . .	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown. . . .	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv.. . .	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim.. . . .	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

L415	Suppression Coil, 1.8uH.	4835 152 27029
L416	Ferrite Bead	4835 526 17001
L420	Ferrite Bead	4835 526 17001
S L421	Line Input Choke	4835 152 27028
L422	Suppression Coil, 10uH..	4835 152 27002
L423	Suppression Coil, 10uH..	4835 152 27002
L424	Suppression Coil, 10uH..	4835 152 27002
L425	Suppression Coil, 10uH..	4835 152 27002
L426	Suppression Coil, 42uH..	4835 157 57063
L427	Ferrite Bead	4835 526 17001
L428	Suppression Coil, 42uH..	4835 157 57063
L429	Ferrite Bead	4835 526 17001
L430	Ferrite Bead	4835 526 17001
L432	Suppression Coil, 10uH..	4835 152 27002
L435	Suppression Coil, 10uH..	4835 152 27002
L440	Suppression Coil, 10uH..	4835 152 27002
L550	Suppression Coil, 10uH..	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer, Switch Mode	4835 148 87339
S T402	Transformer, Power	4835 148 87345
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

SVM MODULE

	SVM MODULE	
C751	1uF., 50V, Electrolytic.	4835 121 47406
C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
C753	470uF., 25V, Electrolytic.	4835 121 47405
C754	0.1uF., 100V, Polyester.	2222 365 85104
C755	0.047uF., 50V, Ceramic	4835 122 47608
C756	47uF., 50V, Electrolytic	4835 124 47668
C757	0.01uF., 100V, Polyester	4822 121 41815
C758	470uF., 25V, Electrolytic.	4835 121 47405
C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
C761	0.1uF., 250V, Polyester.	4835 121 47278
C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S C766	47uF., 160V, Electrolytic.	4835 124 47713
S C767	47uF., 160V, Electrolytic.	4835 124 47713
S C768	47uF., 160V, Electrolytic.	4835 124 47713
S C769	22uF., 160V, Electrolytic.	4835 124 47726
S C770	560pF., 10%, 500V, Ceramic	4835 122 47647
C774	0.01uF., 100V, Polyester	4822 121 41815
S R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R753	4.7k, 1/2W, Metal Film	4835 116 57724
R754	1k, 1/2W, Metal Film	4835 116 57685
R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R765	1.8k, 1/2W, Metal Film	4835 116 57702
R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
R767	3.3k, 1/2W, Metal Film	4835 116 57714
R768	4.7k, 1/2W, Metal Film	4835 116 57724
R769	33k, 1/2W, Metal Film.	4835 116 57715
R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
R771	33k, 1/2W, Metal Film.	4835 116 57715
R772	1k, 1/2W, Metal Film	4835 116 57685
R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
R774	22 ohm, 1/2W, Metal Film	4835 116 57708
R775	22 ohm, 1/2W, Metal Film	4835 116 57708
R776	22 ohm, 1/2W, Metal Film	4835 116 57708
S R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043
R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
R783	68k, 1/2W, Metal Film.	4835 116 57737
R784	10k, 1/2W, Metal Film.	4835 116 57686
R785	68k, 1/2W, Metal Film.	4835 116 57737
R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R789	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
S R791	10 ohm, 5%, 1W Metal Oxide	4835 116 67278
R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
R793	22k, 1/2W, Metal Film.	4835 116 57706
R794	22 ohm, 1/2W, Metal Film	4835 116 57708
R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
R797	4.7k, 1/2W, Metal Film	4835 116 57724
S R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
D751	Diode 1N4148	4835 130 37048
D752	Diode 1N4148	4835 130 37048
D753	Diode 1N4148	4835 130 37048
D760	Diode 1N4148	4835 130 37048
D761	Diode, Silicon	4835 220 17059
D762	Diode, Silicon	4835 220 17059
Q751	Transistor BC548B.	4835 130 47055
Q753	Transistor BC558B.	4835 130 47162
Q754	Transistor BC548B.	4835 130 47055
Q755	Transistor BC548B.	4835 130 47055
Q756	Transistor BC548B.	4835 130 47055
Q757	Transistor BC337-25.	4835 130 48113
Q758	Transistor BC327-25.	4835 130 48112
Q759	Transistor 2SB940A	4835 130 48119
Q760	Transistor 2SD1264AP	4835 130 48121
Q761	Transistor BC548B.	4835 130 47055
L752	Inductor Coil LAL03 10UK	2422 535 96711
FB751	Ferrite Bead	4835 526 17003
FB752	Ferrite Bead	4835 526 17003
HS76	Solder Lug f/IC400	0020 100 70001
HS76	Heatsink	0073 515 10003
HS76	Spring Clip.	4835 290 47008
J751	10 Pin Connector	0018 223 80010
J752	2 Pin Board Connector.	2422 025 14668
J753	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706092 0001 OPTICAL ASSEMBLY

	00706092 0001 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801

S = Safety Part Be sure to use exact replacement part.

8P6054 (continued)

		Focus Lead	3135 010 00730
S		Focus/Screen Control..	2322 460 90514
S		HV Anode Lead (3 used)	4835 321 27397
		SVM Yoke	4835 157 58199
	B	Compression Spring (4 used).	3135 011 00610
S	E	CRT 180DLB22 (Blue).	4835 310 57408
S	E	CRT 180DLB22 (Green)	4835 310 57411
S	E	CRT 180DLB22 (Red) (HU).	4835 310 57409
	H	Seal, CRT.	3135 013 02321
	I	Coolant (Enough to do 3 CRTs).	3135 010 02040
	K	Fill Plug.	4835 432 17791
	L	Fill Plug Seal	4835 290 87147
	M	Diaphragm Cover.	4835 432 17736
	O	Expansion Diaphragm.	3135 013 01060
	P	Coupler 60" (Red).	3135 011 01940
	P	Coupler, Green	4835 290 87152
	R	O-Ring Seal (Lens to Coupler).	4835 290 87141
	S	Lens, C-Element, Blue & Red.	4835 381 47016
	S	Lens, C-Element, Green	4835 381 47019
	W	Lens, Delta 79	4835 381 47021
	W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

MX5472C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77758
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77791
CBA	25W Audio Amp.	4835 219 77762
CBA	Stereo Spread Panel.	4835 219 57687
CBA	Guide Plus Panel	4835 219 77704
CBA	Remote Locator	0000 00A 10706
CBA	Wallvision Switch Panel.	4835 219 77765
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR617	4835 219 17703

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

	RED CRT APNEL	
C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

	GREEN CRT PANEL	
C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00A10706 REMOTE LOCATOR

	00A10706 REMOTE LOCATOR	
C1	30pF., 5%, 50V, Ceramic	3198 016 03990
C2	1000pF., 10%, 50V, Ceramic	3198 017 01020
C3	1000pF., 10%, 50V, Ceramic	3198 017 01020
C4	3pF., 50V, Ceramic	4835 122 87565
C5	10pF., 5%, 50V, Ceramic.	4835 122 87412
C6	1000pF., 10%, 50V, Ceramic	3198 017 01020
C7	1000pF., 10%, 50V, Ceramic	3198 017 01020
C8	10uF., 20%, 50V, Electrolytic.	4835 124 47499

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

C15	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
R3	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R4	68 ohm, 5%, 1/10W, Carbon Film	4835 111 37408
R5	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R6	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R7	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R8	300 ohm, 5%, 1/2W, Metal Film.	2322 187 53301
R9	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
Q1	Transistor, NPN, MMBTH10L.	9322 100 54685
Z1	Zener Diode, 9.1V, BZX79	4835 130 37878
J320	3 Pin Connector.	0018 179 40003

00AVJ218 & 00AVJ221 FRONT JACK PANEL

	00AVJ218 & 00AVJ221 FRONT JACK PANEL	
R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 00MX5472C101

	MODEL 00MX5472C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 00800
	Back Cover Ctr	4835 432 97703
	Back Cover End	3135 013 00730
	Back Cover Rail.	4835 432 97716
	Back Cover Vac FM 54".	3135 014 03320
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
2	Extr., Screen Side (x2).	3135 014 04130
	Extr., Screen T/B (x2)	3135 014 04120
	Filter Contrast 54	3135 014 03720
4	Foot Base Rail (x2).	3135 014 03131
6	Front Base Rail.	3135 013 02031
	Front Jack Panel	4835 219 77791
	Guide Plus	4835 219 77704
9	Hole Insert (x13).	3135 014 02741
	IR Blaster 705994.	3135 017 00920
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00950
10	Lens, Lenticular	3135 013 00920
22	Light Barrier.	4835 432 17847
25	Mirror Board	3135 013 00840
15	Mirror Board Mtng Brkt. (x2)	3135 011 02021
24	Mirror Trapz,1st	4835 380 37028
	Owners Manual.	3135 015 07470
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 07460
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmit. UR617KD	4835 219 17703
1	Retainer Treelock (x16).	3135 014 02620
	Screen Frame Bottom.	3135 014 06140
12	Screen Frame Lt Corner (x2).	3135 014 06110
12	Screen Frame Rt Corner (x2).	3135 014 06120
	Screen Frame Top	3135 014 06070
	Screen Frame, Side (x2).	3135 014 06080
7	Speaker Grille	3135 014 06020
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 6" (x2)	2422 264 00259
	Speed Clip JK.	3135 010 02660

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap.	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester.	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

	C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
	C1031	1uF., 35V Electrolytic	4835 124 97175
	C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
	C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1040	0.1uF., 50V, Ceramic	3198 023 21040
	C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
	C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
	C1046	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
	C1051	0.1uF., 50V, Ceramic	3198 023 21040
	R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
	R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
	R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R368	1k, 5%, 1/2W, Metal Film	4835 116 57685
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R378	1k, 5%, 1/2W, Metal Film	4835 116 57685
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R385	1k, 5%, 1/2W, Metal Film	4835 116 57685
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

	R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R722	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
	R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
	R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R742	470 ohm, 5%, 1/10W, Carbon Film.	4835 111 37259
	R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R744	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R745	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R748	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R753	560 ohm, 5%, 1/10W, Carbon Film.	4835 111 27054
	R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R755	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
	R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R762	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
	R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
	R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
	R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
	R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
	R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R798	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
	R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
	R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
	R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
	R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
	R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
	R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
	R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
	R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
	R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
	R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
	D9	Diode BAS216	4835 130 37905
	D100	Diode BAS216	4835 130 37905
	D300	Diode 1N4148	4835 130 37048
	D301	Diode BAS216	4835 130 37905
	D305	Diode BAS216	4835 130 37905
	D306	Diode BAS216	4835 130 37905
	D310	Diode BAS216	4835 130 37905
	D311	Diode BAS216	4835 130 37905
	D312	Diode BAS216	4835 130 37905
	D313	Diode BAS216	4835 130 37905
	D320	Diode 1N4148	4835 130 37048
	D321	Diode BAS216	4835 130 37905
	D322	Diode BAS216	4835 130 37905
	D323	Diode BAS216	4835 130 37905
	D324	Diode BAS216	4835 130 37905
	D325	Diode BAS216	4835 130 37905
	D326	Diode BAS216	4835 130 37905
	D401	Diode 1N4148	4835 130 37048
	D600	Diode BAS216	4835 130 37905
	D601	Diode BAS216	4835 130 37905
	D602	Diode BAS216	4835 130 37905
	D603	Diode BAS216	4835 130 37905
	D605	Diode BAS216	4835 130 37905
	D607	Diode 1N4148	4835 130 37048
	D608	Diode 1N4148	4835 130 37048
	D609	Diode 1N4148	4835 130 37048
	D610	Diode 1N4148	4835 130 37048
	D611	Diode 1N4148	4835 130 37048
	D612	Diode BAS216	4835 130 37905
	D613	Diode BAS216	4835 130 37905
	D614	Diode BAS216	4835 130 37905
	D615	Diode 1N4148	4835 130 37048
	D617	Diode 1N4148	4835 130 37048
	D618	Diode 1N4148	4835 130 37048
	D630	Diode 1N4148	4835 130 37048
	D700	Diode BAS216	4835 130 37905
	D701	Diode BAS216	4835 130 37905
	D702	Diode BAS216	4835 130 37905
	IC1	IC CXA1855S.	4835 209 88564
	IC4	IC L7809CV	4835 209 88009
	IC105	IC HEF4053BP	4835 209 17033
	IC107	IC HEF4053BP	4835 209 17033
	IC120	IC TDA9855V2	4835 209 88337
	IC200	IC LA7575.	4835 209 87757
	IC201	IC LA7575.	4835 209 87757
	IC300	IC LC864266A	3135 010 03001
	IC304	IC ST24W08B6	9322 098 40682
	IC400	IC L7812CV	9335 040 20682
	IC401	IC MC7805CT.	9334 536 00682
	IC600	IC TA8845AN.	4835 209 88331
	IC606	IC L7809CV	4835 209 88009
	IC700	IC TC90A13N.	4835 209 88566
	IC701	IC LA7222.	4835 209 87089
	IC703	IC MC7805CT.	9334 536 00682
	IC1001	IC MC44461B.	9322 107 07682
	Q3	Transistor BC847B.	4822 130 60511
	Q4	Transistor BC847B.	4822 130 60511
	Q5	Transistor BC847B.	4822 130 60511
	Q9	Transistor J177.	9340 053 20126
	Q10	Transistor BC847B.	4822 130 60511
	Q11	Transistor BC847B.	4822 130 60511
	Q12	Transistor BC847B.	4822 130 60511
	Q14	Transistor BC847B.	4822 130 60511
	Q16	Transistor BC847B.	4822 130 60511
	Q139	Transistor BC847B.	4822 130 60511
	Q140	Transistor BC847B.	4822 130 60511
	Q141	Transistor BC847B.	4822 130 60511
	Q200	Transistor BC85.	5322 130 60508
	Q201	Transistor BC85.	5322 130 60508
	Q205	Transistor BC85.	5322 130 60508
	Q206	Transistor BC85.	5322 130 60508
	Q207	Transistor BC857	4835 130 47112
	Q208	Transistor BC857	4835 130 47112
	Q209	Transistor BC847B.	4822 130 60511
	Q300	Transistor BC847B.	4822 130 60511
	Q301	Transistor BC847B.	4822 130 60511
	Q302	Transistor BC847B.	4822 130 60511
	Q303	Transistor BC847B.	4822 130 60511
	Q304	Transistor BC847B.	4822 130 60511
	Q305	Transistor BC847B.	4822 130 60511
	Q306	Transistor PMBT2222A	4835 130 47066
	Q308	Transistor BC847B.	4822 130 60511
	Q309	Transistor BC85.	5322 130 60508
	Q310	Transistor BC847B.	4822 130 60511
	Q313	Transistor BC847B.	4822 130 60511
	Q314	Transistor BC847B.	4822 130 60511
	Q315	Transistor BC85.	5322 130 60508
	Q600	Transistor BC847B.	4822 130 60511
	Q601	Transistor BC85.	5322 130 60508
	Q602	Transistor BC85.	5322 130 60508
	Q603	Transistor BC85.	5322 130 60508
	Q604	Transistor BC847B.	4822 130 60511
	Q605	Transistor BC847B.	4822 130 60511
	Q606	Transistor BC847B.	4822 130 60511
	Q607	Transistor BC85.	5322 130 60508
	Q608	Transistor BC847B.	4822 130 60511
	Q609	Transistor BC847B.	4822 130 60511
	Q611	Transistor BC85.	5322 130 60508
	Q612	Transistor BC85.	5322 130 60508
	Q613	Transistor BC85.	5322 130 60508

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J300	7 Pin Board Connector.	2422 025 14674
J301	4 Pin Board Connector.	2422 025 14672
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J306	6 Pin Board Connector.	2422 025 15023
J307	8 Pin Board Connector.	2422 025 15025
J308	4 Pin Board Connector.	2422 025 14671
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector.	2422 025 15022
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573
	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic.	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
Q502	Transistor, BC847B	4822 130 60511
Q503	Transistor, BC847B	4822 130 60511
Q550	Transistor, PNP.	4835 130 47084
Q551	Transistor, BC847B	4822 130 60511
Q800	Transistor, BC847B	4822 130 60511
Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
Q802	Transistor, 2SD2539.	4835 130 48074
Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
Q901	Transistor, BC85	5322 130 60508
Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
Q904	Transistor, BC85, Soft Start	5322 130 60508
Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
Z400	Zener Diode, BZX79B10.	4835 130 37935
Z500	Zener Diode, 10V	4835 130 37739
Z501	Diode BZX79-B18.	4835 130 37936
Z503	Zener Diode, P6KE62A	4835 130 37547
Z901	Zener Diode, 6.2V.	4835 130 37751
L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
L407	Ferrite Bead	4835 526 17001
L408	Suppression Coil, 10uH..	4835 152 27002
S L409	Peaking Coil, 2.2uH.	4835 150 57054
L410	Suppression Coil, 18uH..	4835 150 57051
L412	Ferrite Bead	4835 526 17001
L415	Suppression Coil, 1.8uH.	4835 152 27029
L416	Ferrite Bead	4835 526 17001
L420	Ferrite Bead	4835 526 17001
S L421	Line Input Choke	4835 152 27028
L422	Suppression Coil, 10uH..	4835 152 27002
L423	Suppression Coil, 10uH..	4835 152 27002
L424	Suppression Coil, 10uH..	4835 152 27002
L425	Suppression Coil, 10uH..	4835 152 27002
L426	Suppression Coil, 42uH..	4835 157 57063
L427	Ferrite Bead	4835 526 17001
L428	Suppression Coil, 42uH..	4835 157 57063
L429	Ferrite Bead	4835 526 17001
L430	Ferrite Bead	4835 526 17001
L432	Suppression Coil, 10uH..	4835 152 27002
L435	Suppression Coil, 10uH..	4835 152 27002
L440	Suppression Coil, 10uH..	4835 152 27002
L550	Suppression Coil, 10uH..	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer, Switch Mode	4835 148 87339
S T402	Transformer, Power	4835 148 87345
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

WALLVISION SWITCH PANEL

	WALLVISION SWITCH PANEL	
C1	1000pF., 10%, 50V, Ceramic	4835 122 47103
C2	0.01uF., 10%, 50V, Ceramic	4835 122 47081
C4	100pF., 10%, 50V, Ceramic.	4835 122 37001
C5	100pF., 10%, 50V, Ceramic.	4835 122 37001
C7	1000pF., 10%, 50V, Ceramic	4835 122 47103
C8	100pF., 10%, 50V, Ceramic.	4835 122 37001
C9	100pF., 10%, 50V, Ceramic.	4835 122 37001
C10	10uF., 50V, Electrolytic	4835 124 47545
C11	0.1uF., 10%, 100V, Polyester	4835 121 47297
C12	10uF., 50V, Electrolytic	4835 124 47545
R1	1k, 5%, 1/4W, Metal Film	4835 116 57319
R2	1k, 5%, 1/4W, Metal Film	4835 116 57319
R3	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R4	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R5	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R10	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R11	18k, 5%, 1/4W, Metal Film.	4835 116 57323
R12	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R13	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R14	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R15	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R16	10 ohm, 5%, 1/4W, Metal Film	4835 116 57362
D1	Diode 1N4148	4835 130 37048
D2	Diode 1N4148	4835 130 37048
D3	Diode 1N4148	4835 130 37048
D4	Diode 1N4148	4835 130 37048
D5	Diode 1N4148	4835 130 37048
IC1	IC P83C652FBP.	0061 311 95002
Q1	Transistor BC557B.	4835 130 47409
Q2	Transistor BC547B.	4835 130 47055
BKT703	Switch Bracket	0073 568 70004
J100	2 Pin Connector.	2422 025 07305
J254	5 Pin Connector.	0018 222 30405
J254A	5 Pin Connector.	0018 222 30205
J301	5 pin Connector.	2422 038 00176
J305	3 Pin Connector.	2422 038 00175
J704	2 Pin Connector.	2422 015 19025
J707	Phono Jack	0018 221 10006
J712	Jack f/IR Blaster.	2422 026 04376
S703	Switch, 4PDT	4835 277 27072
SHLD1B	Small Signal Cover	0073 602 80003
SHLD1T	Small Signal Shield.	0073 598 90003
Y1	Ceramic Resonator, 12MHz	4835 157 57129

SVM MODULE

	SVM MODULE	
C751	1uF., 50V, Electrolytic.	4835 121 47406
C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
C753	470uF., 25V, Electrolytic.	4835 121 47405
C754	0.1uF., 100V, Polyester.	2222 365 85104
C755	0.047uF., 50V, Ceramic	4835 122 47608
C756	47uF., 50V, Electrolytic	4835 124 47668
C757	0.01uF., 100V, Polyester	4822 121 41815
C758	470uF., 25V, Electrolytic.	4835 121 47405
C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
C761	0.1uF., 250V, Polyester.	4835 121 47278
C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S C766	47uF., 160V, Electrolytic.	4835 124 47713
S C767	47uF., 160V, Electrolytic.	4835 124 47713
S C768	47uF., 160V, Electrolytic.	4835 124 47713
S C769	22uF., 160V, Electrolytic.	4835 124 47726
S C770	560pF., 10%, 500V, Ceramic	4835 122 47647
C774	0.01uF., 100V, Polyester	4822 121 41815
S R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R753	4.7k, 1/2W, Metal Film	4835 116 57724
R754	1k, 1/2W, Metal Film	4835 116 57685
R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R765	1.8k, 1/2W, Metal Film	4835 116 57702
R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
R767	3.3k, 1/2W, Metal Film	4835 116 57714
R768	4.7k, 1/2W, Metal Film	4835 116 57724
R769	33k, 1/2W, Metal Film.	4835 116 57715
R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
R771	33k, 1/2W, Metal Film.	4835 116 57715
R772	1k, 1/2W, Metal Film	4835 116 57685
R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
R774	22 ohm, 1/2W, Metal Film	4835 116 57708
R775	22 ohm, 1/2W, Metal Film	4835 116 57708
R776	22 ohm, 1/2W, Metal Film	4835 116 57708

S = Safety Part Be sure to use exact replacement part.

MX5472C (continued)

S R779	330 ohm, 5%, 5W, Wire Wnd.	4835	112 27043
R782	330 ohm, 1/2W, Metal Film.	4835	116 57713
R783	68k, 1/2W, Metal Film.	4835	116 57737
R784	10k, 1/2W, Metal Film.	4835	116 57686
R785	68k, 1/2W, Metal Film.	4835	116 57737
R786	330 ohm, 1/2W, Metal Film.	4835	116 57713
S R787	27 ohm, 5%, 1W Metal Oxide	4835	116 67269
S R788	27 ohm, 5%, 1W Metal Oxide	4835	116 67269
S R789	3.3 ohm, 5%, 1W Metal Ox..	2120	106 90293
S R791	3.3 ohm, 5%, 1W Metal Ox..	2120	106 90293
R792	470 ohm, 1/2W, Metal Film.	4835	116 57723
R793	22k, 1/2W, Metal Film.	4835	116 57706
R794	22 ohm, 1/2W, Metal Film	4835	116 57708
R795	22 ohm, 1/2W, Metal Film	4835	116 57708
S R796	82 ohm, 5%, 3W Metal Oxide	4835	116 57127
S R798	82 ohm, 5%, 3W Metal Oxide	4835	116 57127
R797	4.7k, 1/2W, Metal Film	4835	116 57724
S R799	82 ohm, 5%, 3W Metal Oxide	4835	116 57127
D751	Diode 1N4148	4835	130 37048
D752	Diode 1N4148	4835	130 37048
D753	Diode 1N4148	4835	130 37048
D760	Diode 1N4148	4835	130 37048
D761	Diode, Silicon	4835	220 17059
D762	Diode, Silicon	4835	220 17059
Q751	Transistor BC548B.	4835	130 47055
Q753	Transistor BC558B.	4835	130 47162
Q754	Transistor BC548B.	4835	130 47055
Q755	Transistor BC548B.	4835	130 47055
Q756	Transistor BC548B.	4835	130 47055
Q757	Transistor BC337-25.	4835	130 48113
Q758	Transistor BC327-25.	4835	130 48112
Q759	Transistor 2SB940A	4835	130 48119
Q760	Transistor 2SD1264AP	4835	130 48121
Q761	Transistor BC548B.	4835	130 47055
L752	Inductor Coil LAL03 10UK	2422	535 96711
FB751	Ferrite Bead	4835	526 17003
FB752	Ferrite Bead	4835	526 17003
HS76	Solder Lug f/IC400	0020	100 70001
HS76	Heatsink	0073	515 10003
HS76	Spring Clip.	4835	290 47008
J751	10 Pin Connector	0018	223 80010
J752	2 Pin Board Connector.	2422	025 14668
J753	2 Pin Board Connector.	2422	025 14668
J754	2 Pin Board Connector.	2422	025 14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE		
C139	4.7uF., 50V, Electrolytic.	4835	124 47506
C141	680pF., 50V, Ceramic	4835	122 47187
C142	10uF., 50V, Electrolytic	4835	124 47499
C144	680pF., 50V, Ceramic	4835	122 47187
C145	0.015uF., 10%, 50V, Polyester.	4835	121 47628
C146	4.7uF., 50V, Electrolytic.	4835	124 47506
C147	150pF., 10%, 50V, Ceramic.	4835	122 47645
C148	2200pF., 50V, Ceramic.	4835	122 47007
C149	0.015uF., 10%, 50V, Polyester.	4835	121 47628
C150	0.015uF., 10%, 50V, Polyester.	4835	121 47628
C151	1uF., 50V, Electrolytic.	4835	121 47406
C152	1uF., 50V, Electrolytic.	4835	121 47406
C154	0.1uF., 63V, Polyester	4835	121 47602
C155	100uF., 16V, Electrolytic.	4835	124 47706
C156	10uF., 50V, Electrolytic	4835	124 47499
C158	10uF., 50V, Electrolytic	4835	124 47499
C159	4.7uF., 50V, Electrolytic.	4835	124 47506
C163	2200pF., 50V, Ceramic.	4835	122 47007
C176	0.1uF., 63V, Polyester	4835	121 47602
C182	0.1uF., 63V, Polyester	4835	121 47602
C196	0.047uF., 50V, Polyester	4835	121 47588
C197	0.047uF., 50V, Polyester	4835	121 47588
R130	100k, 1/2W, Metal Film	4835	116 57687
R140	47k, 1/2W, Metal Film.	4835	116 57725
R141	47k, 1/2W, Metal Film.	4835	116 57725
R143	1k, 1/2W, Metal Film	4835	116 57685
R144	12k, 1/2W, Metal Film.	4835	116 57692
R145	2k, 1/2W, Metal Film	4835	116 57703
S R146	47 ohm, 1/2W, Metal Film	4835	116 57727
R147	12k, 1/2W, Metal Film.	4835	116 57692
R148	15k, 1/2W, Metal Film.	4835	116 57698
R149	15k, 1/2W, Metal Film.	4835	116 57698
R150	20k, 1/2W, Metal Film.	4835	116 57704
R151	10k, 1/2W, Metal Film.	4835	116 57686
R152	1k, 1/2W, Metal Film	4835	116 57685
R153	10k, 1/2W, Metal Film.	4835	116 57686
R154	2k, 1/2W, Metal Film	4835	116 57703
R155	47k, 1/2W, Metal Film.	4835	116 57725
R156	20k, 1/2W, Metal Film.	4835	116 57704
R157	15k, 1/2W, Metal Film.	4835	116 57698
R158	56k, 5%, 1/2W, Metal Film.	4835	116 57758
R159	22k, 1/2W, Metal Film.	4835	116 57706
R160	56k, 5%, 1/2W, Metal Film.	4835	116 57758
R161	10k, 1/2W, Metal Film.	4835	116 57686
R164	47k, 1/2W, Metal Film.	4835	116 57725
R166	10k, 1/2W, Metal Film.	4835	116 57686
R167	22k, 1/2W, Metal Film.	4835	116 57706
R168	1.5k, 1/2W, Metal Film	4835	116 57697
R170	1.5k, 1/2W, Metal Film	4835	116 57697
R171	100k, 1/2W, Metal Film	4835	116 57687
R173	100k, 1/2W, Metal Film	4835	116 57687
R174	100k, 1/2W, Metal Film	4835	116 57687
R175	100k, 1/2W, Metal Film	4835	116 57687
R176	100k, 1/2W, Metal Film	4835	116 57687
R177	1k, 1/2W, Metal Film	4835	116 57685
R178	1k, 1/2W, Metal Film	4835	116 57685
S R179	47 ohm, 1/2W, Metal Film	4835	116 57727
R180	10k, 1/2W, Metal Film.	4835	116 57686
R181	10k, 1/2W, Metal Film.	4835	116 57686
R182	47k, 1/2W, Metal Film.	4835	116 57725
R183	100k, 1/2W, Metal Film	4835	116 57687
IC103	IC, 6124800001, Smart Stereo Surround.	4835	209 17032
IC105	IC, HEF4053BP, 2 Channel Multi/Demultip	4835	209 17033
Q140	Transistor BC547B, Smart Stereo Surroun	4835	130 47055
Z102	Zener Diode BZX79-F3.9V.	4835	130 37929
Z103	Zener Diode BZX79-F3.9V.	4835	130 37929
J178	6 Pin Board Connector.	0018	179 40006
J278A	5 Pin Board Connector.	2422	038 00176
MEC1	Support f/P.C. Bd.	0073	589 20001
MEC2	Support f/P.C. Bd.	0073	589 20001
C1	33pF., 5%, 50V, Ceramic.	4835	122 87414
C2	33pF., 5%, 50V, Ceramic.	4835	122 87414
C3	27pF., 5%, 50V, Ceramic.	4835	122 87381
C4	39pF., 5%, 50V, Ceramic.	4835	122 87016
C6	10uF., 35V, Electrolytic	4835	124 47562
C7	100pF., 5%, 50V, Ceramic	4835	122 87012
C8	1uF., 50V, Electrolytic.	4835	121 47406
C10	1000pF., 10%, 50V, Ceramic	4835	122 87023
C12	0.1uF., 50V, Ceramic	4835	122 87563
C13	0.1uF., +80-20%, 50V, Ceramic.	4835	122 87375
C14	0.1uF., +80-20%, 50V, Ceramic.	4835	122 87375
C15	0.1uF., +80-20%, 50V, Ceramic.	4835	122 87375
C17	0.1uF., +80-20%, 50V, Ceramic.	4835	122 87375
C18	39pF., 5%, 50V, Ceramic.	4835	122 87016
C19	39pF., 5%, 50V, Ceramic.	4835	122 87016
C20	0.1uF., +80-20%, 50V, Ceramic.	4835	122 87375
C21	100uF., 16V, Electrolytic.	4835	124 47493
C22	1000pF., 5%, 50V, Ceramic.	4835	122 87369
C23	1000pF., 5%, 50V, Ceramic.	4835	122 87369
C24	2.2uF., 50V, Electrolytic.	4835	124 47502
C25	6.8uF., 50V, Electrolytic.	4835	124 47604
C26	0.1uF., +80-20%, 50V, Ceramic.	4835	122 87375
C27	6.8uF., 50V, Electrolytic.	4835	124 47604
R1	10k, 5%, 1/10W, Metal Film	4835	111 37216
R2	10k, 5%, 1/10W, Metal Film	4835	111 37216
R3	10k, 5%, 1/10W, Metal Film	4835	111 37216
R4	10k, 5%, 1/10W, Metal Film	4835	111 37216
R5	10k, 5%, 1/10W, Metal Film	4835	111 37216
R6	10k, 5%, 1/10W, Metal Film	4835	111 37216
R7	10k, 5%, 1/10W, Metal Film	4835	111 37216
R8	10k, 5%, 1/10W, Metal Film	4835	111 37216
R9	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R10	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R11	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R12	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R13	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R14	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R15	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R16	2.2k, 5%, 1/10W, Metal Film.	4835	111 37234
R17	100 ohm, 5%, 1/10W, Metal.	4835	111 37432
R18	51 ohm, 5%, 1/10W, Metal Film.	4835	111 37494
R20	1k, 5%, 1/10W, Metal Film.	4835	111 37433
R21	33k, 5%, 1/10W, Metal Film	4835	111 37248
R22	22k, 5%, 1/10W, Metal Film	4835	111 37441
R23	820 ohm, 5%, 1/10W, Metal.	4835	111 37466
R24	4.7k, 5%, 1/10W, Metal Film.	4835	111 37444
R25	4.7k, 5%, 1/10W, Metal Film.	4835	111 37444
R26	200k, 5%, 1/10W, Metal Film.	4835	111 37476
R27	10k, 5%, 1/10W, Metal Film	4835	111 37216
R28	510 ohm, 5%, 1/10W, Metal.	4835	111 37263
R29	510 ohm, 5%, 1/10W, Metal.	4835	111 37263
R30	3k, 5%, 1/10W, Metal Film.	4835	111 37245
R32	22k, 5%, 1/4W, Metal Film.	4835	111 37031
R33	10k, 5%, 1/10W, Metal Film	4835	111 37216
R35	560 ohm, 5%, 1/10W, Metal.	4835	111 37428
R36	3.9k, 5%, 1/10W, Metal Film.	4835	111 37254
R37	4.7k, 5%, 1/10W, Metal Film.	4835	111 37444
R40	1.5k, 5%, 1/10W, Metal Film.	4835	111 37437
R41	4.7k, 5%, 1/10W, Metal Film.	4835	111 37444
R42	4.7k, 5%, 1/10W, Metal Film.	4835	111 37444
R43	4.7k, 5%, 1/10W, Metal Film.	4835	111 37444
R44	91ohm, 5%, 1/4W, Metal Film.	4835	111 37129
R45	10 ohm, 5%, 1/4W, Metal Film	4835	111 37132
R46	1.5k, 5%, 1/10W, Metal Film.	4835	111 37437
R47	1.5k, 5%, 1/10W, Metal Film.	4835	111 37437
R48	510 ohm, 5%, 1/10W, Metal Film	4835	111 37263
R49	560 ohm, 5%, 1/10W, Metal Film	4835	111 37428

S = Safety Part Be sure to use exact replacement part.

R50	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R51	4.7k, 5%, 1/4W, Metal Film	4835 111 37037
R52	240 ohm, 5%, 1/4W, Metal Film.	4835 111 37078
D1	Diode, Silicon	4835 130 37066
IC1	IC 74HC157, Quad Input Multiplexer . .	4835 209 87904
IC2	IC 74HC03D, Quad NAND.	0483 520 98849
IC3	IC 74HC573, Octal D-Type Transparent La tch.	4835 209 88479
IC4	IC LC864164B	4835 209 88492
IC5	IC TC518128CFWL-80	4835 209 88485
IC6	IC UPD65640GF-172.	4835 209 88484
IC7	IC LM311N, Comparator.	4835 209 88489
Q1	Transistor, PNP.	4835 130 47112
Q2	Transistor, PNP.	4835 130 47112
Q3	Transistor, PNP.	4835 130 47112
Q4	Transistor, NPN.	4835 130 47086
Q5	Transistor, PNP.	4835 130 47112
Q6	Transistor, NPN.	4835 130 47086
L1	Coil, Adj., 5uH.	4835 157 58097
L2	Peaking Coil, 12uH..	4835 150 57058
L3	Peaking Coil, 12uH..	4835 150 57058
L4	Peaking Coil, 2.2uH.	4835 150 57054
L5	Peaking Coil, 2.2uH.	4835 150 57054
L6	Peaking Coil, 2. 2uH..	4835 150 57054
L7	Peaking Coil, 2. 2uH..	4835 150 57054
L8	Peaking Coil, 10uH..	4835 150 57057
L9	Peaking Coil, 10uH..	4835 150 57057
J100	2 Pin Board Connector.	2422 025 14668
J306	6 Pin Board Connector.	2422 025 14673
J308	4 Pin Board Connector.	2422 025 15021
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector, Yellow.	0018 223 60005
Y1	Crystal, 12MHz	4835 242 77244
Y2	Pizoelectrolytic Crystal, 8.05MHz. . .	4835 242 77284
B36	Buss Wire.	0046 012 60001
BR3	0 ohm, "Chip" Jumper	4835 111 37019
BR5	0 ohm, "Chip" Jumper	4835 111 37215
BR11	0 ohm, "Chip" Jumper	4835 111 37019

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706104 0001 OPTICAL ASSEMBLY

	00706104 0001 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT (P16LFM00BMB) Blue	4835 310 57438
S E	CRT (P16LFM00HLA) Green.	4835 310 57437
S E	CRT (P16LFM00RFA) Red.	4835 310 57436
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler Red & Blue (54")	4835 290 87155
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Main, Blue	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

MX6072C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77758
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77791
CBA	25W Audio Amp.	4835 219 77762
CBA	Stereo Spread Panel.	4835 219 57687
CBA	Guide Plus Panel	4835 219 77704
CBA	Remote Locator	0000 00A 10706
CBA	Wallvision Switch Panel.	4835 219 77765
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR617	4835 219 17703

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00A10706 REMOTE LOCATOR

00A10706 REMOTE LOCATOR

C1	30pF., 5%, 50V, Ceramic	3198 016 03990
C2	1000pF., 10%, 50V, Ceramic	3198 017 01020
C3	1000pF., 10%, 50V, Ceramic	3198 017 01020
C4	3pF., 50V, Ceramic	4835 122 87565
C5	10pF., 5%, 50V, Ceramic.	4835 122 87412
C6	1000pF., 10%, 50V, Ceramic	3198 017 01020
C7	1000pF., 10%, 50V, Ceramic	3198 017 01020
C8	10uF., 20%, 50V, Electrolytic.	4835 124 47499

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

C15	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
R3	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R4	68 ohm, 5%, 1/10W, Carbon Film	4835 111 37408
R5	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R6	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R7	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R8	300 ohm, 5%, 1/2W, Metal Film.	2322 187 53301
R9	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
Q1	Transistor, NPN, MMBTH10L.	9322 100 54685
Z1	Zener Diode, 9.1V, BZX79	4835 130 37878
J320	3 Pin Connector.	0018 179 40003

00AVJ218 & 00AVJ221 FRONT JACK PANEL

	00AVJ218 & 00AVJ221 FRONT JACK PANEL	
R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 00MX6072C101

	MODEL 00MX6072C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 00790
	Back Cover 60" Vac FM.	3135 014 01020
	Back Cover Ctr	4835 432 97703
	Back Cover End(x2)	3135 013 00730
	Back Cover Rail.	4835 432 97716
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
	Extr. Screen Edge, T&B (x2).	3135 014 04140
2	Extr., Screen Edge, Side (x2).	3135 014 04150
	Filter Contrast 60	3135 014 03730
4	Foot Base Rail (x2).	3135 014 03131
6	Front Base Rail.	3135 013 02031
	Front Jack Panel	4835 219 77791
	Guide Plus	4835 219 77704
9	Hole Insert (x13).	3135 014 02741
	IR Blaster 705994.	3135 017 00920
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00940
10	Lens, Lenticular	3135 013 00910
22	Light Barrier.	4835 432 17847
25	Mirror Board	3135 013 02330
15	Mirror Board Mtng Brkt. (x2)	3135 011 02021
24	Mirror Trapz,1st	4835 380 37029
	Owners Manual.	3135 015 07470
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 07460
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmit. UR617KD	4835 219 17703
1	Retainer Treelock (x22).	3135 014 02620
	Screen Frame Bottom.	3135 014 06150
12	Screen Frame Lt Corner (x2).	3135 014 06110
12	Screen Frame Rt Corner (x2).	3135 014 06120
	Screen Frame Top	3135 014 06090
	Screen Frame, Side (x2).	3135 014 06100
7	Speaker Grille	3135 014 06020
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 6" (x2)	2422 264 00259
	Speed Clip JK.	3135 010 02660

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

	C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
	C1031	1uF., 35V Electrolytic	4835 124 97175
	C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
	C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1040	0.1uF., 50V, Ceramic	3198 023 21040
	C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
	C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
	C1046	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
	C1051	0.1uF., 50V, Ceramic	3198 023 21040
	R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
	R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
	R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R368	1k, 5%, 1/2W, Metal Film	4835 116 57685
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R378	1k, 5%, 1/2W, Metal Film	4835 116 57685
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R385	1k, 5%, 1/2W, Metal Film	4835 116 57685
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R722	560 ohm, 5%, 1/10W, Carbon Film	4835 111 27054	
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048	
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R742	470 ohm, 5%, 1/10W, Carbon Film	4835 111 37259	
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R744	390 ohm, 5%, 1/10W, Carbon Film	4835 111 37253	
R745	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R748	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391	
R753	560 ohm, 5%, 1/10W, Carbon Film	4835 111 27054	
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R755	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458	
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448	
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R759	10k, 5%, 1/10W, Carbon Film	4835 111 37216	
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R761	1k, 5%, 1/4W, Carbon Film	4835 111 37022	
R762	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R772	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684	
R773	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684	
R774	470 ohm, 5%, 1/2W, Metal Film	4835 116 57723	
R775	1k, 5%, 1/4W, Carbon Film	4835 111 37022	
R776	5.1k, 2%, 1/8W, Carbon Film	2322 730 31512	
R777	10k, 5%, 1/10W, Carbon Film	4835 111 37216	
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R785	2.2k, 2%, 1/8W, Carbon Film	2322 730 31222	
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458	
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554	
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231	
R789	150 ohm, 5%, 1/2W, Metal Film	4835 116 57696	
R790	10k, 5%, 1/10W, Carbon Film	4835 111 37216	
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736	
R798	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R800	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102	
R802	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R806	1k, 2%, 1/8W, Carbon Film	4835 110 67216	
R808	390 ohm, 5%, 1/10W, Carbon Film	4835 111 37253	
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620	
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052	
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750	
R821	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234	
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724	
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708	
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445	
R1001	22k, 5%, 1/2W, Metal Film	4835 116 57706	
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R1003	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684	
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097	
R1006	470 ohm, 5%, 1/2W, Metal Film	4835 116 57723	
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685	
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235	
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407	
R1012	12k, 5%, 1/10W, Carbon Film	3198 021 51230	
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R1016	220 ohm, 5%, 1/2W, Metal Film	4835 116 57705	
R1017	220 ohm, 5%, 1/10W, Carbon Film	4835 111 37371	
R1018	220 ohm, 5%, 1/10W, Carbon Film	4835 111 37371	
R1019	220 ohm, 5%, 1/2W, Metal Film	4835 116 57705	
R1020	100 ohm, 5%, 1/2W, Metal Film	4835 116 57684	
R1021	22k, 5%, 1/2W, Metal Film	4835 116 57706	
R1022	22k, 5%, 1/2W, Metal Film	4835 116 57706	
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437	
R1027	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
R1030	100 ohm, 5%, 1/10W, Carbon Film	4835 111 37432	
D9	Diode BAS216	4835 130 37905	
D100	Diode BAS216	4835 130 37905	
D300	Diode 1N4148	4835 130 37048	
D301	Diode BAS216	4835 130 37905	
D305	Diode BAS216	4835 130 37905	
D306	Diode BAS216	4835 130 37905	
D310	Diode BAS216	4835 130 37905	
D311	Diode BAS216	4835 130 37905	
D312	Diode BAS216	4835 130 37905	
D313	Diode BAS216	4835 130 37905	
D320	Diode 1N4148	4835 130 37048	
D321	Diode BAS216	4835 130 37905	
D322	Diode BAS216	4835 130 37905	
D323	Diode BAS216	4835 130 37905	
D324	Diode BAS216	4835 130 37905	
D325	Diode BAS216	4835 130 37905	
D326	Diode BAS216	4835 130 37905	
D401	Diode 1N4148	4835 130 37048	
D600	Diode BAS216	4835 130 37905	
D601	Diode BAS216	4835 130 37905	
D602	Diode BAS216	4835 130 37905	
D603	Diode BAS216	4835 130 37905	
D605	Diode BAS216	4835 130 37905	
D607	Diode 1N4148	4835 130 37048	
D608	Diode 1N4148	4835 130 37048	
D609	Diode 1N4148	4835 130 37048	
D610	Diode 1N4148	4835 130 37048	
D611	Diode 1N4148	4835 130 37048	
D612	Diode BAS216	4835 130 37905	
D613	Diode BAS216	4835 130 37905	
D614	Diode BAS216	4835 130 37905	
D615	Diode 1N4148	4835 130 37048	
D617	Diode 1N4148	4835 130 37048	
D618	Diode 1N4148	4835 130 37048	
D630	Diode 1N4148	4835 130 37048	
D700	Diode BAS216	4835 130 37905	
D701	Diode BAS216	4835 130 37905	
D702	Diode BAS216	4835 130 37905	
IC1	IC CXA1855S	4835 209 88564	
IC4	IC L7809CV	4835 209 88009	
IC105	IC HEF4053BP	4835 209 17033	
IC107	IC HEF4053BP	4835 209 17033	
IC120	IC TDA9855V2	4835 209 88337	
IC200	IC LA7575	4835 209 87757	
IC201	IC LA7575	4835 209 87757	
IC300	IC LC864266A	3135 010 03001	
IC304	IC ST24W08B6	9322 098 40682	
IC400	IC L7812CV	9335 040 20682	
IC401	IC MC7805CT	9334 536 00682	
IC600	IC TA8845AN	4835 209 88331	
IC606	IC L7809CV	4835 209 88009	
IC700	IC TC90A13N	4835 209 88566	
IC701	IC LA7222	4835 209 87089	
IC703	IC MC7805CT	9334 536 00682	
IC1001	IC MC44461B	9322 107 07682	
Q3	Transistor BC847B	4822 130 60511	
Q4	Transistor BC847B	4822 130 60511	
Q5	Transistor BC847B	4822 130 60511	
Q9	Transistor J177	9340 053 20126	
Q10	Transistor BC847B	4822 130 60511	
Q11	Transistor BC847B	4822 130 60511	
Q12	Transistor BC847B	4822 130 60511	
Q14	Transistor BC847B	4822 130 60511	
Q16	Transistor BC847B	4822 130 60511	
Q139	Transistor BC847B	4822 130 60511	
Q140	Transistor BC847B	4822 130 60511	
Q141	Transistor BC847B	4822 130 60511	
Q200	Transistor BC85	5322 130 60508	
Q201	Transistor BC85	5322 130 60508	
Q205	Transistor BC85	5322 130 60508	
Q206	Transistor BC85	5322 130 60508	
Q207	Transistor BC857	4835 130 47112	
Q208	Transistor BC857	4835 130 47112	
Q209	Transistor BC847B	4822 130 60511	
Q300	Transistor BC847B	4822 130 60511	
Q301	Transistor BC847B	4822 130 60511	
Q302	Transistor BC847B	4822 130 60511	
Q303	Transistor BC847B	4822 130 60511	
Q304	Transistor BC847B	4822 130 60511	
Q305	Transistor BC847B	4822 130 60511	
Q306	Transistor PMBT2222A	4835 130 47066	
Q308	Transistor BC847B	4822 130 60511	
Q309	Transistor BC85	5322 130 60508	
Q310	Transistor BC847B	4822 130 60511	
Q313	Transistor BC847B	4822 130 60511	
Q314	Transistor BC847B	4822 130 60511	
Q315	Transistor BC85	5322 130 60508	
Q600	Transistor BC847B	4822 130 60511	
Q601	Transistor BC85	5322 130 60508	
Q602	Transistor BC85	5322 130 60508	
Q603	Transistor BC85	5322 130 60508	
Q604	Transistor BC847B	4822 130 60511	
Q605	Transistor BC847B	4822 130 60511	
Q606	Transistor BC847B	4822 130 60511	
Q607	Transistor BC85	5322 130 60508	
Q608	Transistor BC847B	4822 130 60511	
Q609	Transistor BC847B	4822 130 60511	
Q611	Transistor BC85	5322 130 60508	
Q612	Transistor BC85	5322 130 60508	
Q613	Transistor BC85	5322 130 60508	

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J300	7 Pin Board Connector.	2422 025 14674
J301	4 Pin Board Connector.	2422 025 14672
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J306	6 Pin Board Connector.	2422 025 15023
J307	8 Pin Board Connector.	2422 025 15025
J308	4 Pin Board Connector.	2422 025 14671
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector.	2422 025 15022
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573
	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
Q502	Transistor, BC847B	4822 130 60511
Q503	Transistor, BC847B	4822 130 60511
Q550	Transistor, PNP.	4835 130 47084
Q551	Transistor, BC847B	4822 130 60511
Q800	Transistor, BC847B	4822 130 60511
Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
Q802	Transistor, 2SD2539.	4835 130 48074
Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
Q901	Transistor, BC85	5322 130 60508
Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
Q904	Transistor, BC85, Soft Start	5322 130 60508
Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
Z400	Zener Diode, BZX79B10.	4835 130 37935
Z500	Zener Diode, 10V	4835 130 37739
Z501	Diode BZX79-B18.	4835 130 37936
Z503	Zener Diode, P6KE62A	4835 130 37547
Z901	Zener Diode, 6.2V.	4835 130 37751
L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
L407	Ferrite Bead	4835 526 17001
L408	Suppression Coil, 10uH..	4835 152 27002
S L409	Peaking Coil, 2.2uH.	4835 150 57054
L410	Suppression Coil, 18uH..	4835 150 57051
L412	Ferrite Bead	4835 526 17001
L415	Suppression Coil, 1.8uH.	4835 152 27029
L416	Ferrite Bead	4835 526 17001
L420	Ferrite Bead	4835 526 17001
S L421	Line Input Choke	4835 152 27028
L422	Suppression Coil, 10uH..	4835 152 27002
L423	Suppression Coil, 10uH..	4835 152 27002
L424	Suppression Coil, 10uH..	4835 152 27002
L425	Suppression Coil, 10uH..	4835 152 27002
L426	Suppression Coil, 42uH..	4835 157 57063
L427	Ferrite Bead	4835 526 17001
L428	Suppression Coil, 42uH..	4835 157 57063
L429	Ferrite Bead	4835 526 17001
L430	Ferrite Bead	4835 526 17001
L432	Suppression Coil, 10uH..	4835 152 27002
L435	Suppression Coil, 10uH..	4835 152 27002
L440	Suppression Coil, 10uH..	4835 152 27002
L550	Suppression Coil, 10uH..	4835 152 27002
L803	Coil, Choke.	3121 218 31110
L804	Linear Coil.	0036 202 80026
L805	Ferrite Bead	4835 526 17003
L902	Coil, 22uH., 10%	4835 150 57052
L903	Suppression Coil, 3.6uH.	4835 152 27001
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S T401	Transformer, Switch Mode	4835 148 87339
S T402	Transformer, Power	4835 148 87345
S T800	Transformer, Horiz. Driver	4835 142 47021
S T801	Transformer, Scan Power.	4835 148 87318
S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

WALLVISION SWITCH PANEL

	WALLVISION SWITCH PANEL	
C1	1000pF., 10%, 50V, Ceramic	4835 122 47103
C2	0.01uF., 10%, 50V, Ceramic	4835 122 47081
C4	100pF., 10%, 50V, Ceramic.	4835 122 37001
C5	100pF., 10%, 50V, Ceramic.	4835 122 37001
C7	1000pF., 10%, 50V, Ceramic	4835 122 47103
C8	100pF., 10%, 50V, Ceramic.	4835 122 37001
C9	100pF., 10%, 50V, Ceramic.	4835 122 37001
C10	10uF., 50V, Electrolytic	4835 124 47545
C11	0.1uF., 10%, 100V, Polyester	4835 121 47297
C12	10uF., 50V, Electrolytic	4835 124 47545
R1	1k, 5%, 1/4W, Metal Film	4835 116 57319
R2	1k, 5%, 1/4W, Metal Film	4835 116 57319
R3	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R4	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R5	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R10	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R11	18k, 5%, 1/4W, Metal Film.	4835 116 57323
R12	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R13	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R14	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R15	47k, 5%, 1/4W, Metal Film.	4835 116 57428
R16	10 ohm, 5%, 1/4W, Metal Film	4835 116 57362
D1	Diode 1N4148	4835 130 37048
D2	Diode 1N4148	4835 130 37048
D3	Diode 1N4148	4835 130 37048
D4	Diode 1N4148	4835 130 37048
D5	Diode 1N4148	4835 130 37048
IC1	IC P83C652FBP.	0061 311 95002
Q1	Transistor BC557B.	4835 130 47409
Q2	Transistor BC547B.	4835 130 47055
BKT703	Switch Bracket	0073 568 70004
J100	2 Pin Connector.	2422 025 07305
J254	5 Pin Connector.	0018 222 30405
J254A	5 Pin Connector.	0018 222 30205
J301	5 pin Connector.	2422 038 00176
J305	3 Pin Connector.	2422 038 00175
J704	2 Pin Connector.	2422 015 19025
J707	Phono Jack	0018 221 10006
J712	Jack f/IR Blaster.	2422 026 04376
S703	Switch, 4PDT	4835 277 27072
SHLD1B	Small Signal Cover	0073 602 80003
SHLD1T	Small Signal Shield.	0073 598 90003
Y1	Ceramic Resonator, 12MHz	4835 157 57129

SVM MODULE

	SVM MODULE	
C751	1uF., 50V, Electrolytic.	4835 121 47406
C752	330pF., 10%, 50V, Ceramic.	4835 121 47079
C753	470uF., 25V, Electrolytic.	4835 121 47405
C754	0.1uF., 100V, Polyester.	2222 365 85104
C755	0.047uF., 50V, Ceramic	4835 122 47608
C756	47uF., 50V, Electrolytic	4835 124 47668
C757	0.01uF., 100V, Polyester	4822 121 41815
C758	470uF., 25V, Electrolytic.	4835 121 47405
C759	150pF., 10%, 50V, Ceramic.	4835 122 47645
C760	150pF., 10%, 50V, Ceramic.	4835 122 47645
C761	0.1uF., 250V, Polyester.	4835 121 47278
C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039
S C766	47uF., 160V, Electrolytic.	4835 124 47713
S C767	47uF., 160V, Electrolytic.	4835 124 47713
S C768	47uF., 160V, Electrolytic.	4835 124 47713
S C769	22uF., 160V, Electrolytic.	4835 124 47726
S C770	560pF., 10%, 500V, Ceramic	4835 122 47647
C774	0.01uF., 100V, Polyester	4822 121 41815
S R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745
R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R753	4.7k, 1/2W, Metal Film	4835 116 57724
R754	1k, 1/2W, Metal Film	4835 116 57685
R755	180 ohm, 1/2W, Metal Film.	4835 116 57701
R756	100 ohm, 1/2W, Metal Film.	4835 116 57684
R758	22 ohm, 1/2W, Metal Film	4835 116 57708
S R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763
R761	270 ohm, 1/2W, Metal Film.	4835 116 57709
R762	270 ohm, 1/2W, Metal Film.	4835 116 57709
R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
R765	1.8k, 1/2W, Metal Film	4835 116 57702
R766	150 ohm, 1/2W, Metal Film.	4835 116 57696
R767	3.3k, 1/2W, Metal Film	4835 116 57714
R768	4.7k, 1/2W, Metal Film	4835 116 57724
R769	33k, 1/2W, Metal Film.	4835 116 57715
R770	470 ohm, 1/2W, Metal Film.	4835 116 57723
R771	33k, 1/2W, Metal Film.	4835 116 57715
R772	1k, 1/2W, Metal Film	4835 116 57685
R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761
R774	22 ohm, 1/2W, Metal Film	4835 116 57708
R775	22 ohm, 1/2W, Metal Film	4835 116 57708
R776	22 ohm, 1/2W, Metal Film	4835 116 57708

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

S R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112	27043
R782	330 ohm, 1/2W, Metal Film.	4835 116	57713
R783	68k, 1/2W, Metal Film.	4835 116	57737
R784	10k, 1/2W, Metal Film.	4835 116	57686
R785	68k, 1/2W, Metal Film.	4835 116	57737
R786	330 ohm, 1/2W, Metal Film.	4835 116	57713
S R787	27 ohm, 5%, 1W Metal Oxide	4835 116	67269
S R788	27 ohm, 5%, 1W Metal Oxide	4835 116	67269
S R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106	90293
S R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106	90293
R792	470 ohm, 1/2W, Metal Film.	4835 116	57723
R793	22k, 1/2W, Metal Film.	4835 116	57706
R794	22 ohm, 1/2W, Metal Film	4835 116	57708
R795	22 ohm, 1/2W, Metal Film	4835 116	57708
S R796	82 ohm, 5%, 3W Metal Oxide	4835 116	57127
S R798	82 ohm, 5%, 3W Metal Oxide	4835 116	57127
R797	4.7k, 1/2W, Metal Film	4835 116	57724
S R799	82 ohm, 5%, 3W Metal Oxide	4835 116	57127
D751	Diode 1N4148	4835 130	37048
D752	Diode 1N4148	4835 130	37048
D753	Diode 1N4148	4835 130	37048
D760	Diode 1N4148	4835 130	37048
D761	Diode, Silicon	4835 220	17059
D762	Diode, Silicon	4835 220	17059
Q751	Transistor BC548B.	4835 130	47055
Q753	Transistor BC558B.	4835 130	47162
Q754	Transistor BC548B.	4835 130	47055
Q755	Transistor BC548B.	4835 130	47055
Q756	Transistor BC548B.	4835 130	47055
Q757	Transistor BC337-25.	4835 130	48113
Q758	Transistor BC327-25.	4835 130	48112
Q759	Transistor 2SB940A	4835 130	48119
Q760	Transistor 2SD1264AP	4835 130	48121
Q761	Transistor BC548B.	4835 130	47055
L752	Inductor Coil LAL03 10UK	2422 535	96711
FB751	Ferrite Bead	4835 526	17003
FB752	Ferrite Bead	4835 526	17003
HS76	Solder Lug f/IC400	0020 100	70001
HS76	Heatsink	0073 515	10003
HS76	Spring Clip.	4835 290	47008
J751	10 Pin Connector	0018 223	80010
J752	2 Pin Board Connector.	2422 025	14668
J753	2 Pin Board Connector.	2422 025	14668
J754	2 Pin Board Connector.	2422 025	14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE		
C139	4.7uF., 50V, Electrolytic.	4835 124	47506
C141	680pF., 50V, Ceramic	4835 122	47187
C142	10uF., 50V, Electrolytic	4835 124	47499
C144	680pF., 50V, Ceramic	4835 122	47187
C145	0.015uF., 10%, 50V, Polyester.	4835 121	47628
C146	4.7uF., 50V, Electrolytic.	4835 124	47506
C147	150pF., 10%, 50V, Ceramic.	4835 122	47645
C148	2200pF., 50V, Ceramic.	4835 122	47007
C149	0.015uF., 10%, 50V, Polyester.	4835 121	47628
C150	0.015uF., 10%, 50V, Polyester.	4835 121	47628
C151	1uF., 50V, Electrolytic.	4835 121	47406
C152	1uF., 50V, Electrolytic.	4835 121	47406
C154	0.1uF., 63V, Polyester	4835 121	47602
C155	100uF., 16V, Electrolytic.	4835 124	47706
C156	10uF., 50V, Electrolytic	4835 124	47499
C158	10uF., 50V, Electrolytic	4835 124	47499
C159	4.7uF., 50V, Electrolytic.	4835 124	47506
C163	2200pF., 50V, Ceramic.	4835 122	47007
C176	0.1uF., 63V, Polyester	4835 121	47602
C182	0.1uF., 63V, Polyester	4835 121	47602
C196	0.047uF., 50V, Polyester	4835 121	47588
C197	0.047uF., 50V, Polyester	4835 121	47588
R130	100k, 1/2W, Metal Film	4835 116	57687
R140	47k, 1/2W, Metal Film.	4835 116	57725
R141	47k, 1/2W, Metal Film.	4835 116	57725
R143	1k, 1/2W, Metal Film	4835 116	57685
R144	12k, 1/2W, Metal Film.	4835 116	57692
R145	2k, 1/2W, Metal Film	4835 116	57703
S R146	47 ohm, 1/2W, Metal Film	4835 116	57727
R147	12k, 1/2W, Metal Film.	4835 116	57692
R148	15k, 1/2W, Metal Film.	4835 116	57698
R149	15k, 1/2W, Metal Film.	4835 116	57698
R150	20k, 1/2W, Metal Film.	4835 116	57704
R151	10k, 1/2W, Metal Film.	4835 116	57686
R152	1k, 1/2W, Metal Film	4835 116	57685
R153	10k, 1/2W, Metal Film.	4835 116	57686
R154	2k, 1/2W, Metal Film	4835 116	57703
R155	47k, 1/2W, Metal Film.	4835 116	57725
R156	20k, 1/2W, Metal Film.	4835 116	57704
R157	15k, 1/2W, Metal Film.	4835 116	57698
R158	56k, 5%, 1/2W, Metal Film.	4835 116	57758
R159	22k, 1/2W, Metal Film.	4835 116	57706
R160	56k, 5%, 1/2W, Metal Film.	4835 116	57758
R161	10k, 1/2W, Metal Film.	4835 116	57686
R164	47k, 1/2W, Metal Film.	4835 116	57725
R166	10k, 1/2W, Metal Film.	4835 116	57686
R167	22k, 1/2W, Metal Film.	4835 116	57706
R168	1.5k, 1/2W, Metal Film	4835 116	57697
R170	1.5k, 1/2W, Metal Film	4835 116	57697
R171	100k, 1/2W, Metal Film	4835 116	57687
R173	100k, 1/2W, Metal Film	4835 116	57687
R174	100k, 1/2W, Metal Film	4835 116	57687
R175	100k, 1/2W, Metal Film	4835 116	57687
R176	100k, 1/2W, Metal Film	4835 116	57687
R177	1k, 1/2W, Metal Film	4835 116	57685
R178	1k, 1/2W, Metal Film	4835 116	57685
S R179	47 ohm, 1/2W, Metal Film	4835 116	57727
R180	10k, 1/2W, Metal Film.	4835 116	57686
R181	10k, 1/2W, Metal Film.	4835 116	57686
R182	47k, 1/2W, Metal Film.	4835 116	57725
R183	100k, 1/2W, Metal Film	4835 116	57687
IC103	IC, 6124800001, Smart Stereo Surround.	4835 209	17032
IC105	IC, HEF4053BP, 2 Channel Multi/Demultip	4835 209	17033
Q140	Transistor BC547B, Smart Stereo Surroun	4835 130	47055
Z102	Zener Diode BZX79-F3.9V.	4835 130	37929
Z103	Zener Diode BZX79-F3.9V.	4835 130	37929
J178	6 Pin Board Connector.	0018 179	40006
J278A	5 Pin Board Connector.	2422 038	00176
MEC1	Support f/P.C. Bd.	0073 589	20001
MEC2	Support f/P.C. Bd.	0073 589	20001
C1	33pF., 5%, 50V, Ceramic.	4835 122	87414
C2	33pF., 5%, 50V, Ceramic.	4835 122	87414
C3	27pF., 5%, 50V, Ceramic.	4835 122	87381
C4	39pF., 5%, 50V, Ceramic.	4835 122	87016
C6	10uF., 35V, Electrolytic	4835 124	47562
C7	100pF., 5%, 50V, Ceramic	4835 122	87012
C8	1uF., 50V, Electrolytic.	4835 121	47406
C10	1000pF., 10%, 50V, Ceramic	4835 122	87023
C12	0.1uF., 50V, Ceramic	4835 122	87563
C13	0.1uF., +80-20%, 50V, Ceramic.	4835 122	87375
C14	0.1uF., +80-20%, 50V, Ceramic.	4835 122	87375
C15	0.1uF., +80-20%, 50V, Ceramic.	4835 122	87375
C17	0.1uF., +80-20%, 50V, Ceramic.	4835 122	87375
C18	39pF., 5%, 50V, Ceramic.	4835 122	87016
C19	39pF., 5%, 50V, Ceramic.	4835 122	87016
C20	0.1uF., +80-20%, 50V, Ceramic.	4835 122	87375
C21	100uF., 16V, Electrolytic.	4835 124	47493
C22	1000pF., 5%, 50V, Ceramic.	4835 122	87369
C23	1000pF., 5%, 50V, Ceramic.	4835 122	87369
C24	2.2uF., 50V, Electrolytic.	4835 124	47502
C25	6.8uF., 50V, Electrolytic.	4835 124	47604
C26	0.1uF., +80-20%, 50V, Ceramic.	4835 122	87375
C27	6.8uF., 50V, Electrolytic.	4835 124	47604
R1	10k, 5%, 1/10W, Metal Film	4835 111	37216
R2	10k, 5%, 1/10W, Metal Film	4835 111	37216
R3	10k, 5%, 1/10W, Metal Film	4835 111	37216
R4	10k, 5%, 1/10W, Metal Film	4835 111	37216
R5	10k, 5%, 1/10W, Metal Film	4835 111	37216
R6	10k, 5%, 1/10W, Metal Film	4835 111	37216
R7	10k, 5%, 1/10W, Metal Film	4835 111	37216
R8	10k, 5%, 1/10W, Metal Film	4835 111	37216
R9	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R10	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R11	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R12	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R13	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R14	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R15	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R16	2.2k, 5%, 1/10W, Metal Film.	4835 111	37234
R17	100 ohm, 5%, 1/10W, Metal.	4835 111	37432
R18	51 ohm, 5%, 1/10W, Metal Film.	4835 111	37494
R20	1k, 5%, 1/10W, Metal Film.	4835 111	37433
R21	33k, 5%, 1/10W, Metal Film	4835 111	37248
R22	22k, 5%, 1/10W, Metal Film	4835 111	37441
R23	820 ohm, 5%, 1/10W, Metal.	4835 111	37466
R24	4.7k, 5%, 1/10W, Metal Film.	4835 111	37444
R25	4.7k, 5%, 1/10W, Metal Film.	4835 111	37444
R26	200k, 5%, 1/10W, Metal Film.	4835 111	37476
R27	10k, 5%, 1/10W, Metal Film	4835 111	37216
R28	510 ohm, 5%, 1/10W, Metal.	4835 111	37263
R29	510 ohm, 5%, 1/10W, Metal.	4835 111	37263
R30	3k, 5%, 1/10W, Metal Film.	4835 111	37245
R32	22k, 5%, 1/4W, Metal Film.	4835 111	37031
R33	10k, 5%, 1/10W, Metal Film	4835 111	37216
R35	560 ohm, 5%, 1/10W, Metal.	4835 111	37428
R36	3.9k, 5%, 1/10W, Metal Film.	4835 111	37254
R37	4.7k, 5%, 1/10W, Metal Film.	4835 111	37444
R40	1.5k, 5%, 1/10W, Metal Film.	4835 111	37437
R41	4.7k, 5%, 1/10W, Metal Film.	4835 111	37444
R42	4.7k, 5%, 1/10W, Metal Film.	4835 111	37444
R43	4.7k, 5%, 1/10W, Metal Film.	4835 111	37444
R44	91ohm, 5%, 1/4W, Metal Film.	4835 111	37129
R45	10 ohm, 5%, 1/4W, Metal Film	4835 111	37132
R46	1.5k, 5%, 1/10W, Metal Film.	4835 111	37437
R47	1.5k, 5%, 1/10W, Metal Film.	4835 111	37437
R48	510 ohm, 5%, 1/10W, Metal Film	4835 111	37263
R49	560 ohm, 5%, 1/10W, Metal Film	4835 111	37428

S = Safety Part Be sure to use exact replacement part.

MX6072C (continued)

R50	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R51	4.7k, 5%, 1/4W, Metal Film	4835 111 37037
R52	240 ohm, 5%, 1/4W, Metal Film.	4835 111 37078
D1	Diode, Silicon	4835 130 37066
IC1	IC 74HC157, Quad Input Multiplexer . .	4835 209 87904
IC2	IC 74HC03D, Quad NAND.	0483 520 98849
IC3	IC 74HC573, Octal D-Type Transparent La tch.	4835 209 88479
IC4	IC LC864164B	4835 209 88492
IC5	IC TC518128CFWL-80	4835 209 88485
IC6	IC UPD65640GF-172.	4835 209 88484
IC7	IC LM311N, Comparator.	4835 209 88489
Q1	Transistor, PNP.	4835 130 47112
Q2	Transistor, PNP.	4835 130 47112
Q3	Transistor, PNP.	4835 130 47112
Q4	Transistor, NPN.	4835 130 47086
Q5	Transistor, PNP.	4835 130 47112
Q6	Transistor, NPN.	4835 130 47086
L1	Coil, Adj., 5uH.	4835 157 58097
L2	Peaking Coil, 12uH..	4835 150 57058
L3	Peaking Coil, 12uH..	4835 150 57058
L4	Peaking Coil, 2.2uH.	4835 150 57054
L5	Peaking Coil, 2.2uH.	4835 150 57054
L6	Peaking Coil, 2. 2uH..	4835 150 57054
L7	Peaking Coil, 2. 2uH..	4835 150 57054
L8	Peaking Coil, 10uH..	4835 150 57057
L9	Peaking Coil, 10uH..	4835 150 57057
J100	2 Pin Board Connector.	2422 025 14668
J306	6 Pin Board Connector.	2422 025 14673
J308	4 Pin Board Connector.	2422 025 15021
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector, Yellow.	0018 223 60005
Y1	Crystal, 12MHz	4835 242 77244
Y2	Pizoelectrolytic Crystal, 8.05MHz. . .	4835 242 77284
B36	Buss Wire.	0046 012 60001
BR3	0 ohm, "Chip" Jumper	4835 111 37019
BR5	0 ohm, "Chip" Jumper	4835 111 37215
BR11	0 ohm, "Chip" Jumper	4835 111 37019

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706086 0001, 0002 OPTICAL ASSEMBLY

	00706086 0001, 0002 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	Shield Lt.	3135 013 00121
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT Blue (P16LFM00BMB)	4835 310 57438
S E	CRT Green (P16LFM00HLA).	4835 310 57437
S E	CRT Red (P16LFM00RFA).	4835 310 57436
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler 60" Red (0002)	3135 011 01940
P	Coupler Red & Blue 64" (0001).	3135 011 02550
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Delta 79 (Blue).	4835 381 47021
W	Lens, Main, Red & Green (0002)	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

MX6472C - Manual no. 7573

CBA's

	CBA's	
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77758
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	4835 219 77764
CBA	IR Receiver Panel.	0000 00A RR023
CBA	Switch Panel	4835 219 77786
CBA	Front Jack Panel	4835 219 77791
CBA	25W Audio Amp.	4835 219 77762
CBA	Stereo Spread Panel.	4835 219 57687
CBA	Guide Plus Panel	4835 219 77704
CBA	Remote Locator	0000 00A 10706
CBA	Wallvision Switch Panel.	4835 219 77765
CBA	3 Tube Scan Velocity Module.	4835 219 77792
CBA	Remote Transmitter UR617	4835 219 17703

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00A10706 REMOTE LOCATOR

00A10706 REMOTE LOCATOR

C1	30pF., 5%, 50V, Ceramic	3198 016 03990
C2	1000pF., 10%, 50V, Ceramic	3198 017 01020
C3	1000pF., 10%, 50V, Ceramic	3198 017 01020
C4	3pF., 50V, Ceramic	4835 122 87565
C5	10pF., 5%, 50V, Ceramic.	4835 122 87412
C6	1000pF., 10%, 50V, Ceramic	3198 017 01020
C7	1000pF., 10%, 50V, Ceramic	3198 017 01020
C8	10uF., 20%, 50V, Electrolytic.	4835 124 47499

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

C15	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
R3	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R4	68 ohm, 5%, 1/10W, Carbon Film	4835 111 37408
R5	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R6	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R7	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R8	300 ohm, 5%, 1/2W, Metal Film.	2322 187 53301
R9	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
Q1	Transistor, NPN, MMBTH10L.	9322 100 54685
Z1	Zener Diode, 9.1V, BZX79	4835 130 37878
J320	3 Pin Connector.	0018 179 40003

00AVJ218 & 00AVJ221 FRONT JACK PANEL

	00AVJ218 & 00AVJ221 FRONT JACK PANEL	
R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

MODEL 00MX6472C101

	MODEL 00MX6472C101	
S 20	AC Cord, Filtered.	4835 321 17128
	Back Barrier	3135 013 00800
	Back Cover Ctr..	4835 432 97703
	Back Cover End	3135 013 00730
	Baffle Mount Receptacle (x6)	4835 265 97154
	Battery f/Remote AA.	2422 526 01262
	Cabinet Back, Vac.	3135 014 03860
	Caster (x4).	4835 528 77071
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	4835 240 77063
2	Extr., Screen Edge, Side (x2).	3135 014 04150
	Extr., Screen Edge, T&B (x2)	3135 014 04140
	Filter 64"	3135 014 03740
4	Foot Base Rail (x2).	3135 014 03131
6	Front Base Rail.	3135 013 02031
	Front Jack Panel	4835 219 77791
	Guide Plus	4835 219 77704
9	Hole Insert (x13).	3135 014 02741
	IR Blaster 705994.	3135 017 00920
18	Jack Panel Frame	4835 432 17944
13	Lens, Fresnel.	3135 013 00380
10	Lens, Lenticular	3135 013 00370
22	Light Barrier.	4835 432 17847
25	Mirror Board	3135 013 00390
15	Mirror Board Mtng Brkt. (x2)	3135 011 02021
24	Mirror Trapz,1st	3135 013 01400
	Owners Manual.	3135 015 07470
	Panel, Front Jack.	3135 014 02980
	Quick Use Guide.	3135 015 07460
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmit. UR617KD	4835 219 17703
1	Retainer Treelock (x22).	3135 014 02620
	Screen Frame Bottom.	3135 014 06130
12	Screen Frame Lt Corner (x2).	3135 014 06110
12	Screen Frame Rt Corner (x2).	3135 014 06120
	Screen Frame Side (x2)	3135 014 06060
	Screen Frame Top	3135 014 06050
7	Speaker Grille	3135 014 06020
21	Speaker Tweeter 2.75" (x2)	4835 240 27003
8	Speaker Woofer 6" (x2)	2422 264 00259
	Speed Clip JK.	3135 010 02660

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C390	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

	C1031	1uF., 35V Electrolytic	4835 124 97175
	C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
	C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
	C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1040	0.1uF., 50V, Ceramic	3198 023 21040
	C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
	C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
	C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
	C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
	C1051	0.1uF., 50V, Ceramic	3198 023 21040
	R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
	R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
	R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S	R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
	R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S	R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
	R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
	R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
	R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
	R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
	R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S	R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
	R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
	R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
	R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
	R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
	R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
	R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
	R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
	R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
	R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
	R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
	R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
	R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
	R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
	R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
	R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
	R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
	R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
	R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
	R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
	R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
	R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
	R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
	R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
	R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
	R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
	R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R368	1k, 5%, 1/2W, Metal Film	4835 116 57685
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R378	1k, 5%, 1/2W, Metal Film	4835 116 57685
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R385	1k, 5%, 1/2W, Metal Film	4835 116 57685
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

	R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
	R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S	R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
	R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
	R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
	R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
	R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
	R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
	R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
	R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
	R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
	R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
	R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
	R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
	R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
	R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
	R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
	R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
	R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
	R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
	R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
	R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
	R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
	R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
	R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
	R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
	R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
	R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
	R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
	R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
	R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
	R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
	R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
	R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
	R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
	R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
	R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
	R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
	R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
	D9	Diode BAS216	4835 130 37905
	D100	Diode BAS216	4835 130 37905
	D300	Diode 1N4148	4835 130 37048
	D301	Diode BAS216	4835 130 37905
	D305	Diode BAS216	4835 130 37905
	D306	Diode BAS216	4835 130 37905
	D310	Diode BAS216	4835 130 37905
	D311	Diode BAS216	4835 130 37905
	D312	Diode BAS216	4835 130 37905
	D313	Diode BAS216	4835 130 37905
	D320	Diode 1N4148	4835 130 37048
	D321	Diode BAS216	4835 130 37905
	D322	Diode BAS216	4835 130 37905
	D323	Diode BAS216	4835 130 37905
	D324	Diode BAS216	4835 130 37905
	D325	Diode BAS216	4835 130 37905
	D326	Diode BAS216	4835 130 37905
	D401	Diode 1N4148	4835 130 37048
	D600	Diode BAS216	4835 130 37905
	D601	Diode BAS216	4835 130 37905
	D602	Diode BAS216	4835 130 37905
	D603	Diode BAS216	4835 130 37905
	D605	Diode BAS216	4835 130 37905
	D607	Diode 1N4148	4835 130 37048
	D608	Diode 1N4148	4835 130 37048
	D609	Diode 1N4148	4835 130 37048
	D610	Diode 1N4148	4835 130 37048
	D611	Diode 1N4148	4835 130 37048
	D612	Diode BAS216	4835 130 37905
	D613	Diode BAS216	4835 130 37905
	D614	Diode BAS216	4835 130 37905
	D615	Diode 1N4148	4835 130 37048
	D617	Diode 1N4148	4835 130 37048
	D618	Diode 1N4148	4835 130 37048
	D630	Diode 1N4148	4835 130 37048
	D700	Diode BAS216	4835 130 37905
	D701	Diode BAS216	4835 130 37905
	D702	Diode BAS216	4835 130 37905
	IC1	IC CXA1855S.	4835 209 88564
	IC4	IC L7809CV	4835 209 88009
	IC105	IC HEF4053BP	4835 209 17033
	IC107	IC HEF4053BP	4835 209 17033
	IC120	IC TDA9855V2	4835 209 88337
	IC200	IC LA7575.	4835 209 87757
	IC201	IC LA7575.	4835 209 87757
	IC300	IC LC864266A	3135 010 03001
	IC304	IC ST24W08B6	9322 098 40682
	IC400	IC L7812CV	9335 040 20682
	IC401	IC MC7805CT.	9334 536 00682
	IC600	IC TA8845AN.	4835 209 88331
	IC606	IC L7809CV	4835 209 88009
	IC700	IC TC90A13N.	4835 209 88566
	IC701	IC LA7222.	4835 209 87089
	IC703	IC MC7805CT.	9334 536 00682
	IC1001	IC MC44461B.	9322 107 07682
	Q3	Transistor BC847B.	4822 130 60511
	Q4	Transistor BC847B.	4822 130 60511
	Q5	Transistor BC847B.	4822 130 60511
	Q9	Transistor J177.	9340 053 20126
	Q10	Transistor BC847B.	4822 130 60511
	Q11	Transistor BC847B.	4822 130 60511
	Q12	Transistor BC847B.	4822 130 60511
	Q14	Transistor BC847B.	4822 130 60511
	Q16	Transistor BC847B.	4822 130 60511
	Q139	Transistor BC847B.	4822 130 60511
	Q140	Transistor BC847B.	4822 130 60511
	Q141	Transistor BC847B.	4822 130 60511
	Q200	Transistor BC85.	5322 130 60508
	Q201	Transistor BC85.	5322 130 60508
	Q205	Transistor BC85.	5322 130 60508
	Q206	Transistor BC85.	5322 130 60508
	Q207	Transistor BC857	4835 130 47112
	Q208	Transistor BC857	4835 130 47112
	Q209	Transistor BC847B.	4822 130 60511
	Q300	Transistor BC847B.	4822 130 60511
	Q301	Transistor BC847B.	4822 130 60511
	Q302	Transistor BC847B.	4822 130 60511
	Q303	Transistor BC847B.	4822 130 60511
	Q304	Transistor BC847B.	4822 130 60511
	Q305	Transistor BC847B.	4822 130 60511
	Q306	Transistor PMBT2222A	4835 130 47066
	Q308	Transistor BC847B.	4822 130 60511
	Q309	Transistor BC85.	5322 130 60508
	Q310	Transistor BC847B.	4822 130 60511
	Q313	Transistor BC847B.	4822 130 60511
	Q314	Transistor BC847B.	4822 130 60511
	Q315	Transistor BC85.	5322 130 60508
	Q600	Transistor BC847B.	4822 130 60511
	Q601	Transistor BC85.	5322 130 60508
	Q602	Transistor BC85.	5322 130 60508
	Q603	Transistor BC85.	5322 130 60508
	Q604	Transistor BC847B.	4822 130 60511
	Q605	Transistor BC847B.	4822 130 60511
	Q606	Transistor BC847B.	4822 130 60511
	Q607	Transistor BC85.	5322 130 60508
	Q608	Transistor BC847B.	4822 130 60511
	Q609	Transistor BC847B.	4822 130 60511
	Q611	Transistor BC85.	5322 130 60508
	Q612	Transistor BC85.	5322 130 60508
	Q613	Transistor BC85.	5322 130 60508
	Q614	Transistor BC847B.	4822 130 60511

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028

BKT1	Bracket, Jack Panel.	3135 011 00520
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J300	7 Pin Board Connector.	2422 025 14674
J301	4 Pin Board Connector.	2422 025 14672
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J306	6 Pin Board Connector.	2422 025 15023
J307	8 Pin Board Connector.	2422 025 15025
J308	4 Pin Board Connector.	2422 025 14671
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector.	2422 025 15022
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573
	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

Q502	Transistor, BC847B	4822 130 60511	
Q503	Transistor, BC847B	4822 130 60511	
Q550	Transistor, PNP.	4835 130 47084	
Q551	Transistor, BC847B	4822 130 60511	
Q800	Transistor, BC847B	4822 130 60511	
Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073	
Q802	Transistor, 2SD2539.	4835 130 48074	
Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065	
Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511	
Q901	Transistor, BC85	5322 130 60508	
Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091	
Q903	Transistor, BC85, Error Sig. Inv.	5322 130 60508	
Q904	Transistor, BC85, Soft Start	5322 130 60508	
Q906	Transistor, 2SD2539, HVOT.	4835 130 48074	
Q907	Transistor, NPN, Beam Limiter.	4835 130 47889	
Q908	Transistor, PNP Av Bm Cur. Lim.	4835 130 47891	
Z400	Zener Diode, BZX79B10.	4835 130 37935	
Z500	Zener Diode, 10V	4835 130 37739	
Z501	Diode BZX79-B18.	4835 130 37936	
Z503	Zener Diode, P6KE62A	4835 130 37547	
Z901	Zener Diode, 6.2V.	4835 130 37751	
L401	Peaking Coil, 2.2uH. 10%	4835 157 57051	
L405	Peaking Coil, 2.2uH. 10%	4835 157 57051	
L407	Ferrite Bead	4835 526 17001	
L408	Suppression Coil, 10uH.	4835 152 27002	
S L409	Peaking Coil, 2.2uH.	4835 150 57054	
L410	Suppression Coil, 18uH.	4835 150 57051	
L412	Ferrite Bead	4835 526 17001	
L415	Suppression Coil, 1.8uH.	4835 152 27029	
L416	Ferrite Bead	4835 526 17001	
L420	Ferrite Bead	4835 526 17001	
S L421	Line Input Choke	4835 152 27028	
L422	Suppression Coil, 10uH.	4835 152 27002	
L423	Suppression Coil, 10uH.	4835 152 27002	
L424	Suppression Coil, 10uH.	4835 152 27002	
L425	Suppression Coil, 10uH.	4835 152 27002	
L426	Suppression Coil, 42uH.	4835 157 57063	
L427	Ferrite Bead	4835 526 17001	
L428	Suppression Coil, 42uH.	4835 157 57063	
L429	Ferrite Bead	4835 526 17001	
L430	Ferrite Bead	4835 526 17001	
L432	Suppression Coil, 10uH.	4835 152 27002	
L435	Suppression Coil, 10uH.	4835 152 27002	
L440	Suppression Coil, 10uH.	4835 152 27002	
L550	Suppression Coil, 10uH.	4835 152 27002	
L803	Coil, Choke.	3121 218 31110	
L804	Linear Coil.	0036 202 80026	
L805	Ferrite Bead	4835 526 17003	
L902	Coil, 22uH., 10%	4835 150 57052	
L903	Suppression Coil, 3.6uH.	4835 152 27001	
L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038	
S T401	Transformer, Switch Mode	4835 148 87339	
S T402	Transformer, Power	4835 148 87345	
S T800	Transformer, Horiz. Driver	4835 142 47021	
S T801	Transformer, Scan Power.	4835 148 87318	
S T802	Transformer, Dynamic Focus	4835 142 47025	
S T900	Flyback Transformer.	3128 138 20280	
S T901	Transformer, Horiz. Driver	4835 142 47022	
S F401	Fuse, 5A	4835 253 37022	
S F402	Fuse, 5A	4835 253 37021	
S F408	Fuse, 5A.	4835 253 37021	
S F409	Fuse, 5A	4835 253 37021	
FB910	Ferrite Bead	4835 526 17002	
HS401	MM Heatsink.	3135 011 00620	
HS401	Transistor, BU2508DF	4835 532 47018	
HS406	Heatsink, Vert.	0073 531 90006	
HS408	Heatsink, Transistor	0073 166 50008	
HS419	Heatsink, Diode.	0073 562 10006	
HS433	Heatsink, Transistor	0073 166 50008	
HS434	Heatsink, Transistor	0073 166 50008	
HS550	Heatsink	0073 601 50001	
HS802	MM Heatsink LS BD.	3135 011 00550	
HS802	Transistor, BU2508DF	4835 532 47018	
HS902	Heatsink	0073 525 60011	
HS906	Heatsink, Horiz.	0073 510 30012	
J401	4 Pin Connector, Yellow.	0018 223 60004	
J402	7 Pin Connector, Yellow.	0018 223 60007	
J403	7 Pin Board Connector.	2422 025 14674	
J408	Contact Pin.	3135 010 00470	
J467A	Pin Connector.	2422 025 14669	
J468	9 Pin Connector, Green	0018 223 80009	
J469	4 Pin Connector.	0018 222 20204	
J500	Contact Pin.	3135 010 00470	
J501	Contact Pin.	3135 010 00470	
J502	Contact Pin.	3135 010 00470	
J511	Contact Pin.	3135 010 00470	
J540	Contact Pin.	3135 010 00470	
J601	7 Pin Board Connector.	2422 025 14674	
Q401	Spring Clip f/Q401	4835 256 97316	
Q802	Spring Clip f/Q802	4835 256 97316	
Q906	Spring Clip f/Q906	4835 256 97316	
S SA401	Resistor, Surge Absorber	4835 116 67143	

WALLVISION SWITCH PANEL

	WALLVISION SWITCH PANEL		
C1	1000pF., 10%, 50V, Ceramic	4835 122 47103	
C2	0.01uF., 10%, 50V, Ceramic	4835 122 47081	
C4	100pF., 10%, 50V, Ceramic.	4835 122 37001	
C5	100pF., 10%, 50V, Ceramic.	4835 122 37001	
C7	1000pF., 10%, 50V, Ceramic	4835 122 47103	
C8	100pF., 10%, 50V, Ceramic.	4835 122 37001	
C9	100pF., 10%, 50V, Ceramic.	4835 122 37001	
C10	10uF., 50V, Electrolytic	4835 124 47545	
C11	0.1uF., 10%, 100V, Polyester	4835 121 47297	
C12	10uF., 50V, Electrolytic	4835 124 47545	
R1	1k, 5%, 1/4W, Metal Film	4835 116 57319	
R2	1k, 5%, 1/4W, Metal Film	4835 116 57319	
R3	47k, 5%, 1/4W, Metal Film.	4835 116 57428	
R4	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318	
R5	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318	
R10	47k, 5%, 1/4W, Metal Film.	4835 116 57428	
R11	18k, 5%, 1/4W, Metal Film.	4835 116 57323	
R12	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318	
R13	47k, 5%, 1/4W, Metal Film.	4835 116 57428	
R14	47k, 5%, 1/4W, Metal Film.	4835 116 57428	
R15	47k, 5%, 1/4W, Metal Film.	4835 116 57428	
R16	10 ohm, 5%, 1/4W, Metal Film	4835 116 57362	
D1	Diode 1N4148	4835 130 37048	
D2	Diode 1N4148	4835 130 37048	
D3	Diode 1N4148	4835 130 37048	
D4	Diode 1N4148	4835 130 37048	
D5	Diode 1N4148	4835 130 37048	
IC1	IC P83C652FBP.	0061 311 95002	
Q1	Transistor BC557B.	4835 130 47409	
Q2	Transistor BC547B.	4835 130 47055	
BKT703	Switch Bracket	0073 568 70004	
J100	2 Pin Connector.	2422 025 07305	
J254	5 Pin Connector.	0018 222 30405	
J254A	5 Pin Connector.	0018 222 30205	
J301	5 pin Connector.	2422 038 00176	
J305	3 Pin Connector.	2422 038 00175	
J704	2 Pin Connector.	2422 015 19025	
J707	Phono Jack	0018 221 10006	
J712	Jack f/IR Blaster.	2422 026 04376	
S703	Switch, 4PDT	4835 277 27072	
SHLD1B	Small Signal Cover	0073 602 80003	
SHLD1T	Small Signal Shield.	0073 598 90003	
Y1	Ceramic Resonator, 12MHz	4835 157 57129	

SVM MODULE

	SVM MODULE		
C751	1uF., 50V, Electrolytic.	4835 121 47406	
C752	330pF., 10%, 50V, Ceramic.	4835 121 47079	
C753	470uF., 25V, Electrolytic.	4835 121 47405	
C754	0.1uF., 100V, Polyester.	2222 365 85104	
C755	0.047uF., 50V, Ceramic	4835 122 47608	
C756	47uF., 50V, Electrolytic	4835 124 47668	
C757	0.01uF., 100V, Polyester	4822 121 41815	
C758	470uF., 25V, Electrolytic.	4835 121 47405	
C759	150pF., 10%, 50V, Ceramic.	4835 122 47645	
C760	150pF., 10%, 50V, Ceramic.	4835 122 47645	
C761	0.1uF., 250V, Polyester.	4835 121 47278	
C762	0.01uF., 10%, 400V, Electrolytic	0025 972 51039	
C763	0.01uF., 10%, 400V, Electrolytic	0025 972 51039	
S C766	47uF., 160V, Electrolytic.	4835 124 47713	
S C767	47uF., 160V, Electrolytic.	4835 124 47713	
S C768	47uF., 160V, Electrolytic.	4835 124 47713	
S C769	22uF., 160V, Electrolytic.	4835 124 47726	
S C770	560pF., 10%, 500V, Ceramic	4835 122 47647	
C774	0.01uF., 100V, Polyester	4822 121 41815	
S R751	22 ohm, 5%, 1/3W Metal Film.	4835 116 57745	
R752	18k, 5%, 1/2W, Metal Film.	4835 110 57187	
R753	4.7k, 1/2W, Metal Film	4835 116 57724	
R754	1k, 1/2W, Metal Film	4835 116 57685	
R755	180 ohm, 1/2W, Metal Film.	4835 116 57701	
R756	100 ohm, 1/2W, Metal Film.	4835 116 57684	
R758	22 ohm, 1/2W, Metal Film	4835 116 57708	
S R760	4.7 ohm, 5% 1/3W Metal Film.	4835 116 57763	
R761	270 ohm, 1/2W, Metal Film.	4835 116 57709	
R762	270 ohm, 1/2W, Metal Film.	4835 116 57709	
R764	2.2K, 5%, 1/2W, Metal Film	4835 110 47006	
R765	1.8k, 1/2W, Metal Film	4835 116 57702	
R766	150 ohm, 1/2W, Metal Film.	4835 116 57696	
R767	3.3k, 1/2W, Metal Film	4835 116 57714	
R768	4.7k, 1/2W, Metal Film	4835 116 57724	
R769	33k, 1/2W, Metal Film.	4835 116 57715	
R770	470 ohm, 1/2W, Metal Film.	4835 116 57723	
R771	33k, 1/2W, Metal Film.	4835 116 57715	
R772	1k, 1/2W, Metal Film	4835 116 57685	
R773	82 ohm, 5%, 1/2W Metal Film.	4835 116 57761	
R774	22 ohm, 1/2W, Metal Film	4835 116 57708	
R775	22 ohm, 1/2W, Metal Film	4835 116 57708	
R776	22 ohm, 1/2W, Metal Film	4835 116 57708	
S R779	330 ohm, 5%, 5W, Wire Wnd.	4835 112 27043	

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

R782	330 ohm, 1/2W, Metal Film.	4835 116 57713
R783	68k, 1/2W, Metal Film.	4835 116 57737
R784	10k, 1/2W, Metal Film.	4835 116 57686
R785	68k, 1/2W, Metal Film.	4835 116 57737
R786	330 ohm, 1/2W, Metal Film.	4835 116 57713
S R787	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R788	27 ohm, 5%, 1W Metal Oxide	4835 116 67269
S R789	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
S R791	3.3 ohm, 5%, 1W Metal Ox..	2120 106 90293
R792	470 ohm, 1/2W, Metal Film.	4835 116 57723
R793	22k, 1/2W, Metal Film.	4835 116 57706
R794	22 ohm, 1/2W, Metal Film	4835 116 57708
R795	22 ohm, 1/2W, Metal Film	4835 116 57708
S R796	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
S R798	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
R797	4.7k, 1/2W, Metal Film	4835 116 57724
S R799	82 ohm, 5%, 3W Metal Oxide	4835 116 57127
D751	Diode 1N4148	4835 130 37048
D752	Diode 1N4148	4835 130 37048
D753	Diode 1N4148	4835 130 37048
D760	Diode 1N4148	4835 130 37048
D761	Diode, Silicon	4835 220 17059
D762	Diode, Silicon	4835 220 17059
Q751	Transistor BC548B.	4835 130 47055
Q753	Transistor BC558B.	4835 130 47162
Q754	Transistor BC548B.	4835 130 47055
Q755	Transistor BC548B.	4835 130 47055
Q756	Transistor BC548B.	4835 130 47055
Q757	Transistor BC337-25.	4835 130 48113
Q758	Transistor BC327-25.	4835 130 48112
Q759	Transistor 2SB940A	4835 130 48119
Q760	Transistor 2SD1264AP	4835 130 48121
Q761	Transistor BC548B.	4835 130 47055
L752	Inductor Coil LAL03 10UK	2422 535 96711
FB751	Ferrite Bead	4835 526 17003
FB752	Ferrite Bead	4835 526 17003
HS76	Solder Lug f/IC400	0020 100 70001
HS76	Heatsink	0073 515 10003
HS76	Spring Clip.	4835 290 47008
J751	10 Pin Connector	0018 223 80010
J752	2 Pin Board Connector.	2422 025 14668
J753	2 Pin Board Connector.	2422 025 14668
J754	2 Pin Board Connector.	2422 025 14668

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	
C139	4.7uF., 50V, Electrolytic.	4835 124 47506
C141	680pF., 50V, Ceramic	4835 122 47187
C142	10uF., 50V, Electrolytic	4835 124 47499
C144	680pF., 50V, Ceramic	4835 122 47187
C145	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C146	4.7uF., 50V, Electrolytic.	4835 124 47506
C147	150pF., 10%, 50V, Ceramic.	4835 122 47645
C148	2200pF., 50V, Ceramic.	4835 122 47007
C149	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C150	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C151	1uF., 50V, Electrolytic.	4835 121 47406
C152	1uF., 50V, Electrolytic.	4835 121 47406
C154	0.1uF., 63V, Polyester	4835 121 47602
C155	100uF., 16V, Electrolytic.	4835 124 47706
C156	10uF., 50V, Electrolytic	4835 124 47499
C158	10uF., 50V, Electrolytic	4835 124 47499
C159	4.7uF., 50V, Electrolytic.	4835 124 47506
C163	2200pF., 50V, Ceramic.	4835 122 47007
C176	0.1uF., 63V, Polyester	4835 121 47602
C182	0.1uF., 63V, Polyester	4835 121 47602
C196	0.047uF., 50V, Polyester	4835 121 47588
C197	0.047uF., 50V, Polyester	4835 121 47588
R130	100k, 1/2W, Metal Film	4835 116 57687
R140	47k, 1/2W, Metal Film.	4835 116 57725
R141	47k, 1/2W, Metal Film.	4835 116 57725
R143	1k, 1/2W, Metal Film	4835 116 57685
R144	12k, 1/2W, Metal Film.	4835 116 57692
R145	2k, 1/2W, Metal Film	4835 116 57703
S R146	47 ohm, 1/2W, Metal Film	4835 116 57727
R147	12k, 1/2W, Metal Film.	4835 116 57692
R148	15k, 1/2W, Metal Film.	4835 116 57698
R149	15k, 1/2W, Metal Film.	4835 116 57698
R150	20k, 1/2W, Metal Film.	4835 116 57704
R151	10k, 1/2W, Metal Film.	4835 116 57686
R152	1k, 1/2W, Metal Film	4835 116 57685
R153	10k, 1/2W, Metal Film.	4835 116 57686
R154	2k, 1/2W, Metal Film	4835 116 57703
R155	47k, 1/2W, Metal Film.	4835 116 57725
R156	20k, 1/2W, Metal Film.	4835 116 57704
R157	15k, 1/2W, Metal Film.	4835 116 57698
R158	56k, 5%, 1/2W, Metal Film.	4835 116 57758
R159	22k, 1/2W, Metal Film.	4835 116 57706
R160	56k, 5%, 1/2W, Metal Film.	4835 116 57758
R161	10k, 1/2W, Metal Film.	4835 116 57686
R164	47k, 1/2W, Metal Film.	4835 116 57725
R166	10k, 1/2W, Metal Film.	4835 116 57686
R167	22k, 1/2W, Metal Film.	4835 116 57706
R168	1.5k, 1/2W, Metal Film	4835 116 57697
R170	1.5k, 1/2W, Metal Film	4835 116 57697
R171	100k, 1/2W, Metal Film	4835 116 57687
R173	100k, 1/2W, Metal Film	4835 116 57687
R174	100k, 1/2W, Metal Film	4835 116 57687
R175	100k, 1/2W, Metal Film	4835 116 57687
R176	100k, 1/2W, Metal Film	4835 116 57687
R177	1k, 1/2W, Metal Film	4835 116 57685
R178	1k, 1/2W, Metal Film	4835 116 57685
S R179	47 ohm, 1/2W, Metal Film	4835 116 57727
R180	10k, 1/2W, Metal Film.	4835 116 57686
R181	10k, 1/2W, Metal Film.	4835 116 57686
R182	47k, 1/2W, Metal Film.	4835 116 57725
R183	100k, 1/2W, Metal Film	4835 116 57687
IC103	IC, 6124800001, Smart Stereo Surround.	4835 209 17032
IC105	IC, HEF4053BP, 2 Channel Multi/Demultip	4835 209 17033
Q140	Transistor BC547B, Smart Stereo Surroun	4835 130 47055
Z102	Zener Diode BZX79-F3.9V.	4835 130 37929
Z103	Zener Diode BZX79-F3.9V.	4835 130 37929
J178	6 Pin Board Connector.	0018 179 40006
J278A	5 Pin Board Connector.	2422 038 00176
MEC1	Support f/P.C. Bd.	0073 589 20001
MEC2	Support f/P.C. Bd.	0073 589 20001
C1	33pF., 5%, 50V, Ceramic.	4835 122 87414
C2	33pF., 5%, 50V, Ceramic.	4835 122 87414
C3	27pF., 5%, 50V, Ceramic.	4835 122 87381
C4	39pF., 5%, 50V, Ceramic.	4835 122 87016
C6	10uF., 35V, Electrolytic	4835 124 47562
C7	100pF., 5%, 50V, Ceramic	4835 122 87012
C8	1uF., 50V, Electrolytic.	4835 121 47406
C10	1000pF., 10%, 50V, Ceramic	4835 122 87023
C12	0.1uF., 50V, Ceramic	4835 122 87563
C13	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C14	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C15	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C17	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C18	39pF., 5%, 50V, Ceramic.	4835 122 87016
C19	39pF., 5%, 50V, Ceramic.	4835 122 87016
C20	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C21	100uF., 16V, Electrolytic.	4835 124 47493
C22	1000pF., 5%, 50V, Ceramic.	4835 122 87369
C23	1000pF., 5%, 50V, Ceramic.	4835 122 87369
C24	2.2uF., 50V, Electrolytic.	4835 124 47502
C25	6.8uF., 50V, Electrolytic.	4835 124 47604
C26	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C27	6.8uF., 50V, Electrolytic.	4835 124 47604
R1	10k, 5%, 1/10W, Metal Film	4835 111 37216
R2	10k, 5%, 1/10W, Metal Film	4835 111 37216
R3	10k, 5%, 1/10W, Metal Film	4835 111 37216
R4	10k, 5%, 1/10W, Metal Film	4835 111 37216
R5	10k, 5%, 1/10W, Metal Film	4835 111 37216
R6	10k, 5%, 1/10W, Metal Film	4835 111 37216
R7	10k, 5%, 1/10W, Metal Film	4835 111 37216
R8	10k, 5%, 1/10W, Metal Film	4835 111 37216
R9	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R10	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R11	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R12	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R13	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R14	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R15	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R16	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R17	100 ohm, 5%, 1/10W, Metal.	4835 111 37432
R18	51 ohm, 5%, 1/10W, Metal Film.	4835 111 37494
R20	1k, 5%, 1/10W, Metal Film.	4835 111 37433
R21	33k, 5%, 1/10W, Metal Film	4835 111 37248
R22	22k, 5%, 1/10W, Metal Film	4835 111 37441
R23	820 ohm, 5%, 1/10W, Metal.	4835 111 37466
R24	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R25	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R26	200k, 5%, 1/10W, Metal Film.	4835 111 37476
R27	10k, 5%, 1/10W, Metal Film	4835 111 37216
R28	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R29	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R30	3k, 5%, 1/10W, Metal Film.	4835 111 37245
R32	22k, 5%, 1/4W, Metal Film.	4835 111 37031
R33	10k, 5%, 1/10W, Metal Film	4835 111 37216
R35	560 ohm, 5%, 1/10W, Metal.	4835 111 37428
R36	3.9k, 5%, 1/10W, Metal Film.	4835 111 37254
R37	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R40	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R41	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R42	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R43	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R44	91ohm, 5%, 1/4W, Metal Film.	4835 111 37129
R45	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R46	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R47	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R48	510 ohm, 5%, 1/10W, Metal Film	4835 111 37263
R49	560 ohm, 5%, 1/10W, Metal Film	4835 111 37428
R50	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444

S = Safety Part Be sure to use exact replacement part.

MX6472C (continued)

R51	4.7k, 5%, 1/4W, Metal Film	4835 111 37037
R52	240 ohm, 5%, 1/4W, Metal Film.	4835 111 37078
D1	Diode, Silicon	4835 130 37066
IC1	IC 74HC157, Quad Input Multiplexer . .	4835 209 87904
IC2	IC 74HC03D, Quad NAND.	0483 520 98849
IC3	IC 74HC573, Octal D-Type Transparent La tch.	4835 209 88479
IC4	IC LC864164B	4835 209 88492
IC5	IC TC518128CFWL-80	4835 209 88485
IC6	IC UPD65640GF-172.	4835 209 88484
IC7	IC LM311N, Comparator.	4835 209 88489
Q1	Transistor, PNP.	4835 130 47112
Q2	Transistor, PNP.	4835 130 47112
Q3	Transistor, PNP.	4835 130 47112
Q4	Transistor, NPN.	4835 130 47086
Q5	Transistor, PNP.	4835 130 47112
Q6	Transistor, NPN.	4835 130 47086
L1	Coil, Adj., 5uH.	4835 157 58097
L2	Peaking Coil, 12uH..	4835 150 57058
L3	Peaking Coil, 12uH..	4835 150 57058
L4	Peaking Coil, 2.2uH.	4835 150 57054
L5	Peaking Coil, 2.2uH.	4835 150 57054
L6	Peaking Coil, 2. 2uH..	4835 150 57054
L7	Peaking Coil, 2. 2uH..	4835 150 57054
L8	Peaking Coil, 10uH..	4835 150 57057
L9	Peaking Coil, 10uH..	4835 150 57057
J100	2 Pin Board Connector.	2422 025 14668
J306	6 Pin Board Connector.	2422 025 14673
J308	4 Pin Board Connector.	2422 025 15021
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector, Yellow.	0018 223 60005
Y1	Crystal, 12MHz	4835 242 77244
Y2	Pizoelectrolytic Crystal, 8.05MHz. . .	4835 242 77284
B36	Buss Wire.	0046 012 60001
BR3	0 ohm, "Chip" Jumper	4835 111 37019
BR5	0 ohm, "Chip" Jumper	4835 111 37215
BR11	0 ohm, "Chip" Jumper	4835 111 37019

00ATC669 CUSTOMER CONTROL ASSEMBLY

	00ATC669 CUSTOMER CONTROL ASSEMBLY	
	00ARR023 IR Receiver Panel	4835 219 77785
	00ASW129 Switch Assembly	4835 219 77786

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02470

00706086 0001, 0002 OPTICAL ASSEMBLY

	00706086 0001, 0002 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	Shield Lt.	3135 013 00121
	SVM Yoke	4835 157 58199
B	Compression Spring (4 used).	3135 011 00610
S E	CRT Blue (P16LFM00BMB)	4835 310 57438
S E	CRT Green (P16LFM00HLA).	4835 310 57437
S E	CRT Red (P16LFM00RFA).	4835 310 57436
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler 60" Red (0002)	3135 011 01940
P	Coupler Red & Blue 64" (0001).	3135 011 02550
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Delta 79 (Blue).	4835 381 47021
W	Lens, Main, Red & Green (0002)	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

PV5470 - Manual no. 7573

CBA's

	CBA's	
CBA	25W Audio Amp.	4835 219 77762
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77758
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	0000 00A TC671
CBA	IR Receiver Panel.	4835 219 77769
CBA	Switch Panel	4835 219 77761
CBA	Front Jack Panel	4835 219 77791
CBA	Stereo Spread Panel.	4835 219 57687
CBA	Guide Plus Panel	4835 219 77704
CBA	Remote Locator	0000 00A 10706
CBA	Wallvision Switch Panel.	4835 219 77766
CBA	Remote Transmitter UR617	4835 219 17718

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

	RED CRT APNEL	
C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide. . . .	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

	GREEN CRT PANEL	
C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide. . . .	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic. . . .	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc. . . .	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide. . . .	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film. . . .	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film. . . .	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film. . . .	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film. . . .	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film. . . .	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film. . . .	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film. . . .	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00A10706 REMOTE LOCATOR

	00A10706 REMOTE LOCATOR	
C1	30pF., 5%, 50V, Ceramic	3198 016 03990
C2	1000pF., 10%, 50V, Ceramic	3198 017 01020
C3	1000pF., 10%, 50V, Ceramic	3198 017 01020
C4	3pF., 50V, Ceramic	4835 122 87565
C5	10pF., 5%, 50V, Ceramic.	4835 122 87412
C6	1000pF., 10%, 50V, Ceramic	3198 017 01020
C7	1000pF., 10%, 50V, Ceramic	3198 017 01020
C8	10uF., 20%, 50V, Electrolytic. . . .	4835 124 47499
C15	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
R3	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

R4	68 ohm, 5%, 1/10W, Carbon Film	4835 111 37408
R5	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R6	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R7	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R8	300 ohm, 5%, 1/2W, Metal Film.	2322 187 53301
R9	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
Q1	Transistor, NPN, MMBTH10L.	9322 100 54685
Z1	Zener Diode, 9.1V, BZX79	4835 130 37878
J320	3 Pin Connector.	0018 179 40003

00AVJ218 & 00AVJ221 FRONT JACK PANEL

	00AVJ218 & 00AVJ221 FRONT JACK PANEL	
R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic. . . .	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

R800	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film.	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%	4835 150 57058
L215	Peaking Coil, 12uH., 5%	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M	4835 157 57594
L220	Adjustable LC Coil, 4.75M	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%	4835 157 57121
L302	Peaking Coil, 12uH., 5%	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%	2422 535 94294
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%	4835 157 57119
L709	Peaking Coil, 27uH., 5%	4835 157 57119
L1000	Coil 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
C569	0.1uF., 50V, Ceramic	4835 122 87375
C570	0.1uF., 50V, Ceramic	4835 122 87375
C571	0.1uF., 50V, Ceramic	4835 122 87375
C572	100uF., 50V, Electrolytic.	4835 124 47563
C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
C580	100pF., 5%, 50V, Ceramic	4835 122 87025
C584	50V, 0.47uF., Polyester.	3198 014 04740
C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
C586	0.022uF., 10%, 100V, Polyester	4835 121 47627

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

WALLVISION SWITCH PANEL

	WALLVISION SWITCH PANEL	
C6	10uF., 50V, Electrolytic	4835 124 47545
R8	4.7k, 5%, 1/4W, Metal Film	4835 116 57427
R9	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R16	10 ohm, 5%, 1/4W, Metal Film	4835 116 57362
D6	Diode 1N4148	4835 130 37048
Q4	Transistor BC557B.	4835 130 47409
BKT703	Switch Bracket	0073 568 70004
J100	2 Pin Connector.	2422 025 07305
J254	5 Pin Connector.	0018 222 30405
J254A	5 Pin Connector.	0018 222 30205
J301	5 pin Connector.	2422 038 00176
J305	3 Pin Connector.	2422 038 00175
J305A	3 Pin Connector.	2422 025 14669
J704	2 Pin Connector.	2422 015 19025
J706	Switched Phono Jack, Yellow.	4835 265 97436
J712	Jack f/IR Blaster.	2422 026 04376
S703	Switch, 4PDT	4835 277 27072

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	
C139	4.7uF., 50V, Electrolytic.	4835 124 47506
C141	680pF., 50V, Ceramic	4835 122 47187
C142	10uF., 50V, Electrolytic	4835 124 47499
C144	680pF., 50V, Ceramic	4835 122 47187
C145	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C146	4.7uF., 50V, Electrolytic.	4835 124 47506
C147	150pF., 10%, 50V, Ceramic.	4835 122 47645
C148	2200pF., 50V, Ceramic.	4835 122 47007
C149	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C150	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C151	1uF., 50V, Electrolytic.	4835 121 47406
C152	1uF., 50V, Electrolytic.	4835 121 47406
C154	0.1uF., 63V, Polyester	4835 121 47602
C155	100uF., 16V, Electrolytic.	4835 124 47706
C156	10uF., 50V, Electrolytic	4835 124 47499
C158	10uF., 50V, Electrolytic	4835 124 47499
C159	4.7uF., 50V, Electrolytic.	4835 124 47506
C163	2200pF., 50V, Ceramic.	4835 122 47007
C176	0.1uF., 63V, Polyester	4835 121 47602
C182	0.1uF., 63V, Polyester	4835 121 47602
C196	0.047uF., 50V, Polyester	4835 121 47588
C197	0.047uF., 50V, Polyester	4835 121 47588
R130	100k, 1/2W, Metal Film	4835 116 57687
R140	47k, 1/2W, Metal Film.	4835 116 57725
R141	47k, 1/2W, Metal Film.	4835 116 57725
R143	1k, 1/2W, Metal Film	4835 116 57685
R144	12k, 1/2W, Metal Film.	4835 116 57692
R145	2k, 1/2W, Metal Film	4835 116 57703
S R146	47 ohm, 1/2W, Metal Film	4835 116 57727
R147	12k, 1/2W, Metal Film.	4835 116 57692
R148	15k, 1/2W, Metal Film.	4835 116 57698
R149	15k, 1/2W, Metal Film.	4835 116 57698
R150	20k, 1/2W, Metal Film.	4835 116 57704
R151	10k, 1/2W, Metal Film.	4835 116 57686
R152	1k, 1/2W, Metal Film	4835 116 57685
R153	10k, 1/2W, Metal Film.	4835 116 57686
R154	2k, 1/2W, Metal Film	4835 116 57703
R155	47k, 1/2W, Metal Film.	4835 116 57725
R156	20k, 1/2W, Metal Film.	4835 116 57704
R157	15k, 1/2W, Metal Film.	4835 116 57698
R158	56k, 5%, 1/2W, Metal Film.	4835 116 57758
R159	22k, 1/2W, Metal Film.	4835 116 57706
R160	56k, 5%, 1/2W, Metal Film.	4835 116 57758
R161	10k, 1/2W, Metal Film.	4835 116 57686
R164	47k, 1/2W, Metal Film.	4835 116 57725
R166	10k, 1/2W, Metal Film.	4835 116 57686
R167	22k, 1/2W, Metal Film.	4835 116 57706
R168	1.5k, 1/2W, Metal Film	4835 116 57697
R170	1.5k, 1/2W, Metal Film	4835 116 57697
R171	100k, 1/2W, Metal Film	4835 116 57687
R173	100k, 1/2W, Metal Film	4835 116 57687
R174	100k, 1/2W, Metal Film	4835 116 57687
R175	100k, 1/2W, Metal Film	4835 116 57687
R176	100k, 1/2W, Metal Film	4835 116 57687
R177	1k, 1/2W, Metal Film	4835 116 57685
R178	1k, 1/2W, Metal Film	4835 116 57685
S R179	47 ohm, 1/2W, Metal Film	4835 116 57727
R180	10k, 1/2W, Metal Film.	4835 116 57686
R181	10k, 1/2W, Metal Film.	4835 116 57686
R182	47k, 1/2W, Metal Film.	4835 116 57725
R183	100k, 1/2W, Metal Film	4835 116 57687
IC103	IC, 6124800001, Smart Stereo Surround.	4835 209 17032
IC105	IC, HEF4053BP, 2 Channel Multi/Demultip	4835 209 17033
Q140	Transistor BC547B, Smart Stereo Surroun	4835 130 47055
Z102	Zener Diode BZX79-F3.9V.	4835 130 37929
Z103	Zener Diode BZX79-F3.9V.	4835 130 37929
J178	6 Pin Board Connector.	0018 179 40006
J278A	5 Pin Board Connector.	2422 038 00176
MEC1	Support f/P.C. Bd.	0073 589 20001
MEC2	Support f/P.C. Bd.	0073 589 20001
C1	33pF., 5%, 50V, Ceramic.	4835 122 87414
C2	33pF., 5%, 50V, Ceramic.	4835 122 87414
C3	27pF., 5%, 50V, Ceramic.	4835 122 87381
C4	39pF., 5%, 50V, Ceramic.	4835 122 87016
C6	10uF., 35V, Electrolytic	4835 124 47562
C7	100pF., 5%, 50V, Ceramic	4835 122 87012
C8	1uF., 50V, Electrolytic.	4835 121 47406
C10	1000pF., 10%, 50V, Ceramic	4835 122 87023
C12	0.1uF., 50V, Ceramic	4835 122 87563
C13	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C14	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C15	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C17	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C18	39pF., 5%, 50V, Ceramic.	4835 122 87016
C19	39pF., 5%, 50V, Ceramic.	4835 122 87016
C20	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C21	100uF., 16V, Electrolytic.	4835 124 47493
C22	1000pF., 5%, 50V, Ceramic.	4835 122 87369
C23	1000pF., 5%, 50V, Ceramic.	4835 122 87369
C24	2.2uF., 50V, Electrolytic.	4835 124 47502
C25	6.8uF., 50V, Electrolytic.	4835 124 47604
C26	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C27	6.8uF., 50V, Electrolytic.	4835 124 47604
R1	10k, 5%, 1/10W, Metal Film	4835 111 37216
R2	10k, 5%, 1/10W, Metal Film	4835 111 37216
R3	10k, 5%, 1/10W, Metal Film	4835 111 37216
R4	10k, 5%, 1/10W, Metal Film	4835 111 37216
R5	10k, 5%, 1/10W, Metal Film	4835 111 37216
R6	10k, 5%, 1/10W, Metal Film	4835 111 37216
R7	10k, 5%, 1/10W, Metal Film	4835 111 37216
R8	10k, 5%, 1/10W, Metal Film	4835 111 37216
R9	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R10	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R11	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R12	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R13	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R14	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R15	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R16	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R17	100 ohm, 5%, 1/10W, Metal.	4835 111 37432
R18	51 ohm, 5%, 1/10W, Metal Film.	4835 111 37494
R20	1k, 5%, 1/10W, Metal Film.	4835 111 37433
R21	33k, 5%, 1/10W, Metal Film	4835 111 37248
R22	22k, 5%, 1/10W, Metal Film	4835 111 37441
R23	820 ohm, 5%, 1/10W, Metal.	4835 111 37466
R24	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R25	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R26	200k, 5%, 1/10W, Metal Film.	4835 111 37476
R27	10k, 5%, 1/10W, Metal Film	4835 111 37216
R28	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R29	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R30	3k, 5%, 1/10W, Metal Film.	4835 111 37245
R32	22k, 5%, 1/4W, Metal Film.	4835 111 37031
R33	10k, 5%, 1/10W, Metal Film	4835 111 37216

S = Safety Part Be sure to use exact replacement part.

PV5470 (continued)

R35	560 ohm, 5%, 1/10W, Metal.	4835 111 37428
R36	3.9k, 5%, 1/10W, Metal Film.	4835 111 37254
R37	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R40	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R41	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R42	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R43	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R44	91ohm, 5%, 1/4W, Metal Film.	4835 111 37129
R45	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R46	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R47	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R48	510 ohm, 5%, 1/10W, Metal Film	4835 111 37263
R49	560 ohm, 5%, 1/10W, Metal Film	4835 111 37428
R50	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R51	4.7k, 5%, 1/4W, Metal Film	4835 111 37037
R52	240 ohm, 5%, 1/4W, Metal Film.	4835 111 37078
D1	Diode, Silicon	4835 130 37066
IC1	IC 74HC157, Quad Input Multiplexer	4835 209 87904
IC2	IC 74HC03D, Quad NAND.	0483 520 98849
IC3	IC 74HC573, Octal D-Type Transparent La tch.	4835 209 88479
IC4	IC LC864164B	4835 209 88492
IC5	IC TC518128CFWL-80	4835 209 88485
IC6	IC UPD65640GF-172.	4835 209 88484
IC7	IC LM311N, Comparator.	4835 209 88489
Q1	Transistor, PNP.	4835 130 47112
Q2	Transistor, PNP.	4835 130 47112
Q3	Transistor, PNP.	4835 130 47112
Q4	Transistor, NPN.	4835 130 47086
Q5	Transistor, PNP.	4835 130 47112
Q6	Transistor, NPN.	4835 130 47086
L1	Coil, Adj., 5uH.	4835 157 58097
L2	Peaking Coil, 12uH..	4835 150 57058
L3	Peaking Coil, 12uH..	4835 150 57058
L4	Peaking Coil, 2.2uH.	4835 150 57054
L5	Peaking Coil, 2.2uH.	4835 150 57054
L6	Peaking Coil, 2. 2uH..	4835 150 57054
L7	Peaking Coil, 2. 2uH..	4835 150 57054
L8	Peaking Coil, 10uH..	4835 150 57057
L9	Peaking Coil, 10uH..	4835 150 57057
J100	2 Pin Board Connector.	2422 025 14668
J306	6 Pin Board Connector.	2422 025 14673
J308	4 Pin Board Connector.	2422 025 15021
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector, Yellow.	0018 223 60005
Y1	Crystal, 12MHz	4835 242 77244
Y2	Pizoelectrolytic Crystal, 8.05MHz.	4835 242 77284
B36	Buss Wire.	0046 012 60001
BR3	0 ohm, "Chip" Jumper	4835 111 37019
BR5	0 ohm, "Chip" Jumper	4835 111 37215
BR11	0 ohm, "Chip" Jumper	4835 111 37019

00ATC671 CUSTOMER CONTROL ASSEMBLY

	00ATC671 CUSTOMER CONTROL ASSEMBLY	
	00A10699 IR Receiver Panel	4835 219 77769
	00ASW130 Switch Assembly	4835 219 77761
	00AVJ218 Front Jack Panel.	4835 219 77791

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 017 01951
	Crystal Assembly	4835 242 77323

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
D303	IR LED	4835 130 87147
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02480

00706105 0001, 0002 OPTICAL ASSEMBLY

	00706105 0001, 0002 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	Shield Lt.	3135 013 00121
B	Compression Spring (4 used).	3135 011 00610
S E	CRT (P16LFM00BMB) Blue	4835 310 57438
S E	CRT (P16LFM00HLA) Green.	4835 310 57437
S E	CRT (P16LFM00RFA) Red.	4835 310 57436
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler 60" Red (0002)	3135 011 01940
P	Coupler Red & Blue 54" (0001).	4835 290 87155
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Delta 79 Blue (0002)	4835 381 47021
W	Lens, Main, Blue (0001).	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

PV6070 - Manual no. 7573

CBA's

	CBA's	
CBA	25W Audio Amp.	4835 219 77762
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77758
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	0000 00A TC671
CBA	IR Receiver Panel.	4835 219 77769
CBA	Switch Panel	4835 219 77761
CBA	Front Jack Panel	4835 219 77791
CBA	Stereo Spread Panel.	4835 219 57687
CBA	Guide Plus Panel	4835 219 77704
CBA	Remote Locator	0000 00A 10706
CBA	Wallvision Switch Panel.	4835 219 77766
CBA	Remote Transmitter UR617	4835 219 17718

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop.	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH.	4835 157 67084
L402	Coil 100uH.	4835 157 67084
L403	Coil 100uH.	4835 157 67084
L404	Suppression Coil, 10uH.	4835 152 27002
L405	Coil 100uH.	4835 157 67084
L407	Coil 100uH.	4835 157 67084
L409	Coil 100uH.	4835 157 67084
L410	Coil 100uH.	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040
C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000
HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence . . .	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence . . .	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence . . .	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence . . .	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence . . .	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence) . . .	3135 011 01890
SHD200	Heatsink for Digital Convergence . . .	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

	RED CRT APNEL	
C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

	GREEN CRT PANEL	
C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition . .	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

	BLUE CRT PANEL	
C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc. . . .	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc. . . .	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition. .	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition . .	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition. . .	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E. .	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350 . .	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

00A10706 REMOTE LOCATOR

	00A10706 REMOTE LOCATOR	
C1	30pF., 5%, 50V, Ceramic	3198 016 03990
C2	1000pF., 10%, 50V, Ceramic	3198 017 01020
C3	1000pF., 10%, 50V, Ceramic	3198 017 01020
C4	3pF., 50V, Ceramic	4835 122 87565
C5	10pF., 5%, 50V, Ceramic.	4835 122 87412
C6	1000pF., 10%, 50V, Ceramic	3198 017 01020
C7	1000pF., 10%, 50V, Ceramic	3198 017 01020
C8	10uF., 20%, 50V, Electrolytic.	4835 124 47499
C15	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
R3	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

R4	68 ohm, 5%, 1/10W, Carbon Film	4835 111 37408
R5	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R6	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R7	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R8	300 ohm, 5%, 1/2W, Metal Film.	2322 187 53301
R9	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
Q1	Transistor, NPN, MMBTH10L.	9322 100 54685
Z1	Zener Diode, 9.1V, BZX79	4835 130 37878
J320	3 Pin Connector.	0018 179 40003

00AVJ218 & 00AVJ221 FRONT JACK PANEL

00AVJ218 & 00AVJ221 FRONT JACK PANEL

R1	1k, 5%, 1/2W, Metal Film	4835 116 57685
R2	1k, 5%, 1/2W, Metal Film	4835 116 57685
R15	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
J1	Phono Jack Assembly	2422 026 04881
J15	6 Pin Connector.	2422 025 15523

SMALL SIGNAL PANEL (2 TUNER)

SMALL SIGNAL PANEL (2 TUNER)

C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic . . .	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic. . . .	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic . . .	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic. . . .	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic. . . .	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010
C363	100pF., 5%, 50V, Ceramic	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester.	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic.	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester.	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film.	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film.	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682
IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056
L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH., ...	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%	4835 150 57058
L215	Peaking Coil, 12uH., 5%	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M	4835 157 57594
L220	Adjustable LC Coil, 4.75M	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%	4835 157 57121
L302	Peaking Coil, 12uH., 5%	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%	2422 535 94294
L605	Peaking Coil, 10uH., 5%	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%	4835 157 57119
L709	Peaking Coil, 27uH., 5%	4835 157 57119
L1000	Coil 1.2uH., 5%	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J300	7 Pin Board Connector.	2422 025 14674
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J307	8 Pin Board Connector.	2422 025 15025
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

		LARGE SIGNAL PANEL	
S	C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S	C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S	C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
	C408	330pF., 10%, 500V, Ceramic	4835 122 47648
	C409	3300uF., 35V, Electrolytic	4835 124 47559
	C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C411	0.1uF., 400V, Polyester.	0025 968 41049
	C412	330pF., 10%, 500V, Ceramic	4835 122 47648
	C413	330pF., 10%, 500V, Ceramic	4835 122 47648
	C414	330uF., 25V, Electrolytic.	4835 124 47632
	C415	100pF., 5%, 50V, Ceramic	4835 122 87025
	C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
	C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C418	1000pF., 50V, Ceramic.	4835 122 47004
	C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
	C420	100pF., 5%, 50V, Ceramic	4835 122 87025
	C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C423	470uF., 250V, Electrolytic	4835 124 47141
S	C424	470uF., 250V, Electrolytic	4835 124 47141
	C425	0.1uF., 400V, Polyester.	0025 968 41049
	C426	330pF., 10%, 500V, Ceramic	4835 122 47648
	C427	3300uF., 25V, Electrolytic	4835 124 47672
	C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S	C430A	22uF., 250V, Electrolytic.	4835 124 47021
	C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C435	3300uF., 25V, Electrolytic	4835 124 47575
	C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C437	100pF., 5%, 50V, Ceramic	4835 122 87025
	C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
	C441	6800uF., 16V, Electrolytic	4835 124 47579
	C442	470uF., 200V, Electrolytic	4835 124 47097
	C443	0.1uF., 250V, Polyester.	4835 121 47278
	C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S	C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
	C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
	C451	0.47uF., 400V, Polyester	4835 121 47634
	C452	1.5uF., 50V, Electrolytic.	4835 124 47568
	C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C454	47uF., 25V, Electrolytic	4835 124 47708
	C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C456	100uF., 50V, Electrolytic.	4835 124 47563
	C457	1uF., 50V, Electrolytic.	4835 121 47406
	C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
	C459	2200uF., 50V, Electrolytic	4835 124 47574
	C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C469	330pF., 10%, 500V, Ceramic	4835 122 47648
	C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C471	1uF., 50V, Electrolytic.	4835 121 47406
	C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
	C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C474	2200uF., 50V, Electrolytic	4835 124 47574
	C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C476	0.015uF., 400V, Polyester.	4835 121 47203
	C477	0.015uF., 400V, Polyester.	4835 121 47203
	C478	1000uF., 50V, Electrolytic	4835 124 47573
	C479	1000uF., 50V, Electrolytic	4835 124 47573
	C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
	C481	100uF., 25V, Electrolytic.	4835 124 47501
	C482	0.1uF., 50V, Ceramic	4835 122 87375
	C483	100uF., 25V, Electrolytic.	4835 124 47501
	C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C503	680pF., 5%, 50V, Ceramic	4835 122 87037
	C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
	C555	1000uF., 35V, Electrolytic	4835 124 47551
	C557	100uF., 50V, Electrolytic.	4835 124 47563
	C558	150pF., 10%, 500V, Ceramic	2020 557 90711
	C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
	C560	2.2uF., 50V, Electrolytic.	4835 124 47502
	C561	3300uF., 35V, Electrolytic	4835 124 47559
	C564	0.047uF., 10%, 100V, Polyester	4835 121 47005
	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002
	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

S T802	Transformer, Dynamic Focus	4835 142 47025
S T900	Flyback Transformer.	3128 138 20280
S T901	Transformer, Horiz. Driver	4835 142 47022
S F401	Fuse, 5A	4835 253 37022
S F402	Fuse, 5A	4835 253 37021
S F408	Fuse, 5A.	4835 253 37021
S F409	Fuse, 5A	4835 253 37021
FB910	Ferrite Bead	4835 526 17002
HS401	MM Heatsink.	3135 011 00620
HS401	Transistor, BU2508DF	4835 532 47018
HS406	Heatsink, Vert..	0073 531 90006
HS408	Heatsink, Transistor	0073 166 50008
HS419	Heatsink, Diode.	0073 562 10006
HS433	Heatsink, Transistor	0073 166 50008
HS434	Heatsink, Transistor	0073 166 50008
HS550	Heatsink	0073 601 50001
HS802	MM Heatsink LS BD.	3135 011 00550
HS802	Transistor, BU2508DF	4835 532 47018
HS902	Heatsink	0073 525 60011
HS906	Heatsink, Horiz.	0073 510 30012
J401	4 Pin Connector, Yellow.	0018 223 60004
J402	7 Pin Connector, Yellow.	0018 223 60007
J403	7 Pin Board Connector.	2422 025 14674
J408	Contact Pin.	3135 010 00470
J467A	Pin Connector.	2422 025 14669
J468	9 Pin Connector, Green	0018 223 80009
J469	4 Pin Connector.	0018 222 20204
J500	Contact Pin.	3135 010 00470
J501	Contact Pin.	3135 010 00470
J502	Contact Pin.	3135 010 00470
J511	Contact Pin.	3135 010 00470
J540	Contact Pin.	3135 010 00470
J601	7 Pin Board Connector.	2422 025 14674
Q401	Spring Clip f/Q401	4835 256 97316
Q802	Spring Clip f/Q802	4835 256 97316
Q906	Spring Clip f/Q906	4835 256 97316
S SA401	Resistor, Surge Absorber	4835 116 67143

WALLVISION SWITCH PANEL

	WALLVISION SWITCH PANEL	
C6	10uF., 50V, Electrolytic	4835 124 47545
R8	4.7k, 5%, 1/4W, Metal Film	4835 116 57427
R9	100 ohm, 5%, 1/4W, Metal Film.	4835 116 57318
R16	10 ohm, 5%, 1/4W, Metal Film	4835 116 57362
D6	Diode 1N4148	4835 130 37048
Q4	Transistor BC557B.	4835 130 47409
BKT703	Switch Bracket	0073 568 70004
J100	2 Pin Connector.	2422 025 07305
J254	5 Pin Connector.	0018 222 30405
J254A	5 Pin Connector.	0018 222 30205
J301	5 pin Connector.	2422 038 00176
J305	3 Pin Connector.	2422 038 00175
J305A	3 Pin Connector.	2422 025 14669
J704	2 Pin Connector.	2422 015 19025
J706	Switched Phono Jack, Yellow.	4835 265 97436
J712	Jack f/IR Blaster.	2422 026 04376
S703	Switch, 4PDT	4835 277 27072

STEREO SPREAD MODULE

	STEREO SPREAD MODULE	
C139	4.7uF., 50V, Electrolytic.	4835 124 47506
C141	680pF., 50V, Ceramic	4835 122 47187
C142	10uF., 50V, Electrolytic	4835 124 47499
C144	680pF., 50V, Ceramic	4835 122 47187
C145	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C146	4.7uF., 50V, Electrolytic.	4835 124 47506
C147	150pF., 10%, 50V, Ceramic.	4835 122 47645
C148	2200pF., 50V, Ceramic.	4835 122 47007
C149	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C150	0.015uF., 10%, 50V, Polyester.	4835 121 47628
C151	1uF., 50V, Electrolytic.	4835 121 47406
C152	1uF., 50V, Electrolytic.	4835 121 47406
C154	0.1uF., 63V, Polyester	4835 121 47602
C155	100uF., 16V, Electrolytic.	4835 124 47706
C156	10uF., 50V, Electrolytic	4835 124 47499
C158	10uF., 50V, Electrolytic	4835 124 47499
C159	4.7uF., 50V, Electrolytic.	4835 124 47506
C163	2200pF., 50V, Ceramic.	4835 122 47007
C176	0.1uF., 63V, Polyester	4835 121 47602
C182	0.1uF., 63V, Polyester	4835 121 47602
C196	0.047uF., 50V, Polyester	4835 121 47588
C197	0.047uF., 50V, Polyester	4835 121 47588
R130	100k, 1/2W, Metal Film	4835 116 57687
R140	47k, 1/2W, Metal Film.	4835 116 57725
R141	47k, 1/2W, Metal Film.	4835 116 57725
R143	1k, 1/2W, Metal Film	4835 116 57685
R144	12k, 1/2W, Metal Film.	4835 116 57692
R145	2k, 1/2W, Metal Film	4835 116 57703
S R146	47 ohm, 1/2W, Metal Film	4835 116 57727
R147	12k, 1/2W, Metal Film.	4835 116 57692
R148	15k, 1/2W, Metal Film.	4835 116 57698
R149	15k, 1/2W, Metal Film.	4835 116 57698
R150	20k, 1/2W, Metal Film.	4835 116 57704
R151	10k, 1/2W, Metal Film.	4835 116 57686
R152	1k, 1/2W, Metal Film	4835 116 57685
R153	10k, 1/2W, Metal Film.	4835 116 57686
R154	2k, 1/2W, Metal Film	4835 116 57703
R155	47k, 1/2W, Metal Film.	4835 116 57725
R156	20k, 1/2W, Metal Film.	4835 116 57704
R157	15k, 1/2W, Metal Film.	4835 116 57698
R158	56k, 5%, 1/2W, Metal Film.	4835 116 57758
R159	22k, 1/2W, Metal Film.	4835 116 57706
R160	56k, 5%, 1/2W, Metal Film.	4835 116 57758
R161	10k, 1/2W, Metal Film.	4835 116 57686
R164	47k, 1/2W, Metal Film.	4835 116 57725
R166	10k, 1/2W, Metal Film.	4835 116 57686
R167	22k, 1/2W, Metal Film.	4835 116 57706
R168	1.5k, 1/2W, Metal Film	4835 116 57697
R170	1.5k, 1/2W, Metal Film	4835 116 57697
R171	100k, 1/2W, Metal Film	4835 116 57687
R173	100k, 1/2W, Metal Film	4835 116 57687
R174	100k, 1/2W, Metal Film	4835 116 57687
R175	100k, 1/2W, Metal Film	4835 116 57687
R176	100k, 1/2W, Metal Film	4835 116 57687
R177	1k, 1/2W, Metal Film	4835 116 57685
R178	1k, 1/2W, Metal Film	4835 116 57685
S R179	47 ohm, 1/2W, Metal Film	4835 116 57727
R180	10k, 1/2W, Metal Film.	4835 116 57686
R181	10k, 1/2W, Metal Film.	4835 116 57686
R182	47k, 1/2W, Metal Film.	4835 116 57725
R183	100k, 1/2W, Metal Film	4835 116 57687
IC103	IC, 6124800001, Smart Stereo Surround.	4835 209 17032
IC105	IC, HEF4053BP, 2 Channel Multi/Demultip	4835 209 17033
Q140	Transistor BC547B, Smart Stereo Surroun	4835 130 47055
Z102	Zener Diode BZX79-F3.9V.	4835 130 37929
Z103	Zener Diode BZX79-F3.9V.	4835 130 37929
J178	6 Pin Board Connector.	0018 179 40006
J278A	5 Pin Board Connector.	2422 038 00176
MEC1	Support f/P.C. Bd.	0073 589 20001
MEC2	Support f/P.C. Bd.	0073 589 20001
C1	33pF., 5%, 50V, Ceramic.	4835 122 87414
C2	33pF., 5%, 50V, Ceramic.	4835 122 87414
C3	27pF., 5%, 50V, Ceramic.	4835 122 87381
C4	39pF., 5%, 50V, Ceramic.	4835 122 87016
C6	10uF., 35V, Electrolytic	4835 124 47562
C7	100pF., 5%, 50V, Ceramic	4835 122 87012
C8	1uF., 50V, Electrolytic.	4835 121 47406
C10	1000pF., 10%, 50V, Ceramic	4835 122 87023
C12	0.1uF., 50V, Ceramic	4835 122 87563
C13	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C14	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C15	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C17	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C18	39pF., 5%, 50V, Ceramic.	4835 122 87016
C19	39pF., 5%, 50V, Ceramic.	4835 122 87016
C20	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C21	100uF., 16V, Electrolytic.	4835 124 47493
C22	1000pF., 5%, 50V, Ceramic.	4835 122 87369
C23	1000pF., 5%, 50V, Ceramic.	4835 122 87369
C24	2.2uF., 50V, Electrolytic.	4835 124 47502
C25	6.8uF., 50V, Electrolytic.	4835 124 47604
C26	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
C27	6.8uF., 50V, Electrolytic.	4835 124 47604
R1	10k, 5%, 1/10W, Metal Film	4835 111 37216
R2	10k, 5%, 1/10W, Metal Film	4835 111 37216
R3	10k, 5%, 1/10W, Metal Film	4835 111 37216
R4	10k, 5%, 1/10W, Metal Film	4835 111 37216
R5	10k, 5%, 1/10W, Metal Film	4835 111 37216
R6	10k, 5%, 1/10W, Metal Film	4835 111 37216
R7	10k, 5%, 1/10W, Metal Film	4835 111 37216
R8	10k, 5%, 1/10W, Metal Film	4835 111 37216
R9	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R10	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R11	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R12	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R13	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R14	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R15	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R16	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
R17	100 ohm, 5%, 1/10W, Metal.	4835 111 37432
R18	51 ohm, 5%, 1/10W, Metal Film.	4835 111 37494
R20	1k, 5%, 1/10W, Metal Film.	4835 111 37433
R21	33k, 5%, 1/10W, Metal Film	4835 111 37248
R22	22k, 5%, 1/10W, Metal Film	4835 111 37441
R23	820 ohm, 5%, 1/10W, Metal.	4835 111 37466
R24	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R25	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R26	200k, 5%, 1/10W, Metal Film.	4835 111 37476
R27	10k, 5%, 1/10W, Metal Film	4835 111 37216
R28	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R29	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R30	3k, 5%, 1/10W, Metal Film.	4835 111 37245
R32	22k, 5%, 1/4W, Metal Film.	4835 111 37031
R33	10k, 5%, 1/10W, Metal Film	4835 111 37216

S = Safety Part Be sure to use exact replacement part.

PV6070 (continued)

R35	560 ohm, 5%, 1/10W, Metal.	4835 111 37428
R36	3.9k, 5%, 1/10W, Metal Film.	4835 111 37254
R37	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R40	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R41	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R42	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R43	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R44	91ohm, 5%, 1/4W, Metal Film.	4835 111 37129
R45	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R46	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R47	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R48	510 ohm, 5%, 1/10W, Metal Film	4835 111 37263
R49	560 ohm, 5%, 1/10W, Metal Film	4835 111 37428
R50	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R51	4.7k, 5%, 1/4W, Metal Film	4835 111 37037
R52	240 ohm, 5%, 1/4W, Metal Film.	4835 111 37078
D1	Diode, Silicon	4835 130 37066
IC1	IC 74HC157, Quad Input Multiplexer	4835 209 87904
IC2	IC 74HC03D, Quad NAND.	0483 520 98849
IC3	IC 74HC573, Octal D-Type Transparent Latch.	4835 209 88479
IC4	IC LC864164B	4835 209 88492
IC5	IC TC518128CFWL-80	4835 209 88485
IC6	IC UPD65640GF-172.	4835 209 88484
IC7	IC LM311N, Comparator.	4835 209 88489
Q1	Transistor, PNP.	4835 130 47112
Q2	Transistor, PNP.	4835 130 47112
Q3	Transistor, PNP.	4835 130 47112
Q4	Transistor, NPN.	4835 130 47086
Q5	Transistor, PNP.	4835 130 47112
Q6	Transistor, NPN.	4835 130 47086
L1	Coil, Adj., 5uH.	4835 157 58097
L2	Peaking Coil, 12uH..	4835 150 57058
L3	Peaking Coil, 12uH..	4835 150 57058
L4	Peaking Coil, 2.2uH.	4835 150 57054
L5	Peaking Coil, 2.2uH.	4835 150 57054
L6	Peaking Coil, 2. 2uH..	4835 150 57054
L7	Peaking Coil, 2. 2uH..	4835 150 57054
L8	Peaking Coil, 10uH..	4835 150 57057
L9	Peaking Coil, 10uH..	4835 150 57057
J100	2 Pin Board Connector.	2422 025 14668
J306	6 Pin Board Connector.	2422 025 14673
J308	4 Pin Board Connector.	2422 025 15021
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector, Yellow.	0018 223 60005
Y1	Crystal, 12MHz	4835 242 77244
Y2	Pizoelectrolytic Crystal, 8.05MHz.	4835 242 77284
B36	Buss Wire.	0046 012 60001
BR3	0 ohm, "Chip" Jumper	4835 111 37019
BR5	0 ohm, "Chip" Jumper	4835 111 37215
BR11	0 ohm, "Chip" Jumper	4835 111 37019

00ATC671 CUSTOMER CONTROL ASSEMBLY

	00ATC671 CUSTOMER CONTROL ASSEMBLY	
	00A10699 IR Receiver Panel	4835 219 77769
	00ASW130 Switch Assembly	4835 219 77761
	00AVJ218 Front Jack Panel.	4835 219 77791

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY	
	Crystal Assembly	3135 017 01951
	Crystal Assembly	4835 242 77323

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL	
D301	Green LED.	4835 130 97095
D302	Red LED.	4835 130 97096
D303	IR LED	4835 130 87147
IR300	IR Receiver.	4835 219 67061
J302	5 Pin Board Connector.	2422 038 00176
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY	
J300	7 Pin Board Connector.	2422 025 14674
	Keypad	3135 013 02480

00706105 0001, 0002 OPTICAL ASSEMBLY

	00706105 0001, 0002 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
	Shield Lt.	3135 013 00121
B	Compression Spring (4 used).	3135 011 00610
S E	CRT (P16LFM00BMB) Blue	4835 310 57438
S E	CRT (P16LFM00HLA) Green.	4835 310 57437
S E	CRT (P16LFM00RFA) Red.	4835 310 57436
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
L	Fill Plug Seal	4835 290 87147
M	Diaphragm Cover.	4835 432 17736
O	Expansion Diaphragm.	3135 013 01060
P	Coupler 60" Red (0002)	3135 011 01940
P	Coupler Red & Blue 54" (0001).	4835 290 87155
P	Coupler, Green	4835 290 87152
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Delta 79 Blue (0002)	4835 381 47021
W	Lens, Main, Blue (0001).	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.

XV5270 - Manual no. 7573

CBA's

	CBA's	
CBA	25W Audio Amp.	4835 219 77762
CBA	Large Signal Panel	4835 219 77752
CBA	Small Signal Panel	4835 219 77759
CBA	Digital Convergence Panel.	4835 219 77788
CBA	Green CRT Panel.	4835 219 77782
CBA	Red CRT Panel.	4835 219 77783
CBA	Blue CRT Panel	4835 219 77784
CBA	Customer Control Assembly.	0000 00A TC670
CBA	IR Receiver Panel.	00AR R02 4A001
CBA	Switch Panel	00AS W13 1A001
CBA	Stereo Spread Panel.	4835 219 57687
CBA	Guide Plus Panel	4835 219 77704
CBA	Wallvision Switch Panel.	00A1 069 5A001
CBA	Remote Transmitter UR614	4835 219 17717

25W AUDIO AMP

	25W AUDIO AMP	
C201	1uF., 50V, Electrolytic.	4835 121 47406
C202	0.01uF., 50V, Ceramic.	4835 122 47616
C203	0.01uF., 50V, Ceramic.	4835 122 47616
C208	0.22uF.,20%, 50V, Electrolytic	4835 124 47709
C301	100pF.,10%, 50V, Ceramic	4835 122 47644
C302	100pF.,10%, 50V, Ceramic	4835 122 47644
C303	0.1uF., 63V, Polyester	4835 121 47602
C304	0.1uF., 63V, Polyester	4835 121 47602
C305	100uF., 50V, Electrolytic.	4835 124 47563
C306	47uF., 25V, Electrolytic	4835 124 47708
C307	47uF., 25V, Electrolytic	4835 124 47708
C308	47uF., 25V, Electrolytic	4835 124 47708
C309	1000uF., 35V, Electrolytic	4835 124 47498
C310	1000uF., 35V, Electrolytic	4835 124 47498
C311	47uF., 25V, Electrolytic	4835 124 47708
C312	47uF., 25V, Electrolytic	4835 124 47708
C313	0.1uF., 63V, Polyester	4835 121 47602
C314	0.1uF., 63V, Polyester	4835 121 47602
C401	1000pF.,1kV Ceramic.	4835 122 47373
S C402	220uF., 250V, Electrolytic	4835 124 47041
S C402	220uF., 400V, Electrolytic (AMP030).	4835 124 47711
C403	470pF., 1kV, Ceramic	4835 122 47459
C404	10uF., 50V, Electrolytic	4835 124 47499
C405	1000pF., 50V, Ceramic.	4835 122 47004
C406	0.01uF., 50V, Ceramic.	4835 122 47616
C407	4700pF., 2.5% 63V Polyprop..	4835 121 47085
C408	1000pF., 50V, Ceramic.	4835 122 47004
C409	500V, 100pF., 10%, Ceramic	4835 122 47644
C410	100uF., 16V, Electrolytic.	4835 124 47706
C411	3300uF., 50V, , Electrolytic	4835 124 47582
C412	0.1uF., 63V, Polyester	4835 121 47602
S C413	1000pF., 1kV, Ceramic.	4835 122 47373
C414	680uF., 16V, Electrolytic.	4835 124 47578
C415	10uF., 50V, Electrolytic	4835 124 47499
C416	0.1uF., 63V, Polyester	4835 121 47602
S C417	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C418	0.1uF., 63V, Polyester	4835 121 47602
C423	47uF., 25V, Electrolytic	4835 124 47708
C425	100pF.,10%, 50V, Ceramic	4835 122 47644
R201	47k, 1/2W, Metal Film.	4835 116 57725
R202	47k, 1/2W, Metal Film.	4835 116 57725
R203	22k, 1/2W, Metal Film.	4835 116 57706
R204	22k, 1/2W, Metal Film.	4835 116 57706
R205	220k, 1/2W, Metal Film	4835 116 57018
R208	47k, 1/2W, Metal Film.	4835 116 57725
R260	22k, 1/2W, Metal Film.	4835 116 57706
R261	22k, 1/2W, Metal Film.	4835 116 57706
R301	1k, 1/2W, Metal Film	4835 116 57685
R302	1k, 1/2W, Metal Film	4835 116 57685
R303	100k, 1/2W, Metal Film	4835 116 57687
R304	100k, 1/2W, Metal Film	4835 116 57687
S R305	100 ohm, 1/2W, Metal Film.	4835 116 57684
R306	270k, 5%, 1/2W, Metal Film	4835 116 57756
R307	100k, 1/2W, Metal Film	4835 116 57687
R309	12k, 1/2W, Metal Film.	4835 116 57692
R310	100k, 5%, 2W, Metal Oxide.	4835 116 57692
S R401	100k, 5%, 2W, Metal Oxide.	2120 105 92485
S R402	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S R403	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R404	20k, 1%, 2/3W, Metal Film.	4835 116 57752
R405	4.75k, 1%, 2/3W, Metal Film.	4835 116 57754
R406	220k, 1/2W, Metal Film	4835 116 57018
R407	10k, 1/2W, Metal Film.	4835 116 57686
R408	100k, 1/2W, Metal Film	4835 116 57687
R409	10k, 1/2W, Metal Film.	4835 116 57686
R410	3.01k, 1%, 2/3W, Metal Film.	4835 116 57753
R411	100 ohm, 1/2W, Metal Film.	4835 116 57684
S R412	470 ohm, 5%, 3W, Metal Oxide	4835 116 67265
R413	2k, 1/2W, Metal Film	4835 116 57703
R414	470 ohm, 1/2W, Metal Film.	4835 116 57723
S R415	0.68 ohm, 5%, 1/2W, Metal Film	4835 116 57052
R416	390 ohm, 1/2W, Metal Film.	4835 116 57719
R418	470 ohm, 1/2W, Metal Film.	4835 116 57723
R419	2.7k, 1/2W, Metal Film	4835 116 57711
S R420	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
S R421	4.7 ohm, 1/2W, Metal Film.	4835 110 47023
D202	Diode 1N4148	4835 130 37048
D203	Diode 1N4148	4835 130 37048
D401	Diode BAV21 (AMP030)	4822 130 30842
D401	Diode BAX18.	4835 130 37933
D402	Diode, Silicon (AMP030).	4835 130 37491
D402	Diode, Silicon	4835 130 37663
D404	Diode, Silicon	4835 130 37674
D405	Diode BYV95C	4835 130 37052
D406	Diode BYV95C	4835 130 37052
D407	Diode 1N4150	4835 130 37934
Q202	Transistor BC547B, Inverter.	4835 130 47055
Q203	Transistor J175, Mute.	4835 130 48123
Q204	Transistor J175.	4835 130 48123
Q207	Transistor J175, Mute.	4835 130 48123
Q208	Transistor J175, Mute.	4835 130 48123
Q401	Transistor BC547B, Inverter.	4835 130 47055
Q402	Transistor BC547B, Inverter.	4835 130 47055
Q403	N-Channel MOSFET, Regulator.	4835 130 47887
Q403	Transistor MTW7N80E, Reg. (AMP030)	4835 220 27116
IC301	IC, 6125040001, HiFi Audio Power Amp	4835 209 87082
IC401	IC, 6127410001, Current Mode Controller	4835 209 17027
Z401	Zener Diode BZX79-C8.2V.	4835 130 37503
L401	Coil 100uH..	4835 157 67084
L402	Coil 100uH..	4835 157 67084
L403	Coil 100uH..	4835 157 67084
L404	Suppression Coil, 10uH..	4835 152 27002
L405	Coil 100uH..	4835 157 67084
L407	Coil 100uH..	4835 157 67084
L409	Coil 100uH..	4835 157 67084
L410	Coil 100uH..	4835 157 67084
S T401	Transformer W02242 B	4835 148 87369
BKS301	Stabilizer Bracket	0073 466 70001
BKT301	Bracket, 25W Amp	0073 514 10005
S F401	Fuse, 3A	4835 220 17012
HS402	Heatsink, Transistor	0073 166 50008
HS403	Heatsink, Vertical	0073 497 40004
J251A	4 Pin Board Connector.	2422 025 14671
J254A	5 Pin Connector.	0018 222 20405
J278	4 Pin Board Connector.	2422 025 14672
J469	4 Pin Connector.	0018 222 20304

CONVERGENCE PANEL

	CONVERGENCE PANEL	
C11	1000uF., 50V, Electrolytic	3198 026 51020
C13	470uF., 25V, Electrolytic.	4835 124 47576
C14	100uF., 25V, Electrolytic.	3198 025 31010
C16	100pF., 5%, 50V, Ceramic	3198 016 01010
C17	100pF., 5%, 50V, Ceramic	3198 016 01010
C19	0.1uF., 50V, Ceramic	3198 023 21040
C20	0.01uF.,10%, 100V, Polyester	4835 121 47232
C21	2700pF.,10%, 100V, Polyester	4835 122 47487
C22	220pF., 5%, 50V, Ceramic	3198 016 02210
C23	220pF., 5%, 50V, Ceramic	3198 016 02210
C24	10pF., 5%, 50V, Ceramic.	3198 016 01090
C25	0.1uF., 50V, Ceramic	3198 023 21040
C29	0.1uF., 50V, Ceramic	3198 023 21040
C30	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C31	27pF., 5%, 50V, Ceramic.	3198 016 02790
C32	330pF., 10%, 50V, Ceramic Disc	3198 019 13310
C33	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C34	0.1uF., 50V, Ceramic	3198 023 21040
C35	220uF., 25V, Electrolytic.	3198 025 32210
C36	22uF., 20%, 50V, Electrolytic.	3198 025 52290
C37	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C38	1000uF., 25V, Electrolytic	3198 026 31020
C39	27pF., 5%, 50V, Ceramic.	3198 016 02790
C41	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C42	0.1uF., 50V, Ceramic	3198 023 21040
C50	0.1uF., 50V, Ceramic	3198 023 21040
C51	100pF., 5%, 50V, Ceramic	3198 016 01010
C52	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C71	100pF., 5%, 50V, Ceramic	3198 016 01010
C72	100pF., 5%, 50V, Ceramic	3198 016 01010
C73	100pF., 5%, 50V, Ceramic	4835 122 87025
C74	27pF., 5%, 50V, Ceramic.	3198 016 02790
C81	1000uF., 50V, Electrolytic	3198 026 51020
C83	470uF., 25V, Electrolytic.	4835 124 47576
C84	100uF., 25V, Electrolytic.	3198 025 31010
C85	0.1uF., 63V, Metalized Polyester	4835 121 47602
C86	0.1uF., 63V, Metalized Polyester	4835 121 47602
C87	1000uF., 16V, Electrolytic	3198 026 21020
C88	0.1uF., 50V, Ceramic	3198 023 21040
C100	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C101	39pF., 50V, Ceramic Disc	4835 122 47651
C106	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C107	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C108	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C109	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C110	0.1uF., 50V, Ceramic	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

C111	0.1uF., 50V, Ceramic	3198 023 21040
C112	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C127	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C150	0.022uF.,5%, 50V, Polyester	4835 122 47091
C151	39pF., 50V, Ceramic Disc	4835 122 47651
C152	0.01uF.,10%, 100V, Polyester	4835 121 47232
C153	0.01uF.,10%, 100V, Polyester	4835 121 47232
C157	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C158	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C162	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C173	470pF., 5%, 50V, Ceramic	3198 016 04710
C174	470pF., 5%, 50V, Ceramic	3198 016 04710
C175	0.1uF., 50V, Ceramic	3198 023 21040
C176	0.1uF., 50V, Ceramic	3198 023 21040
C177	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C180	1uF., 20%, 50V, Electrolytic	3198 025 51080
C200	0.022uF., 5%, 50V, Polyester.	4835 122 47091
C201	39pF., 50V, Ceramic Disc	4835 122 47651
C206	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C207	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C208	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C209	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C210	0.1uF., 50V, Ceramic	3198 023 21040
C211	0.1uF., 50V, Ceramic	3198 023 21040
C212	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C227	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C250	0.022uF.,5%, 50V, Polyester	4835 122 47091
C251	39pF., 50V, Ceramic Disc	4835 122 47651
C252	0.01uF.,10%, 100V, Polyester	4835 121 47232
C253	0.01uF.,10%, 100V, Polyester	4835 121 47232
C257	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C258	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C262	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C265	0.1uF., 63V, Metalized Polyester . . .	4835 121 47602
C273	470pF., 5%, 50V, Ceramic	3198 016 04710
C274	470pF., 5%, 50V, Ceramic	3198 016 04710
C275	0.1uF., 50V, Ceramic	3198 023 21040
C276	0.1uF., 50V, Ceramic	3198 023 21040
C277	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C280	1uF., 20%, 50V, Electrolytic	3198 025 51080
C300	0.022uF.,5%, 50V, Polyester	4835 122 47091
C301	39pF., 50V, Ceramic Disc	4835 122 47651
C306	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C307	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C308	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C309	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C310	0.1uF., 50V, Ceramic	3198 023 21040
C311	0.1uF., 50V, Ceramic	3198 023 21040
C312	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C327	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C350	0.022uF.,5%, 50V, Polyester	4835 122 47091
C351	39pF., 50V, Ceramic Disc	4835 122 47651
C352	0.01uF.,10%, 100V, Polyester	4835 121 47232
C353	0.01uF.,10%, 100V, Polyester	4835 121 47232
C357	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C358	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C362	270pF., 10%, 50V, Ceramic Disc	4835 122 47668
C373	470pF., 5%, 50V, Ceramic	3198 016 04710
C374	470pF., 5%, 50V, Ceramic	3198 016 04710
C375	0.1uF., 50V, Ceramic	3198 023 21040
C376	0.1uF., 50V, Ceramic	3198 023 21040
C377	0.22uF., 100V, Metalized Polyester . .	4835 121 47038
C380	1uF., 20%, 50V, Electrolytic	3198 025 51080
R10	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R11	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R12	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R13	15k, 5%, 1/10W, Carbon Film.	4835 111 37458
R14	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R18	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R19	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R20	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R21	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R22	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R24	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R25	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R27	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R28	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R29	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R30	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R31	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R32	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R33	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R34	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R35	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R35	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R36	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R37	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R38	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R41	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R42	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R47	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R48	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R49	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R54	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R55	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R56	100 ohm, 5%, 3W, Metal Oxide	2120 105 92503
R57	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R78	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R79	2.4k, 5%, 1/2W, Metal Film	2322 187 53242
R80	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R82	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R82	1k, 5%, 1/10W, Carbon Film.	4822 051 10102
R83	47k, 5%, 1/10W, Carbon Film.	4835 111 27052
R84	47k, 5%, 1/2W, Metal Film.	4835 116 57724
R86	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R87	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R88	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R89	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R90	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R91	100 ohm, 5%, 1W, Metal Oxide	2120 105 90191
R92	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R93	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R94	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R95	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R98	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R99	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R100	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R101	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R102	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R103	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R104	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R105	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R106	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R107	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R108	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R109	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R110	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R111	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R112	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R113	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R114	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R115	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R127	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R147	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R148	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R149	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R150	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R152	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R153	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R154	6.8k, 5%, 1/10W, Carbon Film	4835 111 37272
R155	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R156	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R157	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R158	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R159	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R160	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R161	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R162	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R163	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R177	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R179	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R180	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R182	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R183	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R198	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R199	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R200	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R201	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R202	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R203	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R204	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R205	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R206	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R207	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R208	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R209	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R210	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R211	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R212	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R213	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R214	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R215	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R227	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R247	3K65 1%, 0.4W, Metal Film.	4835 116 57462
R248	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R249	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R250	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R252	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R253	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R254	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R255	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R256	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R257	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R258	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

R259	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R260	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R261	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R262	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R263	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R277	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R279	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R280	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R282	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R283	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R298	2.94k, 1%, 0.4W, Metal Film.	4835 116 57649
R299	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R300	1.3k, 5%, 1/2W, Metal Film	4835 116 57694
R301	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R302	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R303	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R304	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R305	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R306	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R307	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R308	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R309	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R310	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R311	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R312	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R313	680 ohm, 5%, 1/2W, Metal Film.	4835 116 57735
R314	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R315	12 ohm, 5%, 1/3W, Metal Film	4835 116 57164
R327	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R347	2.43k, 1%, 0.4W, Metal Film.	4835 116 57028
R348	2.7k, 5%, 1/10W, Carbon Film	4835 111 27076
R349	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R350	1.3k, 5%, 1/10W, Carbon Film	4835 111 27069
R352	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R353	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R354	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R355	1.2k, 5%, 1/10W, Carbon Film	4835 111 27042
R356	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R357	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R358	150 ohm, 5%, 1/3W, Metal Film.	4835 116 57151
R359	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
R360	18k, 5%, 1/2W, Metal Film.	4835 110 57187
R361	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R362	5.1 ohm, 5%, 1W, Metal Oxide	4835 116 57121
R363	560 ohm, 5%, 1/2W, Metal Film.	4835 116 57731
R377	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R379	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R380	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R382	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
R383	0.33 ohm, 5%, 5W, Metal Oxide.	4835 116 67152
D5	Diode, BAS216.	4835 130 37905
D6	Diode, BAS216.	4835 130 37905
D7	Diode, BAS216.	4835 130 37905
D10	Diode, BAS216.	4835 130 37905
D11	Diode, BAS216.	4835 130 37905
D12	Diode, BAS216.	4835 130 37905
D13	Diode, BAS216.	4835 130 37905
D100	Diode, 1N4150.	4835 130 37934
D111	Diode, BAS216.	4835 130 37905
D112	Diode, BAS216.	4835 130 37905
D113	Diode, BAS216.	4835 130 37905
D114	Diode, BAS216.	4835 130 37905
D150	Diode, 1N4150.	4835 130 37934
D200	Diode, 1N4150.	4835 130 37934
D211	Diode, BAS216.	4835 130 37905
D212	Diode, BAS216.	4835 130 37905
D213	Diode, BAS216.	4835 130 37905
D214	Diode, BAS216.	4835 130 37905
D250	Diode, 1N4150.	4835 130 37934
D300	Diode, 1N4150.	4835 130 37934
D311	Diode, BAS216.	4835 130 37905
D312	Diode, BAS216.	4835 130 37905
D313	Diode, BAS216.	4835 130 37905
D314	Diode, BAS216.	4835 130 37905
D350	Diode, 1N4150.	4835 130 37934
VR1	Diode, BB909A.	4835 130 37949
IC6	IC MC7805CT 13.59MHz Voltage Regulator	4835 209 87486
IC10	IC NE5532N PLL Filter.	4835 209 17038
IC11	IC ST24W08B6 EEPROM.	4835 209 88556
IC13	IC UPD65654GF-260 Convergence Spline Processor.	4835 209 88475
IC100	IC NE5532N Green Output Amplifier. . .	4835 209 17038
IC165	IC TDA1313/N1 Green DAC.	4835 209 88476
IC200	IC NE5532N Blue Output Amplifier . . .	4835 209 17038
IC265	IC TDA1313/N1 Blue DAC	4835 209 88476
IC300	IC NE5532N Red Output Amplifier. . . .	4835 209 17038
IC365	IC TDA1313/N1 Red DAC.	4835 209 88476
Q5	Transistor, +15 Volt Regulator, BD139.	4835 130 47642
Q6	Transistor, Intensity Buffer,.	4835 130 47086
Q7	Transistor, Fast Blanking Buffer, SMBT1159-2T	4835 130 47086
Q8	Transistor, Horizontal Pulse Buffer, SMBT1159	4835 130 47086
Q9	Transistor, Vertical Pulse Buffer, SMBT 1159-2	4835 130 47086
Q10	Transistor, 13.59MHz Voltage Controlled Oscil.	4835 209 47125
Q11	Transistor, +5.5 Volt Regulator, SPS735	4835 130 47051
Q15	Transistor, -15 Volt Regulator, BD140.	4835 130 47641
Q100	Transistor, NPN, BC547B.	4835 130 47055
Q101	Transistor, NPN, BC547B.	4835 130 47055
Q102	Transistor, NPN, BC547B.	4835 130 47055
Q103	Transistor, NPN, BC547B.	4835 130 47055
Q104	Transistor, PNP, BD140	4835 130 47641
Q105	Transistor, NPN, BD139	4835 130 47642
Q106	Transistor, NPN, SJE1331-5	4835 130 47107
Q107	Transistor, PNP, SJE1763	4835 130 47084
Q150	Transistor, NPN, BC547B.	4835 130 47055
Q151	Transistor, NPN, BC547B.	4835 130 47055
Q152	Transistor, NPN, BC547B.	4835 130 47055
Q153	Transistor, NPN, BC547B.	4835 130 47055
Q154	Transistor, PNP, BD140	4835 130 47641
Q155	Transistor, NPN, BD139	4835 130 47642
Q156	Transistor, NPN, SJE1331-5	4835 130 47107
Q157	Transistor, PNP, SJE1763	4835 130 47084
Q200	Transistor, NPN, BC547B.	4835 130 47055
Q201	Transistor, NPN, BC547B.	4835 130 47055
Q202	Transistor, NPN, BC547B.	4835 130 47055
Q203	Transistor, NPN, BC547B.	4835 130 47055
Q204	Transistor, PNP, BD140	4835 130 47641
Q205	Transistor, NPN, BD139	4835 130 47642
Q206	Transistor, NPN, SJE1331-5	4835 130 47107
Q207	Transistor, PNP, SJE1763	4835 130 47084
Q250	Transistor, NPN, BC547B.	4835 130 47055
Q251	Transistor, NPN, BC547B.	4835 130 47055
Q252	Transistor, NPN, BC547B.	4835 130 47055
Q253	Transistor, NPN, BC547B.	4835 130 47055
Q254	Transistor, PNP, BD140	4835 130 47641
Q255	Transistor, NPN, BD139	4835 130 47642
Q256	Transistor, NPN, SJE1331-5	4835 130 47107
Q257	Transistor, PNP, SJE1763	4835 130 47084
Q300	Transistor, NPN, BC547B.	4835 130 47055
Q301	Transistor, NPN, BC547B.	4835 130 47055
Q302	Transistor, NPN, BC547B.	4835 130 47055
Q303	Transistor, NPN, BC547B.	4835 130 47055
Q304	Transistor, PNP, BD140	4835 130 47641
Q305	Transistor, NPN, BD139	4835 130 47642
Q306	Transistor, NPN, SJE1331-5	4835 130 47107
Q307	Transistor, PNP, SJE1763	4835 130 47084
Q350	Transistor, NPN, BC547B.	4835 130 47055
Q351	Transistor, NPN, BC547B.	4835 130 47055
Q352	Transistor, NPN, BC547B.	4835 130 47055
Q353	Transistor, NPN, BC547B.	4835 130 47055
Q354	Transistor, PNP, BD140	4835 130 47641
Q355	Transistor, NPN, BD139	4835 130 47642
Q356	Transistor, NPN, SJE1331-5	4835 130 47107
Q357	Transistor, PNP, SJE1763	4835 130 47084
Z2	Zener Diode, 12V, BZX79.	4835 130 37001
Z3	Zener Diode, 10V, BZX79.	4835 130 37014
Z5	Zener Diode, 5.1V, BZX79	4835 130 37119
Z6	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z7	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z8	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z9	Zener Diode, 5.1V, MMSZ5231B	4835 220 17061
Z10	Zener Diode, 5.1V, BZX7.	4835 130 37941
Z15	Zener Diode, 5.1V, BZX79	4835 130 37119
Z30	Zener Diode, 5.1V, BZX79	4835 130 37119
Z200	Zener Diode, 30V, BZX7	4835 130 37942
Z201	Zener Diode, 30V, BZX7	4835 130 37942
Z300	Zener Diode, 30V, BZX7	4835 130 37942
Z301	Zener Diode, 30V, BZX7	4835 130 37942
L3	5uH., Adjustable Coil.	4835 157 58097
L4	10uH., Suppression Coil.	4835 152 27026
L5	22uH., 10%, Choke Coil	4835 152 27049
L6	22uH., 10%, Choke Coil	4835 152 27049
L11	5.6uH., 5%, Peaking Coil	2422 535 94291
L12	5.6uH., 5%, Peaking Coil	2422 535 94291
L13	5.6uH., 5%, Peaking Coil	2422 535 94291
L16	5.6uH., 5%, Peaking Coil	2422 535 94291
L19	5.6uH., 5%, Peaking Coil	2422 535 94291
L20	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L22	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L24	5.6uH., 10%, Peaking Coil LAL03. . . .	4835 157 57103
L25	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L26	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L27	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L28	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
L29	6.8uH., 10% Peaking Coil LAL03	4835 157 57988
BRXXX	Zero ohm, Carbon Film.	4835 111 27056
BRSXXX	Zero ohm, Carbon Film.	4835 111 27056
F1	4 Amp Fuse	4835 253 37027
F2	4 Amp Fuse	4835 253 37027
F3	1 Amp Fuse	4835 253 37026
HS6	Small Signal Shield.	3135 011 02251
HS100	Heatsink for Digital Convergence . . .	3135 011 02000

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

HS100	Spring Clip for Q306 and Q307 (2 used)	3135 011 03270
HS150	Heatsink for Digital Convergence	3135 011 02000
HS150	Spring Clip for Q356 and Q357 (2 used)	3135 011 03270
HS200	Heatsink for Digital Convergence	3135 011 02000
HS200	Spring Clip for Q206 and Q207 (2 used)	3135 011 03270
HS250	Heatsink for Digital Convergence	3135 011 02000
HS250	Spring Clip for Q256 and Q257 (2 used)	3135 011 03270
HS300	Heatsink for Digital Convergence	3135 011 02000
HS300	Spring Clip for Q156 and Q157 (2 used)	3135 011 03270
HS350	Heatsink for Digital Convergence	3135 011 02000
HS350	Spring Clip for Q106 and Q107 (2 used)	3135 011 03270
J307	8 Pin Connector.	2422 025 15025
J468	9 Pin Connector.	2422 025 15205
J483	5 Pin Connector.	3135 010 02931
J484	5 Pin Connector.	3135 010 02931
J485	5 Pin Connector.	3135 010 02931
J654A	10 Pin Board Connector	2422 025 15027
P701	10 Pin Connector	4835 265 97463
P801	10 Pin Connector	4835 265 97463
P901	10 Pin Connector	4835 265 97463
SA701	Surge Protector.	4835 116 97013
SA801	Surge Protector.	4835 116 97013
SA901	Surge Protector.	4835 116 97013
SHB200	Shield (for Digital Convergence)	3135 011 01890
SHD200	Heatsink for Digital Convergence	3135 011 03291
TP4	2 Pin Board Connector.	2422 025 02496
Y1	Saw Filter, 390MHz	4835 153 97054

RED CRT APNEL

RED CRT APNEL

C701	0.01uF., 400V, Electrolytic.	0025 972 51039
C702	0.01uF., 400V, Electrolytic.	0025 972 51039
S C705	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C717	10uF., 350V, Electrolytic.	2020 012 93272
C720	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 63V, Metalized Polyester	4835 121 47602
C750	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C751	1200pF.,5%, 100V, Polyester.	4835 121 47558
C752	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R701	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R703	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R710	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R716	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R718	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R719	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R720	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R730	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R731	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R735	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R738	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R742	750 ohm, 1%, 1/4W, Carbon Film	4835 110 57352
R743	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R745	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R751	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R752	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R753	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R755	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R756	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D705	Diode, MUR140.	4835 130 37102
Q701	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q702	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q703	Transistor, Bias, SPS9	4835 130 47091
L701	100uH., 10%, Peaking Coil.	4835 157 67077
L702	15uH., Coil LAL04.	4835 157 67087
L703	47uH., Coil LAL02.	4835 157 67088
L704	47uH., Coil LAL02.	4835 157 67088
L705	22uH., 5%, Peaking Coil.	4835 157 67089
HS701	Heatsink for Q701.	3135 011 01230
J540A	2 Pin Connector.	3135 010 02941
J567	2 Pin Connector.	3135 010 02941
J580	Contact Pin.	3135 010 00470
J654	10 Pin Board Connector	2422 025 15027

GREEN CRT PANEL

GREEN CRT PANEL

C801	0.01uF., 400V, Electrolytic.	0025 972 51039
S C805	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C807	0.01uF., 400V, Electrolytic.	0025 972 51039
C817	10uF., 350V, Electrolytic.	2020 012 93272
C820	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C821	0.1uF., 63V, Metalized Polyester	4835 121 47602
C850	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C851	1200pF.,5%, 100V, Polyester.	4835 121 47558
C852	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R801	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R803	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R810	1.5k, 5%, 1/2W, Carbon Composition	4835 110 47194
S R816	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R818	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R819	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
S R820	5.6 ohm, 5%, 1/2W, Metal Film	4835 116 57595
R825	220k, 5%, 1/2W, Metal Film	4835 116 57018
R826	100k, 5%, 1/2W, Metal Film	4835 116 57687
S R830	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R831	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R835	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
R838	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R842	750 ohm, 1%, 0.6W, Metal Film.	4835 116 57767
R843	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R845	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R851	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R852	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R853	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R855	47 ohm, 5%, 1/3W, Carbon Film.	4835 110 57019
R856	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
R857	10k, 5%, 1/2W, Metal Film.	4835 116 57686
D805	Diode, MUR140.	4835 130 37102
Q801	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q802	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q803	Transistor, Bias, SPS9	4835 130 47091
L801	100uH., 10%, Peaking Coil.	4835 157 67077
L802	15uH., Coil LAL04.	4835 157 67087
L803	47uH., Coil LAL02.	4835 157 67088
L804	47uH., Coil LAL02.	4835 157 67088
L805	22uH., 10%, Peaking Coil	4835 157 67069
HS801	Heatsink for Q801.	3135 011 01230
J401	4 Pin Board Connector.	2422 025 15021
J540	2 Pin Connector.	3135 010 02941
J568	2 Pin Connector.	3135 010 02941
J569	2 Pin Connector.	3135 010 02941
J581	Contact Pin.	3135 010 00470
J608	10 Pin Board Connector	2422 025 15196
J654A	10 Pin Board Connector	2422 025 15027
J658A	10 Pin Board Connector	2422 025 14677

BLUE CRT PANEL

BLUE CRT PANEL

C901	0.01uF., 400V, Electrolytic.	0025 972 51039
C902	0.01uF., 400V, Electrolytic.	0025 972 51039
S C905	1000pF., 20%, 2kV, Ceramic Disc.	4822 122 32064
C917	10uF., 350V, Electrolytic.	2020 012 93272
C920	10uF., 20%, 50V, Electrolytic.	4835 124 47202
C921	0.1uF., 63V, Metalized Polyester	4835 121 47602
C950	100pF., 5%, 50V, Ceramic Disc.	3198 019 01010
C951	1200pF.,5%, 100V, Polyester.	4835 121 47558
C952	1000pF., 20%, 1kV, Ceramic Disc.	4822 122 32064
S R901	27 ohm, 5%, 1/2W, Metal Oxide.	4835 116 57112
R903	100 ohm, 5%, 1/3W, Carbon Film	4822 050 21001
S R910	1.5k, 10%, 1/2W, Carbon Composition.	4835 110 47001
S R916	110 ohm, 5%, 1/2W, Carbon Composition.	4835 110 47096
S R918	22k, 20%, 1/2W, Carbon Composition	4835 110 47167
S R919	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R920	5.6 ohm, 5%, 1/2W, Metal Film.	4835 116 57595
S R930	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
S R931	3.3k, 5%, 5W, Metal Oxide.	4835 116 67302
R935	100ohm, 5%, 1/3W, Carbon Film.	4822 050 21001
R938	100k, 5%, 1/3W, Carbon Film.	4822 050 21004
R942	750ohm, 1%, 1/4W, Carbon Film.	4835 110 57352
R943	220 ohm, 1%, 0.6W, Metal Film.	4835 116 57765
R945	75 ohm, 2%, 1/2W, Carbon Film.	4835 110 47202
R951	15 ohm, 1%, 0.6W, Metal Film	4835 116 57766
R952	22k, 5%, 1/4W, Carbon Composition.	4835 110 57317
R953	43 ohm, 5%, 1/2W, Carbon Film.	4835 110 47195
R955	47 ohm, 5%, 1/8W, Carbon Film.	4822 050 14709
R956	68 ohm, 5%, 1/3W, Carbon Film.	4835 110 57008
D905	Diode, MUR140.	4835 130 37102
Q901	Transistor, Upper Cascode, 2SC3790E.	4835 130 47886
Q902	Transistor, Lower Cascode, SPS7350	4835 130 47051
Q903	Transistor, Bias, SPS9	4835 130 47091
L901	100uH., 10%, Peaking Coil.	4835 157 67077
L902	15uH., Coil LAL04.	4835 157 67087
L903	47uH., Coil LAL02.	4835 157 67088
L904	47uH., Coil LAL02.	4835 157 67088
L905	22uH., 10%, Peaking Coil	4835 157 67069
HS901	Heatsink for Q901.	3135 011 01230
J569A	2 Pin Connector.	3135 010 02941
J570	2 Pin Connector.	3135 010 02941
J582	Contact Pin.	3135 010 00470
J658	10 Pin Board Connector	2422 025 14677

MODEL 00XV5270B103

MODEL 00XV5270B103

S 20	AC Cord, Filtered.	3135 010 03060
	Back Barrier	3135 013 01700
27	Back Cover (Lower)	3135 013 01690
26	Back Cover (Upper)	3135 013 01680
	Battery f/Remote AA 3 Pk	2422 526 01262
	Caster (x2).	4835 528 77065
	Caster (x2).	4835 528 77066
17	Chassis Frame.	4835 432 17943
	Crossover Assembly (Spkr).	00A1 069 2A001
3	Extr., Screen Bottom	3135 014 02930
2	Extr., Screen Edge, Side (x2).	3135 014 03030
14	Extr., Screen Top.	3135 014 03020

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

16	Frame f/Digital Convergence.	4835 432 17846
9	Hole Insert (x12).	4835 265 97341
18	Jack Panel Frame	3135 014 01111
13	Lens, Fresnel.	3135 013 01110
10	Lens, Lenticular	3135 013 01100
22	Light Barrier.	4835 432 17847
15	Mirror Board Mtng Brkt. (x2)	0313 501 10240
25	Mirror Mounting Board.	3135 013 01710
24	Mirror Trapz, 1st Surface.	4835 380 37033
	Owners Manual.	00IB 790 4E001
	Quick Use Guide.	00EL 624 5E001
19	Rear Jack Panel Overlay.	3135 015 04430
	Remote Transmitter UR614	4835 219 17717
1	Retainer Treelock (13)	4835 432 17956
11	Screen Frame	4835 380 57013
8	Speaker 6 ohm Full	2422 264 00313
21	Speaker Tweeter 3", 6 ohm.	2422 264 00318
	Speed Clip JK.	3135 010 02660

SMALL SIGNAL PANEL (2 TUNER)

	SMALL SIGNAL PANEL (2 TUNER)	
C1	2.2uF., 25V, Electrolytic.	4835 124 97179
C2	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C5	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C7	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C8	220uF., 16V, Electrolytic.	2020 012 92633
C9	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C10	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C11	10uF., 20V, Electrolytic	4835 124 97184
C12	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C13	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C14	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C15	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C16	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C25	0.1uF., 50V, Ceramic	3198 023 21040
C28	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C29	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C30	10uF., 10V, Electrolytic	4835 124 97178
C31	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C39	220uF., 16V, Electrolytic.	2020 012 92633
C40	220uF., 16V, Electrolytic.	2020 012 92633
C41	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C42	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C50	1000pF., 10%, 50V, Ceramic	3198 017 01020
C51	1000pF., 10%, 50V, Ceramic	3198 017 01020
C52	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C53	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C54	10uF., 20V, Electrolytic	4835 124 97184
C60	10uF., 10V, Electrolytic	4835 124 97178
C79	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C80	10uF., 20V, Electrolytic	4835 124 97184
C81	2.2uF., 25V, Electrolytic.	4835 124 97179
C82	2.2uF., 25V, Electrolytic.	4835 124 97179
C83	0.1uF., 50V, Ceramic	3198 023 21040
C95	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C96	0.1uF., 50V, Ceramic	3198 023 21040
C97	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C98	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C100	5600pF., 10%, 50V Ceramic.	4835 122 87043
C101	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C102	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C103	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C104	2.2uF., 25V, Electrolytic.	4835 124 97179
C105	8200pF., 10%, 50V Ceramic.	4835 122 87527
C106	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C107	2.2uF., 25V, Electrolytic.	4835 124 97179
C108	2.2uF., 25V, Electrolytic.	4835 124 97179
C109	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C110	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C111	1uF., 35V Electrolytic	4835 124 97175
C112	1uF., 35V Electrolytic	4835 124 97175
C113	0.047., 10%, 50V, Ceramic.	3198 017 04730
C114	0.1uF., 50V, Ceramic	3198 023 21040
C115	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C116	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C117	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C118	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C119	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C120	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C121	0.22uF., 63V, Metalized Polyester. . .	4835 121 47603
C122	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C123	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C124	2.2uF., 25V, Electrolytic.	4835 124 97179
C125	2.2uF., 25V, Electrolytic.	4835 124 97179
C126	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C127	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
C128	2.2uF., 25V, Electrolytic.	4835 124 97179
C129	8200pF., 10%, 50V Ceramic.	4835 122 87527
C130	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C131	5600pF., 10%, 50V Ceramic.	4835 122 87043
C132	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C133	0.15uF., 50V Metalized Polyester . . .	3198 014 01540
C135	0.1uF., 50V, Ceramic	3198 023 21040
C137	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C138	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C140	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C142	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C143	2.2uF., 25V, Electrolytic.	4835 124 97179
C151	1uF., 20%, 50V, Electrolytic	3198 025 51080
C154	0.1uF., 50V, Ceramic	3198 023 21040
C155	100uF., 16V Electrolytic	4835 124 47706
C156	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C158	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C170	1uF., 20%, 50V, Electrolytic	3198 025 51080
C173	100uF., 16V Electrolytic	4835 124 47706
C176	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C181	0.1uF., 50V, Ceramic	3198 023 21040
C186	1uF., 20%, 50V, Electrolytic	3198 025 51080
C191	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C195	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C198	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C199	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C200	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C201	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C202	1000pF., 10%, 50V, Ceramic	3198 017 01020
C203	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C204	100uF., 25V, Electrolytic.	3198 025 31010
C205	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C206	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C207	2.2uF., 25V, Electrolytic.	4835 124 97179
C208	330pF., 10%, 50V, Ceramic.	4835 122 47047
C209	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C210	16pF., 5%, 50V, Ceramic.	4835 122 87449
C211	0.47uF., 35V, Electrolytic	4835 124 97182
C212	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C213	0.33uF., 35V, Electrolytic	4835 124 97037
C218	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C219	470pF., 5%, 50V, Ceramic	3198 016 04710
C220	1uF., 20%, 50V, Electrolytic	3198 025 51080
C221	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C222	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C223	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C224	0.1uF., 50V, Ceramic	3198 023 21040
C225	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C227	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C230	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C231	1000pF., 10%, 50V, Ceramic	3198 017 01020
C232	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C233	10uF., 20V, Electrolytic	4835 124 97184
C234	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C235	100uF., 25V, Electrolytic.	3198 025 31010
C236	2.2uF., 25V, Electrolytic.	4835 124 97179
C237	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C238	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C239	4.7uF., 20%, 16V Electrolytic.	2020 004 90258
C240	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C241	330pF., 10%, 50V, Ceramic.	4835 122 47047
C242	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C243	0.068uF., 10%, 50V, Ceramic.	4835 122 87448
C244	0.047uF., 10%, 50V, Ceramic.	4835 122 87071
C245	0.33uF., 35V, Electrolytic	4835 124 97037
C246	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C247	0.47uF., 35V, Electrolytic	4835 124 97182
C248	16pF., 5%, 50V, Ceramic.	4835 122 87449
C250	0.1uF., 50V, Ceramic	3198 023 21040
C300	0.1uF., 50V, Ceramic	3198 023 21040
C301	33pF., 5%, 50V, Ceramic.	3198 016 03390
C302	33pF., 5%, 50V, Ceramic.	3198 016 03390
C303	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C305	1000pF., 10%, 50V, Ceramic	3198 017 01020
C306	1000pF., 10%, 50V, Ceramic	3198 017 01020
C307	100pF., 5%, 50V, Ceramic	3198 016 01010
C308	1000pF., 10%, 50V, Ceramic	3198 017 01020
C309	1000pF., 10%, 50V, Ceramic	3198 017 01020
C310	1000pF., 10%, 50V, Ceramic	3198 017 01020
C311	6.8uF., 20%, 50V, Electrolytic	2020 012 93632
C312	100pF., 5%, 50V, Ceramic	3198 016 01010
C313	1000pF., 10%, 50V, Ceramic	3198 017 01020
C314	1000pF., 10%, 50V, Ceramic	3198 017 01020
C315	1000pF., 10%, 50V, Ceramic	3198 017 01020
C316	1000pF., 10%, 50V, Ceramic	3198 017 01020
C317	1000pF., 10%, 50V, Ceramic	3198 017 01020
C318	1000pF., 10%, 50V, Ceramic	3198 017 01020
C319	1000pF., 10%, 50V, Ceramic	3198 017 01020
C321	1000pF., 10%, 50V, Ceramic	3198 017 01020
C322	1uF., 20%, 50V, Electrolytic	3198 025 51080
C323	1uF., 20%, 50V, Electrolytic	3198 025 51080
C341	3-40pF., 250V, Trimmer Cap..	2222 808 11409
C342	470uF., 50V, Electrolytic.	3198 025 54770
C355	100pF., 5%, 50V, Ceramic	3198 016 01010
C356	100pF., 5%, 50V, Ceramic	3198 016 01010
C359	1000pF., 10%, 50V, Ceramic	3198 017 01020
C360	1000pF., 10%, 50V, Ceramic	3198 017 01020
C362	100pF., 5%, 50V, Ceramic	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

C363	100pF., 5%, 50V, Ceramic	3198 016 01010
C375	1000pF., 10%, 50V, Ceramic	3198 017 01020
C377	1000pF., 10%, 50V, Ceramic	3198 017 01020
C378	1000pF., 10%, 50V, Ceramic	3198 017 01020
C379	1000pF., 10%, 50V, Ceramic	3198 017 01020
C380	0.1uF., 50V, Ceramic	3198 023 21040
C381	220pF., 5%, 50V, Ceramic	3198 016 02210
C382	1000pF., 10%, 50V, Ceramic	3198 017 01020
C383	27pF., 5%, 50V, Ceramic.	3198 016 02790
C384	0.1uF., 50V, Ceramic	3198 023 21040
C386	1000pF., 10%, 50V, Ceramic	3198 017 01020
C387	2.2uF., 20%, 50V, Electrolytic	3198 025 52280
C388	100pF., 5%, 50V, Ceramic	3198 016 01010
C389	100pF., 5%, 50V, Ceramic	3198 016 01010
C391	1000pF., 10%, 50V, Ceramic	3198 017 01020
C395	0.1uF., 50V, Ceramic	3198 023 21040
C396	0.1uF., 50V, Ceramic	3198 023 21040
C400	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C401	22uF., 20%, 25V, Electrolytic.	4835 124 47707
C402	0.1uF., 50V, Ceramic	3198 023 21040
C405	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C406	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C407	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C408	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C600	33pF., 5%, 50V, Ceramic.	3198 016 03390
C601	0.1uF., 50V, Ceramic	3198 023 21040
C602	82pF., 5%, 50V, Ceramic.	3198 016 08290
C603	0.1uF., 50V, Ceramic	3198 023 21040
C604	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C605	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C606	0.1uF., 50V, Ceramic	3198 023 21040
C607	0.1uF., 50V, Ceramic	3198 023 21040
C608	82pF., 5%, 50V, Ceramic.	3198 016 08290
C609	82pF., 5%, 50V, Ceramic.	3198 016 08290
C611	1uF., 20%, 50V, Electrolytic	3198 025 51080
C612	0.1uF., 50V, Ceramic	3198 023 21040
C615	2.2uF., 25V, Electrolytic.	4835 124 97179
C616	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C617	1000pF., 10%, 50V, Ceramic	3198 017 01020
C618	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C619	0.47uF., 50V, Metalized Polyester. . .	3198 014 04740
C620	0.018uF., 10%, 50V, Ceramic.	4835 122 87533
C621	100uF., 25V, Electrolytic.	3198 025 31010
C622	100uF., 25V, Electrolytic.	3198 025 31010
C623	1uF., 20%, 50V, Electrolytic	3198 025 51080
C624	680pF., 5%, 50V, Ceramic	3198 016 06810
C625	82pF., 5%, 50V, Ceramic.	3198 016 08290
C628	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C629	68pF., 5%, 50V, Ceramic.	3198 016 06890
C637	4700pF., 10%, 50V, Ceramic	3198 017 04720
C638	0.1uF., 50V, Ceramic	3198 023 21040
C639	0.33uF., 20%, 50V, Electrolytic. . . .	2020 012 91588
C640	0.012uF., 10%, 50V Ceramic	4835 122 87501
C641	0.1uF., 50V, Ceramic	3198 023 21040
C642	2.2uF., 25V, Electrolytic.	4835 124 97179
C651	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C654	0.1uF., 50V, Ceramic	3198 023 21040
C655	0.1uF., 50V, Ceramic	3198 023 21040
C658	360pF., 5%, 50V, Ceramic	4835 122 87484
C659	180pF., 5%, 50V, Ceramic	4835 122 87028
C660	120pF., 5%, 50V, Ceramic	3198 016 01210
C661	15pF., 5%, 50V, Ceramic.	4835 122 87047
C662	0.1uF., 50V, Ceramic	3198 023 21040
C664	0.1uF., 50V, Ceramic	3198 023 21040
C665	0.1uF., 50V, Ceramic	3198 023 21040
C667	2.2uF., 25V, Electrolytic.	4835 124 97179
C675	0.1uF., 50V, Ceramic	3198 023 21040
C677	0.033uF., 10%, 50V, Ceramic.	3198 017 03330
C679	47pF., 5%, 50V, Ceramic.	3198 016 04790
C690	220uF., 25V, Electrolytic.	3198 025 32210
C691	0.1uF., 50V, Ceramic	3198 023 21040
C699	1uF., 35V Electrolytic	4835 124 97175
C700	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C701	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C702	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C703	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C704	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C705	4700pF., 10%, 50V, Ceramic	3198 017 04720
C706	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C707	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C708	220pF., 5%, 50V, Ceramic	3198 016 02210
C709	330pF., 5%, 50V, Ceramic	4835 122 87032
C710	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C711	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C712	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C713	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C714	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C715	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C716	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C717	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C718	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C721	0.1uF., 50V, Ceramic	3198 023 21040
C722	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C723	0.33uF., 35V, Electrolytic	4835 124 97037
C726	120pF., 5%, 50V, Ceramic	3198 016 01210
C727	0.47uF., 10%, 16V, Ceramic	2020 552 95426
C728	220uF., 25V, Electrolytic.	3198 025 32210
C729	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C730	0.1uF., 50V, Ceramic	3198 023 21040
C731	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C732	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C733	100uF., 25V, Electrolytic.	3198 025 31010
C734	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C735	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C736	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C750	100uF., 25V, Electrolytic.	3198 025 31010
C752	1000pF., 10%, 50V, Ceramic	3198 017 01020
C760	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C761	18pF., 5%, 50V, Ceramic.	3198 016 01890
C763	39pF., 5%, 50V, Ceramic.	4835 122 87016
C764	120pF., 5%, 50V, Ceramic	3198 016 01210
C765	39pF., 5%, 50V, Ceramic.	4835 122 87016
C766	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C767	10pF., 5%, 50V, Ceramic.	4835 122 87045
C768	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C769	4.7pF., 5%, 50V, Ceramic	3198 016 04780
C1000	0.1uF., 50V, Ceramic	3198 023 21040
C1001	0.22uF., 25V Ceramic	3198 023 22240
C1002	0.1uF., 50V, Ceramic	3198 023 21040
C1003	0.1uF., 50V, Ceramic	3198 023 21040
C1004	680pF., 5%, 50V, Ceramic	3198 016 06810
C1005	100pF., 5%, 50V, Ceramic	3198 016 01010
C1006	100pF., 5%, 50V, Ceramic	3198 016 01010
C1007	47uF., 20%, 25V, Electrolytic.	3198 025 34790
C1009	100pF., 5%, 50V, Ceramic	3198 016 01010
C1010	100pF., 5%, 50V, Ceramic	3198 016 01010
C1012	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1013	1uF., 35V Electrolytic	4835 124 97175
C1014	100pF., 5%, 50V, Ceramic	3198 016 01010
C1017	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1020	100pF., 5%, 50V, Ceramic	3198 016 01010
C1021	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1022	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1023	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1025	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1027	0.1uF., 100V, Metalized Polyester. . .	2222 365 22104
C1028	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1029	1uF., 20%, 50V, Electrolytic	3198 025 51080
C1031	1uF., 35V Electrolytic	4835 124 97175
C1033	4.7uF., 20%, 50V, Electrolytic	3198 025 54780
C1034	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1035	12pF., 5%, 50V, Ceramic.	3198 016 01290
C1037	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1038	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C1039	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1040	0.1uF., 50V, Ceramic	3198 023 21040
C1041	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1042	0.01uF., 10%, 50V, Ceramic	3198 017 01030
C1043	1000pF., 10%, 50V, Ceramic	3198 017 01020
C1044	0.1uF., 20%, 50V, Ceramic.	2238 581 16741
C1046	10uF., 20%, 50V, Electrolytic.	3198 025 51090
C1051	0.1uF., 50V, Ceramic	3198 023 21040
R4	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R6	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R7	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R9	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R10	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R13	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R16	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R17	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R18	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R19	2.2 Meg ohm, 5%, 1/10W Carbon.	4835 111 27047
R20	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R21	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R22	2.2 Meg ohm, 5%, 1/10W, Carbon	4835 111 27047
R25	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R26	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R28	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R29	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R30	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R31	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R32	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R33	1k, 5%, 1/2W, Metal Film	4835 116 57685
R34	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
S R35	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R37	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R38	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R40	1k, 5%, 1/2W, Metal Film	4835 116 57685
R42	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R43	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R45	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276
R46	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R48	75 ohm, 5%, 1/10W, Carbon Film	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

R49	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R51	47k, 5%, 1/10W, Metal Film	4835 111 37445
R52	47k, 5%, 1/10W, Metal Film	4835 111 37445
R53	1k, 5%, 1/2W, Metal Film	4835 116 57685
R54	1k, 5%, 1/2W, Metal Film	4835 116 57685
R55	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R56	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R57	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R58	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R59	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R60	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R61	1k, 5%, 1/2W, Metal Film	4835 116 57685
R62	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R64	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R66	75 ohm, 5%, 1/4W, Carbon Film.	4835 111 37042
S R68	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R69	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R70	510 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 55110
R71	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R72	1k, 5%, 1/2W, Metal Film	4835 116 57685
R73	1k, 5%, 1/2W, Metal Film	4835 116 57685
R74	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R75	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R76	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R82	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R83	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R84	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R85	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R86	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R88	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R89	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R90	220k, 5%, 1/2W, Metal Film	4835 116 57018
R91	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R95	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R96	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R97	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R98	68 ohm, 5%, 1/2W, Metal Film	4835 116 57774
R100	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R101	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R102	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R103	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R104	160 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 51610
R105	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R106	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
S R107	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
R108	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R109	20k, 5%, 1/10W, Carbon Film.	3198 021 52030
R110	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R111	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R112	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R113	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R116	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R117	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R118	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R119	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R120	680 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37271
R121	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R125	100k, 5%, 1/2W, Metal Film	4835 116 57687
R126	100k, 5%, 1/2W, Metal Film	4835 116 57687
R127	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R128	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R133	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R134	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R139	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R157	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R158	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R170	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R171	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R172	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R173	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R174	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R175	100k, 5%, 1/2W, Metal Film	4835 116 57687
R177	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R178	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R179	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R180	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R181	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R182	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R183	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R200	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R201	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R202	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R203	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R204	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R205	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R207	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R208	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R209	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R210	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R211	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R212	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R213	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R214	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R215	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R216	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R217	100k, 5%, 1/2W, Metal Film	4835 116 57687
R218	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R219	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R220	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R221	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R222	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R223	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R224	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R225	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R226	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R227	2.7k, 5%, 1/10W, Carbon Film	3198 021 52720
R243	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R244	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R245	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R255	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R256	4.7k Trim Pot. CControl Adjust). . . .	2020 363 90236
R257	9.1k, 5%, 1/10W, Carbon Film	3198 021 59120
R258	47k, 5%, 1/2W, Carbon Film	4835 110 47042
R259	22K, 5%, 1/8W, Carbon Film	4835 111 37558
R260	2.2k, 5%, 1/4W, Carbon Film.	2322 711 61222
R261	9.1k, 5%, 1/2W, Metal Film	2322 187 53912
R262	6.2k, 5%, 1/4W, Carbon Film.	2322 711 61622
R264	6.8k, 5%, 1/4W, Carbon Film.	2322 711 61682
R265	1k, Control Adj. VZ067SL2 B.	4835 100 17014
R266	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R267	4.3k, 5%, 1/4W, Carbon Film.	2322 711 61432
R268	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R269	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R271	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R272	100k, 5%, 1/2W, Metal Film	4835 116 57687
R273	62k, 5%, 1/4W, Carbon Film	2322 711 61623
R274	47k, 5%, 1/4W, Carbon Film	4835 111 37561
R275	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R277	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R278	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R280	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R281	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R282	750 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 57510
R283	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R284	10k, 5%, 1/4W, Carbon Film	4835 111 37023
R285	270 ohm, 5%, 1/4W, Carbon Film	2322 711 61271
R286	1.1k, 5%, 1/10W, Carbon Film	3198 021 51120
R287	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R288	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R289	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R291	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R293	47k, 5%, 1/10W, Metal Film	4835 111 37445
R294	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231
R295	680k, 5%, 1/10W, Carbon Film	3198 021 56840
R296	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R297	47k, 5%, 1/10W, Metal Film	4835 111 37445
R300	47 ohm, 5%, 1/4W, Carbon Comp.	4835 110 47214
R301	1k, 5%, 1/2W, Metal Film	4835 116 57685
R302	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R303	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R304	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R305	100k, 5%, 1/2W, Metal Film	4835 116 57687
R306	100k, 5%, 1/10W, Carbon Film	4835 111 37434
R307	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R308	47k, 5%, 1/10W, Metal Film	4835 111 37445
R309	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R310	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R311	100 ohm, 5%, 1/4W, Carbon Com.	4835 110 57066
R312	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R313	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R314	47k, 5%, 1/10W, Metal Film	4835 111 37445
R315	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R316	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R317	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R318	1k, 5%, 1/2W, Metal Film	4835 116 57685
R319	16K, 5%, 1/10W, Carbon Film.	3198 021 51630
R320	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R321	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R322	1k, 5%, 1/2W, Metal Film	4835 116 57685
R323	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R324	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R325	1k, 5%, 1/2W, Metal Film	4835 116 57685
R326	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R327	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R328	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R329	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R330	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R331	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R332	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R333	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R334	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R335	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R336	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R337	47k, 5%, 1/2W, Metal Film.	4835 116 57725

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

R338	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R339	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R340	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R341	1k, 5%, 1/2W, Metal Film	4835 116 57685
R342	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R343	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R344	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R345	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R346	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R347	33k, 5%, 1/2W, Metal Film.	4835 116 57715
R348	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R349	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R350	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
R351	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R352	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R353	1k, 5%, 1/2W, Metal Film	4835 116 57685
R354	150k, 5%, 1/10W, Carbon Film	4835 111 27045
R355	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R356	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R357	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R358	47 ohm, 5%, 1/10W, Carbon Film	4835 111 37262
R359	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R360	1k, 5%, 1/2W, Metal Film	4835 116 57685
R361	1k, 5%, 1/2W, Metal Film	4835 116 57685
R362	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R363	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R364	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R365	1k, 5%, 1/2W, Metal Film	4835 116 57685
R366	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R367	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R368	1k, 5%, 1/2W, Metal Film	4835 116 57685
R370	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R371	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R372	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R373	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R374	1k, 20%, 1/4W, Carbon Comp..	4835 110 57318
R375	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R376	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R378	1k, 5%, 1/2W, Metal Film	4835 116 57685
R379	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R380	2.2k, 5%, 1/2W, Metal Film	4835 110 47006
R381	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R382	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R383	22k, 5%, 1/10W, Carbon Film.	4835 111 37441
R384	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R385	1k, 5%, 1/2W, Metal Film	4835 116 57685
R386	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R388	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R389	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R390	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R391	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R392	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R399	33k, 5%, 1/10W, Carbon Film.	4835 111 37248
S R402	8.2 ohm, 5%, 3W, Metal Oxide.	2120 106 90528
R600	1k, 5%, 1/2W, Metal Film	4835 116 57685
R601	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R602	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R603	3.3k, 5%, 1/10W, Carbon Film	4835 111 37247
R604	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R605	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R606	180 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37229
R607	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R608	2.4k, 5%, 1/10W, Carbon Film	3198 021 52420
R609	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R610	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R611	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R612	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R613	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R614	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R615	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R616	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R617	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R618	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R619	47 ohm, 5%, 1/4W, Carbon Film.	2322 711 61479
R620	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R621	620 ohm, 5%, 1/4W, Carbon Film	2322 711 61621
R622	360 ohm, 5%, 1/4W, Carbon Film	2322 711 61361
R623	2k, 5%, 1/4W Carbon Film	2322 711 61202
R624	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R625	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R627	910 ohm, 5%, 1/4W, Carbon Film	2322 711 61911
R628	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R629	51k, 5%, 1/10W, Carbon Film.	4835 111 27057
R630	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R631	110k, 5%, 1/10W, Carbon Film	3198 021 51140
R632	270 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37424
R633	390 ohm, 5%, 1/2W, Metal Film.	4835 116 57719
R634	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R636	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R637	1.5k, 5%, 1/2W, Metal Film	4835 116 57697
R638	15k, 5%, 1/2W, Metal Film.	4835 116 57698
R640	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R641	750 ohm, 5%, 1/2W, Metal Film.	2322 187 53751
R642	430 ohm, 5%, 1/10W, Carbon Film. . . .	3198 021 54310
R649	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R650	330 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37443
R655	3.6k, 5%, 1/10W, Carbon Film	3198 021 53620
R656	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R658	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R659	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R660	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R661	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R662	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R663	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R664	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R665	470 ohm, 5%, 1/4W, Carbon Film	4835 111 37104
R666	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R667	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R669	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R670	330k, 5%, 1/10W, Carbon Film	3198 021 53340
R690	1 Meg ohm, 5%, 1/10W Carb. Film. . . .	4835 111 37217
R691	10 ohm, 5%, 1/10W, Carbon Film	4835 111 37363
R696	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R697	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R698	47 ohm, 5%, 1/2W, Metal Film	4835 116 57727
R699	180k, 5%, 1/10W, Carbon Film	4835 111 37484
R700	510k, 5%, 1/10W, Carbon Film	4835 111 27053
R701	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R702	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R703	820 ohm, 5%, 1/2W, Metal Film.	4835 116 57741
R705	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R706	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R707	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R708	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R709	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R710	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R711	13k, 5%, 1/10W, Carbon Film.	4835 111 27059
R712	36k, 5%, 1/10W, Carbon Film.	3198 021 53630
R713	4.3k, 5%, 1/10W, Carbon Film	3198 021 54320
R714	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R715	1.3k, 5%, 1/10W, Carbon Film	3198 021 51320
R716	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R717	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R718	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R719	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R720	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R721	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R722	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R723	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R724	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R725	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R738	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R739	1k, 5%, 1/10W, Carbon Film	4822 051 10102
S R740	22 ohm, 5%, 1/10W, Carbon Film	4835 111 27048
R741	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R742	470 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37259
R743	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R744	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R745	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R746	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R747	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R748	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R749	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R750	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R751	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R752	390 ohm, 5%, 1/4W, Carbon Film	2322 711 61391
R753	560 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 27054
R754	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R755	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R756	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R757	8.2k, 5%, 1/10W, Carbon Film	4835 111 37448
R758	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R759	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R760	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R761	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R762	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R763	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R772	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R773	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R774	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R775	1k, 5%, 1/4W, Carbon Film.	4835 111 37022
R776	5.1k, 2%, 1/8W, Carbon Film.	2322 730 31512
R777	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R778	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R779	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R780	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R783	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R785	2.2k, 2%, 1/8W, Carbon Film.	2322 730 31222
R786	8.2k, 5%, 1/10W, Carbon Film	4835 111 37458
R787	180k, 5%, 1/10W, Carbon Film	4835 111 37554
R788	1.8k, 5%, 1/10W, Carbon Film	4835 111 37231

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

R789	150 ohm, 5%, 1/2W, Metal Film.	4835 116 57696
R790	10k, 5%, 1/10W, Carbon Film.	4835 111 37216
R791	6.8k, 5%, 1/2W, Metal Film	4835 116 57736
R798	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R799	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R800	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R801	1k, 5%, 1/10W, Carbon Film	4822 051 10102
R802	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R806	1k, 2%, 1/8W, Carbon Film.	4835 110 67216
R808	390 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37253
R809	1.6k, 5%, 1/10W, Carbon Film	3198 021 51620
R812	4.7k, 5%, 1/10W, Carbon Film	4835 111 27052
R814	4.7 Meg ohm, 5%, 1/10W, Carbon	3198 021 54750
R821	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R822	2.2k, 5%, 1/10W, Carbon Film	4835 111 37234
R843	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R844	22 ohm, 5%, 1/2W, Metal Film	4835 116 57708
R1000	47k, 5%, 1/10W, Metal Film	4835 111 37445
R1001	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1002	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1003	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1004	10 ohm, 5%, 1/2W, Metal Film	4835 116 57097
R1006	470 ohm, 5%, 1/2W, Metal Film.	4835 116 57723
R1007	1k, 5%, 1/2W, Metal Film	4835 116 57685
R1008	220k, 5%, 1/10W, Carbon Film	4835 111 37235
R1009	470k, 5%, 1/10W, Carbon Film	4835 111 37407
R1012	12k, 5%, 1/10W, Carbon Film.	3198 021 51230
R1015	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1016	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1017	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1018	220 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37371
R1019	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R1020	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R1021	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1022	22k, 5%, 1/2W, Metal Film.	4835 116 57706
R1023	1.5k, 5%, 1/10W, Carbon Film	4835 111 37437
R1027	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
R1030	100 ohm, 5%, 1/10W, Carbon Film. . . .	4835 111 37432
D9	Diode BAS216	4835 130 37905
D100	Diode BAS216	4835 130 37905
D300	Diode 1N4148	4835 130 37048
D301	Diode BAS216	4835 130 37905
D305	Diode BAS216	4835 130 37905
D306	Diode BAS216	4835 130 37905
D310	Diode BAS216	4835 130 37905
D311	Diode BAS216	4835 130 37905
D312	Diode BAS216	4835 130 37905
D313	Diode BAS216	4835 130 37905
D320	Diode 1N4148	4835 130 37048
D321	Diode BAS216	4835 130 37905
D322	Diode BAS216	4835 130 37905
D323	Diode BAS216	4835 130 37905
D324	Diode BAS216	4835 130 37905
D325	Diode BAS216	4835 130 37905
D326	Diode BAS216	4835 130 37905
D401	Diode 1N4148	4835 130 37048
D600	Diode BAS216	4835 130 37905
D601	Diode BAS216	4835 130 37905
D602	Diode BAS216	4835 130 37905
D603	Diode BAS216	4835 130 37905
D605	Diode BAS216	4835 130 37905
D607	Diode 1N4148	4835 130 37048
D608	Diode 1N4148	4835 130 37048
D609	Diode 1N4148	4835 130 37048
D610	Diode 1N4148	4835 130 37048
D611	Diode 1N4148	4835 130 37048
D612	Diode BAS216	4835 130 37905
D613	Diode BAS216	4835 130 37905
D614	Diode BAS216	4835 130 37905
D615	Diode 1N4148	4835 130 37048
D617	Diode 1N4148	4835 130 37048
D618	Diode 1N4148	4835 130 37048
D630	Diode 1N4148	4835 130 37048
D700	Diode BAS216	4835 130 37905
D701	Diode BAS216	4835 130 37905
D702	Diode BAS216	4835 130 37905
IC1	IC CXA1855S.	4835 209 88564
IC4	IC L7809CV	4835 209 88009
IC105	IC HEF4053BP	4835 209 17033
IC107	IC HEF4053BP	4835 209 17033
IC120	IC TDA9855V2	4835 209 88337
IC200	IC LA7575.	4835 209 87757
IC201	IC LA7575.	4835 209 87757
IC300	IC LC864266A	3135 010 03001
IC304	IC ST24W08B6	9322 098 40682
IC400	IC L7812CV	9335 040 20682
IC401	IC MC7805CT.	9334 536 00682
IC600	IC TA8845AN.	4835 209 88331
IC606	IC L7809CV	4835 209 88009
IC700	IC TC90A13N.	4835 209 88566
IC701	IC LA7222.	4835 209 87089
IC703	IC MC7805CT.	9334 536 00682

IC1001	IC MC44461B.	9322 107 07682
Q3	Transistor BC847B.	4822 130 60511
Q4	Transistor BC847B.	4822 130 60511
Q5	Transistor BC847B.	4822 130 60511
Q9	Transistor J177.	9340 053 20126
Q10	Transistor BC847B.	4822 130 60511
Q11	Transistor BC847B.	4822 130 60511
Q12	Transistor BC847B.	4822 130 60511
Q14	Transistor BC847B.	4822 130 60511
Q16	Transistor BC847B.	4822 130 60511
Q139	Transistor BC847B.	4822 130 60511
Q140	Transistor BC847B.	4822 130 60511
Q141	Transistor BC847B.	4822 130 60511
Q200	Transistor BC85.	5322 130 60508
Q201	Transistor BC85.	5322 130 60508
Q205	Transistor BC85.	5322 130 60508
Q206	Transistor BC85.	5322 130 60508
Q207	Transistor BC857	4835 130 47112
Q208	Transistor BC857	4835 130 47112
Q209	Transistor BC847B.	4822 130 60511
Q300	Transistor BC847B.	4822 130 60511
Q301	Transistor BC847B.	4822 130 60511
Q302	Transistor BC847B.	4822 130 60511
Q303	Transistor BC847B.	4822 130 60511
Q304	Transistor BC847B.	4822 130 60511
Q305	Transistor BC847B.	4822 130 60511
Q306	Transistor PMBT2222A	4835 130 47066
Q308	Transistor BC847B.	4822 130 60511
Q309	Transistor BC85.	5322 130 60508
Q310	Transistor BC847B.	4822 130 60511
Q313	Transistor BC847B.	4822 130 60511
Q314	Transistor BC847B.	4822 130 60511
Q315	Transistor BC85.	5322 130 60508
Q600	Transistor BC847B.	4822 130 60511
Q601	Transistor BC85.	5322 130 60508
Q602	Transistor BC85.	5322 130 60508
Q603	Transistor BC85.	5322 130 60508
Q604	Transistor BC847B.	4822 130 60511
Q605	Transistor BC847B.	4822 130 60511
Q606	Transistor BC847B.	4822 130 60511
Q607	Transistor BC85.	5322 130 60508
Q608	Transistor BC847B.	4822 130 60511
Q609	Transistor BC847B.	4822 130 60511
Q611	Transistor BC85.	5322 130 60508
Q612	Transistor BC85.	5322 130 60508
Q613	Transistor BC85.	5322 130 60508
Q614	Transistor BC847B.	4822 130 60511
Q616	Transistor BC85.	5322 130 60508
Q617	Transistor BC85.	5322 130 60508
Q618	Transistor BC85.	5322 130 60508
Q619	Transistor BC85.	5322 130 60508
Q620	Transistor BC85.	5322 130 60508
Q621	Transistor BC85.	5322 130 60508
Q632	Transistor BC85.	5322 130 60508
Q635	Transistor BC847B.	4822 130 60511
Q700	Transistor BC847B.	4822 130 60511
Q701	Transistor BC847B.	4822 130 60511
Q702	Transistor BC85.	5322 130 60508
Q707	Transistor BC847B.	4822 130 60511
Q708	Transistor BC847B.	4822 130 60511
Q709	Transistor BC847B.	4822 130 60511
Q710	Transistor BC857	4835 130 47112
Q711	Transistor BC847B.	4822 130 60511
Q712	Transistor BC847B.	4822 130 60511
Q713	Transistor BC847B.	4822 130 60511
Q714	Transistor BC857	4835 130 47112
Q715	Transistor BC847B.	4822 130 60511
Q716	Transistor BC847B.	4822 130 60511
Q1000	Transistor PMBT2907.	4835 130 47065
Z1	Zener Diode, BZX284-C3V3	9340 385 60115
Z2	Zener Diode, BZX284-C3V3	9340 385 60115
Z3	Zener Diode, BZX284-C3V3	9340 385 60115
Z4	Zener Diode, BZX284-C3V3	9340 385 60115
Z5	Zener Diode, BZX284-C3V3	9340 385 60115
Z6	Zener Diode, BZX284-C3V3	9340 385 60115
Z7	Zener Diode, BZX284-C3V3	9340 385 60115
Z8	Zener Diode, BZX284-C3V3	9340 385 60115
Z9	Zener Diode, BZX284-C3V3	9340 385 60115
Z10	Zener Diode, BZX284-C3V3	9340 385 60115
Z11	Zener Diode, BZX284-C3V3	9340 385 60115
Z12	Zener Diode, BZX284-C3V3	9340 385 60115
Z100	Zener Diode, BZX79-C8V2.	4835 130 37503
Z200	Zener Diode, MMSZ5257B	4835 130 37823
Z201	Zener Diode, MMSZ5257B	4835 130 37823
Z300	Zener Diode, BZX79-C5V1.	3198 010 25180
L200	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L201	Adjustable LC Coil, 4.5M	4835 157 57113
L202	Adjustable LC Coil, 45.75M.	4835 157 57594
L203	Peaking Coil, 2.2uH., 5%	4835 150 57054
L204	Adjustable LC Coil, 4.75M.	4835 157 57485
L205	Peaking Coil, 2.2uH., 5%	4835 150 57054
L206	Peaking Coil, 8.2uH., 5%	4835 150 57056

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

L208	Peaking Coil, 12uH., 5%.	4835 150 57058
L209	Peaking Coil, 1000uH.,	4835 157 57828
L210	Peaking Coil, 47uH., 5%.	4835 150 57055
L211	Peaking Coil, 12uH., 5%.	4835 150 57058
L212	Peaking Coil, 12uH..	4835 157 67075
L213	Peaking Coil, 2.2uH., 5%	4835 150 57054
L214	Peaking Coil, 12uH., 5%.	4835 150 57058
L215	Peaking Coil, 12uH., 5%.	4835 150 57058
L216	Peaking Coil, 12uH..	4835 157 67075
L217	Peaking Coil, 0.68uH., 5%.	4835 150 57053
L218	Adjustable LC Coil, 4.5M	4835 157 57113
L219	Adjustable LC Coil, 45.75M.	4835 157 57594
L220	Adjustable LC Coil, 4.75M.	4835 157 57485
L221	Peaking Coil, 2.2uH., 5%	4835 150 57054
L222	Peaking Coil, 47uH., 5%.	4835 150 57055
L223	Peaking Coil, 8.2uH., 5%	4835 150 57056
L300	Peaking Coil, 5.6uH., 5%	4835 157 57833
L301	Peaking Coil, 12uH., 5%.	4835 157 57121
L302	Peaking Coil, 12uH., 5%.	4835 150 57058
L303	Peaking Coil, 0.68uH..	4835 157 57596
L313	Peaking Coil, 4.7uH.	4835 157 67057
L373	Peaking Coil, 0.68uH..	4835 157 57596
L374	Peaking Coil, 0.68uH..	4835 157 57596
L375	Peaking Coil, 0.68uH..	4835 157 57596
L379	Peaking Coil, 0.68uH..	4835 157 57596
L600	Peaking Coil, 33uH., 10%	2422 535 98879
L601	Peaking Coil, 10uH	4835 157 67074
L602	Peaking Coil, 10uH., 5%.	2422 535 94294
L605	Peaking Coil, 10uH., 5%.	4835 150 57008
L606	Coil, 3.3uH., 5%	4835 157 57832
L607	Peaking Coil, 3.9uH., 5%.	4835 157 57893
L613	Peaking Coil, 4.7uH., 5%	4835 150 57028
L614	Peaking Coil, 4.7uH., 5%	4835 150 57028
L615	Peaking Coil, 4.7uH., 5%	4835 150 57028
L616	Coil 1.2uH., 5%.	4835 157 67028
L700	Peaking Coil, 10uH	4835 157 67074
L701	Peaking Coil, 4.7uH., 5%	4835 150 57077
L702	Peaking Coil, 4.7uH., 5%	4835 150 57077
L703	Peaking Coil, 4.7uH., 5%	4835 157 67034
L704	Peaking Coil, 4.7uH., 5%	4835 157 67034
L707	Peaking Coil, 4.7uH., 5%	4835 150 57077
L708	Peaking Coil, 27uH., 5%.	4835 157 57119
L709	Peaking Coil, 27uH., 5%.	4835 157 57119
L1000	Coil 1.2uH., 5%.	4835 157 67028
L1001	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1003	Peaking Coil, 6.8uH., 5%	4835 157 57061
L1004	Peaking Coil, 4.7uH., 5%	4835 150 57028
BKT1	Bracket, Jack Panel.	3135 011 00520
BRSX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm, Carbon Film.	4835 111 27056
BRXX	Zero ohm Jumper.	3198 021 90010
HS4	Heatsink for IC4	3135 011 03291
HS400	Heatsink for IC400	3135 011 02510
HS401	Heatsink for IC401	3135 011 03291
HS703	Heatsink for IC703	3135 011 02510
J1	3 Pin Jack Assembly.	2422 026 04886
J2	2x6 Pin Connector.	2422 026 04778
J3	4 Pin Cinch Connector.	2422 026 04763
J5	4 Pin Push Terminal.	4835 265 97448
J10	4 Pin Mini Circuit Socket.	2422 026 04884
J11	4 Pin Mini Circuit Socket.	2422 026 04884
J15	6 Pin Board Connector.	2422 025 14673
J251A	4 Pin Board Connector.	2422 025 14671
J278	4 Pin Board Connector.	2422 025 14672
J300	7 Pin Board Connector.	2422 025 14674
J301	4 Pin Board Connector.	2422 025 14672
J302	4 Pin Board Connector.	2422 025 14672
J305	3 Pin Board Connector.	2422 025 14669
J306	6 Pin Board Connector.	2422 025 15023
J307	8 Pin Board Connector.	2422 025 15025
J308	4 Pin Board Connector.	2422 025 14671
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector.	2422 025 15022
J402	7 Pin Connector, Yellow.	2422 025 15193
J403	7 Pin Connector.	2422 025 14674
J467A	3 Pin Board Connector.	2422 025 14669
J601	7 Pin Board Connector.	2422 025 14674
J608	10 Pin Board Connector, Yel.	2422 025 15196
J751	10 Pin Board Connector, Grn.	2422 025 15206
MEC4	Shield	3135 011 02360
MEC6	Shield	3135 011 02360
SHD1T	Shield, Small Signal	3135 011 02251
SHD3T	Shield, Small Signal	3135 011 02251
SHD7T	Shield, Small Signal	3135 011 02251
TNR1	Tuner, UV1236.	4835 210 47081
TNR2	Tuner, UV1236.	4835 210 47081
TNX1	Connector.	4835 265 97076
TNX2	Connector.	4835 265 97076
Y100	Ceramic Resonator.	4835 122 97102
Y200	Dual Saw Filter.	4835 153 97024
Y202	Ceramic Trap, 4.5MHz	4835 154 97168
Y203	Ceramic Filter 4.5MHz.	4835 153 57004
Y204	Dual Saw Filter.	4835 153 97024
Y205	Ceramic Filter 4.5MHz.	4835 153 57004
Y206	Ceramic Trap, 4.5MHz	4835 154 97168
Y301	Crystal, 12.288MHz	4835 242 77283
Y600	Crystal, 3M579 OP B.	2422 543 00862
Y601	Ceramic Resonator, 503.5kHz.	4835 153 97004
Y700	Filter, 7.00MHz LPF.	4835 154 97185
Y701	Filter, 7.00MHz LPF.	4835 154 97185
Y702	Filter, 7.00MHz LPF.	4835 154 97185
Y1000	Crystal, 14.318MHz	4835 242 77059
Y1001	Crystal, 14.318MHz	4835 242 77059

LARGE SIGNAL PANEL

	LARGE SIGNAL PANEL	
S C402	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C403	6800pF., 10%, 250Vac Metal Film.	4835 122 97082
S C406	220pF., 10%, 1kV, Ceramic.	4835 122 47458
S C407	3900pF., 5%, 1kV, Polypropylene.	4835 121 47636
C408	330pF., 10%, 500V, Ceramic	4835 122 47648
C409	3300uF., 35V, Electrolytic	4835 124 47559
C410	0.1uF., 10%, 100V, Polyester	4822 121 41608
C411	0.1uF., 400V, Polyester.	0025 968 41049
C412	330pF., 10%, 500V, Ceramic	4835 122 47648
C413	330pF., 10%, 500V, Ceramic	4835 122 47648
C414	330uF., 25V, Electrolytic.	4835 124 47632
C415	100pF., 5%, 50V, Ceramic	4835 122 87025
C416	4700pF., 2.5%, 63V, Polypropylene.	4835 121 47087
C417	2200pF., 10%, 50V, Ceramic	4835 122 87524
C418	1000pF., 50V, Ceramic.	4835 122 47004
C419	1000pF., 10%, 50V, Ceramic	4835 122 87041
C420	100pF., 5%, 50V, Ceramic	4835 122 87025
C421	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C422	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C423	470uF., 250V, Electrolytic	4835 124 47141
S C424	470uF., 250V, Electrolytic	4835 124 47141
C425	0.1uF., 400V, Polyester.	0025 968 41049
C426	330pF., 10%, 500V, Ceramic	4835 122 47648
C427	3300uF., 25V, Electrolytic	4835 124 47672
C428	0.1uF., 10%, 100V, Polyester	4822 121 41608
C429	1000pF., 10%, 1kV, Ceramic	4835 122 47373
S C430A	22uF., 250V, Electrolytic.	4835 124 47021
C434	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C435	3300uF., 25V, Electrolytic	4835 124 47575
C436	0.1uF., 10%, 100V, Polyester	4822 121 41608
C437	100pF., 5%, 50V, Ceramic	4835 122 87025
C438	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C439	0.1uF., 10%, 100V, Polyester	4822 121 41608
C440	220pF., 10%, 1kV, Ceramic.	4835 122 47458
C441	6800uF., 16V, Electrolytic	4835 124 47579
C442	470uF., 200V, Electrolytic	4835 124 47097
C443	0.1uF., 250V, Polyester.	4835 121 47278
C444	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C445	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C447	0.1uF., 10%, 100V, Polyester	4822 121 41608
S C449	0.1uF., 10%, 250Vac, Metallic.	4835 122 97067
C450	0.68uF., 10%, 250Vac, Metallic	4835 122 97068
C451	0.47uF., 400V, Polyester	4835 121 47634
C452	1.5uF., 50V, Electrolytic.	4835 124 47568
C453	0.01uF., 10%, 50V, Ceramic	4835 122 87042
C454	47uF., 25V, Electrolytic	4835 124 47708
C455	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C456	100uF., 50V, Electrolytic.	4835 124 47563
C457	1uF., 50V, Electrolytic.	4835 121 47406
C458	4.7uF., 20%, 50V, Electrolytic	4835 124 47072
C459	2200uF., 50V, Electrolytic	4835 124 47574
C468	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C469	330pF., 10%, 500V, Ceramic	4835 122 47648
C470	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C471	1uF., 50V, Electrolytic.	4835 121 47406
C472	0.22uF., 20%, 50V, Ceramic	4835 122 87087
C473	1000pF., 10%, 1kV, Ceramic	4835 122 47373
C474	2200uF., 50V, Electrolytic	4835 124 47574
C475	0.1uF., 10%, 100V, Polyester	4822 121 41608
C476	0.015uF., 400V, Polyester.	4835 121 47203
C477	0.015uF., 400V, Polyester.	4835 121 47203
C478	1000uF., 50V, Electrolytic	4835 124 47573
C479	1000uF., 50V, Electrolytic	4835 124 47573
C480	0.1uF., 10%, 100V, Polyester	4822 121 41608
C481	100uF., 25V, Electrolytic.	4835 124 47501
C482	0.1uF., 50V, Ceramic	4835 122 87375
C483	100uF., 25V, Electrolytic.	4835 124 47501
C499	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
C501	0.47uF., 5%, 100V, Polyester	4835 121 47364
C503	680pF., 5%, 50V, Ceramic	4835 122 87037
C511	0.1uF., 10%, 50V, Polyester.	4822 121 42094
C555	1000uF., 35V, Electrolytic	4835 124 47551
C557	100uF., 50V, Electrolytic.	4835 124 47563
C558	150pF., 10%, 500V, Ceramic	2020 557 90711
C559	0.068uF., 10%, 100V, Polyester	4835 121 47042
C560	2.2uF., 50V, Electrolytic.	4835 124 47502
C561	3300uF., 35V, Electrolytic	4835 124 47559
C564	0.047uF., 10%, 100V, Polyester	4835 121 47005

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

	C565	2200pF., 10%, 50V, Ceramic	4835 122 87083
	C567	0.022uF., 10%, 50V, Ceramic.	4835 122 87064
	C569	0.1uF., 50V, Ceramic	4835 122 87375
	C570	0.1uF., 50V, Ceramic	4835 122 87375
	C571	0.1uF., 50V, Ceramic	4835 122 87375
	C572	100uF., 50V, Electrolytic.	4835 124 47563
	C573	2200pF., 10%, 50V, Ceramic	4835 122 87524
	C580	100pF., 5%, 50V, Ceramic	4835 122 87025
	C584	50V, 0.47uF., Polyester.	3198 014 04740
	C585	3.3uF., 5%, 50V, Polyester	4835 121 47516
	C586	0.022uF., 10%, 100V, Polyester	4835 121 47627
	C587	680pF., 5%, 50V, Ceramic	4835 122 87019
	C588	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C800	1uF., 50V, Electrolytic.	4835 121 47406
	C801	0.1uF., 50V, Ceramic	4835 122 87375
	C805	0.1uF., 250V, Polyester.	4835 121 47629
	C806	1000pF., 500V, Ceramic	4835 122 47384
	C807	0.1uF., 50V, Ceramic	4835 122 87375
	C808	680pF., 10%, 500V, Ceramic	4835 122 47035
	C809	0.1uF., 250V, Polyester.	4835 121 47278
	C810	470uF., 200V, Electrolytic	4835 124 47673
S	C811	330pF., 20%, 2kV, Ceramic.	4835 122 47058
	C814	47uF., 315V, Electrolytic.	4835 124 47482
	C815	1000pF., 500V, Ceramic	4835 122 47384
	C817	0.011uF., 1.6kV, Polyprop.	4835 121 47612
	C818	560pF., 10%, 500V, Ceramic	4835 122 47212
	C819	0.039uF., 630V, Polypropylene.	4835 121 47638
	C820	4.7uF., 100V, Polyester.	4835 121 47633
	C822	0.43uF., 250V, Polypropylene	4835 121 47607
	C824	1000pF., 500V, Ceramic	4835 122 47384
	C826	100uF., 50V, Electrolytic.	4835 124 47563
	C900	220uF., 16V, Electrolytic.	4835 124 47494
	C901	3300pF., 5%, 50V, Ceramic.	4835 122 87447
	C902	680pF., 5%, 50V, Ceramic	3198 016 06810
	C903	1uF., 50V, Electrolytic.	4835 121 47406
	C904	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C905	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C906	0.01uF., 10%, 50V, Ceramic	4835 122 87042
	C907	0.015uF., 10%, 50V, Ceramic.	4835 122 87063
	C908	15pF., 10%, 500V, Ceramic.	4835 122 47455
	C909	330pF., 10%, 500V, Ceramic	4835 122 47648
	C910	0.047uF., 10%, 100V, Polyester	4835 121 47081
	C911	4.7uF., 50V, Electrolytic.	4835 124 47506
S	C913	1000uF., 16V, Electrolytic	4835 124 47699
	C914	470uF., 200V, Electrolytic	4835 124 47673
S	C915	6800pF., 1.6kV, Polypropylene.	4835 121 47637
S	C916	6800pF., 10%, 50V, Polyester	2020 300 90571
	C917	0.1uF., 250V, Polyester.	4835 121 47278
	C918	2.2uF., 50V, Electrolytic.	4835 124 47502
	C919	0.12uF., 100V, Polyester	4835 121 47425
	C920	4.7uF., 50V, Electrolytic.	4835 124 47506
	C921	100uF., 25V, Electrolytic.	4835 124 47501
	C922	470uF., 25V, Electrolytic.	4835 121 47405
	C923	1000pF., 10%, 50V, Ceramic	4835 122 87041
S	C924	820pF., 10%, 2kV, Ceramic.	4835 122 57004
	C927	1uF., 50V, Electrolytic.	4835 121 47406
	C928	0.33uF., 50V, Electrolytic	4835 124 47525
	C929	330pF., 10%, 500V, Ceramic	4835 122 47648
	C930	1uF., 100V, Electrolytic	4835 124 47485
	C931	0.47uF., 5%, 100V, Polyester	4835 121 47364
	C932	0.1uF., 10%, 50V, Ceramic.	4835 122 87061
	C933	330pF., 10%, 500V, Ceramic	4835 122 47033
	C2804	100uF., 50V, Electrolytic.	4835 124 47563
	C2805	10uF., 50V, Electrolytic	4835 124 47499
	C2836	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2837	10uF., 50V, Electrolytic	4835 124 47499
	C2838	1000pF., 10%, 1kV, Ceramic	4835 122 47373
	C2839	0.01uF., 20%, 2kV, Ceramic	4835 122 57002
	BRXX	0 ohm, "Chip" Jumper	4835 111 37019
S	R401	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R402	2k, 5%, 1/2W, Metal Film	4835 116 57703
S	R404	100 ohm, 5%, 10W, Wire Wound	4835 112 37032
S	R405	4.7 ohm, 1/2W, Metal Film.	4835 116 57009
	R406	100 ohm, 5%, 1/4W, Carbon.	4835 110 57247
S	R407	0.1 ohm, 5%, 1W, Metal Film.	4835 116 67179
S	R408	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
S	R409	10 ohm, 5%, 20W, Wire Wound.	4835 112 47012
	R412	510 ohm, 5%, 1/4W, Carbon.	4835 110 57179
S	R413	2k, 5%, 1/4W, Metal Film	4835 111 37029
S	R414	0.91 ohm, 5%, 1/2W, Metal Film	4835 116 57053
S	R415	100k, 5%, 2W, Metal Oxide.	4835 116 67264
S	R416	15 ohm, 5%, 1/3W, Metal Film	4835 116 57064
	R417	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R418	5.76k, 1%, 1/8W, Metal Film.	4835 111 27064
	R419	22k, 5%, 1/8W, Metal Film.	4835 111 37558
	R420	1.6k, 5%, 1/2W, Metal Film	2322 187 53162
	R421	390 ohm, 5%, 1/4W, Metal Film.	4835 111 37095
	R422	100k, 5%, 1/4W, Metal Film	4835 111 37024
	R423	3.92k, 1%, 1/8W, Metal Film.	4835 111 27063
	R424	18.2k, 1%, 1/8W, Metal Film.	4835 116 57637
	R425	2.4k, 5%, 1/4W, Metal Film	2322 711 61242
	R426	100k, 1/2W, Metal Film	4835 116 57687
	R427	27k, 1/10W, Metal Film	4835 111 37442
	R428	24k, 5%, 1/10W, Metal Film	4835 111 37241
	R429	68k, 1/10W, Metal Film	4835 111 37273
S	R430	1k, 5%, 3W, Metal Film	4835 116 57242
	R431	10k, 1/2W, Metal Film.	4835 116 57686
	R433	4.7k, 1/2W, Metal Film	4835 116 57724
	R438	33k, 1/10W, Metal Film	4835 111 37248
	R439	10k, 1/10W, Metal Film	4835 111 37216
	R440	10k, 1/10W, Metal Film	4835 111 37216
	R441	10k, 1/2W, Metal Film.	4835 116 57686
	R442	3.3k, 1/10W, Metal Film.	4835 111 37247
	R443	100k, 1/10W, Metal Film.	4835 111 37434
S	R444	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R445	5.1k, 5%, 1/10W, Metal Film.	4835 111 27086
	R446	10k, 1/2W, Metal Film.	4835 116 57686
S	R447	100k, 5%, 1W, Metal Oxide.	4835 116 67267
	R448	10k, 5%, 1/8W, Metal Film.	4835 111 37556
S	R449	10 ohm, 1/2W, Metal Film	4835 116 57097
	R450	11.5k, 1%, 1/8W, Metal Film.	4835 116 57636
	R451	1.82k, 1%, 1/10W, Metal Film	4835 111 27065
	R452	3.32k, 1%, 1/8W, Metal Film.	4835 111 27062
S	R453	102k, 1%, 1/8W, Metal Film	4835 116 57389
	R454	2.67k, 1%, 1/8W, Metal Film.	4835 111 27061
	R455	470 ohm, Control Adjust.	4835 100 17039
	R456	510k, 5%, 1/2W, Metal Film	2322 187 53514
	R457	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R458	330 ohm, 1/2W, Metal Film.	4835 116 57713
S	R466	0.12 ohm, 5%, 1W, Metal Film	4835 116 67121
	R469	1.5 ohm, 5%, 1/2W, Metal Film.	4835 116 57755
S	R475	15 ohm, 5%, 2W, Metal Oxide.	4835 116 67263
S	R476	100k, 5%, 2W, Metal Oxide.	2322 194 73104
	R483	27 ohm, 5%, 1/4W, Carbon Film.	4835 110 57174
S	R484	2k, 5%, 1W, Metal Film	4835 116 67154
S	R485	2k, 5%, 1W, Metal Film	4835 116 67154
	R486	1k, 5%, 1/4W, Carbon Film.	4835 110 57018
	R500	4.7k, 5%, 1/8W, Metal Film	4835 111 37559
	R501	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R503	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R504	120k, 5%, 1/2W, Metal Film	4835 116 57693
	R505	220 ohm, 5%, 1/4W, Metal Film.	4835 111 37071
	R506	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R507	62k, 5%, 1/4W, Metal Film.	4835 111 37356
	R508	4.3k, 2%, 1/4W, Metal Film	4835 111 37498
	R510	470k, 1/10W, Metal Film.	4835 111 37407
	R511	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R512	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R513	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R514	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R550	47k, 5%, 1/10W, Metal Film	4835 111 37445
	R554	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R555	1 ohm, 5%, 1W, Metal Oxide	4835 116 67268
	R558	100 ohm, 5%, 1/3W, Metal Film.	4835 116 87002
S	R559	1k, 5%, 1W, Metal Oxide.	4835 116 67266
S	R560	220 ohm, 1W, Metal Oxide	4835 116 57603
	R561	27k, 5%, 1/4W, Metal Film.	4835 111 37033
	R562	24k, 5%, 1/4W, Metal Film.	4835 111 37081
S	R564	1 ohm, 5%, 3W, Wire Wound.	2122 251 01385
	R565	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R570	470 ohm, 1/2W, Metal Film.	4835 116 57723
	R571	1k, 1/2W, Metal Film	4835 116 57685
S	R572	1k, 5%, 1/10W, Metal Film.	4822 051 10102
S	R573	750 ohm, 5%, 1W, Metal Film.	4835 116 67016
	R578	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R581	2.2K, 5%, 1/2W, Metal Film	4835 110 47006
	R582	91k, 5%, 1/2W, Metal Film.	2322 187 53913
	R583	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R585	20k, 5%, 1/10W, Metal Film	4835 111 37313
	R586	10k, 1/10W, Metal Film	4835 111 37216
	R587	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R588	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R589	47 ohm, 5%, 1/4W, Metal Film	4835 111 37107
	R800	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R801	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R802	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R803	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R805	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
	R806	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R807	300 ohm, 5%, 1/4W, Metal Film.	4835 111 37085
	R808	2.2k, 5%, 1/2W, Carbon Film.	4835 110 47083
	R809	270 ohm, 1/10W, Metal Film	4835 111 37424
S	R810	1.5k, 5%, 5W, Metal Film	4835 116 67218
S	R811	1.5k, 5%, 5W, Metal Film	4835 116 67218
	R812	68k, 5%, 1/4W, Metal Film.	4835 111 37118
S	R813	1.5 ohm, 5%, 2W, Metal Film.	4835 116 67217
	R814	33 ohm, 5%, 1/2W, Metal Film	4835 116 57366
	R815	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
S	R816	0.56 ohm, 5%, 1/2W, Metal Film	4835 116 67006
S	R817	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R821	560 ohm, 5%, 1/2W, Carbon.	4835 111 57002
	R822	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R823	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R824	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

S	R825	1 ohm, 5%, 1/2W, Metal Film.	4835 116 57441
	R826	270 ohm, 5%, 1/2W, Carbon.	4835 110 47113
	R827	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R828	68k, 5%, 1/4W, Metal Film.	4835 111 37118
	R829	15 ohm, 1/2W, Metal Film	4835 116 57699
S	R830	510 ohm, 5%, 1W, Metal Film.	4835 116 67124
	R840	1M., 5%, 1/2W, Metal Film.	4835 116 57764
S	R900	240 ohm, 5%, 1W, Metal Film.	4835 116 57355
	R901	10k, Control Adjust.	4835 100 17036
	R902	24k, 5%, 1/4W, Metal Film.	4835 111 37081
	R904	3k, 5%, 1/4W, Metal Film	4835 111 37086
	R905	120k, 5%, 1/4W, Metal Film	4835 111 37055
	R906	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R907	5.6k, 5%, 1/4W, Metal Film	4835 111 37112
	R908	1.5k, 1/10W, Metal Film.	4835 111 37437
	R910	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R911	30 ohm, 5%, 1/4W, Metal Film	4835 111 37354
	R912	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R913	4.7k, 1/2W, Metal Film	4835 116 57724
	R914	47k, 5%, 1/4W, Metal Film.	4835 111 37038
	R915	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R916	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R917	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R918	2k, 5%, 1/2W, Metal Film	4835 116 57703
	R919	3.6k, 5%, 1/4W, Metal Film	4835 111 37092
	R920	1k, 5%, 1/4W, Metal Film	4835 111 37022
	R921	18k, 5%, 1/4W, Metal Film.	4835 111 37066
	R922	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
	R923	15k, 1/2W, Metal Film.	4835 116 57698
	R924	360 ohm, 5%, 1/4W, Metal Film.	4835 111 37036
	R926	100 ohm, 5%, 1/4W, Metal Film.	4835 111 37021
	R927	10k, 5%, 1/8W, Metal Film.	4835 111 37556
	R928	2.2k, 2%, 1/8W, Metal Film	2322 730 31222
	R930	10k, 5%, 1/2W, Carbon Film	4835 110 47173
	R931	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R932	5.6k, 1/10W, Metal Film.	4835 111 37376
	R933	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
S	R934	0.33 ohm, 5%, 1/2W, Metal Film	4835 116 57114
S	R937	33k, 1W, Metal Oxide	4835 116 67253
S	R938	30 ohm, 5%, 10W, Wire Wound.	4835 112 37033
	R939	8060 ohm, 1%, 1/8W, Metal.	4835 116 57597
S	R940	11.5k, 1%, 0.6W, Metal Film.	4835 116 57612
	R941	110k, 5%, 1/2W, Carbon Comp.	4835 110 47193
S	R942	510k, 5%, 1/8W, Metal Film	4835 111 37266
	R943	2.2k, Control Adjust	4835 100 17047
S	R944	240 ohm, 2%, 1/8W, Carbon.	4835 110 67204
	R945	680k, 5%, 1/4W, Metal Film	4835 111 37119
	R946	33k, 2%, 1/4W, Carbon Film	4835 110 57321
	R947	820 ohm, 5%, 1/4W, Metal Film.	4835 111 37123
	R948	1k, 5%, 1/10W, Metal Film.	4822 051 10102
	R949	620 ohm, 5%, 1/4W, Metal Film.	4835 111 37114
	R951	10k, 1/2W, Metal Film.	4835 116 57686
	R952	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
	R954	39k, 5%, 1/4W, Metal Film.	4835 111 37097
	R955	33k, 5%, 1/2W, Carbon Film	4835 110 47172
	R956	100 ohm, 1/2W, Metal Film.	4835 116 57684
	R957	1.5k, 5%, 1/4W, Metal Film	4835 111 37026
S	R958	39 ohm, 5%, 2W, Metal Oxide.	4835 110 57065
	R959	1k, 20%, 1/2W, Carbon Comp..	4835 110 47215
	R960	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R961	68 ohm, 5%, 1/3W, Metal Film	4835 116 57751
	R964	10 ohm, 20%, 1/2W, Carbon.	4835 110 47164
	R965	1 Meg, 5%, 1/4W, Metal Film.	4835 111 37047
	R967	470 ohm, 5%, 1/4W, Metal Film.	4835 111 37104
	R968	20k, 5%, 1/4W, Metal Film.	4835 111 37069
	R969	47K, 5%, 1/10W, Metal Film	4835 111 37445
	R970	10k, 1/10W, Metal Film	4835 111 37216
	R971	100k, 1/10W, Metal Film.	4835 111 37434
	R975	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57552
S	R980	4.7k, 5%, 10W, Metal Oxide	4835 116 67272
	R2810	1.1k, 5%, 1/4W, Metal Film	4835 111 37051
	R2812	110k, 5%, 1/4W, Metal Film	4835 111 37052
	R2834	0.27 ohm, 5%, 1/2W, Metal Film	4835 116 57112
	R2835	3k, 5%, 1/2W, Metal Film	4835 116 57757
	R2836	270 ohm, 1/2W, Metal Film.	4835 116 57709
	R2837	12k, 5%, 1/4W, Metal Film.	4835 111 37025
	R2838	2.4k, 5%, 1/4W, Metal.	2322 711 61242
S	R2839	300k, 5%, 3W, Metal Film	2322 195 73304
	D402	Diode BYV95C	4835 130 37052
	D403	Diode, Silicon MUR120.	4835 130 37674
	D404	Diode BYV95C	4835 130 37052
	D405	Diode BAX18.	4835 130 37933
	D406	Diode GBU6J.	4835 130 37931
	D407	Diode, Silicon MUR120.	4835 130 37674
	D409	Diode BAS216	4835 130 37905
	D417	Diode MUR460	4835 130 37932
	D418	Diode, Silicon MUR460.	4835 130 37488
	D419	Diode, Silicon	4835 130 37491
	D420	Diode BAX18.	4835 130 37933
	D431	Diode BAX18.	4835 130 37933
	D432	Diode 1N4150	4835 130 37934
	D433	Diode, Silicon	4835 130 37663
	D434	Diode, Silicon	4835 130 37663
	D501	Diode BAS216	4835 130 37905
	D502	Diode BAS216	4835 130 37905
	D503	Diode BAS216	4835 130 37905
	D504	Diode, Silicon BYD77D.	4835 130 37497
	D505	Diode BAS216	4835 130 37905
	D550	Diode BYV95C	4835 130 37052
	D551	Diode BAS216	4835 130 37905
	D571	Diode BAS216	4835 130 37905
	D801	Diode BYD33J	4835 130 37094
	D802	Diode BYV95C	4835 130 37052
	D806	Diode BY228.	4835 130 37166
	D808	Diode BYW95C	4835 130 37059
	D900	Diode BAS216	4835 130 37905
	D901	Diode 1N4148	4835 130 37048
	D902	Diode BY328.	4835 130 37938
	D904	Diode BAX18.	4835 130 37933
	D905	Diode BYD33J	4835 130 37094
	D906	Diode, Silicon MUR140.	4835 130 37102
	D907	Diode, Silicon MUR140.	4835 130 37102
	D908	Diode BYV95C	4835 130 37052
	D909	Diode BAV103	4835 130 37937
	D910	Diode BYW95C	4835 130 37059
	D911	Diode BAS216	4835 130 37905
	D2830	Diode BYD33M	4835 130 37012
S	IC400	IC LM393N, Dual Comparator	4835 209 87081
	IC401	IC, 6126640002	4835 209 87834
	IC402	IC, 6127710001	4835 209 87712
S	IC403	OPT CP CNX83A, Optoisolator.	4835 209 88555
S	IC405	OPT CP CNW136.300.	4835 209 88561
S	IC406	OPT CP CNX83A.	4835 209 88555
	IC408	IC MC7805CT, Vertical Deflection	4835 209 88535
	IC550	IC TDA3654Q/N3	4835 209 17162
	IC551	IC TA8859CP, IIC Defl. Processor	4835 209 88565
	IC552	IC MC7812CT, 12V Regulator	4835 209 88554
	IC900	IC MC1391P, Horiz. Processor	9332 898 70682
	IC901	IC, 6126729002	4835 209 88011
	IC902	IC, 6128270001	4835 209 87838
	Q2830	Transistor, NPN.	4835 130 47893
	C914	Transistor, BU2508DF	4835 532 47018
S	Q400	Transistor, BC847B	4822 130 60511
	Q401	N-Channel Power MOSFET	4835 130 47888
	Q402	Transistor, Standby Regulator.	4835 130 47885
S	Q403	Transistor, BC847B	4822 130 60511
	Q404	Transistor, BC85	5322 130 60508
	Q442	Transistor, BU2508DF	4835 532 47018
	Q500	Transistor, BC85	5322 130 60508
	Q501	Transistor, BC85 H&V Dfl Fail-safe	5322 130 60508
	Q502	Transistor, BC847B	4822 130 60511
	Q503	Transistor, BC847B	4822 130 60511
	Q550	Transistor, PNP.	4835 130 47084
	Q551	Transistor, BC847B	4822 130 60511
	Q800	Transistor, BC847B	4822 130 60511
	Q801	Transistor, 2SC2482, Horiz. Driver	4835 130 47073
	Q802	Transistor, 2SD2539.	4835 130 48074
	Q803	Transistor, PNP, Hor. Pre-Driver	4835 130 47065
	Q900	Transistor, BC847B, Sync Pls. Inv.	4822 130 60511
	Q901	Transistor, BC85	5322 130 60508
	Q902	Transistor, SPS9397-1, Shutdown.	4835 130 47091
	Q903	Transistor, BC85, Error Sig. Inv..	5322 130 60508
	Q904	Transistor, BC85, Soft Start	5322 130 60508
	Q906	Transistor, 2SD2539, HVOT.	4835 130 48074
	Q907	Transistor, NPN, Beam Limiter.	4835 130 47889
	Q908	Transistor, PNP Av Bm Cur. Lim..	4835 130 47891
	Z400	Zener Diode, BZX79B10.	4835 130 37935
	Z500	Zener Diode, 10V	4835 130 37739
	Z501	Diode BZX79-B18.	4835 130 37936
	Z503	Zener Diode, P6KE62A	4835 130 37547
	Z901	Zener Diode, 6.2V.	4835 130 37751
	L401	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L405	Peaking Coil, 2.2uH. 10%	4835 157 57051
	L407	Ferrite Bead	4835 526 17001
	L408	Suppression Coil, 10uH..	4835 152 27002
S	L409	Peaking Coil, 2.2uH.	4835 150 57054
	L410	Suppression Coil, 18uH..	4835 150 57051
	L412	Ferrite Bead	4835 526 17001
	L415	Suppression Coil, 1.8uH.	4835 152 27029
	L416	Ferrite Bead	4835 526 17001
	L420	Ferrite Bead	4835 526 17001
S	L421	Line Input Choke	4835 152 27028
	L422	Suppression Coil, 10uH..	4835 152 27002
	L423	Suppression Coil, 10uH..	4835 152 27002
	L424	Suppression Coil, 10uH..	4835 152 27002
	L425	Suppression Coil, 10uH..	4835 152 27002
	L426	Suppression Coil, 42uH..	4835 157 57063
	L427	Ferrite Bead	4835 526 17001
	L428	Suppression Coil, 42uH..	4835 157 57063
	L429	Ferrite Bead	4835 526 17001
	L430	Ferrite Bead	4835 526 17001
	L432	Suppression Coil, 10uH..	4835 152 27002
	L435	Suppression Coil, 10uH..	4835 152 27002
	L440	Suppression Coil, 10uH..	4835 152 27002

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

	L550	Suppression Coil, 10uH..	4835 152 27002
	L803	Coil, Choke.	3121 218 31110
	L804	Linear Coil.	0036 202 80026
	L805	Ferrite Bead	4835 526 17003
	L902	Coil, 22uH., 10%	4835 150 57052
	L903	Suppression Coil, 3.6uH.	4835 152 27001
	L905	Suppression Coil, 5.6uH., 10%.	4835 152 27038
S	T401	Transformer, Switch Mode	4835 148 87339
S	T402	Transformer, Power	4835 148 87345
S	T800	Transformer, Horiz. Driver	4835 142 47021
S	T801	Transformer, Scan Power.	4835 148 87318
S	T802	Transformer, Dynamic Focus	4835 142 47025
S	T900	Flyback Transformer.	3128 138 20280
S	T901	Transformer, Horiz. Driver	4835 142 47022
S	F401	Fuse, 5A	4835 253 37022
S	F402	Fuse, 5A	4835 253 37021
S	F408	Fuse, 5A.	4835 253 37021
S	F409	Fuse, 5A	4835 253 37021
	FB910	Ferrite Bead	4835 526 17002
	HS401	MM Heatsink.	3135 011 00620
	HS401	Transistor, BU2508DF	4835 532 47018
	HS406	Heatsink, Vert..	0073 531 90006
	HS408	Heatsink, Transistor	0073 166 50008
	HS419	Heatsink, Diode.	0073 562 10006
	HS433	Heatsink, Transistor	0073 166 50008
	HS434	Heatsink, Transistor	0073 166 50008
	HS550	Heatsink	0073 601 50001
	HS802	MM Heatsink LS BD.	3135 011 00550
	HS802	Transistor, BU2508DF	4835 532 47018
	HS902	Heatsink	0073 525 60011
	HS906	Heatsink, Horiz.	0073 510 30012
	J401	4 Pin Connector, Yellow.	0018 223 60004
	J402	7 Pin Connector, Yellow.	0018 223 60007
	J403	7 Pin Board Connector.	2422 025 14674
	J408	Contact Pin.	3135 010 00470
	J467A	Pin Connector.	2422 025 14669
	J468	9 Pin Connector, Green	0018 223 80009
	J469	4 Pin Connector.	0018 222 20204
	J500	Contact Pin.	3135 010 00470
	J501	Contact Pin.	3135 010 00470
	J502	Contact Pin.	3135 010 00470
	J511	Contact Pin.	3135 010 00470
	J540	Contact Pin.	3135 010 00470
	J601	7 Pin Board Connector.	2422 025 14674
	Q401	Spring Clip f/Q401	4835 256 97316
	Q802	Spring Clip f/Q802	4835 256 97316
	Q906	Spring Clip f/Q906	4835 256 97316
S	SA401	Resistor, Surge Absorber	4835 116 67143

WALLVISION SWITCH PANEL

		WALLVISION SWITCH PANEL	
	R6	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R7	1k, 5%, 1/2W, Metal Film	4835 116 57685
	R16	10 ohm, 5%, 1/4W, Metal Film	4835 116 57362
	BKT703	Switch Bracket	0073 568 70004
	J15	Connector.	2422 038 00177
	J100	2 Pin Connector.	2422 025 07305
	J254	5 Pin Connector.	0018 222 30405
	J254A	5 Pin Connector.	0018 222 30205
	J301	5 pin Connector.	2422 038 00176
	J305	3 Pin Connector.	2422 038 00175
	J704	2 Pin Connector.	2422 015 19025
	J709	1 Pin Connector.	2422 026 04932
	J710	Phono Jack	2422 026 04556
	J711	Connector.	2422 026 04557
	J712	Jack f/IR Blaster.	2422 026 04376
	S703	Switch, 4PDT	4835 277 27072

STEREO SPREAD MODULE

		STEREO SPREAD MODULE	
	C139	4.7uF., 50V, Electrolytic.	4835 124 47506
	C141	680pF., 50V, Ceramic	4835 122 47187
	C142	10uF., 50V, Electrolytic	4835 124 47499
	C144	680pF., 50V, Ceramic	4835 122 47187
	C145	0.015uF., 10%, 50V, Polyester.	4835 121 47628
	C146	4.7uF., 50V, Electrolytic.	4835 124 47506
	C147	150pF., 10%, 50V, Ceramic.	4835 122 47645
	C148	2200pF., 50V, Ceramic.	4835 122 47007
	C149	0.015uF., 10%, 50V, Polyester.	4835 121 47628
	C150	0.015uF., 10%, 50V, Polyester.	4835 121 47628
	C151	1uF., 50V, Electrolytic.	4835 121 47406
	C152	1uF., 50V, Electrolytic.	4835 121 47406
	C154	0.1uF., 63V, Polyester	4835 121 47602
	C155	100uF., 16V, Electrolytic.	4835 124 47706
	C156	10uF., 50V, Electrolytic	4835 124 47499
	C158	10uF., 50V, Electrolytic	4835 124 47499
	C159	4.7uF., 50V, Electrolytic.	4835 124 47506
	C163	2200pF., 50V, Ceramic.	4835 122 47007
	C176	0.1uF., 63V, Polyester	4835 121 47602
	C182	0.1uF., 63V, Polyester	4835 121 47602
	C196	0.047uF., 50V, Polyester	4835 121 47588
	C197	0.047uF., 50V, Polyester	4835 121 47588
	R130	100k, 1/2W, Metal Film	4835 116 57687
	R140	47k, 1/2W, Metal Film.	4835 116 57725
	R141	47k, 1/2W, Metal Film.	4835 116 57725
	R143	1k, 1/2W, Metal Film	4835 116 57685
	R144	12k, 1/2W, Metal Film.	4835 116 57692
	R145	2k, 1/2W, Metal Film	4835 116 57703
S	R146	47 ohm, 1/2W, Metal Film	4835 116 57727
	R147	12k, 1/2W, Metal Film.	4835 116 57692
	R148	15k, 1/2W, Metal Film.	4835 116 57698
	R149	15k, 1/2W, Metal Film.	4835 116 57698
	R150	20k, 1/2W, Metal Film.	4835 116 57704
	R151	10k, 1/2W, Metal Film.	4835 116 57686
	R152	1k, 1/2W, Metal Film	4835 116 57685
	R153	10k, 1/2W, Metal Film.	4835 116 57686
	R154	2k, 1/2W, Metal Film	4835 116 57703
	R155	47k, 1/2W, Metal Film.	4835 116 57725
	R156	20k, 1/2W, Metal Film.	4835 116 57704
	R157	15k, 1/2W, Metal Film.	4835 116 57698
	R158	56k, 5%, 1/2W, Metal Film.	4835 116 57758
	R159	22k, 1/2W, Metal Film.	4835 116 57706
	R160	56k, 5%, 1/2W, Metal Film.	4835 116 57758
	R161	10k, 1/2W, Metal Film.	4835 116 57686
	R164	47k, 1/2W, Metal Film.	4835 116 57725
	R166	10k, 1/2W, Metal Film.	4835 116 57686
	R167	22k, 1/2W, Metal Film.	4835 116 57706
	R168	1.5k, 1/2W, Metal Film	4835 116 57697
	R170	1.5k, 1/2W, Metal Film	4835 116 57697
	R171	100k, 1/2W, Metal Film	4835 116 57687
	R173	100k, 1/2W, Metal Film	4835 116 57687
	R174	100k, 1/2W, Metal Film	4835 116 57687
	R175	100k, 1/2W, Metal Film	4835 116 57687
	R176	100k, 1/2W, Metal Film	4835 116 57687
	R177	1k, 1/2W, Metal Film	4835 116 57685
	R178	1k, 1/2W, Metal Film	4835 116 57685
S	R179	47 ohm, 1/2W, Metal Film	4835 116 57727
	R180	10k, 1/2W, Metal Film.	4835 116 57686
	R181	10k, 1/2W, Metal Film.	4835 116 57686
	R182	47k, 1/2W, Metal Film.	4835 116 57725
	R183	100k, 1/2W, Metal Film	4835 116 57687
	IC103	IC, 6124800001, Smart Stereo Surround.	4835 209 17032
	IC105	IC, HEF4053BP, 2 Channel Multi/Demultip	4835 209 17033
	Q140	Transistor BC547B, Smart Stereo Surroun	4835 130 47055
	Z102	Zener Diode BZX79-F3.9V.	4835 130 37929
	Z103	Zener Diode BZX79-F3.9V.	4835 130 37929
	J178	6 Pin Board Connector.	0018 179 40006
	J278A	5 Pin Board Connector.	2422 038 00176
	MEC1	Support f/P.C. Bd.	0073 589 20001
	MEC2	Support f/P.C. Bd.	0073 589 20001
	C1	33pF., 5%, 50V, Ceramic.	4835 122 87414
	C2	33pF., 5%, 50V, Ceramic.	4835 122 87414
	C3	27pF., 5%, 50V, Ceramic.	4835 122 87381
	C4	39pF., 5%, 50V, Ceramic.	4835 122 87016
	C6	10uF., 35V, Electrolytic	4835 124 47562
	C7	100pF., 5%, 50V, Ceramic	4835 122 87012
	C8	1uF., 50V, Electrolytic.	4835 121 47406
	C10	1000pF., 10%, 50V, Ceramic	4835 122 87023
	C12	0.1uF., 50V, Ceramic	4835 122 87563
	C13	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
	C14	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
	C15	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
	C17	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
	C18	39pF., 5%, 50V, Ceramic.	4835 122 87016
	C19	39pF., 5%, 50V, Ceramic.	4835 122 87016
	C20	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
	C21	100uF., 16V, Electrolytic.	4835 124 47493
	C22	1000pF., 5%, 50V, Ceramic.	4835 122 87369
	C23	1000pF., 5%, 50V, Ceramic.	4835 122 87369
	C24	2.2uF., 50V, Electrolytic.	4835 124 47502
	C25	6.8uF., 50V, Electrolytic.	4835 124 47604
	C26	0.1uF., +80-20%, 50V, Ceramic.	4835 122 87375
	C27	6.8uF., 50V, Electrolytic.	4835 124 47604
	R1	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R2	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R3	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R4	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R5	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R6	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R7	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R8	10k, 5%, 1/10W, Metal Film	4835 111 37216
	R9	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R10	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R11	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R12	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R13	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R14	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R15	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R16	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	R17	100 ohm, 5%, 1/10W, Metal.	4835 111 37432
	R18	51 ohm, 5%, 1/10W, Metal Film.	4835 111 37494
	R20	1k, 5%, 1/10W, Metal Film.	4835 111 37433
	R21	33k, 5%, 1/10W, Metal Film	4835 111 37248
	R22	22k, 5%, 1/10W, Metal Film	4835 111 37441

S = Safety Part Be sure to use exact replacement part.

XV5270 (continued)

R23	820 ohm, 5%, 1/10W, Metal.	4835 111 37466
R24	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R25	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R26	200k, 5%, 1/10W, Metal Film.	4835 111 37476
R27	10k, 5%, 1/10W, Metal Film	4835 111 37216
R28	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R29	510 ohm, 5%, 1/10W, Metal.	4835 111 37263
R30	3k, 5%, 1/10W, Metal Film.	4835 111 37245
R32	22k, 5%, 1/4W, Metal Film.	4835 111 37031
R33	10k, 5%, 1/10W, Metal Film	4835 111 37216
R35	560 ohm, 5%, 1/10W, Metal.	4835 111 37428
R36	3.9k, 5%, 1/10W, Metal Film.	4835 111 37254
R37	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R40	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R41	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R42	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R43	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R44	91ohm, 5%, 1/4W, Metal Film.	4835 111 37129
R45	10 ohm, 5%, 1/4W, Metal Film	4835 111 37132
R46	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R47	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
R48	510 ohm, 5%, 1/10W, Metal Film	4835 111 37263
R49	560 ohm, 5%, 1/10W, Metal Film	4835 111 37428
R50	4.7k, 5%, 1/10W, Metal Film.	4835 111 37444
R51	4.7k, 5%, 1/4W, Metal Film	4835 111 37037
R52	240 ohm, 5%, 1/4W, Metal Film.	4835 111 37078
D1	Diode, Silicon	4835 130 37066
IC1	IC 74HC157, Quad Input Multiplexer . .	4835 209 87904
IC2	IC 74HC03D, Quad NAND.	0483 520 98849
IC3	IC 74HC573, Octal D-Type Transparent La tch.	4835 209 88479
IC4	IC LC864164B	4835 209 88492
IC5	IC TC518128CFWL-80	4835 209 88485
IC6	IC UPD65640GF-172.	4835 209 88484
IC7	IC LM311N, Comparator.	4835 209 88489
Q1	Transistor, PNP.	4835 130 47112
Q2	Transistor, PNP.	4835 130 47112
Q3	Transistor, PNP.	4835 130 47112
Q4	Transistor, NPN.	4835 130 47086
Q5	Transistor, PNP.	4835 130 47112
Q6	Transistor, NPN.	4835 130 47086
L1	Coil, Adj., 5uH.	4835 157 58097
L2	Peaking Coil, 12uH..	4835 150 57058
L3	Peaking Coil, 12uH..	4835 150 57058
L4	Peaking Coil, 2.2uH.	4835 150 57054
L5	Peaking Coil, 2.2uH.	4835 150 57054
L6	Peaking Coil, 2. 2uH..	4835 150 57054
L7	Peaking Coil, 2. 2uH..	4835 150 57054
L8	Peaking Coil, 10uH..	4835 150 57057
L9	Peaking Coil, 10uH..	4835 150 57057
J100	2 Pin Board Connector.	2422 025 14668
J306	6 Pin Board Connector.	2422 025 14673
J308	4 Pin Board Connector.	2422 025 15021
J310	5 Pin Board Connector.	2422 025 15022
J311	5 Pin Connector, Yellow.	0018 223 60005
Y1	Crystal, 12MHz	4835 242 77244
Y2	Pizoelectrolytic Crystal, 8.05MHz. . .	4835 242 77284
B36	Buss Wire.	0046 012 60001
BR3	0 ohm, "Chip" Jumper	4835 111 37019
BR5	0 ohm, "Chip" Jumper	4835 111 37215
BR11	0 ohm, "Chip" Jumper	4835 111 37019

ATC669, ATC670 & ATC671 CUST. CNTRL. ASSY

	ATC669, ATC670 & ATC671 CUST. CNTRL. AS SY	
	Crystal Assembly	3135 014 06401
	Keypad Assembly.	3135 017 01941

00ARR023, 00ARR024 & 00A10699 IR RECEIVER PANEL

	00ARR023, 00ARR024 & 00A10699 IR RECEIV ER PANEL	
IR300	IR Receiver.	4835 219 67061
J305	3 Pin Board Connector.	2422 038 00175

00ASW129, 00ASW130 & 00ASW131 SWITCH ASSEMBLY

	00ASW129, 00ASW130 & 00ASW131 SWITCH AS SEMBLY	
D1	Green LED.	4835 130 37056
D3	Red LED.	4835 130 37065
J302	4 Pin Board Connector.	2422 025 14672

00706103 0001 OPTICAL ASSEMBLY

	00706103 0001 OPTICAL ASSEMBLY	
S	Deflection Yoke.	2422 549 43801
	Focus Lead	3135 010 00730
S	Focus/Screen Control..	2322 460 90514
S	HV Anode Lead (3 used)	4835 321 27397
S E	CRT P16LFM00BMB (Blue)	4835 310 57438
S E	CRT P16LFM00HLA (Green).	4835 310 57437
S E	CRT P16LFM00RFA (Red).	4835 310 57436
H	Seal, CRT.	3135 013 02321
I	Coolant (Enough to do 3 CRTs).	3135 010 02040
K	Fill Plug.	4835 432 17791
O	Expansion Diaphragm.	3135 014 02680
O	Diaphragm,Coupler.	3135 013 01060
P	Coupler, Green	4835 290 87152
P	Coupler, Red & Blue (52").	4835 290 87154
R	O-Ring Seal (Lens to Coupler).	4835 290 87141
S	Lens, C-Element, Blue & Red.	4835 381 47016
S	Lens, C-Element, Green	4835 381 47019
W	Lens, Main, Blue	4835 381 47017
W	Lens, Main, Red & Green.	4835 381 47022

S = Safety Part Be sure to use exact replacement part.